



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
18.04.2018 Bulletin 2018/16

(51) Int Cl.:
F02M 35/12 (2006.01) **F02M 35/10** (2006.01)
F02M 35/116 (2006.01)

(21) Application number: **17196709.4**

(22) Date of filing: **16.10.2017**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(72) Inventors:
• **TARABRA, Marco**
41051 CASTELNUOVO RANGONE (IT)
• **NACLERIO, Francesco**
32100 BELLUNO (IT)

(74) Representative: **Maccagnan, Matteo et al**
Studio Torta S.p.A.
Via Viotti, 9
10121 Torino (IT)


(30) Priority: **17.10.2016 IT 201600103942**

(71) Applicant: **FERRARI S.p.A.**
41100 Modena (IT)

(54) **INTERNAL COMBUSTION ENGINE PROVIDED WITH A DEVICE FOR THE AMPLIFICATION OF THE INTAKE SOUND**

(57) An internal combustion engine (4) comprising: a plurality of cylinders (8); at least one intake manifold (9), which receives fresh air from the outside; a plurality of intake channels (14), each connecting a cylinder (8) to the intake manifold (9); and an intake sound amplification device (26), which is provided with an amplification pipe (27), an insulating element (29) sealing the amplifi-

cation pipe (27) in a tight manner, a plurality of amplification channels (30), each originating from a corresponding intake channel (14), and an amplification manifold (31), which, on one side, is connected to all amplification channels (30) and, on the other side, is connected to the amplification pipe (27).

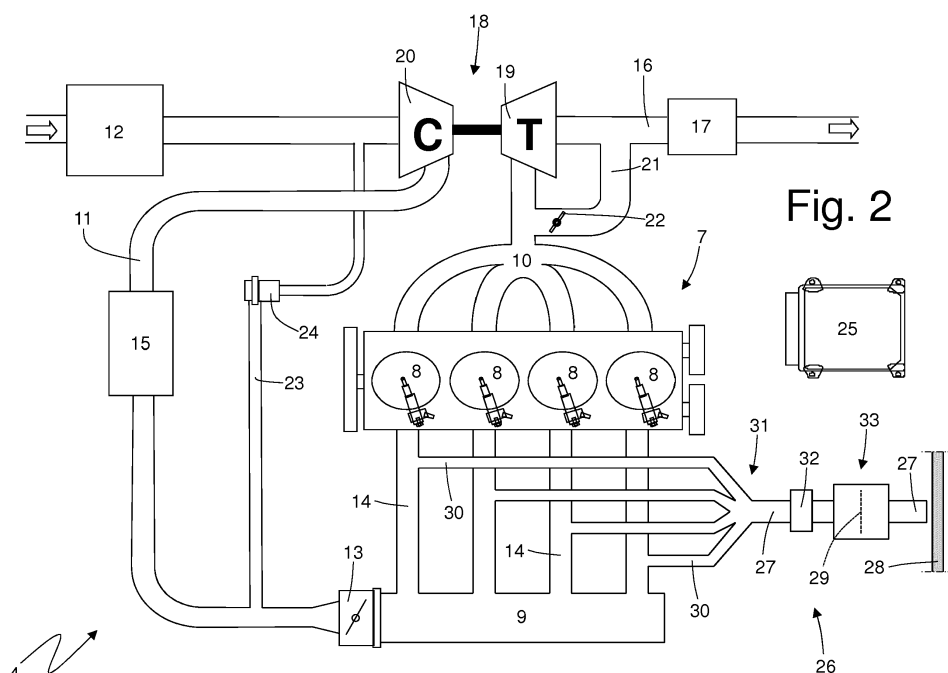

Description

TECHNICAL FIELD

[0001] The present invention relates to an internal combustion engine provided with a device for the amplification of the intake sound.

PRIOR ART

[0002] Patent US7975802B2 describes an internal combustion engine provided with a device for the amplification of the intake sound, which comprises an amplification pipe originating in the intake pipe between the air filter and the inlet valve and has an outlet opening, which is free and points towards the passenger compartment. The amplification pipe is provided with a membrane, which serves the purpose of sealing the intake pipe with respect to the external environment and is carried by a bellows to be free to vibrate so as to generate sound waves under the thrust of the pressure waves present in the intake pipe.

[0003] However, in the known devices for the amplification of the intake sound, for example of the type described in Patent US7975802B2, the intake sound conveyed from the intake pipe to the inside of the passenger compartment is not very natural (and therefore unpleasant because "artificial").

[0004] Patent application DE19922216A1 and patent application DE10116169A1 describe an internal combustion engine comprising: a plurality of cylinders; an intake manifold that receives fresh air from the outside environment; a plurality of intake channels, each of which connects a cylinder to the intake manifold; and an intake sound amplification device provided with an amplification pipe and an insulating element that seals the amplification pipe in a tight manner. According to a possible embodiment, the head end of the amplification pipe is connected to the intake manifold.

DESCRIPTION OF THE INVENTION

[0005] The object of the present invention is to provide an internal combustion engine provided with a device for the amplification of the intake sound, said combustion engine being easy and inexpensive to manufacture and free from the drawbacks described above, i.e. allows for perceiving within the passenger compartment an intake sound which is natural, and therefore more pleasant for the driver and the passengers.

[0006] According to the present invention, an internal combustion engine provided with a device for the amplification of the intake sound is provided as claimed in the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] The present invention will now be described

with reference to the accompanying drawings, which illustrate a non-limiting embodiment thereof, in which:

- Figure 1 is a schematic view of a car provided with an internal combustion engine manufactured according to the present invention; and
- Figure 2 is a schematic view of an internal combustion engine bank of Figure 1.

10 PREFERRED EMBODIMENTS OF THE INVENTION

[0008] In Figure 1, the numeral 1 indicates, as a whole, a car equipped with two front wheels 2 and two rear driving wheels 3, which receive the driving torque from a combustion heat engine 4 arranged in the front. The car 1 is provided with a passenger compartment 5, which is adapted to accommodate the driver and any passengers. The internal combustion heat engine 4 has a base 6 from which two banks 7 of cylinders 8 (partially shown in Figure 2) rise, which are mutually angled so as to form a "V", each having four cylinders 8 (i.e., overall, the internal combustion heat engine 4 is a "V8" engine); obviously, according to other embodiments not shown, the number and/or arrangement of the cylinders may be different. The two banks 7 of cylinders of the internal combustion heat engine 4 are mutually identical and completely independent of each other, i.e. each having its own intake system and its own exhaust system.

[0009] As shown in Figure 2, each bank 7 comprises four cylinders 8, each of which is connected to an intake manifold 9 (also designated as intake lung) via at least one respective intake valve (not shown), and to an exhaust manifold 10 via at least one respective exhaust valve (not shown). Each intake manifold 9 receives fresh air (i.e. air from the external environment) through an intake pipe 11, which is provided with an air filter 12 and is controlled by a throttle valve 13. Each intake manifold 9 is connected to the respective cylinders 8 via corresponding intake channels 14 (also called intake runners); i.e. each intake channel 14 connects one cylinder 8 to the corresponding intake manifold 9. An intercooler 15, whose function is to cool the intake air, is arranged along each intake pipe 11. Each exhaust manifold 10 is connected to an exhaust pipe 16 that feeds the exhaust gases produced by combustion to an exhaust system, which emits the gases produced by combustion into the atmosphere and normally comprises at least one catalyst 17 and at least one silencer (not shown) arranged downstream of the catalyst 17.

[0010] Each bank 7 comprises its own supercharging system provided with a turbocharger 18; each turbocharger 18 is provided with a turbine 19, which is arranged along the exhaust pipe 16 so as to rotate at high speed under the action of the exhaust gases expelled from the cylinders 8, and a supercharger 20, which is arranged along the intake pipe 11 and is mechanically connected to the turbine 19 to be driven into rotation by the turbine 19 itself so as to increase the pressure of the

air fed into the feeding pipe 11.

[0011] The turbocharger 18 comprises a bypass pipe 21, which is connected in parallel to the turbine 19 so as to have its ends connected upstream and downstream of the turbine 19 itself; a wastegate valve 22 is arranged along the bypass pipe 21, the former being adapted to adjust the flow rate of the exhaust gases flowing through the bypass pipe 21 and controlled by an actuator (not shown). Furthermore, the turbocharger 18 comprises a bypass pipe 23, which is connected in parallel to the supercharger 20 so as to have its ends connected upstream and downstream of the supercharger 20 itself; a Poff valve 24 is arranged along the bypass pipe 23, the former being adapted to adjust the flow rate of the fresh air flowing through the bypass pipe 23 and controlled by an actuator (not shown).

[0012] The internal combustion engine 4 is controlled by an electronic control unit 25, which supervises the operation of all the components of the internal combustion engine 4.

[0013] Each bank 7 of the internal combustion engine 4 comprises an intake sound amplification device 26 which serves to amplify the intake sound so that the overall sound generated by the internal combustion engine 4 and perceived by the occupants of the car 1 is more "*intense*" and more "*pleasant*", i.e. more compliant with the desires/expectations of the occupants of the car 1. The presence of the intake sound amplification devices 26 is particularly useful in the case of turbo-compression since the presence of the supercharger 20 and the intercooler 15 along each intake pipe 11 attenuates (compared to a similar naturally aspirated engine) the level of the intake sound generated by the internal combustion engine 4.

[0014] Each amplification device 26 comprises an amplification pipe 27 that is oriented towards the passenger compartment 5 of the car 1 and ends in close proximity of a firewall 28 that separates the engine compartment (in which the internal combustion engine 4 is housed) from the passenger compartment 5. In other words, the terminal end of each amplification pipe 27 is oriented towards the passenger compartment 5 of the car 1 and faces the firewall 28; alternatively, the terminal end of the amplification pipe 27 may be very close to, yet disunited from, the firewall 28, or the terminal end of the amplification pipe 27 may be in contact with the firewall 28.

[0015] An insulating element 29, which seals the amplification pipe 27 in a tight manner, is arranged along each amplification pipe 27. In other words, the function of each insulating element 29 is to prevent the amplification pipe 27 from interfering with the intake of air into the cylinders 8, and it performs this function by tight sealing said amplification pipe 27; in this way, no type of air circulation whatsoever can occur along the amplification pipe 27, which could disrupt the intake of air into the cylinders 8. It is important to emphasize that the amplification pipe 27 only has an acoustic function (i.e. it has no effect on the intake of air).

[0016] Each insulating element 29 is shaped so as to

prevent the passage of air (i.e. to seal in a pneumatically tight manner) and allow (facilitate) the passage of sound (i.e. of the acoustic waves). By way of a non-limiting example, each insulating element 29 could comprise a rigid membrane and an elastic ring element (which may be flat or cup-shaped), which is arranged around the membrane and fixed to the inner wall of the amplification pipe 27. In this manner, the membrane is suspended inside the amplification pipe 27 and is free to oscillate under the thrust of the pressure pulsations of the air present in the intake pipe 11; this oscillation of the membrane generates sound waves that propagate along the amplification pipe 27 downstream of the membrane until reaching the firewall 28.

[0017] Each amplification device 26 comprises a plurality of amplification channels 30, each originating from a corresponding intake channel 14, and an amplification manifold 31, which, on one side, is connected to all amplification channels 30 and, on the other side, is connected to the amplification pipe 27. Importantly, each amplification channel 30 is devoid of insulating elements or filters for a direct and unobstructed connection of the corresponding intake channel 14 to the amplification manifold 31.

[0018] In the embodiment illustrated in Figure 2, each amplification manifold 31 is of the "*four-in-one*" type, i.e. all four amplification channels 30 directly lead into the amplification manifold 31 and, therefore, only join one another in the amplification manifold 31. According to an alternative, and perfectly equivalent embodiment not illustrated, the four amplification channels 30 join one another in a pair-wise manner in respective convergences arranged upstream of the amplification manifold 31, i.e. two convergences of the "*two-in-one*" type are provided, in which the four amplification channels 30 become two, which join in the amplification manifold 31 (which, therefore, is of the "*two-in-one*" type).

[0019] In the embodiment illustrated in Figure 2, each bank 7 comprises its own amplification manifold 31 that originates its own amplification pipe 27. According to a different, and perfectly equivalent, embodiment not illustrated, the internal combustion engine 4 comprises a single amplification pipe 27 common to both banks 7; in this case, two amplification manifolds 31 can be provided, which receive the amplification channels 30 from the corresponding banks 7 and then converge together towards the single amplification pipe 27, or a single amplification manifold 31 may be provided, which receives the amplification channels 30 from both banks 7 and then leads toward the single amplification pipe 27.

[0020] According to a preferred embodiment, in each bank 7 all amplification channels 30 have the same length (within a certain tolerance which may be, for example, 3-5%); this feature is important because when all amplification channels 30 of each bank 7 have the same length, the acoustic waves in the amplification channels 30 (and coming from the respective intake channels 14) combine with each other (when they arrive in the amplification

manifold 31) providing a final result that is particularly pleasant to the human ear. In particular, when all amplification channels 30 of each bank 7 have the same length, the so-called "semitones" of the acoustic waves that are present in the amplification channels 30 and have a dissonant effect cancel each other out, thus leaving an overall (resulting) sound in the amplification manifold 31 (and therefore in the amplification pipe 27) that is very pleasant to the human ear.

[0021] According to a possible, yet not binding, embodiment illustrated in Figure 2, each amplification device 26 comprises at least one acoustic sensor 32 (preferably of the low-pass type to block the higher frequencies) arranged along the amplification pipe 27. According to an alternative, and perfectly equivalent, embodiment not shown, each amplification device 26 is devoid of the acoustic sensor 32.

[0022] According to a possible, yet not binding, embodiment illustrated in Figure 2, each amplification device 26 comprises at least one acoustic resonator 33 arranged along the amplification pipe 27; preferably, but not necessarily, the acoustic resonator 33 resonates under the effect of the pulsing pressure of the air in the amplification pipe 27 within a frequency range ranging from 350 to 600 Hz (this frequency band is the most suitable for transferring the feeling of a sporty sound). According to an alternative, and perfectly equivalent, embodiment not shown, each amplification device 26 is devoid of the acoustic resonator 33.

[0023] Preferably, but not necessarily, the insulating element 29 of each amplification pipe 27 is arranged inside the acoustic resonator 33; alternatively, the insulating element 29 of each amplification pipe 27 may be arranged upstream or downstream of the acoustic resonator 33.

[0024] In the exemplary embodiment illustrated in the attached figures, the internal combustion engine 4 is a "V8" engine; alternatively, the internal combustion engine 4 may have any other number and arrangement of cylinders 8, for example: four cylinders 8 in-line, six cylinders 8 in-line, six "V" cylinders 8, six boxer cylinders 8, ten "V" cylinders 8, twelve "V" cylinders 8.

[0025] The internal combustion engine 4 described above and provided with the amplification device 26 has many advantages.

[0026] Firstly, the amplification device 26 allows the intake sound from the internal combustion engine 4 to be amplified (and thus enhanced) with a mode that is extremely pleasant (and therefore appreciated) to/by the occupants of the passenger compartment.

[0027] Moreover, the amplification device 26 is simple and inexpensive to manufacture, since it consists essentially of plastic pipes (the amplification pipes 27, amplification channels 30, amplification manifolds 31), which are combined with passive bodies (the insulating elements 29, acoustic sensors 32, acoustic resonators 33) that are easy to construct.

Claims

1. An internal combustion engine (4) comprising:

a plurality of cylinders (8);
at least one intake manifold (9), which receives fresh air from the outside;
a plurality of intake channels (14), each connecting a cylinder (8) to the intake manifold (9); and
an intake sound amplification device (26), which is provided with an amplification pipe (27) and with an insulating element (29), which seals the amplification pipe (27) in a tight manner;
the internal combustion engine (4) is **characterized in that** the amplification device (26) comprises:

a plurality of amplification channels (30), each originating from a corresponding intake channel (14); and
an amplification manifold (31), which, on one side, is connected to all amplification channels (30) and, on the other side, is connected to the amplification pipe (27).

2. The internal combustion engine (4) according to claim 1, wherein each amplification channel (30) is devoid of insulating elements or filters for a direct and unobstructed connection of the corresponding intake channel (14) to the amplification manifold (31).

3. The internal combustion engine (4) according to claim 1 or 2, wherein all amplification channels (30) have the same length.

4. The internal combustion engine (4) according to claim 1, 2 or 3, wherein all amplification channels (30) directly lead into the amplification manifold (31) and, therefore, only join one another in the amplification manifold (31).

5. The internal combustion engine (4) according to claim 1, 2 or 3, wherein at least two amplification channels (30) join one another in a convergence arranged upstream of the amplification manifold (31).

6. The internal combustion engine (4) according to any of the claims from 1 to 5, wherein the amplification device (26) comprises at least one acoustic sensor (32) arranged along the amplification pipe (27).

7. The internal combustion engine (4) according to claim 6, wherein the acoustic sensor (32) is of the low-pass type.

8. The internal combustion engine (4) according to any of the claims from 1 to 7, wherein the amplification device (26) comprises at least one acoustic resona-

tor (33) arranged along the amplification pipe (27).

9. The internal combustion engine (4) according to claim 8, wherein the insulating element (29) is arranged inside the acoustic resonator (33). 5
10. The internal combustion engine (4) according to claim 8 or 9, wherein the acoustic resonator (33) resonates under the effect of the pulsing pressure of the air in the amplification pipe (27) within a frequency range ranging from 350 to 600 Hz. 10
11. The internal combustion engine (4) according to any of the claims from 1 to 10, wherein the amplification pipe (27) is designed to be oriented towards a passenger compartment (5) of a vehicle (1) provided with the internal combustion engine (4). 15

20

25

30

35

40

45

50

55


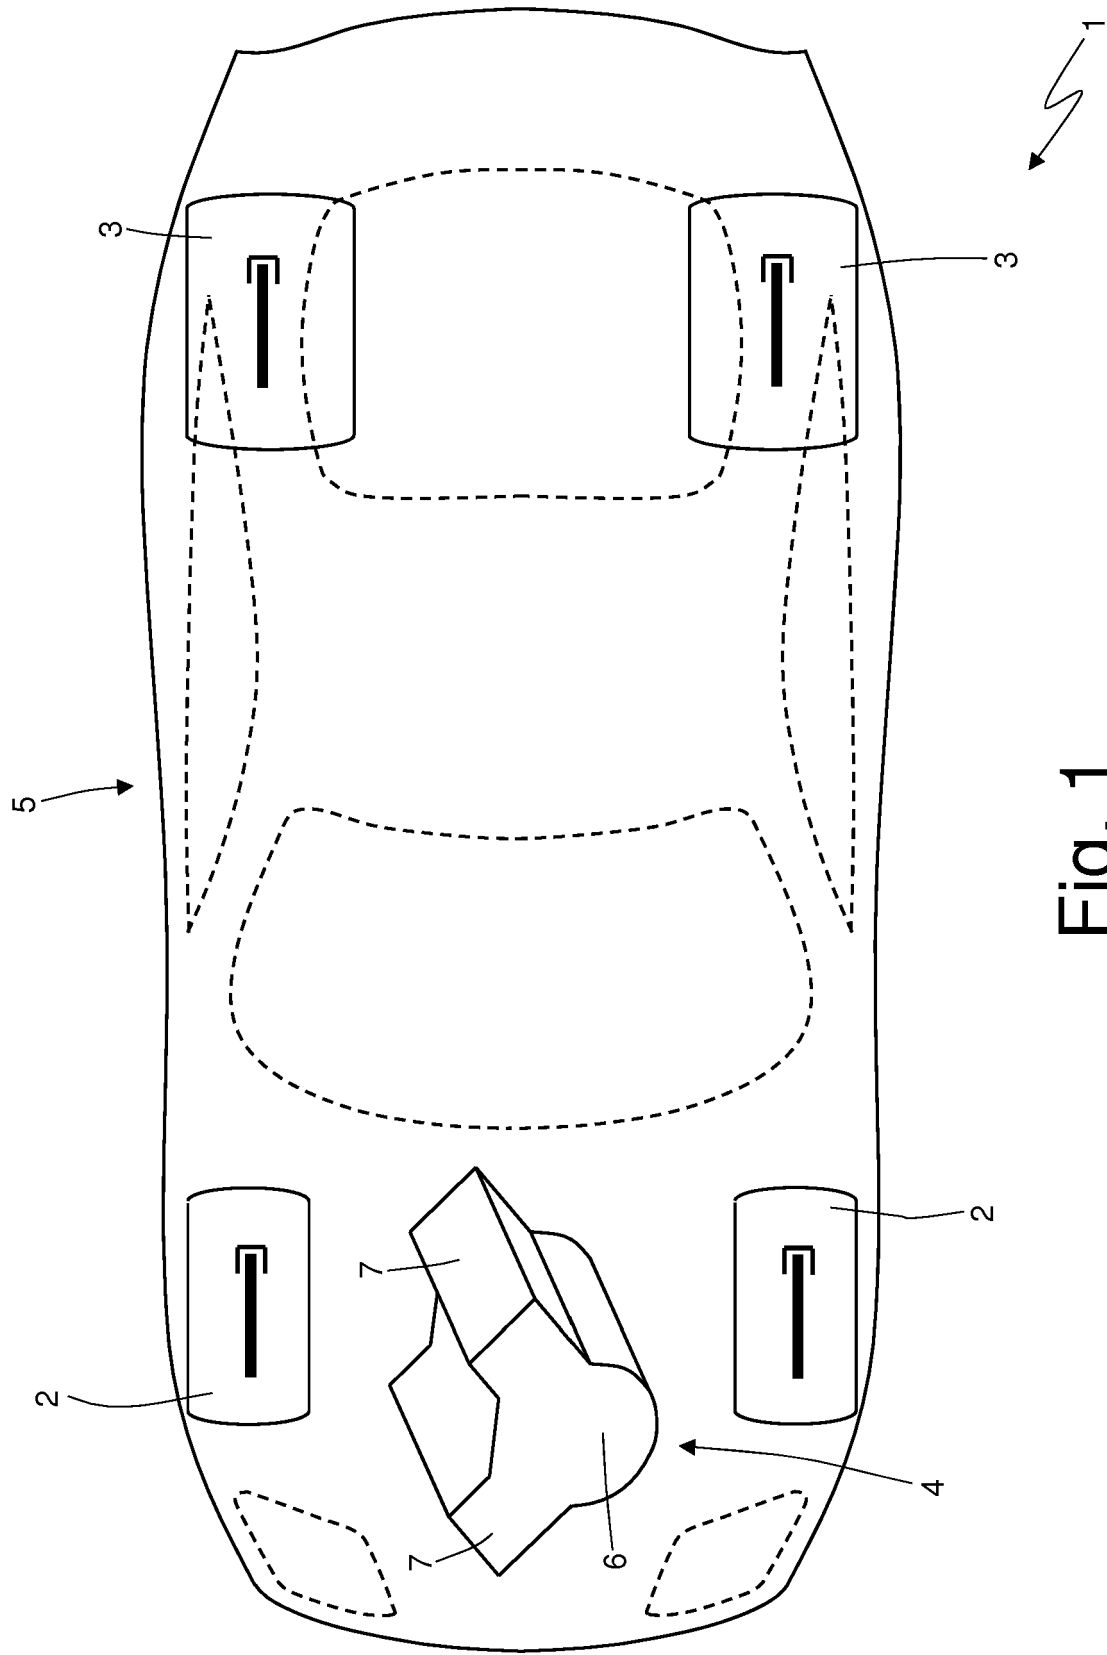


Fig. 1



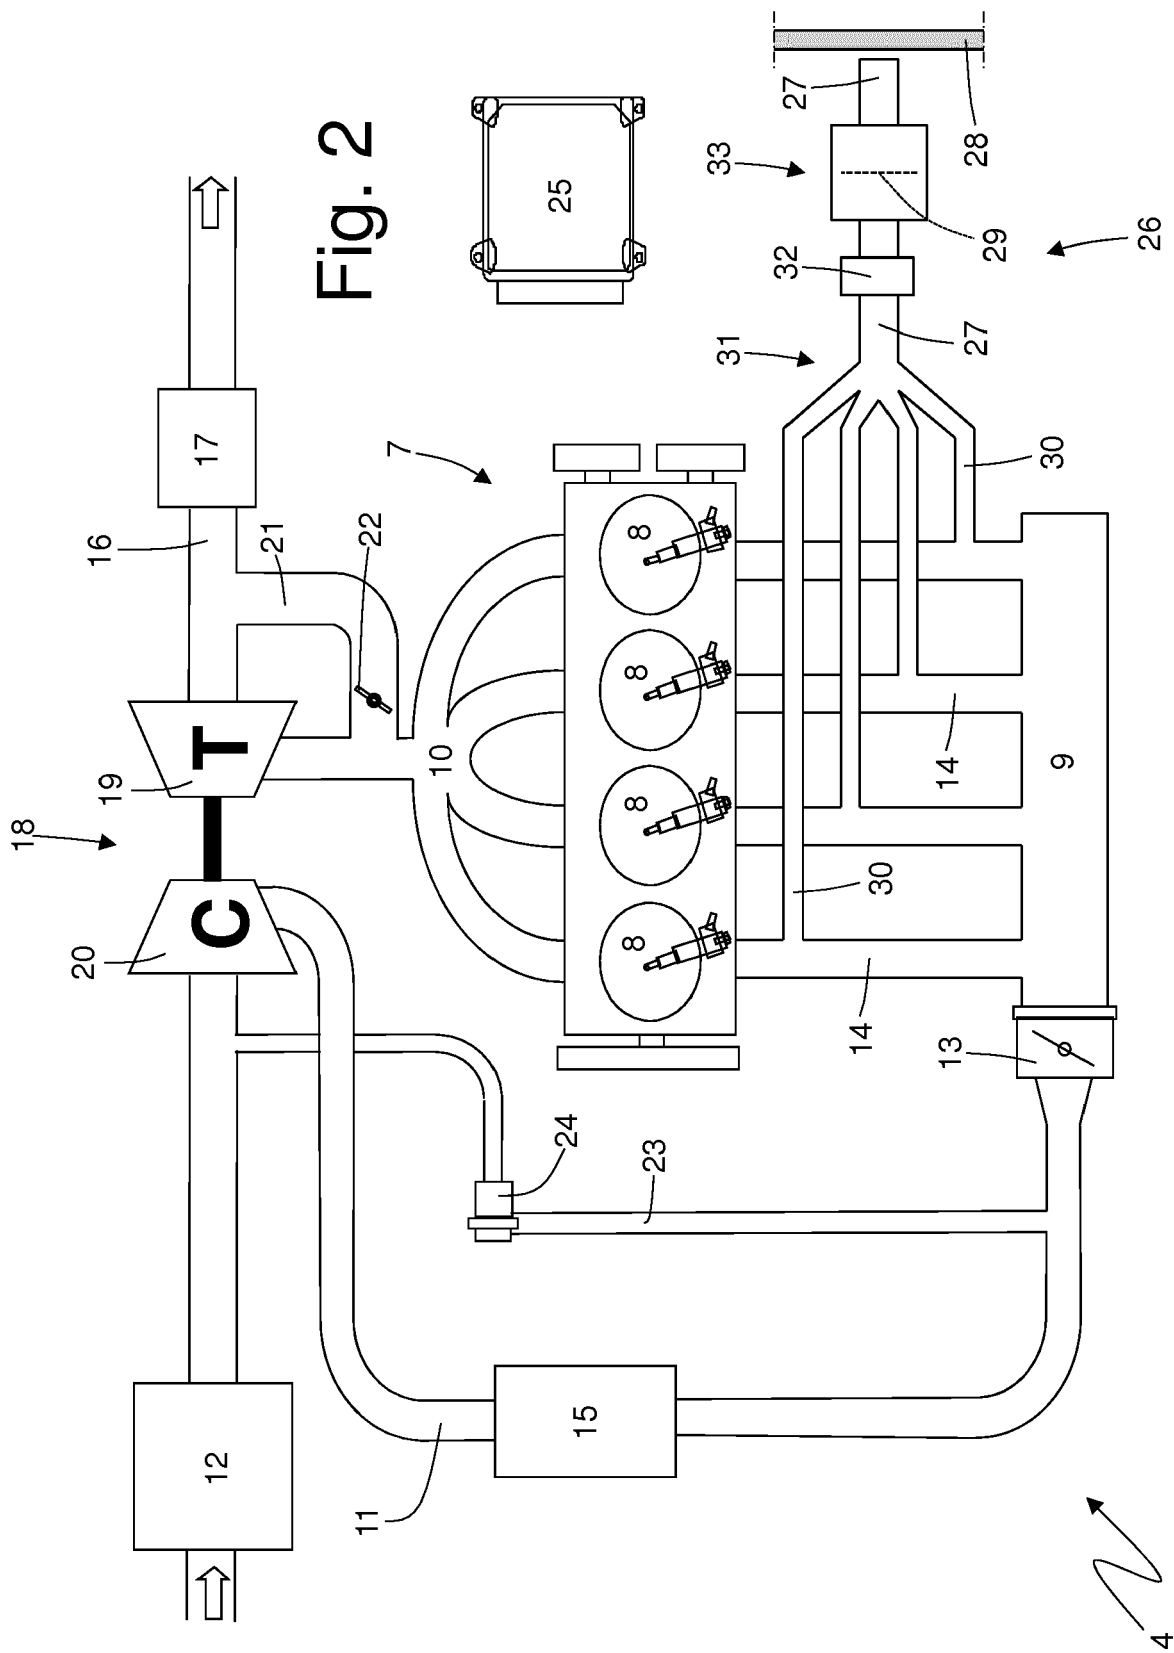

EUROPEAN SEARCH REPORT

 Application Number
 EP 17 19 6709

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
Y	DE 199 22 216 A1 (MAHLE FILTERSYSTEME GMBH [DE]) 30 November 2000 (2000-11-30) * columns 1-5; figures 1-3 *	1-11	INV. F02M35/12 F02M35/10
Y	DE 101 16 169 A1 (MAHLE FILTERSYSTEME GMBH [DE]) 17 October 2002 (2002-10-17) * paragraphs [0011], [0028] - [0032], [0039], [0046], [0048], [0050]; figures 2, 3 *	1-11	ADD. F02M35/116
Y	EP 1 431 536 A1 (MAHLE FILTERSYSTEME GMBH [DE]; BAYERISCHE MOTOREN WERKE AG [DE]) 23 June 2004 (2004-06-23) * paragraphs [0015] - [0017], [0019], [0020], [0023], [0026] *	1-11	
Y	DE 100 16 104 A1 (AUDI AG [DE]) 4 October 2001 (2001-10-04) * paragraphs [0011] - [0014]; figure 3 *	1-11	
A	DE 101 14 397 A1 (MAHLE FILTERSYSTEME GMBH [DE]; BAYERISCHE MOTOREN WERKE AG [DE]) 26 September 2002 (2002-09-26) * paragraphs [0020] - [0022]; figures 1-3 *	1-11	TECHNICAL FIELDS SEARCHED (IPC) F02M F02B
A	US 2007/044747 A1 (SAWATARI TOMOYUKI [JP] ET AL) 1 March 2007 (2007-03-01) * abstract; figure 1 *	6,7,10	
A	GB 2 413 157 A (FORD GLOBAL TECH LLC [US]) 19 October 2005 (2005-10-19) * page 2, lines 10-11 *	10	
A	DE 10 2013 112409 A1 (EBERSPÄCHER EXHAUST TECHNOLOGY GMBH & CO KG [DE]) 28 May 2015 (2015-05-28) * abstract *	10	
		-/--	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 30 January 2018	Examiner Karstens, Thede
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P04C01)



EUROPEAN SEARCH REPORT

Application Number
EP 17 19 6709

5

10

15

20

25

30

35

40

45

2

50

55

EPO FORM 1503 03.82 (P04C01)

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	EP 1 304 461 A1 (HITACHI LTD [JP]; HITACHI CAR ENG CO LTD [JP]) 23 April 2003 (2003-04-23) * abstract; figures 1,7 * -----	1-11	
			TECHNICAL FIELDS SEARCHED (IPC)
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 30 January 2018	Examiner Karstens, Thede
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 17 19 6709

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

30-01-2018

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 19922216 A1	30-11-2000	DE 19922216 A1	30-11-2000
		EP 1178901 A1	13-02-2002
		US 6600408 B1	29-07-2003
		WO 0069680 A1	23-11-2000
DE 10116169 A1	17-10-2002	NONE	
EP 1431536 A1	23-06-2004	DE 10259099 A1	01-07-2004
		EP 1431536 A1	23-06-2004
		ES 2242137 T3	01-11-2005
DE 10016104 A1	04-10-2001	NONE	
DE 10114397 A1	26-09-2002	DE 10114397 A1	26-09-2002
		EP 1371056 A1	17-12-2003
		ES 2246397 T3	16-02-2006
		US 2004094112 A1	20-05-2004
		WO 02077969 A1	03-10-2002
US 2007044747 A1	01-03-2007	DE 102006039467 A1	15-03-2007
		US 2007044747 A1	01-03-2007
GB 2413157 A	19-10-2005	NONE	
DE 102013112409 A1	28-05-2015	NONE	
EP 1304461 A1	23-04-2003	EP 1304461 A1	23-04-2003
		JP 2003120447 A	23-04-2003
		US 2003106516 A1	12-06-2003

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 7975802 B2 [0002] [0003]
- DE 19922216 A1 [0004]
- DE 10116169 A1 [0004]