

(19)



(11)

EP 3 316 427 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
02.05.2018 Bulletin 2018/18

(51) Int Cl.:
H01R 43/26 ^(2006.01) **H01R 13/436** ^(2006.01)
H01R 13/641 ^(2006.01) **H01R 13/627** ^(2006.01)
H01R 13/639 ^(2006.01)

(21) Application number: **17207747.1**

(22) Date of filing: **15.12.2017**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
 GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
 PL PT RO RS SE SI SK SM TR**
 Designated Extension States:
BA ME
 Designated Validation States:
MA MD TN

(72) Inventors:
 • **Jabrane, Khalid**
Farmington Hills, Michigan 48335 (US)
 • **Holub, Franklin A.**
Farmington Hills, Michigan 48335 (US)
 • **Abraham, Rajit**
Farmington Hills, Michigan 48335 (US)

(30) Priority: **17.01.2017 US 201715407573**


(74) Representative: **Latscha Schöllhorn Partner AG**
Austrasse 24
4051 Basel (CH)

(71) Applicant: **J.S.T. Corporation**
Farmington Hills, MI 48335 (US)

(54) METHOD OF OPERATING MSL CONNECTOR SERIES

(57) Method of operating a connector apparatus having a female connector assembly and a male connector assembly. The female connector assembly includes a female housing, a connector position assurance (CPA) member for assuring the engagement of the male connector assembly with the female connector assembly, and a first terminal position assurance (TPA) member for

assuring that terminals for the female connector assembly are positioned properly. The female housing further includes a connector latch used to securely hold together a connector apparatus. The female housing has TPA protection ribs and CPA protection walls. The male housing has TPA protection ribs.

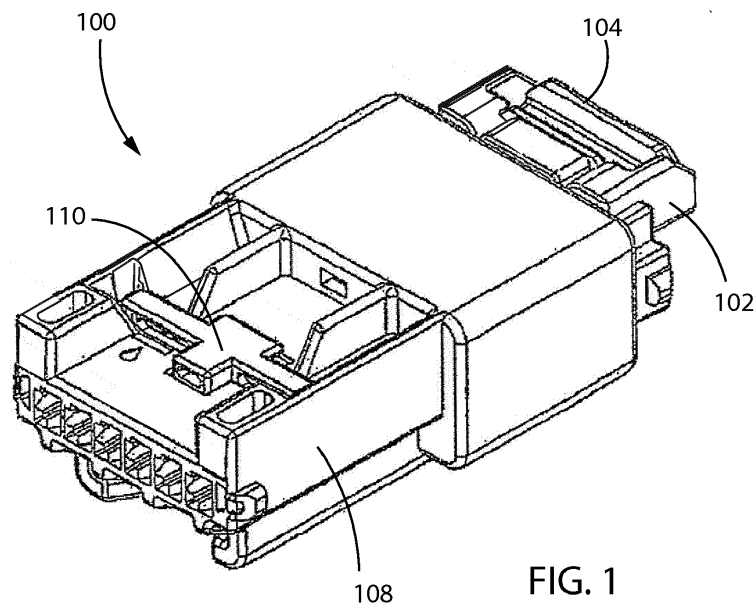**FIG. 1****EP 3 316 427 A1**

Description

BACKGROUND OF THE INVENTION

[0001] The present invention generally relates to a method of operating a connector apparatus having a female connector assembly and a male connector assembly.

BRIEF SUMMARY OF THE INVENTION

[0002] The present invention generally relates to a method of operating a connector apparatus having a female connector assembly and a male connector assembly.

[0003] The female connector assembly includes a female housing, a connector position assurance (CPA) member for assuring the engagement of the male connector assembly with the female connector assembly, and a first terminal position assurance (TPA) member for assuring that terminals for the female connector assembly are positioned properly. The female housing further includes a connector latch used to securely hold together a connector apparatus.

[0004] The male connector assembly includes a male housing and a second TPA member for assuring that terminals for the male connector assembly are positioned properly.

[0005] The female connector assembly and male connector assembly can be mated together.

[0006] The connector apparatus, having the female housing, male housing, CPA member, first TPA member, second TPA member, and connector latch, provides a number of desirable characteristics, including at least, for example: an audible "click" sound when the female connector assembly and the male connector assembly are mated together, which is an extra loud sound; a low profile connector latch; a resistance to permanent set for the connector latch; a resistance to movement to final lock position for the CPA member, first TPA member, and second TPA member; a moderate amount of reinforcement; mutual retention; good mechanical strength; easy molding features; no secondary operation of a user is required; failure prevention means; and good dimensional control of latching geometry.

[0007] To ensure that the first TPA member is made available for connecting to the female housing during transport thereof, for example, the first TPA is engaged, in a preset position, to the female housing.

[0008] To ensure that the second TPA member is made available for connecting to the male housing during transport thereof, for example, the second TPA is engaged, in a preset position, to the male housing.

[0009] To ensure that the CPA member is made available for connecting to the female housing during transport thereof, for example, the CPA member is engaged, in a preset position, to the female housing.

[0010] At least one terminal can be provided into each

of the male connector assembly and the female connector assembly, when the first TPA member and the second TPA member are in the preset position.

[0011] The male connector assembly and female connector assembly are engaged together, and the engagement thereof is assured when the CPA member is placed in a final lock position.

[0012] The set of terminals provided for the female connector assembly is secured thereto when the first TPA member is placed in the final lock position.

[0013] The set of terminals provided for the male connector assembly is secured thereto when the second TPA member is placed in the final lock position.

[0014] It is a desirable trait to have an audible "click" sound for a connector. For example, when components of an automotive connector are completely mated with each other, it is a desirable trait to have an audible "click" sound for convenient assurance that the components are completely mated. In the automotive connector field, an extra loud sound is favorable. It is desirable to have the loudest "click" sound possible. The "click" sound can be achieved by an interaction of latching features, for example. By placing latching features in a preloaded condition, there is additional force when a first connector assembly and a second connector assembly are mated together, and that additional force helps to make the "click" sound louder than it would have been if the latching features had not been in a preloaded condition.

[0015] It is a desirable trait for the connector latch to have a low profile. By manufacturing the connector latch in an undeflected position, the gaps required to create overstress protection features, to prevent the connector latch from being pried in the wrong direction and damaged, are not needed. The gaps can be removed from the overall height of the latch system, so that the connector latch can have a low profile.

[0016] It is a desirable trait to have a resistance to being set. For example, when automotive wire harnesses are bundled for shipment, the connector latches can be unintentionally compressed and held in a deflected position. Especially in hot environments, this condition causes the connector latch to be permanently deflected, also known as permanently set, thus rendering the connector latch useless or less effective. Preloading the connector latch makes the connector latch more resistant to this failure mode.

[0017] It is a desirable trait to have good dimensional control of latching geometry. By preloading the connector latch against dimensionally stable features, the height of the connector latch features can be controlled easily.

[0018] After the connector latch is manufactured, the connector latch is in an undeflected position. The connector latch is then subjected to a pre-mating deflection process, in order to deflect the connector latch and lock the connector latch in a preloaded position. After the pre-mating deflection process has been completed, the connector latch is locked in a preloaded position and can be referred to as a preloaded connector latch.

[0019] When a first connector assembly and a second connector assembly are engaged together, the engagement thereof is assured because the connector latch causes an audible "click" sound. A first connector assembly can correspond to a female connector assembly or other type of connector assembly, for example. A second connector assembly can correspond to a male connector assembly or other type of connector assembly, for example. The undeflected position can also be referred to as an extended and relaxed undeflected position.

[0020] Each TPA member has at least one flexible feature and at least one guide. The flexible feature can also be referred to as a protrusion. The guide can provide proper guidance and avoid any imbalance created during engagement of a TPA member with a housing.

[0021] A CPA member provides a number of desirable characteristics, including at least, for example: it helps to achieve a full potential force of the system and desirable audible "click" sound when the CPA member is inserted into a housing; it helps to avoid a CPA member being moved to a final lock position (or "set" position) during shipping and/or handling; it requires no secondary operation of a user; and it helps prevent failure.

[0022] A TPA member provides a number of desirable characteristics, including at least, for example: it helps to achieve a full potential force of the system and desirable audible "click" sound when the TPA member is inserted into a housing; it helps to avoid a TPA member being moved to a final lock position during shipping and/or handling; it requires no secondary operation of a user; and it helps prevent failure.

[0023] Because of the use of a TPA member having the guide, the TPA member's first pair of flexible features is more likely to engage substantially simultaneously, and then subsequently the TPA member's second pair of flexible features is more likely to engage substantially simultaneously, thereby achieving full potential force of the system and producing an audible "click" sound. Because of the guide, there is additional force when a TPA member and a connector assembly are mated together, and that additional force helps to make the "click" sound louder than it would have been if the guide was not present.

[0024] It is a desirable trait to avoid a TPA member being moved to a final lock position during shipping and/or handling. The guide and flexible features of the TPA member help to make the TPA member more resistant to entering a final lock position during shipping and/or handling. The guide and flexible features of the TPA members help to prevent a movement of the TPA members from a preset position to a final lock position during shipping and/or handling.

[0025] It is a desirable trait for a TPA member to avoid a need for a secondary operation of a user. The guide and flexible features of TPA members help to avoid a need for a secondary operation of a user. The desired movement can be accomplished by a single operation of a user.

[0026] It is a desirable trait for a TPA member to help

prevent failure. The location/guide features and flexible features of TPA members, according to the principles disclosed herein, help to avoid failure.

[0027] When a TPA member and a housing are engaged together in a final lock position, the engagement thereof is assured because there is an audible "click" sound.

[0028] The connector apparatus of the present invention is at least one part of MSL connector series.

[0029] Additional features, advantages, and embodiments of the invention are set forth or apparent from consideration of the following detailed description, drawings and claims. Moreover, it is to be understood that both the foregoing summary of the invention and the following detailed description are exemplary and intended to provide further explanations without limiting the scope of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0030]

FIG. 1 is a perspective view of a connector apparatus, in accordance with the principles of the present invention, in a six-pin configuration.

FIG. 2 is a perspective view of a connector apparatus, in accordance with the principles of the present invention, in a six-pin configuration.

FIG. 3 is an exploded perspective view of parts of a connector apparatus, in accordance with the principles of the present invention, showing a female housing, a TPA member for the female housing, a CPA member for the female housing, and a male housing, in a sixteen-pin configuration.

FIG. 4A includes a front end elevational view of the female housing of the connector apparatus of FIG. 3 without a TPA member and without a CPA member, and includes a cross-sectional view thereof, taken along line 4A-4A.

FIG. 4B includes a front end elevational view of the female housing of the connector apparatus of FIG. 3 with a TPA member in the preset position and a CPA member in the preset position, and includes a cross-sectional view thereof, taken along line 4B-4B.

FIG. 4C includes a front end elevational view of the female housing of the connector apparatus of FIG. 3 with a TPA member in the final lock position and a CPA member in the final lock position, and includes a cross-sectional view thereof, taken along line 4C-4C.

FIG. 5A includes a top elevational view of the female housing of the connector apparatus of FIG. 3 without

a TPA member and without a CPA member, and includes a cross-sectional view thereof, taken along line 5A-5A.

FIG. 5B includes a top elevational view of the female housing of the connector apparatus of FIG. 3 with a TPA member in the preset position and a CPA member in the preset position, and includes a cross-sectional view thereof, taken along line 5B-5B.

FIG. 5C includes a top elevational view of the female housing of the connector apparatus of FIG. 3 with a TPA member in the final lock position and a CPA member in the final lock position, and includes a cross-sectional view thereof, taken along line 5C-5C.

FIG. 6A is a bottom elevational view of the female housing of the connector apparatus of FIG. 3 without a TPA member and without a CPA member.

FIG. 6B is a bottom elevational view of the female housing of the connector apparatus of FIG. 3 with a TPA member in the preset position and a CPA member in the preset position.

FIG. 6C is a bottom elevational view of the female housing of the connector apparatus of FIG. 3 with a TPA member in the final lock position and a CPA member in the final lock position.

FIG. 7A is a rear end elevational view of the female housing of the connector apparatus of FIG. 3 without a TPA member and without a CPA member.

FIG. 7B is a rear end elevational view of the female housing of the connector apparatus of FIG. 3 with a TPA member in the preset position and a CPA member in the preset position.

FIG. 7C is a rear end elevational view of the female housing of the connector apparatus of FIG. 3 with a TPA member in the final lock position and a CPA member in the final lock position.

FIG. 8A is a perspective view of the female housing of the connector apparatus of FIG. 3 without a TPA member and without a CPA member.

FIG. 8B is a perspective view of the female housing of the connector apparatus of FIG. 3 with a TPA member in the preset position and a CPA member in the preset position.

FIG. 8C is a perspective view of the female housing of the connector apparatus of FIG. 3 with a TPA member in the final lock position and a CPA member in the final lock position.

FIG. 9A is a front end elevational view of the female housing and male housing of FIG. 3 mated together showing the female housing with a CPA member in the preset position, without a TPA member in the female housing and without a TPA member in the male housing.

FIG. 9B is a cross-sectional view, taken along line 9B-9B in FIG. 9A.

FIG. 9C is an enlarged view of the portion denoted 9C in FIG. 9B.

FIG. 9D is an enlarged view of the portion denoted 9D in FIG. 9B.

FIG. 10A is a front elevational view of the female housing and male housing of FIG. 3 mated together showing the female housing with a CPA member in the final lock position, without a TPA member in the female housing and without a TPA member in the male housing.

FIG. 10B is a cross-sectional view, taken along line 10B-10B in FIG. 10A.

FIG. 10C is an enlarged view of the portion denoted 10C in FIG. 10B.

FIG. 11 is an exploded perspective view of a male connector assembly, in accordance with the principles of the present invention, showing a male housing and a TPA member for the male housing, in a sixteen-pin configuration.

FIG. 12A is a front end elevational view of the male housing of the male connector assembly of FIG. 11 without a TPA member.

FIG. 12B is a front end elevational view of the male housing of the male connector assembly of FIG. 11 with a TPA member in the preset position.

FIG. 12C is a front end elevational view of the male housing of the male connector assembly of FIG. 11 with a TPA member in the final lock position.

FIG. 13A is a cross-sectional view, taken along line 13A-13A in FIG. 12A.

FIG. 13B is a cross-sectional view, taken along line 13B-13B in FIG. 12B.

FIG. 13C is a cross-sectional view, taken along line 13C-13C in FIG. 12C.

FIG. 14A is a top elevational view of the male housing of the male connector assembly of FIG. 11 without

a TPA member.

FIG. 14B is a top elevational view of the male housing of the male connector assembly of FIG. 11 with a TPA member in the preset position.

5

FIG. 14C is a top elevational view of the male housing of the male connector assembly of FIG. 11 with a TPA member in the final lock position.

10

FIG. 15A is a perspective view of the male housing of the male connector assembly of FIG. 11 without a TPA member.

FIG. 15B is a perspective view of the male housing of the male connector assembly of FIG. 11 with a TPA member in the preset position.

15

FIG. 15C is a perspective view of the male housing of the male connector assembly of FIG. 11 with a TPA member in the final lock position.

20

FIG. 16 is a partial cross-sectional view, taken along line 16-16 in FIG. 14B, showing details of some features of the male housing engaging with some features of the TPA member, when the TPA member is in the preset position, in accordance with the principles of the present invention.

25

FIG. 17 is an enlarged view of the portion denoted in FIG. 16.

30

FIG. 18 is a partial cross-sectional view, taken along line 18-18 in FIG. 14C, showing details of some features of the male housing engaging with some features of the TPA member, when the TPA member is in the final lock position, in accordance with the principles of the present invention.

35

FIG. 19 is an enlarged view of the portion denoted in FIG. 18.

40

FIG. 20 is a side elevational view of the female housing of the connector apparatus of FIG. 3 without a TPA member and without a CPA member.

45

FIG. 21 is a side elevational view of the female housing of the connector apparatus of FIG. 3 with a TPA member in the preset position and a CPA member in the preset position.

50

FIG. 22 is a side elevational view of the female housing of the connector apparatus of FIG. 3 with a TPA member in the final lock position and a CPA member in the final lock position.

55

FIG. 23 is a rear end elevational view of the male housing of the male connector assembly of FIG. 11

without a TPA member.

FIG. 24 is a side elevational view of the male housing of the male connector assembly of FIG. 11.

FIG. 25 is a bottom elevational view of the male housing of the male connector assembly of FIG. 11.

FIG. 26 is an exploded perspective view of a female connector assembly of a connector apparatus, in accordance with the principles of the present invention, showing a female housing, a TPA member for the female housing, and a CPA member for the female housing, in a six-pin configuration.

FIG. 27A includes a front end elevational view of the female housing of the female connector assembly of FIG. 26 without a TPA member and without a CPA member, and includes a cross-sectional view thereof, taken along line 27A-27A.

FIG. 27B includes a front end elevational view of the female housing of the female connector assembly of FIG. 26 with a TPA member in the preset position and a CPA member in the preset position, and includes a cross-sectional view thereof, taken along line 27B-27B.

FIG. 27C includes a front end elevational view of the female housing of the female connector assembly of FIG. 26 with a TPA member in the final lock position and a CPA member in the final lock position, and includes a cross-sectional view thereof, taken along line 27C-27C.

FIG. 28 is a bottom elevational view of the female housing of the female connector assembly of FIG. 26 without a TPA member and without a CPA member.

FIG. 29 is a rear end elevational view of the female housing of the female connector assembly of FIG. 26 without a TPA member and without a CPA member.

FIG. 30 includes a top elevational view of the female housing of the female connector assembly of FIG. 26 without a TPA member and without a CPA member, and includes a cross-sectional view thereof, taken along line 30-30.

FIG. 31 is a side elevational view of the female housing of the female connector assembly of FIG. 26 without a TPA member and without a CPA member.

FIG. 32 is a side elevational view of the female housing of the female connector assembly of FIG. 26 with a TPA member in the preset position and a CPA

member in the preset position.

FIG. 33 is a side elevational view of the female housing of the female connector assembly of FIG. 26 with a TPA member in the final lock position and a CPA member in the final lock position.

FIG. 34 is an exploded perspective view of a male connector assembly, in accordance with the principles of the present invention, showing a male housing and a TPA member for the male housing, in a six-pin configuration.

FIG. 35 is a front end elevational view of the male housing of the male connector assembly of FIG. 34.

FIG. 36 is a cross-sectional view, taken along line 36-36 in FIG. 35, when a TPA member is in a preset position.

FIG. 37 is a cross-sectional view, taken along line 36-36 in FIG. 35, when a TPA member is in a final lock position.

FIG. 38 is a top elevational view of the male housing of the male connector assembly of FIG. 34 with a TPA member in the preset position.

FIG. 39 is a perspective view of the male housing of the male connector assembly of FIG. 34 with a TPA member in the preset position.

FIG. 40 is a perspective view of the male housing of the male connector assembly of FIG. 34 with a TPA member in the final lock position.

FIG. 41 is a side elevational view of the male housing of the male connector assembly of FIG. 34.

FIG. 42 is a bottom elevational view of the male housing of the male connector assembly of FIG. 34.

FIG. 43 is a perspective view of the CPA member of FIG. 3.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0031] FIG. 1 is a perspective view of a connector apparatus, in accordance with the principles of the present invention, in a six-pin configuration. FIG. 1 illustrates a connector apparatus, generally referred to by reference numeral 100, which includes a female housing 102, a CPA member 104 in the female housing 102, a male housing 108, and a TPA member 110 in the male housing 108. As shown in FIG. 1, the female housing 102 is mated with the male housing 108.

[0032] FIG. 2 is a perspective view of a connector ap-

paratus, in accordance with the principles of the present invention, in a six-pin configuration. FIG. 2 illustrates a connector apparatus, generally referred to by reference numeral 200, which includes a female housing 202, a CPA member 204 in the female housing 202, a male housing 208, and a TPA member 210 in the male housing 208. As shown in FIG. 2, the female housing 2102 is mated with the male housing 208.

[0033] A full connector assembly consists of a male connector assembly and a female connector assembly. The full connector assembly can also be referred to as a connector apparatus.

[0034] The female connector assembly consists of a female housing, a TPA member, and a CPA member. For female sub-assembly, the TPA member and CPA member are inserted into the female housing in the preset position.

[0035] The male connector assembly consists of a male housing and a TPA member. For male sub-assembly, the TPA member is inserted into the male housing in the preset position.

[0036] The female and male connector assemblies are assembled separately. After inserting terminals in both the female and male connector assemblies, the TPA member is pushed to the final lock position for providing a secondary locking to the terminals. Both sub-assemblies are then mated to make a system assembly.

[0037] The female housing has a connector latch which latches with the male housing to interlock. The CPA member provides an assurance that both female and male connector assemblies are locked. Then the CPA member is pushed to the final lock position.

[0038] The connector apparatus of the present invention includes a number of advantages and improvements. The connector apparatus of the present invention can help to prevent a locking latch from getting damaged/deformed during shipping and handling, and thus can help prevent mating problems.

[0039] The connector apparatus of the present invention can help to prevent a CPA member from getting damaged/deformed during shipping and handling, and thus can help prevent mating problems.

[0040] The connector apparatus of the present invention can help to prevent a TPA member from getting inadvertently pushed into the final lock position during shipping and handling, and thus can help prevent terminal insertion problems.

[0041] The connector apparatus of the present invention can help to prevent a user from needing to engage in secondary operations.

[0042] The connector apparatus of the present invention can help to prevent complaints from a user, because it helps prevent problems associated with an inadvertent movement of a TPA member or CPA member to a final lock position during shipping and/or handling, for example.

[0043] The connector apparatus of the present invention provides an improved connector assembly compris-

ing a female housing and male housing designed to provide a superior audible click sound, moderate reinforcement, mutual retention, good mechanical strength when the female and male housings engage with each other, and extremely easy molding consideration by manufacturing the female housing's connector latch with overbuild and then pushing the button of the connector latch to a preset position during assembly.

[0044] After the connector latch of the present invention is manufactured, the connector latch is in the extended and relaxed undeflected position. When the connector latch is in that position, the button 902 of the connector latch is extended upward, above a top 410 of a female housing 400. The button 902 is held up in the extended and relaxed undeflected position by the latch beams 904 and 906.

[0045] As indicated above, after the connector latch of the present invention is manufactured, the connector latch is in the extended and relaxed undeflected position. The connector latch is then subjected to a pre-mating deflection process, in order to deflect the connector latch and lock the connector latch in a preloaded position.

[0046] After the pre-mating deflection process has been completed, the connector latch is locked in a preloaded position and can be referred to as a preloaded connector latch.

[0047] FIGs. 3, 4A, 5A, 7A, and 8A, for example, show a female housing 400 having a connector latch in accordance with the principles of the present invention, showing the connector latch in a preloaded position.

[0048] The connector apparatus of the present invention can help to provide protection to a TPA member by having TPA protection ribs 416, 418, 442, 444, 446, and 448 around the TPA member on the female housing 400, for example. Those ribs help to prevent the TPA member from contacting other connectors during shipping and handling, to help reduce the occurrence of set TPA members, for example. That is, the ribs help to prevent TPA members from inadvertently moving from the preset position to the final lock position during shipping and handling, for example.

[0049] The connector apparatus of the present invention can help to provide protection to a TPA member by having TPA protection ribs 740, 742, 744, 746, 748, and 750 around the TPA member on the male housing 700, for example. Those ribs help to prevent the TPA member from contacting other connectors during shipping and handling, to help reduce the occurrence of set TPA members, for example. That is, the ribs help to prevent TPA members from inadvertently moving from the preset position to the final lock position during shipping and handling, for example.

[0050] The connector apparatus of the present invention can help to provide protection to a CPA member by having CPA protection walls 432, 434, and 436 around the CPA member on the female housing 400, for example. Those walls help to prevent the CPA member from contacting other components and wiring harnesses dur-

ing shipping and handling, and help to prevent damage, for example.

[0051] The connector apparatus of the present invention can help to protect foreign wires belonging to an adjacent harness from being caught in components by providing anti-snagging features to the female housing and male housing.

[0052] The connector apparatus of the present invention can help the TPA members and CPA members to stay in the preset position during shipping and handling.

[0053] The connector apparatus of the present invention can prevent a need for a user to engage in a secondary operation such as trying to move a TPA member from a final lock position to a preset position, for example, after the TPA member was inadvertently moved into the final lock position during shipping and handling.

[0054] The connector apparatus of the present invention can prevent a need for a user to engage in a secondary operation such as trying to move a CPA member from a final lock position to a preset position, for example, after the CPA member was inadvertently moved into the final lock position during shipping and handling.

[0055] The connector apparatus of the present invention can help prevent customer complaints, because it helps avoid snags with other cables.

[0056] The connector apparatus of the present invention can help prevent a need for tray packaging.

[0057] FIG. 1 depicts a male housing 108 with TPA protection ribs, and depicts a female housing 102 with CPA protection walls.

[0058] FIG. 2 depicts a male housing 208 without TPA protection ribs, and depicts a female housing 202 with CPA protection walls.

[0059] FIG. 3 is an exploded perspective view of parts of a connector apparatus, in accordance with the principles of the present invention, showing a female housing, a TPA member for the female housing, a CPA member for the female housing, and a male housing, in a sixteen-pin configuration.

[0060] FIG. 3 illustrates a connector apparatus, generally referred to by reference numeral 300, which includes a female housing 400, a CPA member 500 for the female housing 400, a male housing 700, and a TPA member 600. An insertion side 612 of the TPA member 600 can be inserted into the female housing 400. The insertion side 612 can also be referred to as the bottom of the TPA member 600. The insertion side 612 of the TPA member 600 can also be inserted into the male housing 700.

[0061] FIG. 4A includes a front end elevational view of the female housing of the connector apparatus of FIG. 3 without a TPA member and without a CPA member, and includes a cross-sectional view thereof, taken along line 4A-4A.

[0062] FIG. 4A has an upper view and a lower view. The upper view is a front end elevational view of the female housing 400 of the connector apparatus of FIG. 3 without a TPA member and without a CPA member. The

lower view is a cross-sectional view of the upper view, taken along line 4A-4A.

[0063] The upper view of FIG. 4A shows TPA protection rib 416 and TPA protection rib 418. These TPA protection ribs help to prevent a TPA member from moving from the preset position to the final lock position during shipping and/or handling.

[0064] The upper view of FIG. 4A shows button 902 of a connector latch on female housing 400. The upper view of FIG. 4A also shows a top 410 of the female housing 400, a front end 402 of the female housing 400, a first side 406 of the female housing 400, a second side 408 of the female housing 400, a bottom 412 of the female housing 400, and a terminal aperture 414 on the front end 402 of the female housing 400.

[0065] The lower view of FIG. 4A shows a rear end 404 of the female housing 400. Also depicted is a protrusion 422 that is formed on an interior of the female housing 400. The protrusion 422 has a shape similar to that of a shark fin. The lower view of FIG. 4A shows an aperture 420 for receiving the insertion side 612 of a TPA member 600.

[0066] FIG. 4B includes a front end elevational view of the female housing of the connector apparatus of FIG. 3 with a TPA member in the preset position and a CPA member in the preset position, and includes a cross-sectional view thereof, taken along line 4B-4B.

[0067] FIG. 4B has an upper view and a lower view. The upper view is a front end elevational view of the female housing 400 of the connector apparatus of FIG. 3 with a TPA member 600 in the preset position and a CPA member 500 in the preset position. The lower view is a cross-sectional view of the upper view, taken along line 4B-4B.

[0068] The upper view of FIG. 4B shows a rear upright portion 514 of CPA member 500. The lower view of FIG. 4B shows a front edge 502 of the CPA member 500, a central beam 504 of the CPA member 500, and a front tip 506 of the central beam 504.

[0069] As shown in the lower view of FIG. 4B, when the CPA member 500 is in the preset position, the front edge 502 is on the left of the shark fin 422, and the front tip 506 is on the right of the latch surface 908.

[0070] As shown in the lower view of FIG. 4B, when the TPA member 600 is in the preset position, the insertion side 612 is in the position indicated.

[0071] As shown in the lower view of FIG. 4B, when the TPA member 600 is in the preset position, the exposed side 614 is in the position indicated.

[0072] FIG. 4C includes a front end elevational view of the female housing of the connector apparatus of FIG. 3 with a TPA member in the final lock position and a CPA member in the final lock position, and includes a cross-sectional view thereof, taken along line 4C-4C.

[0073] FIG. 4C has an upper view and a lower view. The upper view is a front end elevational view of the female housing 400 of the connector apparatus of FIG. 3 with a TPA member 600 in the final lock position and a

CPA member 500 in the final lock position. The lower view is a cross-sectional view of the upper view, taken along line 4C-4C.

[0074] As shown in the lower view of FIG. 4C, when the CPA member 500 is in the final lock position, the front edge 502 is in the position indicated, and the front tip 506 is on the left side of the latch surface 908.

[0075] As shown in the lower view of FIG. 4C, when the TPA member 600 is in the final lock position, the insertion side 612 is in the position indicated.

[0076] As shown in the lower view of FIG. 4C, when the TPA member 600 is in the final lock position, the exposed side 614 is in the position indicated.

[0077] FIG. 5A includes a top elevational view of the female housing of the connector apparatus of FIG. 3 without a TPA member and without a CPA member, and includes a cross-sectional view thereof, taken along line 5A-5A.

[0078] FIG. 5A has an upper view and a lower view. The upper view is a front end elevational view of the female housing 400 of the connector apparatus of FIG. 3 without a TPA member and without a CPA member. The lower view is a cross-sectional view of the upper view, taken along line 5A-5A.

[0079] The upper view of FIG. 5A shows CPA protection wall 432, CPA protection wall 434, and CPA protection wall 436. These CPA protection walls help to keep a CPA member 500 in a proper position, help to prevent the CPA member 500 from moving from the preset position to the final lock position or any other position during shipping and/or handling, help to prevent the CPA member 500 from getting damaged, and help to prevent the CPA member 500 from causing damage.

[0080] The upper view of FIG. 5A also shows button 902 of the connector latch of the female housing 400, first latch beam 904 of the connector latch, second latch beam 906 of the connector latch, and the latch surface 908 of the connector latch.

[0081] FIG. 5B includes a top elevational view of the female housing of the connector apparatus of FIG. 3 with a TPA member in the preset position and a CPA member in the preset position, and includes a cross-sectional view thereof, taken along line 5B-5B.

[0082] FIG. 5B includes an upper view and a lower view. The upper view is a top elevational view of the female housing 400 of the connector apparatus of FIG. 3 with a TPA member 600 in the preset position and a CPA member 500 in the preset position. The lower view is a cross-sectional view thereof, taken along line 5B-5B.

[0083] The upper view of FIG. 5B shows the following parts of the CPA member 500: a front edge 502; a first side 508; a second side 510; a rear base 512; a rear upright portion 514; and a front tip 506 of the central beam 504. In the preset position, as shown, the front tip 506 is located between the latch surface 908 and the rear upright portion 514.

[0084] The lower view of FIG. 5B shows an exposed side 614 of the TPA member 600. The exposed side 614

is also referred to as a top of the TPA member 600. The lower view of FIG. 5B also shows guide 616 of the TPA member 600.

[0085] FIG. 5C includes an upper view showing a top elevational view of the female housing 400 of the connector apparatus of FIG. 3 with a TPA member 600 in the final lock position and a CPA member 500 in the final lock position, and includes a lower view showing a cross-sectional view of the upper view taken along line 5C-5C. In the final lock position, as shown, the front tip 506 is located between the latch surface 908 and the front edge 502 of the CPA member 500.

[0086] The lower view of FIG. 5C shows the TPA member 600 in the final lock position in the female housing 400.

[0087] FIG. 6A is a bottom elevational view of the female housing 400 of the connector apparatus 300 of FIG. 3 without a TPA member and without a CPA member.

[0088] FIG. 6A shows CPA protection wall 432, CPA protection wall 434, and CPA protection wall 436. FIG. 6A also shows TPA protection ribs 416, 418, 442, 444, 446, and 448. Also, FIG. 6A shows a rear end 404 of the female housing 400.

[0089] FIG. 6A shows that the female housing 400 forms an aperture 420 for receiving the bottom 612 of the TPA member 600, also known as the insertion side 612 of the TPA member 600.

[0090] The female housing 400 forms aperture 428 to receive guide 616 of the TPA member 600, and also forms aperture 430 to receive guide 618 of the TPA member 600.

[0091] The female housing 400 forms two tabs 438 on an interior of the female housing 400. The two tabs 438 are visible inside aperture 420, as shown in FIG. 6A.

[0092] The male housing 700 forms aperture 720 for receiving the bottom 612 of the TPA member 800, also known as the insertion side 612 of the TPA member 800.

[0093] The male housing 700 forms two tabs 438 on an interior of the male housing 700. The two tabs 438 are visible inside aperture 720, as shown in FIG. 14A.

[0094] TPA member 800, as shown in FIG. 11, is equivalent to the TPA member 600 shown in FIG. 3. Members 800 and 600 are both TPA members that can be used in a male housing having a sixteen-pin configuration or a female housing having a sixteen-pin configuration. The female housing 400 has a sixteen-pin configuration, as shown in FIG. 3. The male housing 700 has a sixteen-pin configuration, as shown in FIGs. 3 and 11.

[0095] The female housing 920 has a six-pin configuration, as shown in FIG. 26. The male housing 970 has a six-pin configuration, as shown in FIG. 34. A TPA member 960 can be used for a male housing having a six-pin configuration or a female housing having a six-pin configuration. The TPA member 960 is shown in FIGs. 26 and 34, for example.

[0096] For illustration purposes, TPA member 600 is intended to be inserted into the female housing 400 of FIG. 3, and TPA member 800 is intended to be inserted

into the male housing 700 of FIG. 11.

[0097] TPA member 600 and TPA member 800 each has a flexible feature 602 or protrusion 602. The flexible feature 602 is shown in FIG. 11 on TPA member 800.

5 The same flexible feature 602 is on TPA member 600, shown in FIG. 3. Each TPA member 600, 800 also has flexible features (protrusions) 604, 606, and 608, which are shown in FIG. 11. Each TPA member 600, 800 has a body 610, a guide 616, a guide 618, an insertion side (bottom) 612, an exposed side (top) 614, and at least one terminal aperture 620. FIG. 3 shows that TPA member 600 has a plurality of terminal apertures 620. FIG. 11 shows that TPA member 800 has a plurality of terminal apertures 620.

10 **[0098]** When TPA member 600 is not in aperture 420 of female housing 400, tabs 438 are visible, as shown in FIG. 6A. However, when TPA member 600 is in the preset position, as shown in FIG. 6B, the tabs 438 are not visible. When TPA member 600 is in the preset position, as shown in FIG. 6B, the flexible features 604 and 608 of TPA member 600 are visible in aperture 420. When TPA member 600 is in the final lock position, as shown in FIG. 6C, the tabs 438 are visible.

15 **[0099]** When TPA member 800 is not in aperture 720 of male housing 700, tabs 438 are visible, as shown in FIG. 14A. However, when TPA member 800 is in the preset position, as shown in FIG. 14B, the tabs 438 are not visible. When TPA member 800 is in the preset position, as shown in FIG. 14B, the flexible features 604 and 608 of TPA member 800 are visible in aperture 720. When TPA member 800 is in the final lock position, as shown in FIG. 14C, the tabs 438 are visible.

20 **[0100]** For the preset position, the relationship between tab 438 and flexible features 602 and 604 is shown in FIGs. 16 and 17. For the final lock position, the relationship between tab 438 and flexible features 602 and 604 is shown in FIGs. 18 and 19.

25 **[0101]** FIG. 6B is a bottom elevational view of the female housing 400 of the connector apparatus of FIG. 3 with a TPA member 600 in the preset position and a CPA member 500 in the preset position. Flexible features 604 and 608 are visible on TPA member 600.

30 **[0102]** FIG. 6C is a bottom elevational view of the female housing 400 of the connector apparatus of FIG. 3 with a TPA member 600 in the final lock position and a CPA member 500 in the final lock position. Tabs 438 are visible on the interior of the female housing 400, in aperture 420.

35 **[0103]** FIG. 7A is a rear end elevational view of the female housing 400 of the connector apparatus 300 of FIG. 3 without a TPA member and without a CPA member. The female housing 400 has a plurality of terminal apertures 426.

40 **[0104]** FIG. 7B is a rear end elevational view of the female housing 400 of the connector apparatus 300 of FIG. 3 with a TPA member 600 in the preset position and a CPA member 500 in the preset position.

45 **[0105]** FIG. 7C is a rear end elevational view of the

female housing 400 of the connector apparatus 300 of FIG. 3 with a TPA member 600 in the final lock position and a CPA member 500 in the final lock position.

[0106] FIG. 8A is a perspective view of the female housing 400 of the connector apparatus 300 of FIG. 3 without a TPA member and without a CPA member. The female housing 400 forms an aperture 424 for receiving CPA member 500. The entrance area of aperture 424 is bordered by CPA protection walls 432, 434, and 436, as shown in FIG. 8A.

[0107] FIG. 8B is a perspective view of the female housing 400 of the connector apparatus 300 of FIG. 3 with a TPA member 600 in the preset position and a CPA member 500 in the preset position.

[0108] FIG. 8C is a perspective view of the female housing 400 of the connector apparatus 300 of FIG. 3 with a TPA member 600 in the final lock position and a CPA member 500 in the final lock position.

[0109] FIG. 9A is a front end elevational view of the female housing 300 and male housing 700 of FIG. 3 mated together showing the female housing 300 with a CPA member 500 in the preset position. As shown in FIG. 9A, the female housing 300 does not have a TPA member 600 and the male housing 700 does not have a TPA member 800.

[0110] FIG. 9A shows the top 410 of the female housing 400, and also shows the following features of the male housing 700: top 710; bottom 712; first side 706; and second side 708.

[0111] FIG. 9B is a cross-sectional view, taken along line 9B-9B in FIG. 9A. FIG. 9B shows rear end 704 of the male housing 700, and shows protrusion 732 formed by the male housing 700. Protrusion 732 has a shape similar to that of a shark fin. FIG. 9B shows central beam 504 of CPA member 500.

[0112] FIG. 9C is an enlarged view of the portion denoted 9C in FIG. 9B. FIG. 9D is an enlarged view of the portion denoted 9D in FIG. 9B.

[0113] The CPA 500 is not typically inserted into aperture 424 of the female housing 300 until after the female housing 300 is mated with the male housing 700. FIGS. 4B, 4C, 5B, 5C, 6B, 6C, 7B, 7C, 8B, and 8C, for example, appear to depict a situation where CPA member 500 is inserted into a female housing 300 at a time when the female housing 300 is not yet mated with the male housing 700, and thus are for illustrative purposes only.

[0114] FIG. 10A is a front elevational view of the female housing 400 and male housing 700 of FIG. 3 mated together showing the female housing 300 with CPA member 500 in the final lock position, without a TPA member in the female housing 300 and without a TPA member in the male housing 700. FIG. 10B is a cross-sectional view, taken along line 10B-10B in FIG. 10A. FIG. 10C is an enlarged view of the portion denoted 10C in FIG. 10B.

[0115] FIG. 11 is an exploded perspective view of a male connector assembly, in accordance with the principles of the present invention, showing a male housing 700 and a TPA member 800 for the male housing 700,

in a sixteen-pin configuration.

[0116] TPA member 800 has a flexible feature 602 or protrusion 602. TPA member 800 also has flexible features (protrusions) 604, 606, and 608, which are shown in FIG. 11. TPA member 800 has a body 610, a guide 616, a guide 618, an insertion side (bottom) 612, an exposed side (top) 614, and at least one terminal aperture 620.

[0117] FIG. 11 shows that the male housing 700 has TPA protection ribs 740, 742, 744, 746, 748, and 750.

[0118] FIG. 11 shows that the male housing 700 has a rear end 704, a plurality of terminal apertures 726, and an aperture 720 for receiving TPA member 800. The male housing 700 forms aperture 728 for receiving guide 616 of TPA member 800, and forms aperture 730 for receiving guide 618 of TPA member 800. FIG. 11 also shows side 714 of the male housing 700.

[0119] FIG. 12A is a front end elevational view of the male housing 700 of the male connector assembly of FIG. 11 without a TPA member. FIG. 12A shows aperture 734 in male housing 700, intended to receive the rear end 404 of the female housing 400. FIG. 12B is a front end elevational view of the male housing 700 of the male connector assembly of FIG. 11 with a TPA member 800 in the preset position. FIG. 12C is a front end elevational view of the male housing 700 of the male connector assembly of FIG. 11 with a TPA member 800 in the final lock position.

[0120] FIG. 13A is a cross-sectional view, taken along line 13A-13A in FIG. 12A. FIG. 13A shows front end 702 of the male housing 700.

[0121] FIG. 13B is a cross-sectional view, taken along line 13B-13B in FIG. 12B. FIG. 13B shows TPA member 800 in the preset position.

[0122] FIG. 13C is a cross-sectional view, taken along line 13C-13C in FIG. 12C. FIG. 13C shows TPA member 800 in the final lock position.

[0123] FIG. 14A is a top elevational view of the male housing 700 of the male connector assembly of FIG. 11 without a TPA member. FIG. 14A shows side 714 and side 716 of the male housing 700.

[0124] FIG. 14B is a top elevational view of the male housing 700 of the male connector assembly of FIG. 11 with TPA member 800 in the preset position. FIG. 14C is a top elevational view of the male housing 700 of the male connector assembly of FIG. 11 with TPA member 800 in the final lock position.

[0125] FIG. 15A is a perspective view of the male housing 700 of the male connector assembly of FIG. 11 without a TPA member. FIG. 15A shows the aperture 734 in the male housing 700, which receives the rear end 404 of the female housing 400.

[0126] FIG. 15B is a perspective view of the male housing 700 of the male connector assembly of FIG. 11 with TPA member 800 in the preset position. FIG. 15C is a perspective view of the male housing 700 of the male connector assembly of FIG. 11 with TPA member 800 in the final lock position.

[0127] FIG. 16 is a partial cross-sectional view, taken along line 16-16 in FIG. 14B, showing details of some features of the male housing 700 engaging with some features of TPA member 800, when TPA member 800 is in the preset position, in accordance with the principles of the present invention. FIG. 17 is an enlarged view of the portion denoted in FIG. 16.

[0128] For the preset position, the relationship between tab 438 and flexible features 602 and 604 is shown in FIGs. 16 and 17. Figures 16 and 17 show that the male housing 700 forms a groove 440 or receiving area 440 on a surface of the aperture 720 of the male housing 700. The groove 440 or receiving area 440 receives flexible feature 602 and not flexible feature 604 when a TPA member is in the preset position.

[0129] The female housing 400 forms aperture 428 to receive guide 616 of the TPA member 600, and also forms aperture 430 to receive guide 618 of the TPA member 600. The female housing 400 forms two tabs 438 on an interior of the female housing 400. The two tabs 438 are visible inside aperture 420, as shown in FIG. 6A.

[0130] The male housing 700 forms aperture 720 for receiving the bottom 612 of the TPA member 800, also known as the insertion side 612 of the TPA member 800. The male housing 700 forms two tabs 438 on an interior of the male housing 700. The two tabs 438 are visible inside aperture 720, as shown in FIG. 14A.

[0131] When TPA member 600 is not in aperture 420 of female housing 400, tabs 438 are visible, as shown in FIG. 6A. However, when TPA member 600 is in the preset position, as shown in FIG. 6B, the tabs 438 are not visible. When TPA member 600 is in the preset position, as shown in FIG. 6B, the flexible features 604 and 608 of TPA member 600 are visible in aperture 420.

[0132] When TPA member 800 is not in aperture 720 of male housing 700, tabs 438 are visible, as shown in FIG. 14A. However, when TPA member 800 is in the preset position, as shown in FIG. 14B, the tabs 438 are not visible. When TPA member 800 is in the preset position, as shown in FIG. 14B, the flexible features 604 and 608 of TPA member 800 are visible in aperture 720.

[0133] FIG. 18 is a partial cross-sectional view, taken along line 18-18 in FIG. 14C, showing details of some features of the male housing 700 engaging with some features of the TPA member 800, when the TPA member 800 is in the final lock position, in accordance with the principles of the present invention. FIG. 19 is an enlarged view of the portion denoted in FIG. 18.

[0134] For the final lock position, the relationship between tab 438 and flexible features 602 and 604 is shown in FIGs. 18 and 19. Figures 18 and 19 show that the male housing 700 forms a groove 440 or receiving area 440, on a surface of the aperture 720 of the male housing 700. The groove 440 or receiving area 440 receives flexible feature 602 and flexible feature 604 when a TPA member is in the final lock position.

[0135] When TPA member 600 is in the final lock position, as shown in FIG. 6C, the tabs 438 are visible.

When TPA member 800 is in the final lock position, as shown in FIG. 14C, the tabs 438 are visible.

[0136] FIG. 20 is a side elevational view of the female housing 400 of the connector apparatus 300 of FIG. 3 without a TPA member and without a CPA member. FIG. 21 is a side elevational view of the female housing 400 of the connector apparatus 300 of FIG. 3 with TPA member 600 in the preset position and CPA member 500 in the preset position.

[0137] FIG. 22 is a side elevational view of the female housing 400 of the connector apparatus 300 of FIG. 3 with TPA member 600 in the final lock position and CPA member 500 in the final lock position. FIG. 23 is a rear end elevational view of the male housing 700 of the male connector assembly of FIG. 11 without a TPA member. FIG. 24 is a side elevational view of the male housing 700 of the male connector assembly of FIG. 11. FIG. 25 is a bottom elevational view of the male housing 700 of the male connector assembly of FIG. 11.

[0138] FIG. 26 is an exploded perspective view of a female connector assembly of a connector apparatus, in accordance with the principles of the present invention, showing a female housing 920, a TPA member 960 for the female housing 920, and a CPA member 500 for the female housing 920, in a six-pin configuration. TPA member 960 has insertion side (bottom) 962 and guide 966, as shown in FIG. 26.

[0139] FIG. 27A includes an upper view and a lower view. The upper view is a front end elevational view of the female housing 920 of the female connector assembly of FIG. 26 without a TPA member and without a CPA member. The lower view is a cross-sectional view thereof, taken along line 27A-27A in the upper view.

[0140] FIG. 27A shows TPA protection ribs 934 and 936 on female housing 920. FIG. 27A also shows the following aspects of the female housing 920: front end 922; rear end 924; first side 926; second side 928; top 930; and bottom 932.

[0141] FIG. 27B includes an upper view and a lower view. The upper view is a front end elevational view of the female housing 920 of the female connector assembly of FIG. 26 with a TPA member 960 in the preset position and a CPA member 500 in the preset position. The lower view is a cross-sectional view thereof, taken along line 27B-27B in the upper view. FIG. 27B shows the position of insertion side (bottom) 962 and exposed side (top) 964 of TPA member 960, when TPA member 960 is in the preset position.

[0142] FIG. 27C includes an upper view and a lower view. The upper view is a front end elevational view of the female housing of the female connector assembly of FIG. 26 with a TPA member in the final lock position and a CPA member in the final lock position. The lower view is a cross-sectional view thereof, taken along line 27C-27C in the upper view. FIG. 27C shows the position of insertion side (bottom) 962 and exposed side (top) of TPA member 960, when TPA member 960 is in the final lock position.

[0143] FIG. 28 is a bottom elevational view of the female housing 920 of the female connector assembly of FIG. 26 without a TPA member and without a CPA member. FIG. 28 shows that female housing 920 has TPA protection ribs 934, 936, 944, and 946. FIG. 28 shows CPA protection walls 432, 434, and 436. The female housing 920 forms aperture 938 for receiving the insertion side (bottom) 962 of TPA member 960. FIG. 29 is a rear end elevational view of the female housing 920 of the female connector assembly of FIG. 26 without a TPA member and without a CPA member.

[0144] FIG. 30 includes an upper view and a lower view. The upper view is a top elevational view of the female housing 920 of the female connector assembly of FIG. 26 without a TPA member and without a CPA member. The lower view is a cross-sectional view taken along line 30-30.

[0145] FIG. 31 is a side elevational view of the female housing 920 of the female connector assembly of FIG. 26 without a TPA member and without a CPA member. FIG. 32 is a side elevational view of the female housing 920 of the female connector assembly of FIG. 26 with a TPA member 960 in the preset position and a CPA member 500 in the preset position.

[0146] FIG. 33 is a side elevational view of the female housing 920 of the female connector assembly of FIG. 26 with a TPA member 960 in the final lock position and a CPA member 500 in the final lock position.

[0147] FIG. 34 is an exploded perspective view of a male connector assembly, in accordance with the principles of the present invention, showing a male housing 970 and a TPA member 960 for the male housing 970, in a six-pin configuration.

[0148] FIG. 34 shows that TPA member 960 has an exposed (top) side 964, a guide 966, and a guide 968. FIG. 34 also shows that male housing 970 has TPA protection ribs 988, 990, 992, 994, 996, and 998. The male housing 970 has a rear end 974 and has a plurality of terminal apertures 985. Male housing 970 has six terminal apertures 985. Other configurations are possible.

[0149] A male housing 700 having 16 terminal apertures has been described herein, and a male housing 970 having 6 terminal apertures has been described herein, in accordance with the principles of the present invention. Male housings are not limited to those two configurations. Male housings can have other numbers of terminal apertures, in accordance with the principles of the present invention.

[0150] A female housing 400 having 16 terminal apertures has been described herein, and a female housing 920 having 6 terminal apertures has been described herein, in accordance with the principles of the present invention. Female housings are not limited to those two configurations. Female housings can have other numbers of terminal apertures, in accordance with the principles of the present invention.

[0151] FIG. 35 is a front end elevational view of the male housing 970 of the male connector assembly of

FIG. 34. Male housing 970 has a first side 976 and a second side 978, and has an aperture 986 for receiving a rear end 924 of female housing 920.

[0152] FIG. 36 is a cross-sectional view, taken along line 36-36 in FIG. 35, when a TPA member 960 is in a preset position. The male housing 970 has a top 980, a front end 972, and a rear end 974. The positions of the insertion side (bottom) 962 and the exposed side (top) 964 are depicted in FIG. 36, when the TPA member 960 is in the preset position.

[0153] FIG. 37 is a cross-sectional view, taken along line 36-36 in FIG. 35, when a TPA member 960 is in a final lock position. The positions of the insertion side (bottom) 962 and the exposed side (top) 964 are depicted in FIG. 36, when the TPA member 960 is in the final lock position.

[0154] FIG. 38 is a top elevational view of the male housing 970 of the male connector assembly of FIG. 34 with a TPA member 960 in the preset position. FIG. 39 is a perspective view of the male housing 970 of the male connector assembly of FIG. 34 with a TPA member 960 in the preset position.

[0155] FIG. 34 depicts an aperture for receiving the insertion side (bottom) 962 of TPA member 960, and FIG. 39 shows TPA member 960 in that aperture for receiving the insertion side (bottom) 962 of TPA member 960 with the TPA member 960 in the preset position.

[0156] FIG. 40 is a perspective view of the male housing 970 of the male connector assembly of FIG. 34 with a TPA member 960 in the final lock position. FIG. 34 depicts an aperture for receiving the insertion side (bottom) 962 of TPA member 960, and FIG. 40 shows TPA member 960 in that aperture for receiving the insertion side (bottom) 962 of TPA member 960 with the TPA member 960 in the final lock position.

[0157] FIG. 41 is a side elevational view of the male housing 970 of the male connector assembly of FIG. 34. FIG. 42 is a bottom elevational view of the male housing 970 of the male connector assembly of FIG. 34. FIG. 42 depicts the bottom 982 of the male housing 970.

[0158] The female housing 920 is mated with the male housing 970 when the rear end 924 of the female housing 920 is received into the aperture 986 of the male housing 970. The female housing 400 is mated with the male housing 700 when the rear end 404 of the female housing 400 is received into the aperture 734 of the male housing 700.

[0159] As confirmed by the upper view and lower view of FIG. 4B, for the preset position, the exposed side (top) 614 of TPA member 600 does not extend away from the female housing 400 beyond the TPA protection ribs 416 and 418. The TPA protection ribs 416 and 418 protect the TPA member 600 in the preset position, because the TPA protection ribs 416 and 418 extend away from the female housing 400 beyond the exposed side (top) 614 of TPA member 600.

[0160] The fact that the TPA protection ribs extend away from a female housing beyond the exposed side

(top) of a TPA member, in the preset position, is also shown in the lower view of FIG. 5B, for example.

[0161] FIG. 7B shows that an outermost edge of TPA protection ribs 446 and 448 of female housing 400 extend further away from the female housing 400 than the exposed side (top) 614, in the preset position, and thus the TPA member 600 is protected by the ribs 446 and 448. That is, as shown in FIG. 7B, an outermost edge of TPA protection ribs 446 and 448 of female housing 400 is lower than the exposed side (top) 614, in the preset position, and thus the TPA member 600 is protected by the ribs 446 and 448. The bottom 412 of female housing 400 also extends below the exposed side (top) 614, as shown in FIG. 7B, and thus the bottom 412 also helps to prevent the TPA member 600 from inadvertently being moved from the preset position to the final lock position during shipping and/or handling.

[0162] As depicted by FIG. 13B, for the preset position, the exposed side (top) 614 of the TPA member does not extend away from the male housing 700 beyond the TPA protection ribs 740, 742, 744, 746, 748, and 750. The TPA protection ribs 740, 742, 744, 746, 748, and 750 protect the TPA member in the preset position, because the TPA protection ribs 740, 742, 744, 746, 748, and 750 extend away from the male housing 700 beyond the exposed side (top) 614 of the TPA member. See also FIG. 15B.

[0163] FIG. 13B shows that, for the preset position, the exposed side (top) 614 of TPA member is positioned nearer to the male housing 700 than the outermost edges of the TPA protection ribs 740, 742, 744, 746, 748, and 750. That is, the outermost edges of the TPA protection ribs 740, 742, 744, 746, 748, and 750 extend above the exposed side (top) 614 of TPA member, in the preset position. This is shown in FIGs. 13B, 15B, and 1, for example. Thus, the tops of the TPA protection ribs are above the top of the TPA member, when the TPA member is in the preset position, as shown in FIGs. 1, 13B, and 15B, for example, and the TPA protection ribs on the male housing help to prevent the TPA member from being bumped inadvertently or pushed inadvertently into the final lock position during shipping and/or handling, for example.

[0164] As shown in FIGs. 11, 15A, and 15B, for example, the TPA protection ribs 742, 744, 748, and 750 are shaped to slope down toward the aperture receiving the TPA member 600. The sloping surfaces help to guide the TPA member 600 into the aperture in male housing 700, for example, when a user is first inserting the TPA member 600 into the aperture of the male housing 700.

[0165] As shown in FIGs. 34 and 39, for example, the TPA protection ribs 990, 992, 996, and 998 are shaped to slope down toward the aperture receiving the TPA member 960. The sloping surfaces help to guide the TPA member 960 into the aperture in male housing 970, for example, when a user is first inserting the TPA member 960 into the aperture of the male housing 970.

[0166] FIG. 43 is a perspective view of the CPA mem-

ber 500 of FIG. 3. CPA member 500 has a rear upright portion 514, first side 508, second side 510, central beam 504, front tip 506 of central beam 504, and front edge 502. CPA member 500 also has a rear base 512, as shown in the upper view of FIG. 5B. A user can push rear upright portion 514 to push CPA member 500 to the preset position and to the final lock position.

[0167] Although the foregoing description is directed to the preferred embodiments of the invention, it is noted that other variations and modifications will be apparent to those skilled in the art, and may be made without departing from the spirit or scope of the invention. Moreover, features described in connection with one embodiment of the invention may be used in conjunction with other embodiments, even if not explicitly stated above.

List of Reference Numerals

[0168]

100	Connector apparatus, six-pin configuration
102	Female housing
104	CPA member in female housing 102
108	Male housing
110	TPA member in male housing 108
200	Connector apparatus, six-pin configuration
202	Female housing
204	CPA member in female housing 202
208	Male housing
210	TPA member in male housing 208
300	Connector apparatus, sixteen-pin configuration
400	Female housing, sixteen-pin configuration
402	Front end of female housing 400
404	Rear end of female housing 400
406	First side of female housing 400
408	Second side of female housing 400
410	Top of female housing 400
412	Bottom of female housing 400
414	Terminal aperture on front end of female housing 400
416	TPA protection rib
418	TPA protection rib
420	Aperture for receiving insertion side (bottom) of TPA member
422	Protrusion (shark fin) on interior of female housing 400
424	Aperture for receiving front edge of CPA member
426	Terminal aperture on rear end of female housing 400
428	Aperture for receiving guide 616 of TPA member
430	Aperture for receiving guide 618 of TPA member
432	CPA protection wall
434	CPA protection wall
436	CPA protection wall
438	Tab
440	Receiving area in housing, receiving flexible features (protrusions) of TPA member
442	TPA protection rib

444 TPA protection rib
 446 TPA protection rib
 448 TPA protection rib
 500 CPA member
 502 Front edge of CPA member
 504 Central beam of CPA member
 506 Front tip of central beam of CPA member
 508 First side of CPA member
 510 Second side of CPA member
 512 Rear base of CPA member
 514 Rear upright portion of CPA member
 600 TPA member, sixteen-pin configuration
 602 Flexible feature (protrusion)
 604 Flexible feature (protrusion)
 606 Flexible feature (protrusion)
 608 Flexible feature (protrusion)
 610 Body of TPA member
 612 Insertion side (bottom) of TPA member
 614 Exposed side (top) of TPA member
 616 Guide
 618 Guide
 620 Terminal aperture on TPA member
 700 Male housing, sixteen-pin configuration
 702 Front end of male housing 700
 704 Rear end of male housing 700
 706 First side of male housing 700
 708 Second side of male housing 700
 710 Top of male housing 700
 712 Bottom of male housing 700
 714 Side of male housing 700
 716 Side of male housing 700
 720 Aperture for receiving insertion side (bottom) of TPA member
 726 Terminal aperture on rear end of male housing 700
 728 Aperture for receiving guide 616 of TPA member
 730 Aperture for receiving guide 618 of TPA member
 732 Protrusion (shark fin) on male housing 700
 734 Aperture for receiving rear end of female housing 400
 740 TPA protection rib
 742 TPA protection rib
 744 TPA protection rib
 746 TPA protection rib
 748 TPA protection rib
 750 TPA protection rib
 800 TPA member, sixteen-pin configuration
 902 Button of connector latch
 904 First latch beam of connector latch
 906 Second latch beam of connector latch
 908 Latch surface of connector latch
 920 Female housing, six-pin configuration
 922 Front end of female housing 920
 924 Rear end of female housing 920
 926 First side of female housing 920
 928 Second side of female housing 920
 930 Top of female housing 920
 932 Bottom of female housing 920

934 TPA protection rib
 936 TPA protection rib
 938 Aperture for receiving insertion side (bottom) of TPA member 960
 5 944 TPA protection rib
 946 TPA protection rib
 960 TPA member, six-pin configuration
 962 Insertion side (bottom) of TPA member 960
 964 Exposed side (top) of TPA member 960
 10 966 Guide
 968 Guide
 970 Male housing, six-pin configuration
 972 Front end of male housing 970
 974 Rear end of male housing 970
 15 976 First side of male housing 970
 978 Second side of male housing 970
 980 Top of male housing 970
 982 Bottom of male housing 970
 985 Terminal aperture
 20 986 Aperture for receiving rear end of female housing 920
 988 TPA protection rib
 990 TPA protection rib
 992 TPA protection rib
 25 994 TPA protection rib
 996 TPA protection rib
 998 TPA protection rib

30 Claims

1. A method for assembling a connector apparatus, comprising the steps of:

35 providing a female housing forming at least a first aperture and a second aperture;
 providing a male housing forming at least a first aperture;
 accommodating a first terminal position assurance member within the first aperture formed by the female housing;
 40 accommodating a connector position assurance member within the second aperture formed by the female housing;
 45 accommodating a second terminal position assurance member within the first aperture formed by the male housing; and
 accommodating the female housing into the male housing, wherein the female housing forms at least one terminal position assurance protection rib and at least one connector position assurance protection wall, wherein the male housing forms at least one terminal position assurance protection rib.

2. The method of claim 1, wherein the step of accommodating the first terminal position assurance member within the first aperture formed by the female

housing comprises:

moving the first terminal position assurance member into the first aperture formed by the female housing a first distance corresponding to a preset position; and
moving the first terminal position assurance member into the first aperture formed by the female housing a second distance corresponding to a final lock position.

3. The method of claim 1 or 2, wherein the first terminal position assurance member has an insertion side and an exposed side, and wherein the step of accommodating the first terminal position assurance member within the first aperture formed by the female housing comprises inserting the insertion side of the first terminal position assurance member into the first aperture formed by the female housing.
4. The method of claim 3, wherein the exposed side of the first terminal position assurance member does not extend beyond an outermost edge of the at least one terminal position assurance protection rib formed by the female housing, when the first terminal position assurance member is in the preset position.
5. The method of any one of the preceding claims, wherein an exposed side of the first terminal position assurance member does not extend beyond an outermost edge of the at least one terminal position assurance protection rib formed by the female housing, when the first terminal position assurance member is in a preset position.
6. The method of any one of the preceding claims, wherein an exposed side of the second terminal position assurance member does not extend beyond an outermost edge of the at least one terminal position assurance protection rib formed by the male housing, when the second terminal position assurance member is in a preset position.
7. The method of any one of the preceding claims, wherein the at least one connector position assurance protection wall includes three connector position assurance protection walls, and each one of the three connector position assurance protection walls is on a different side of the second aperture formed by the female housing.
8. The method of claim 7, wherein a rear upright portion of the connector position assurance member is disposed between at least two of the three connector position assurance protection walls, when the connector position assurance member is in a preset position.

9. The method of claim 8, wherein the rear upright portion of the connector position assurance member is disposed between at least two of the three connector position assurance protection walls, when the connector position assurance member is in a final lock position.

10. The method of any one of the preceding claims, wherein the female housing forms at least a third aperture, wherein the first terminal position assurance member forms at least one guide, and the step of accommodating the first terminal position assurance member within the first aperture formed by the female housing includes accommodating the at least one guide in the third aperture.

11. A method for assembling a female connector assembly, comprising the steps of:

accommodating a terminal position assurance member within a first aperture formed by a female housing; and
accommodating a connector position assurance member within a second aperture formed by the female housing, wherein the female housing forms a plurality of terminal position assurance protection ribs and a plurality of connector position assurance protection walls.

12. The method of claim 11, wherein the step of accommodating the terminal position assurance member within the first aperture formed by the female housing comprises:

moving the terminal position assurance member into the first aperture formed by the female housing a first distance corresponding to a preset position; and
moving the terminal position assurance member into the first aperture formed by the female housing a second distance corresponding to a final lock position.

13. The method of claim 11 or 12, wherein the terminal position assurance member has an insertion side and an exposed side, the step of accommodating the terminal position assurance member within the first aperture formed by the female housing comprises inserting the insertion side of the terminal position assurance member into the first aperture formed by the female housing, and the exposed side of the terminal position assurance member does not extend beyond an outermost edge of the plurality of terminal position assurance protection ribs formed by the female housing, when the terminal position assurance member is in a preset position.


14. The method of any one of claims 11 to 13, wherein

the connector position assurance member has a rear upright portion, and the rear upright portion of the connector position assurance member is disposed between at least two of the plurality of connector position assurance protection walls when the connector position assurance member is in a preset position.

15. The method of any one of claims 11 to 14, wherein the terminal position assurance member has an insertion side and an exposed side, the step of accommodating the terminal position assurance member within the first aperture formed by the female housing comprises inserting the insertion side of the terminal position assurance member into the first aperture formed by the female housing, and the exposed side of the terminal position assurance member is disposed between at least two of the plurality of terminal position assurance protection ribs formed by the female housing, when the terminal position assurance member is in a preset position.
16. A method for assembling a male connector assembly, comprising the steps of:
 - accommodating an insertion side of a terminal position assurance member within a first aperture formed by a male housing a first distance, corresponding to a preset position; and
 - accommodating the insertion of the terminal position assurance member within the first aperture formed by the male housing a second distance, corresponding to a final lock position, wherein the male housing forms a plurality of terminal position assurance protection ribs, and an exposed side of the terminal position assurance member is disposed between at least two of the plurality of terminal position assurance protection ribs when the terminal position assurance member is in the preset position.
17. The method of claim 16, wherein the exposed side of the terminal position assurance member does not extend beyond an outermost edge of the plurality of terminal position assurance protection ribs formed by the male housing when the terminal position assurance member is in the preset position.
18. The method of claim 16 or 17, wherein the male housing forms at least a second aperture, the terminal position assurance member forms at least a first guide, and the step of accommodating the insertion side of the terminal position assurance member within the first aperture includes accommodating the first guide in the second aperture.
19. The method of any one of claims 16 to 18, wherein the plurality of terminal position assurance protection

ribs formed by the male housing corresponds to a first plurality of terminal position assurance protection ribs being on a first side of the exposed side of the terminal position assurance member and a second plurality of terminal position assurance protection ribs being on a second side of the exposed side of the terminal position assurance member, when the terminal position assurance member is in the preset position.

20. The method of any one of claims 16 to 19, wherein the plurality of terminal position assurance protection ribs formed by the male housing includes at least one terminal position assurance protection rib sloping down toward the first aperture.

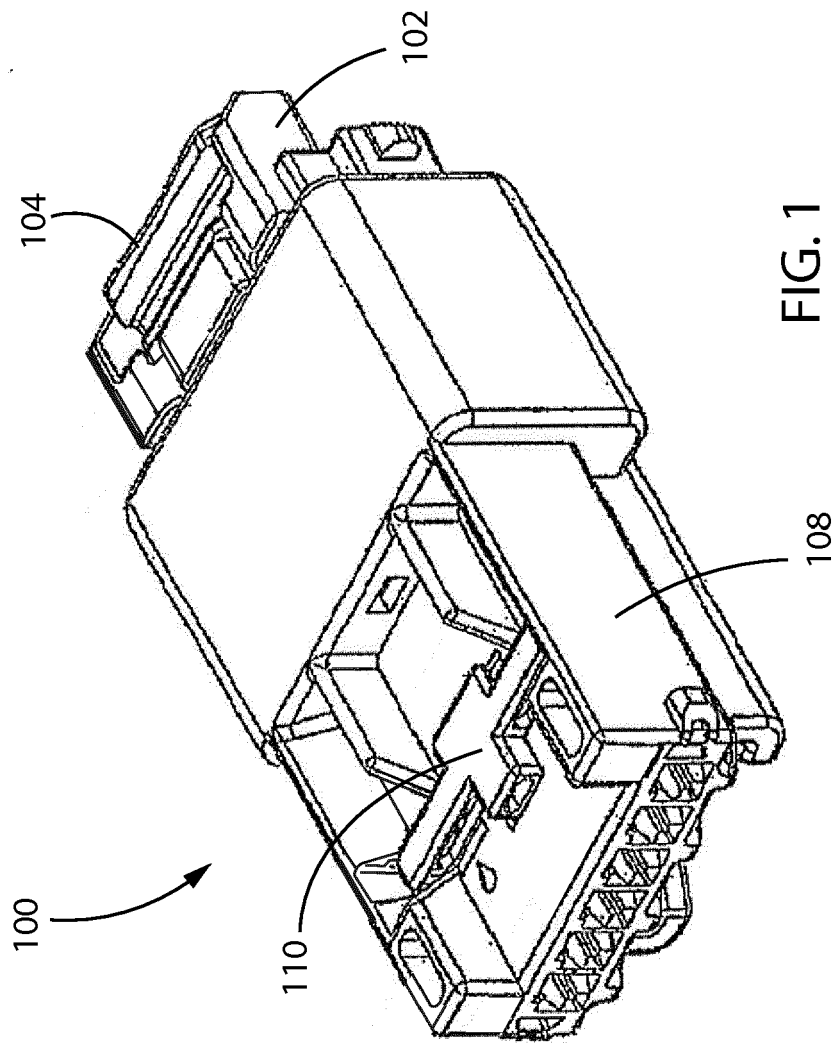

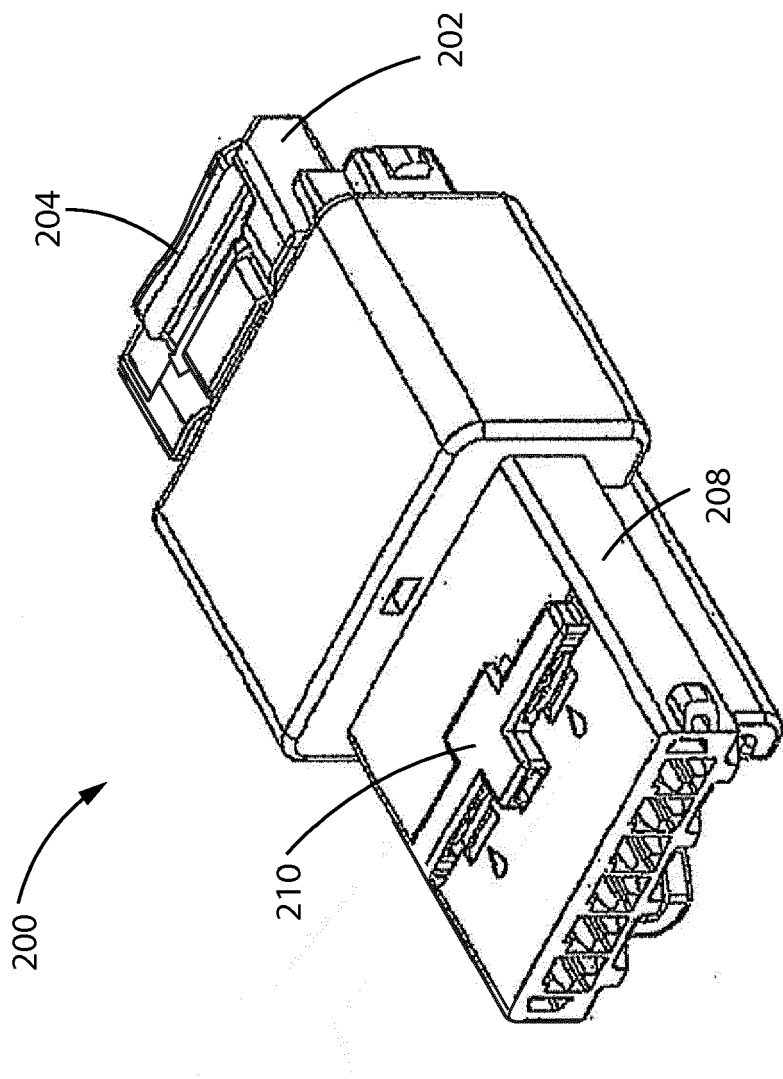
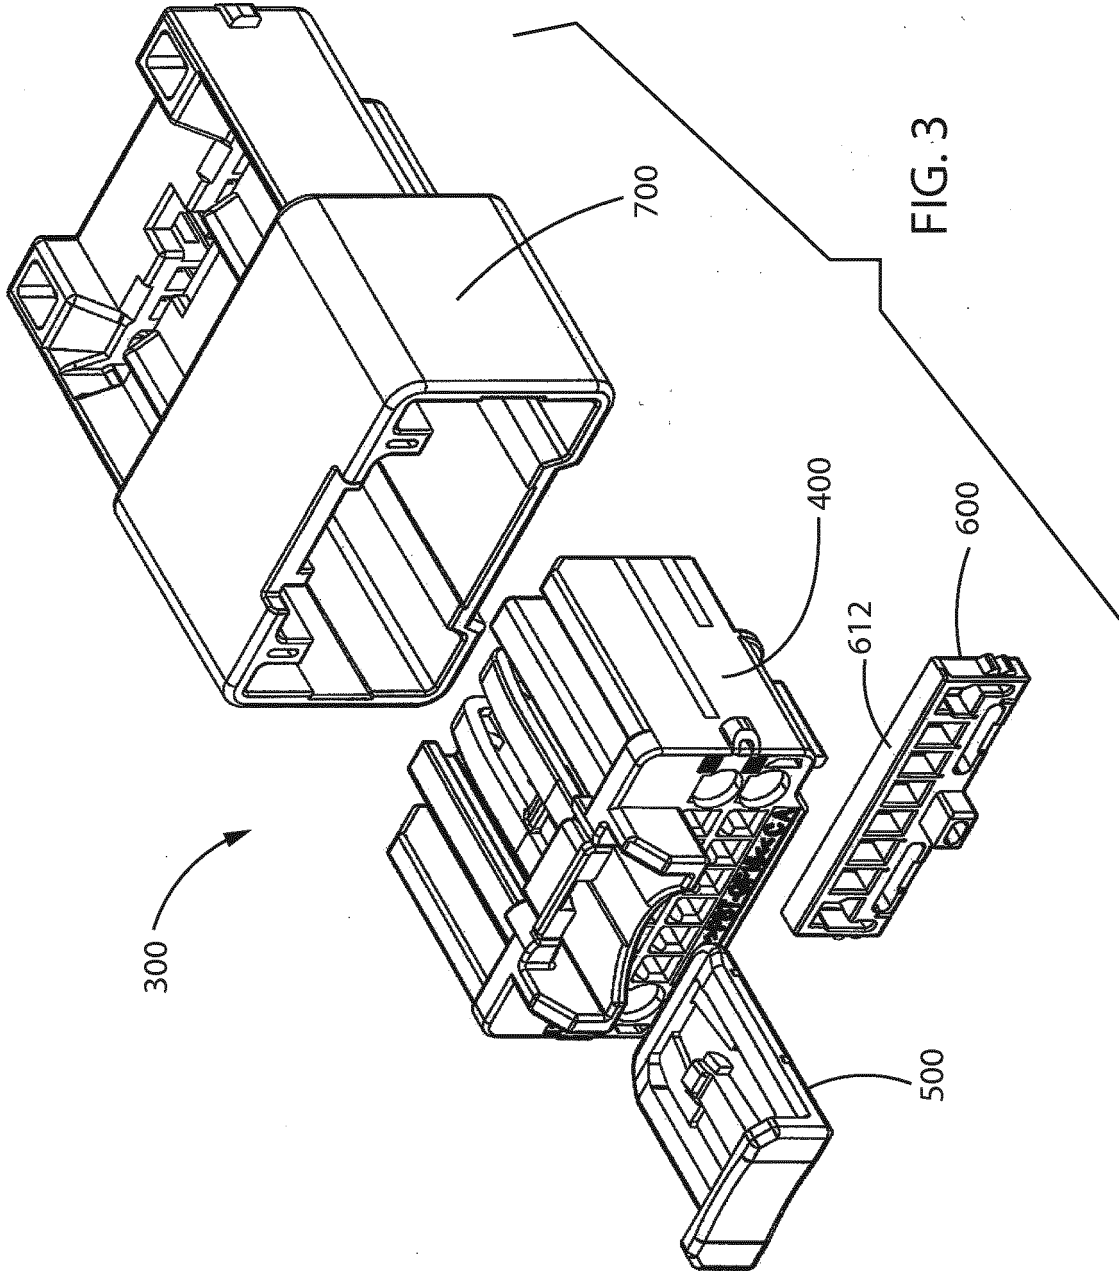
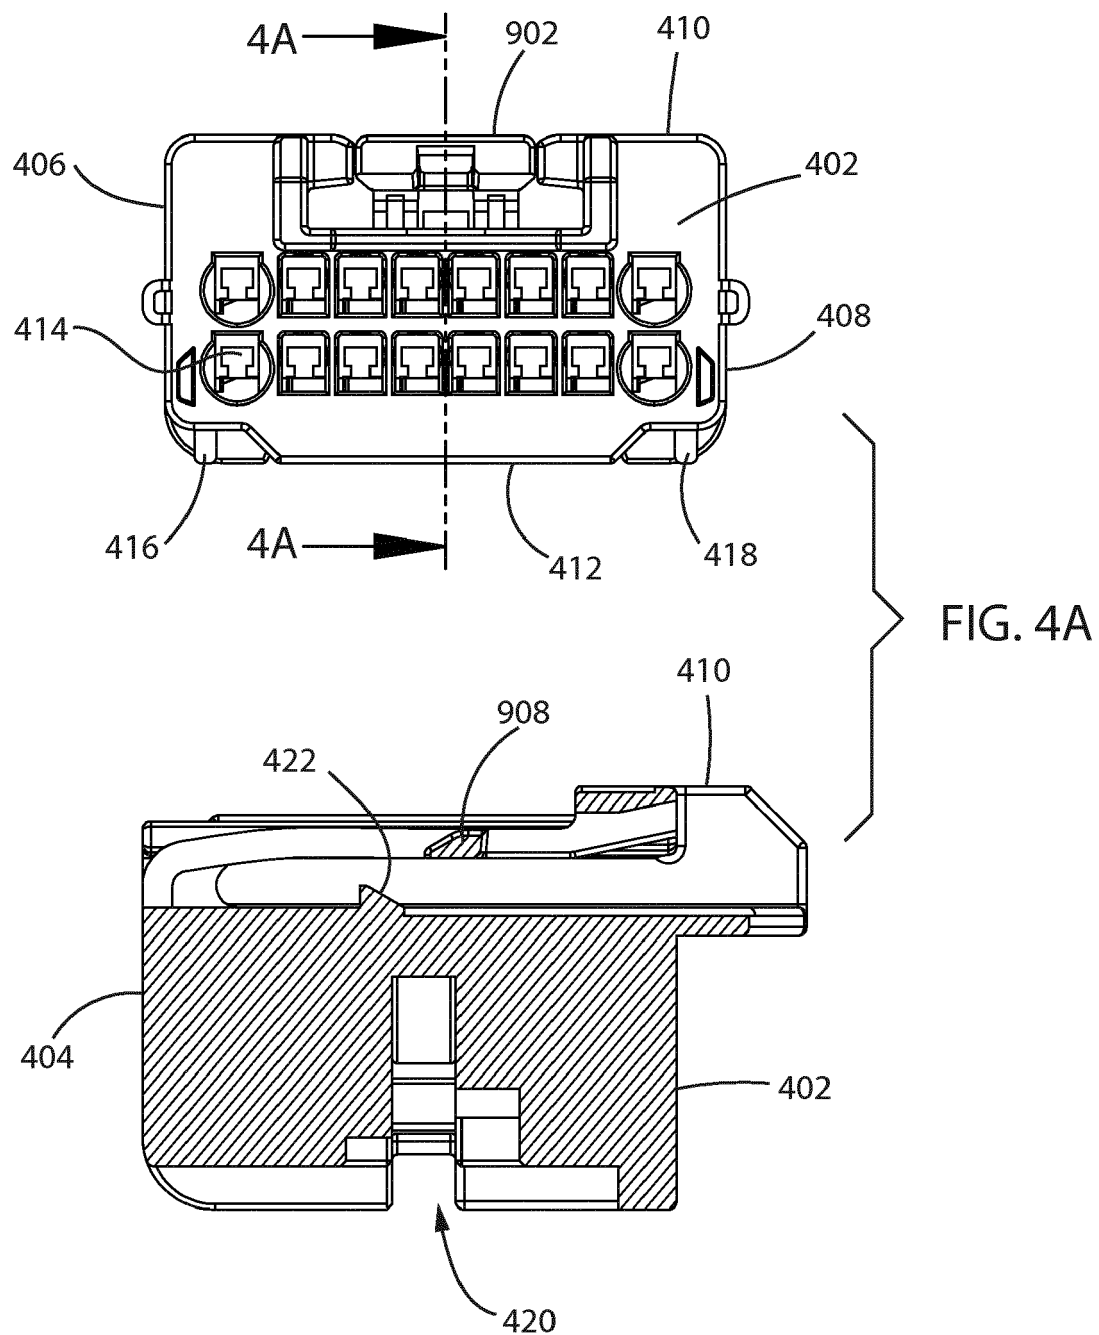
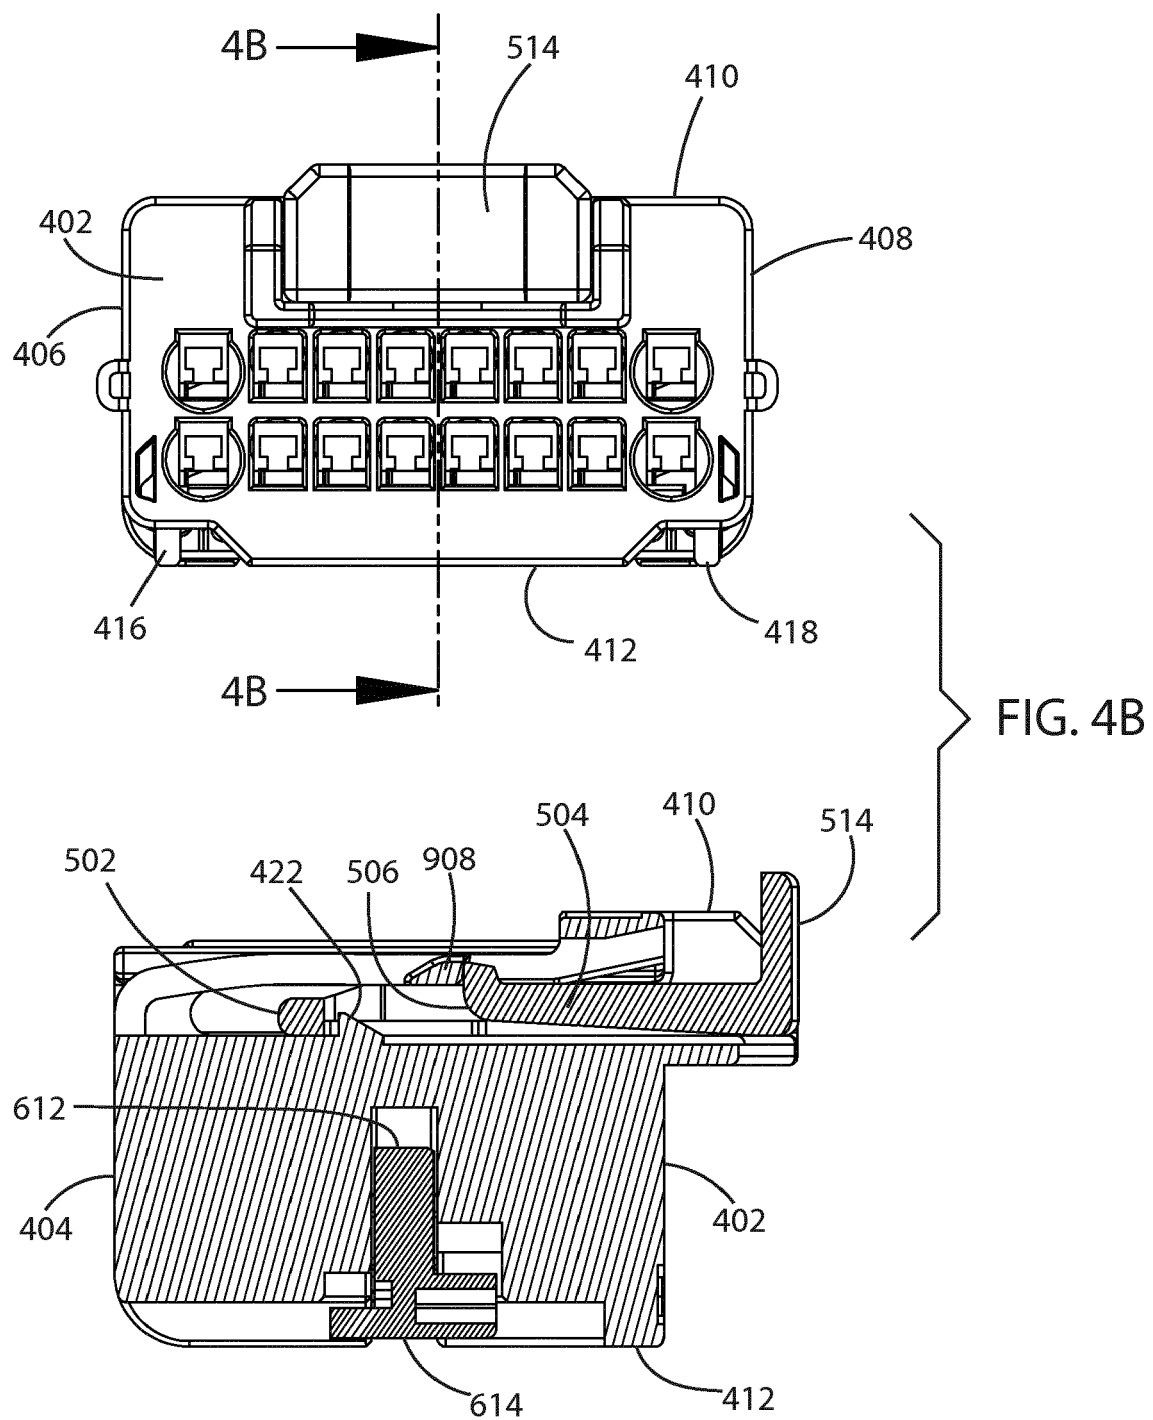
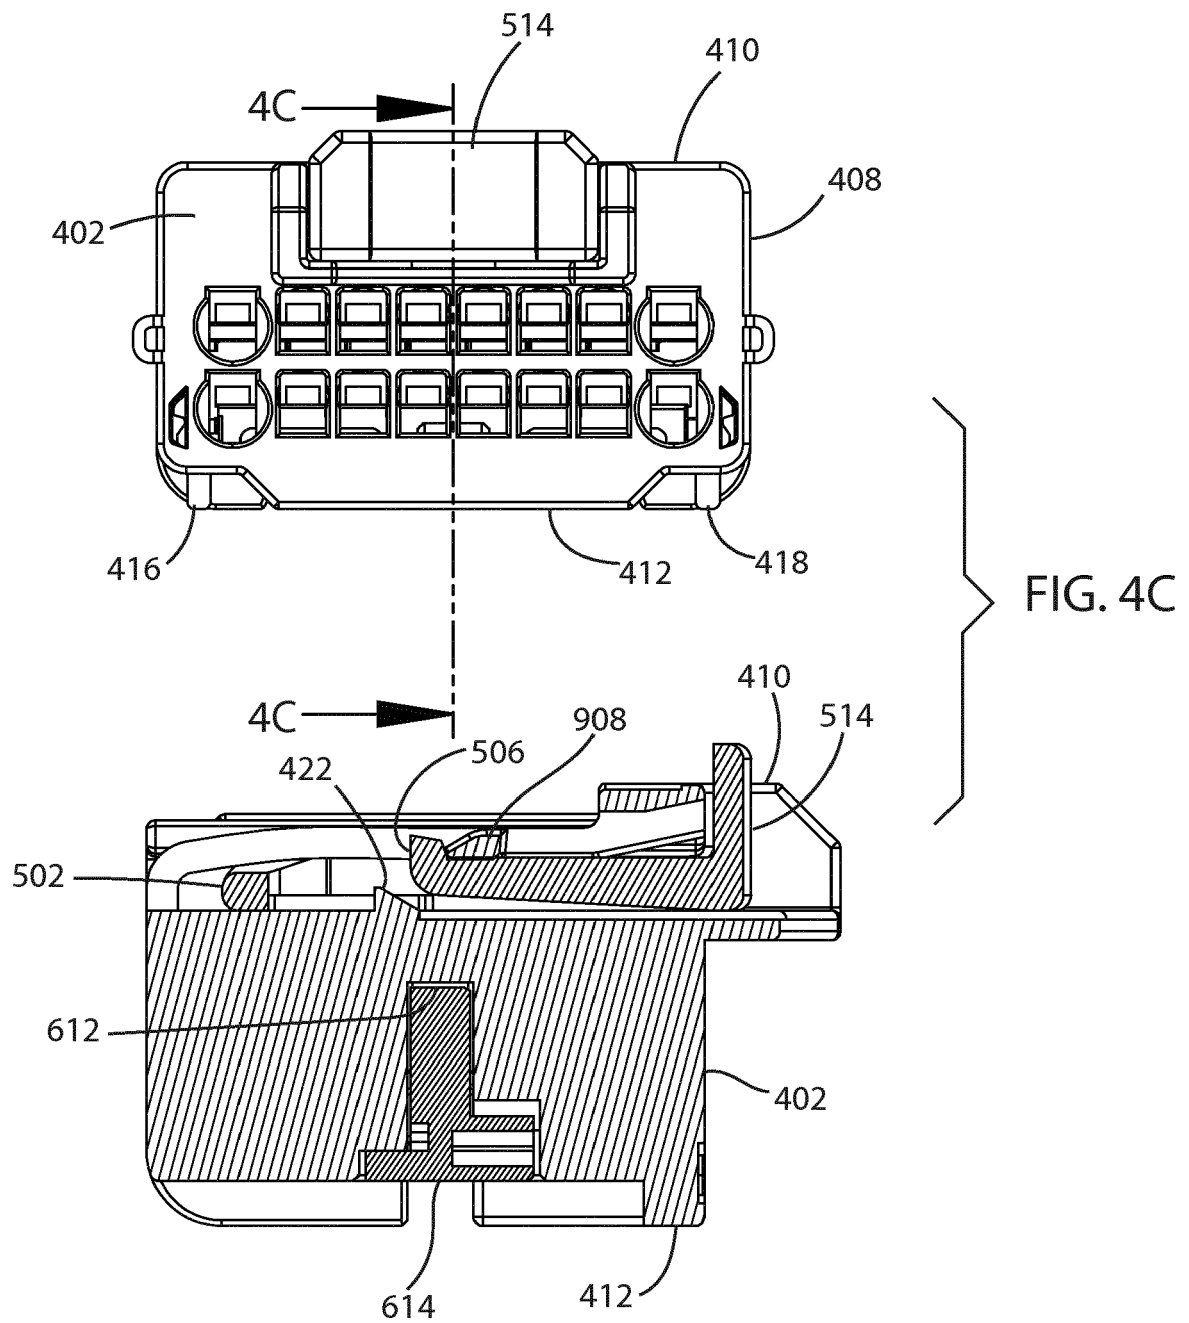



FIG. 2











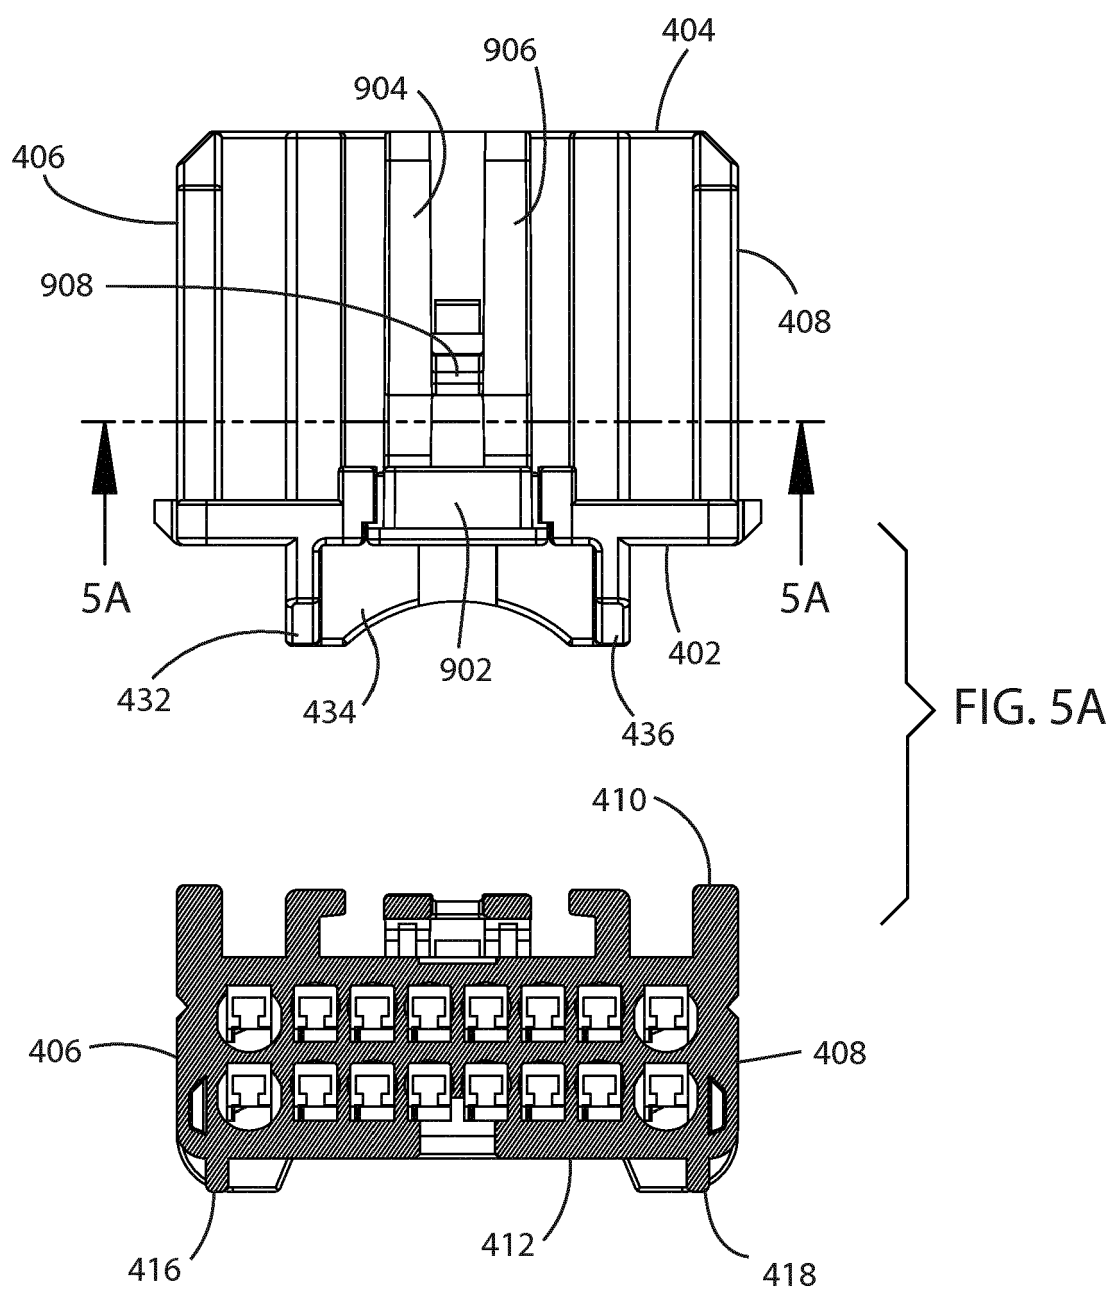

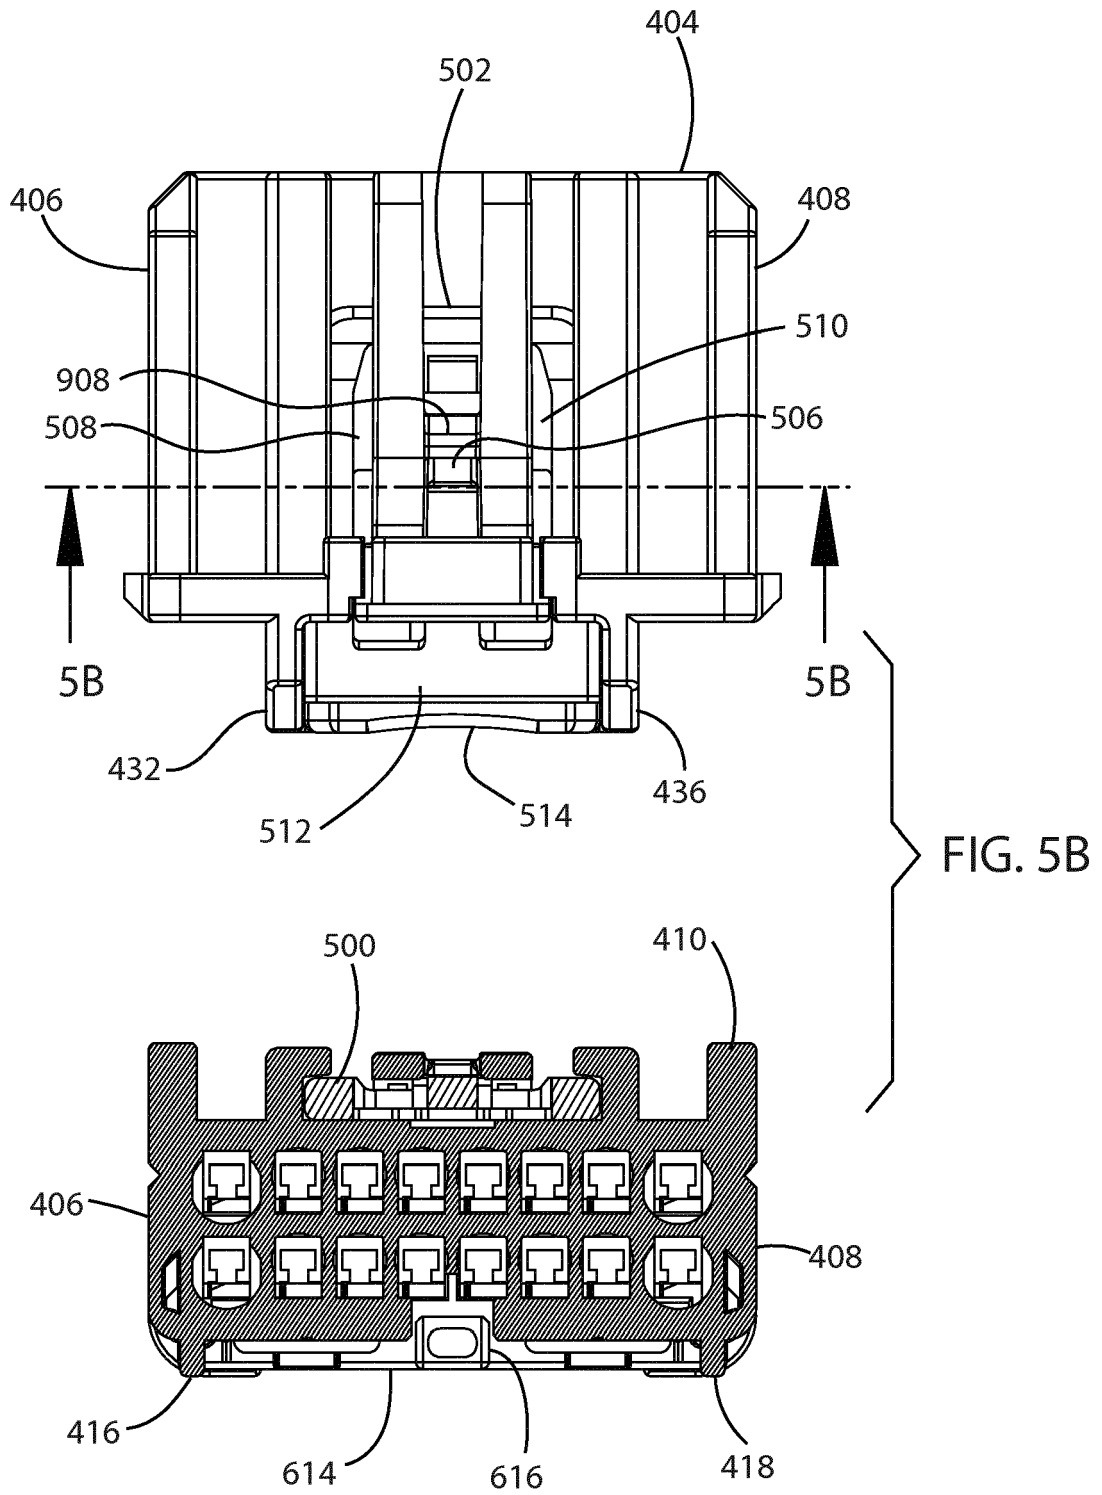

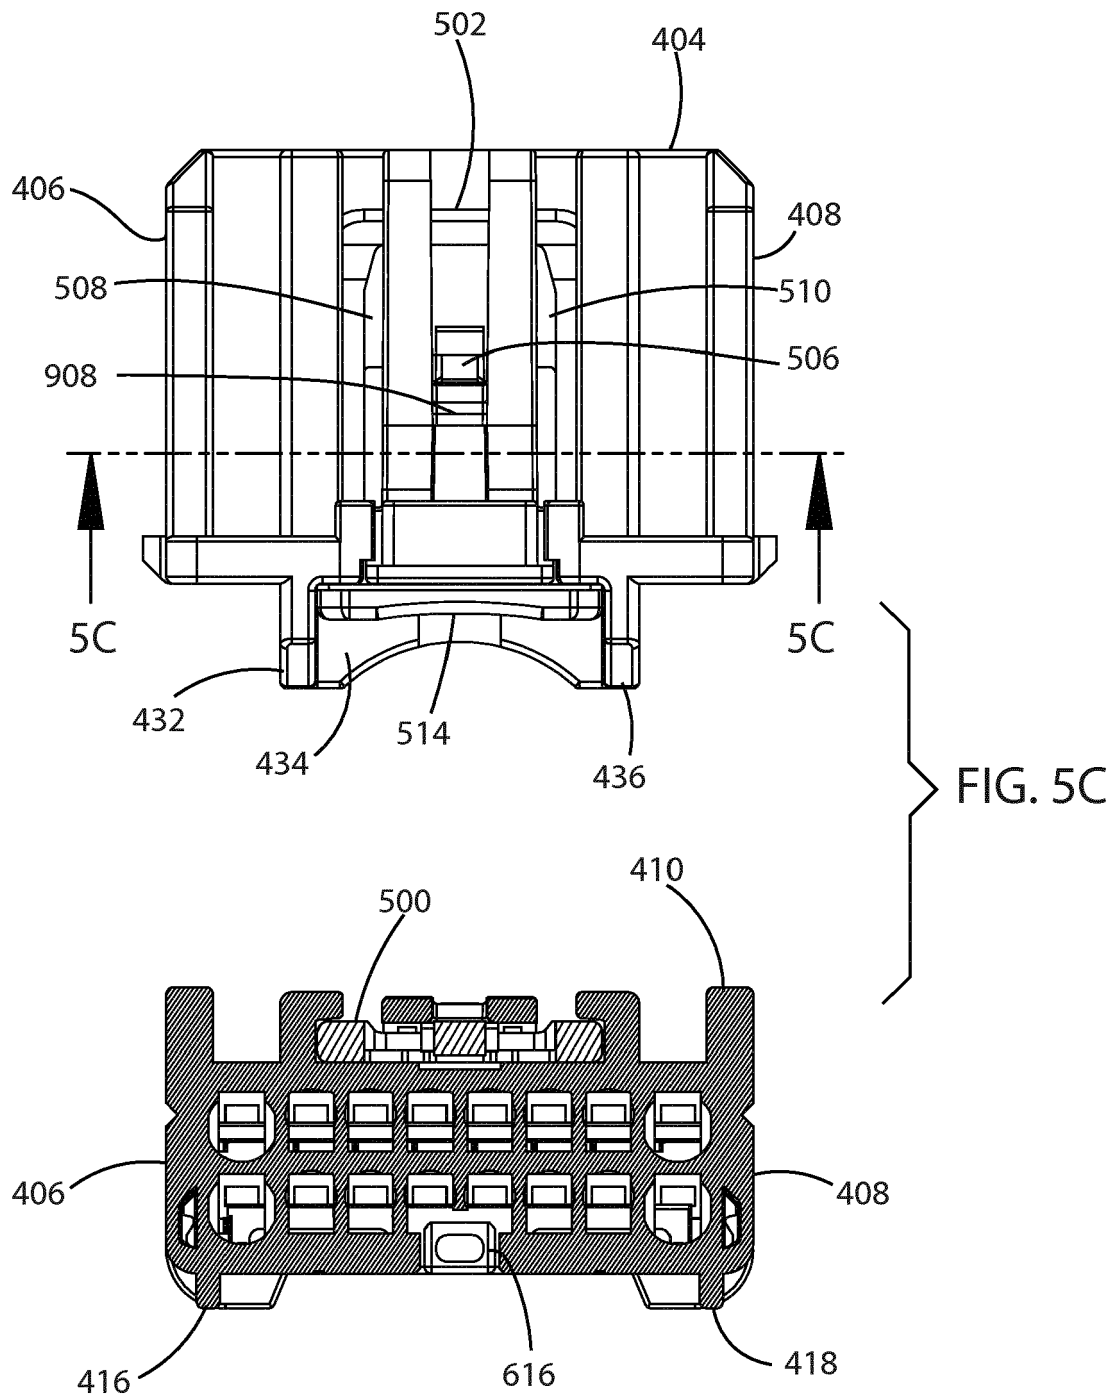

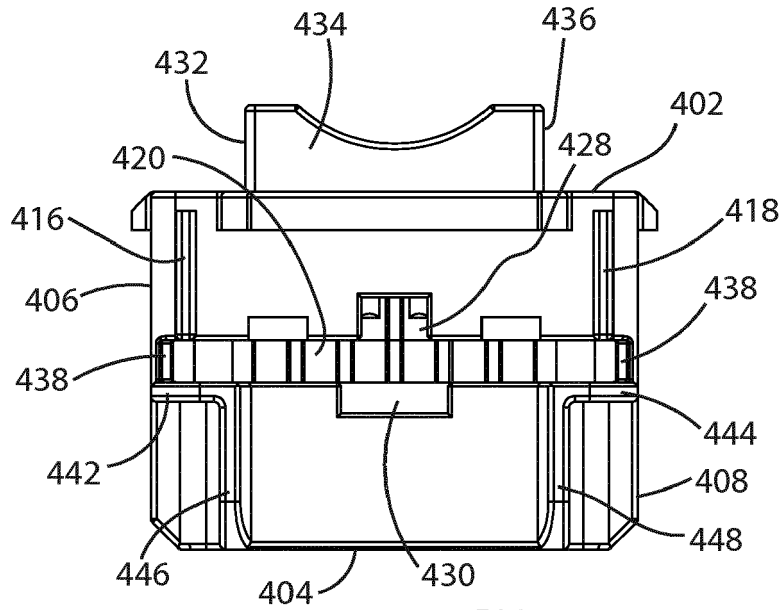


FIG. 6A

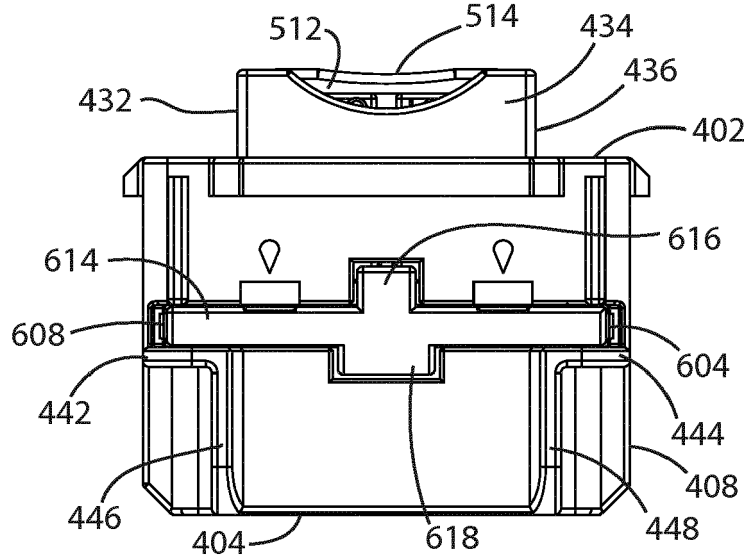


FIG. 6B

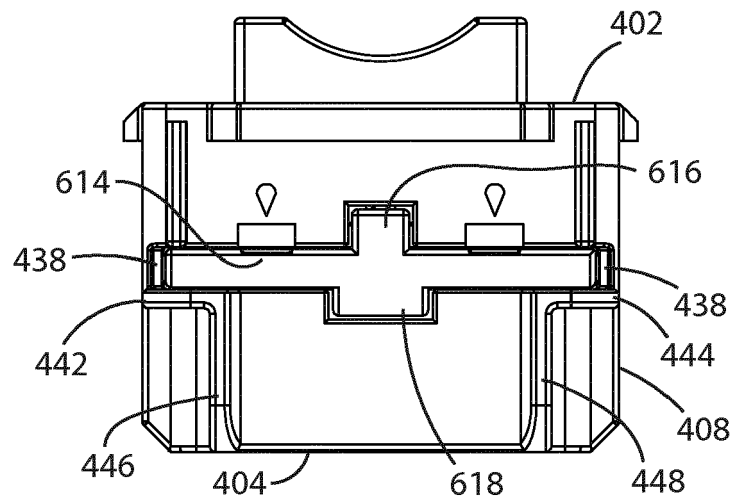


FIG. 6C

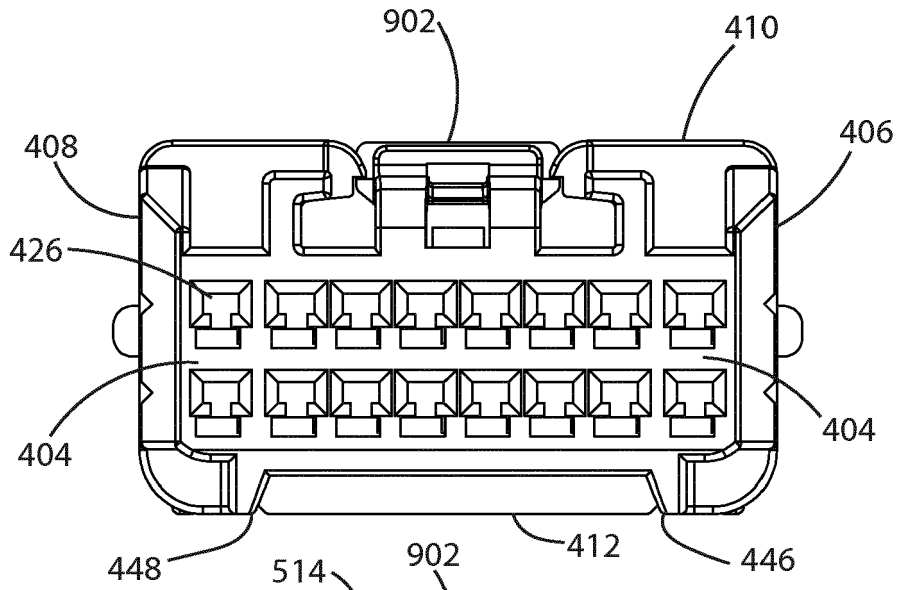


FIG. 7A

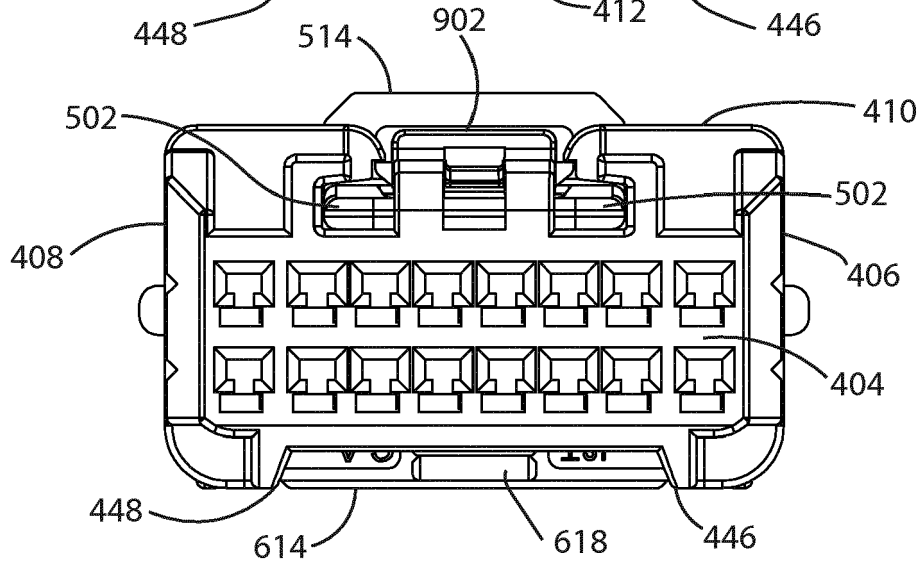


FIG. 7B

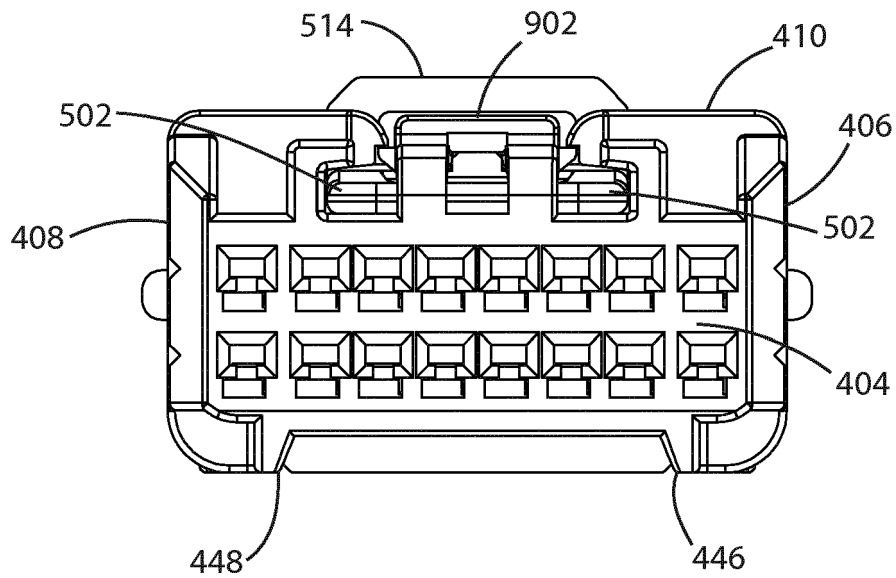


FIG. 7C

FIG. 8A

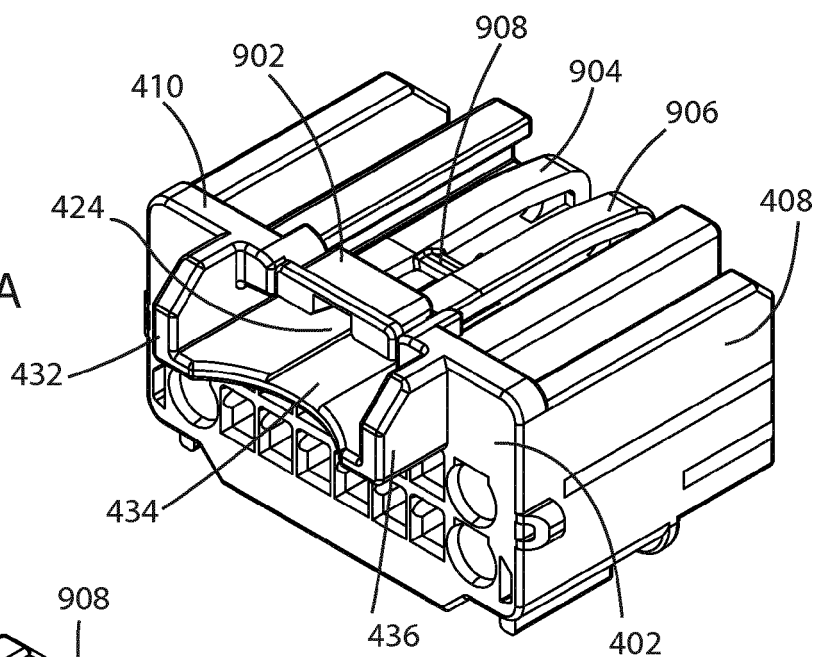


FIG. 8B

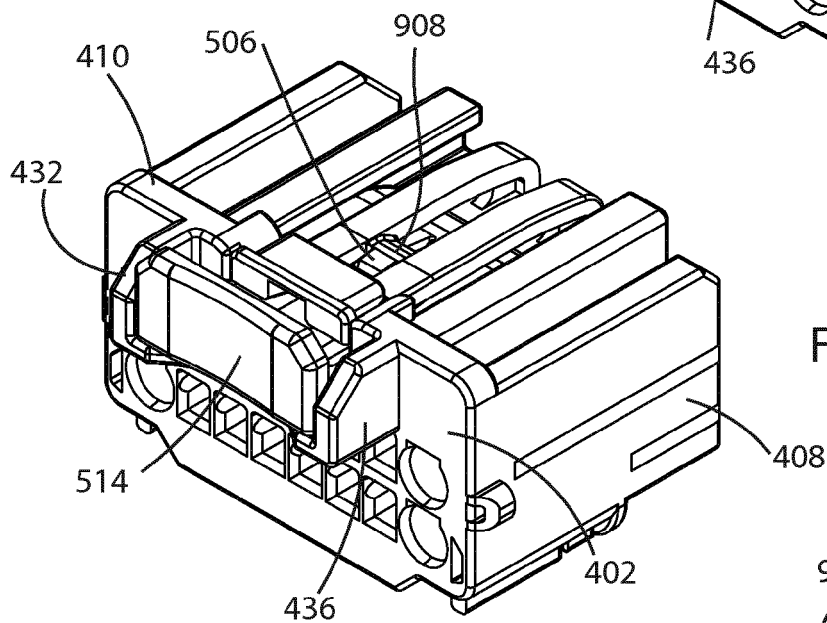
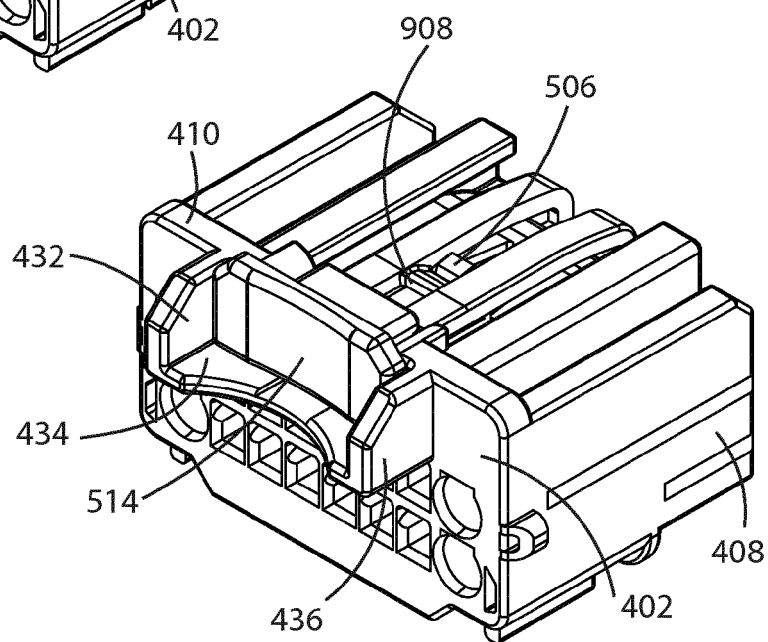


FIG. 8C



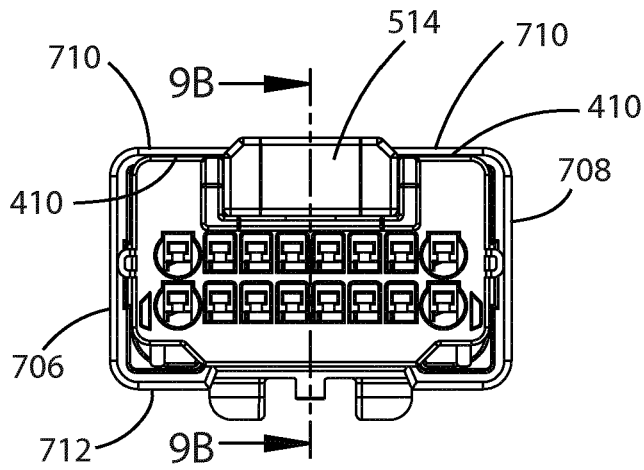


FIG. 9A

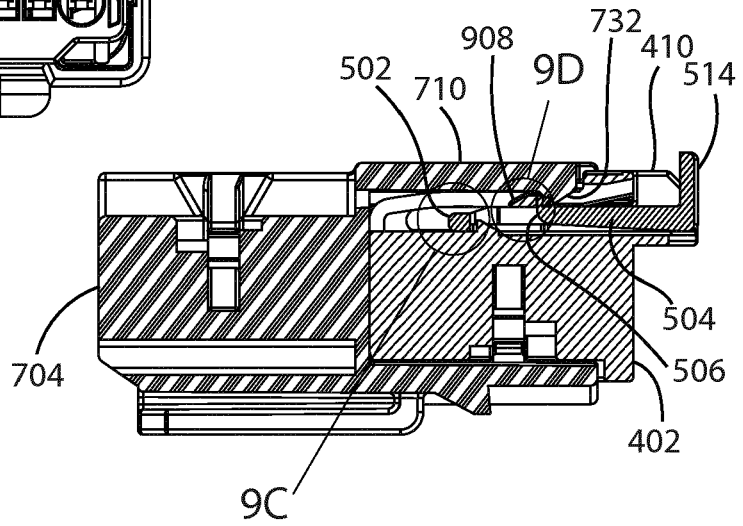


FIG. 9B

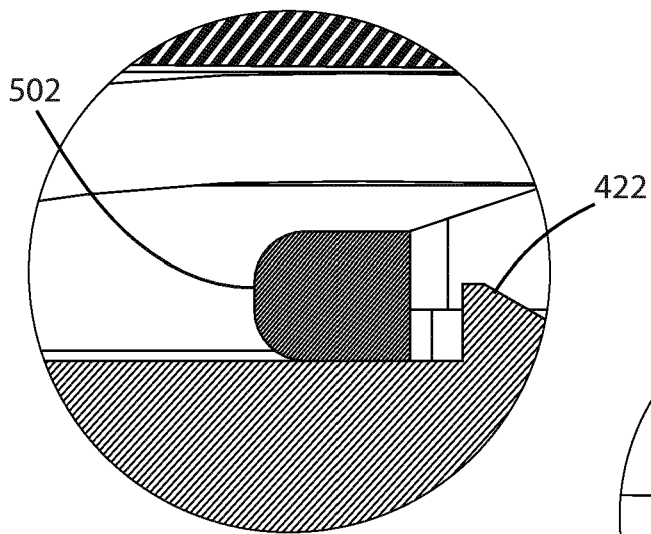


FIG. 9C

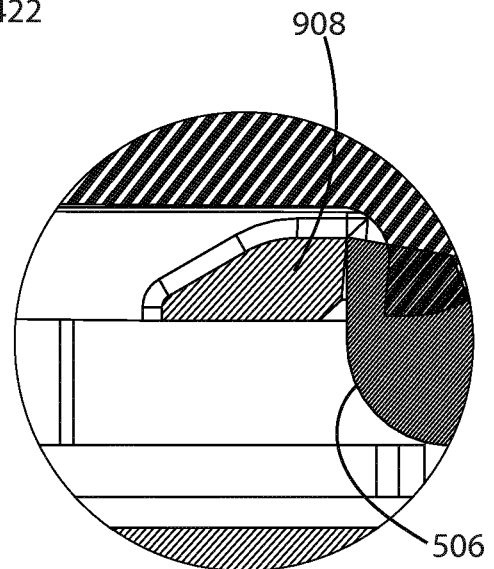


FIG. 9D

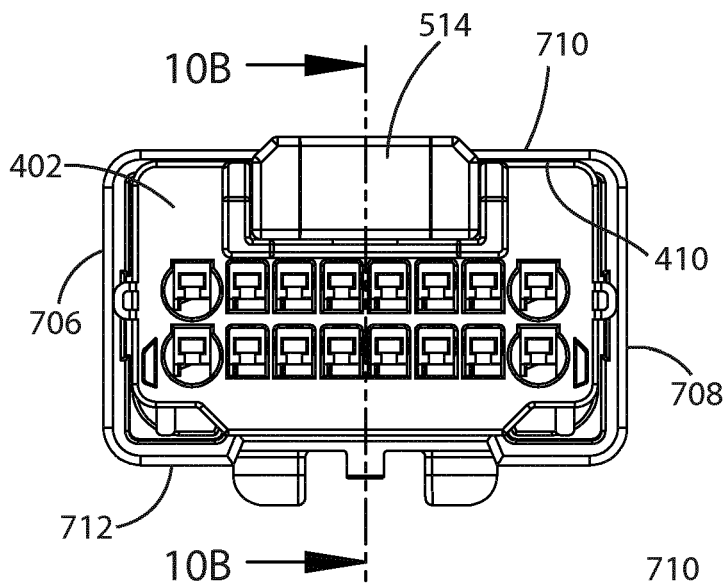


FIG. 10A

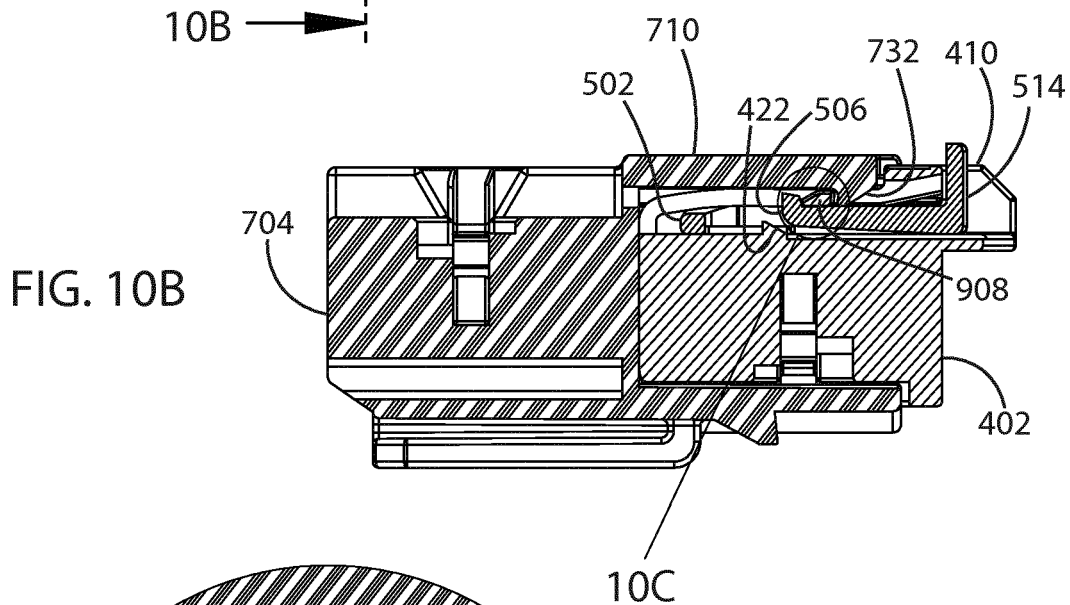


FIG. 10B

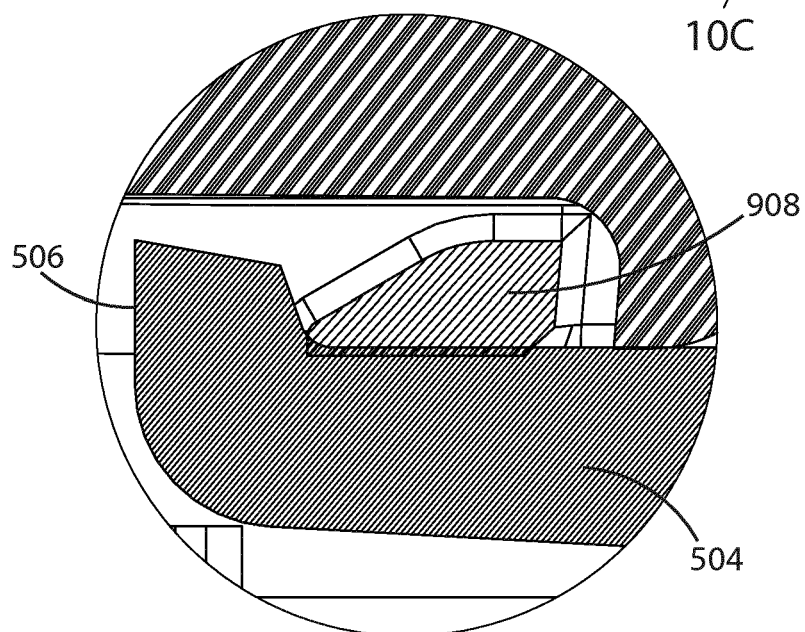
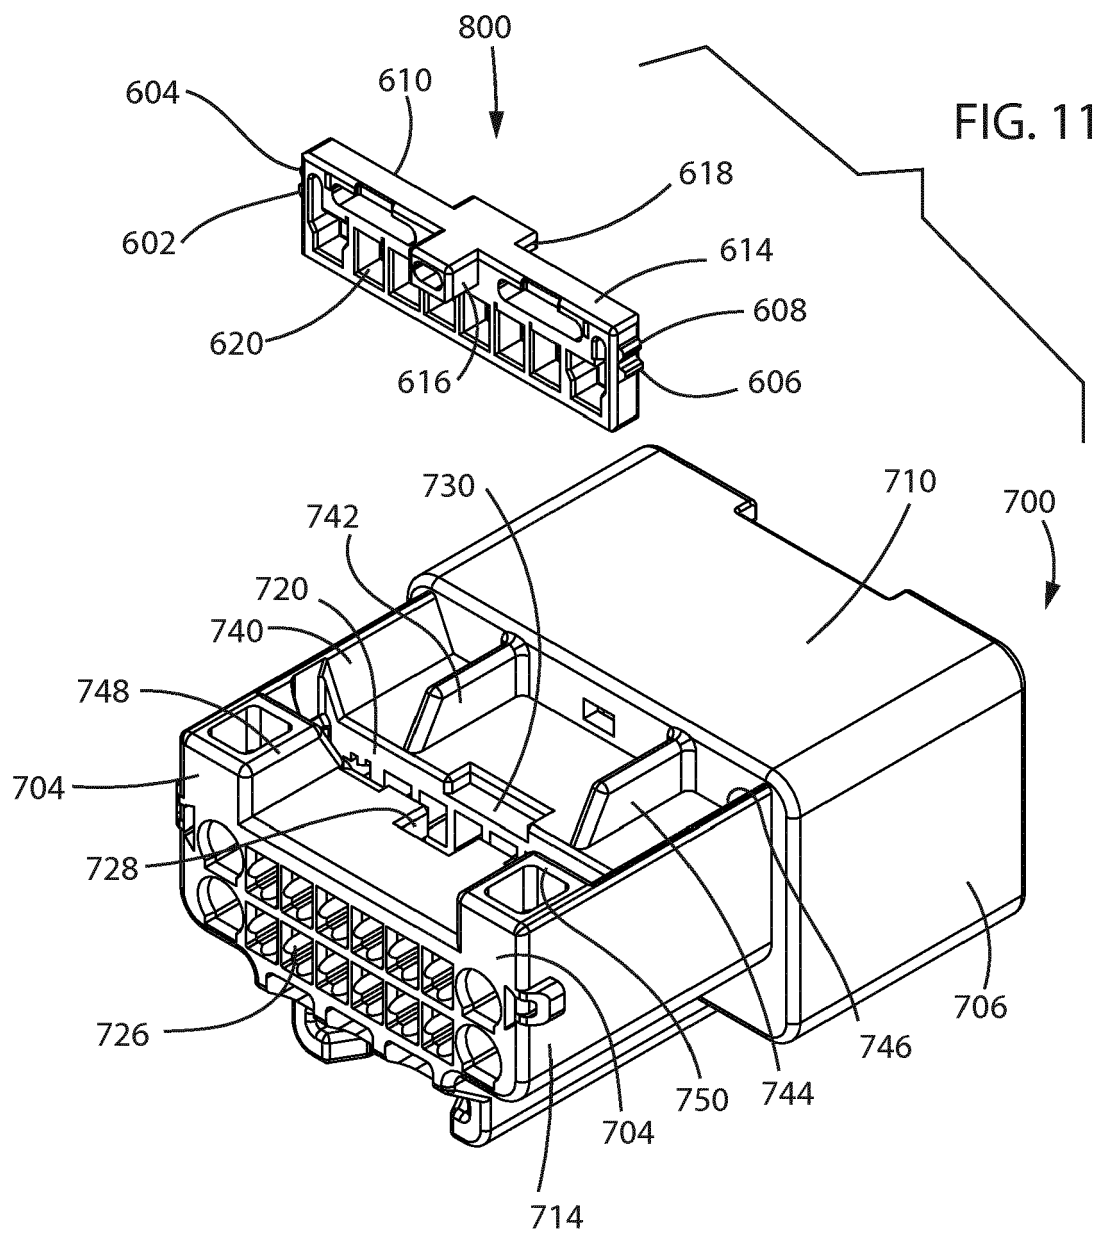


FIG. 10C



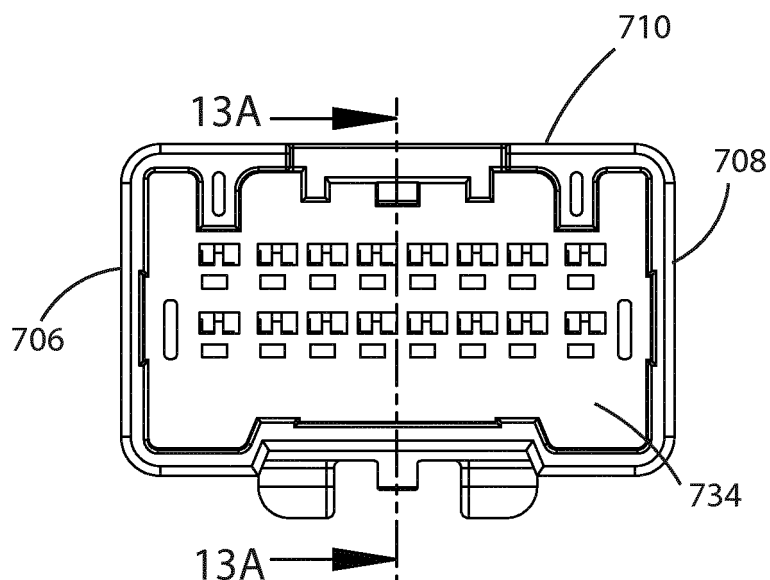


FIG. 12A

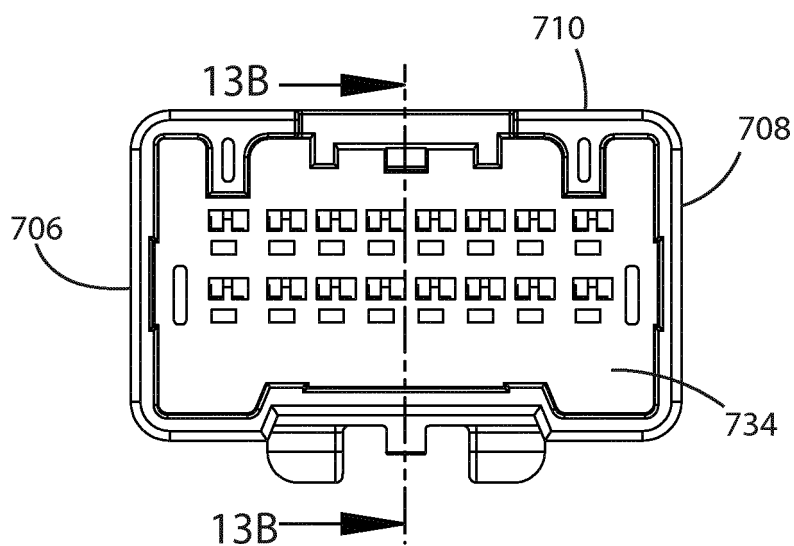


FIG. 12B

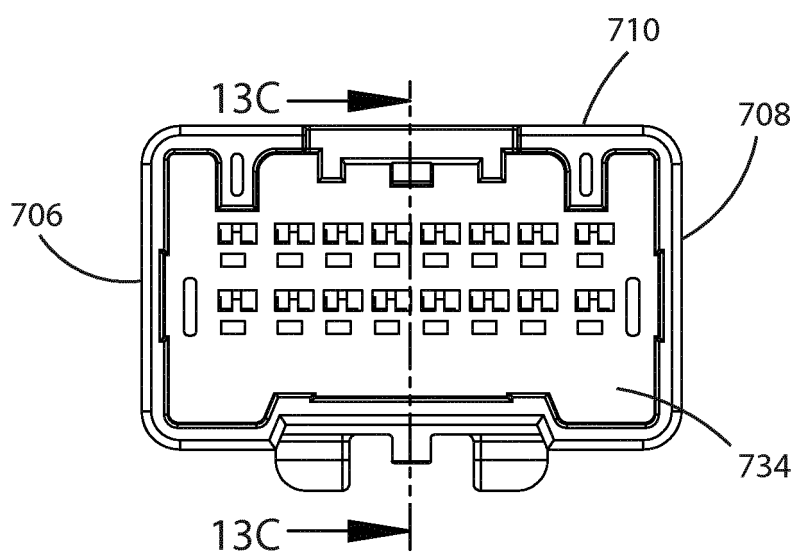
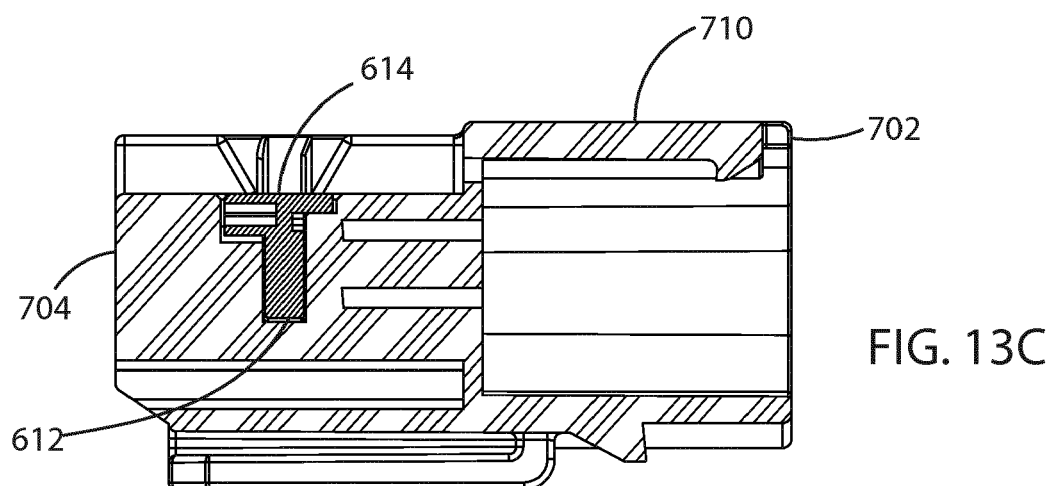
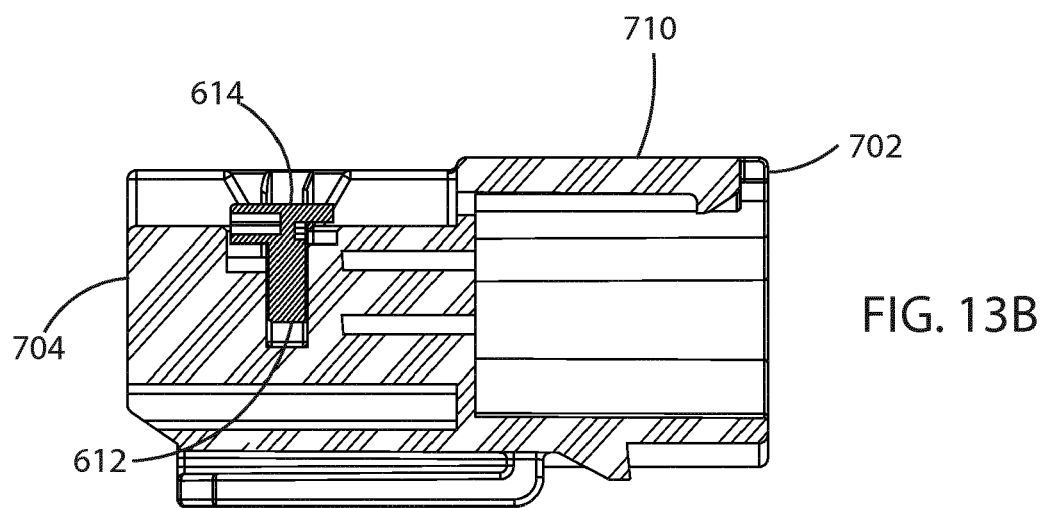
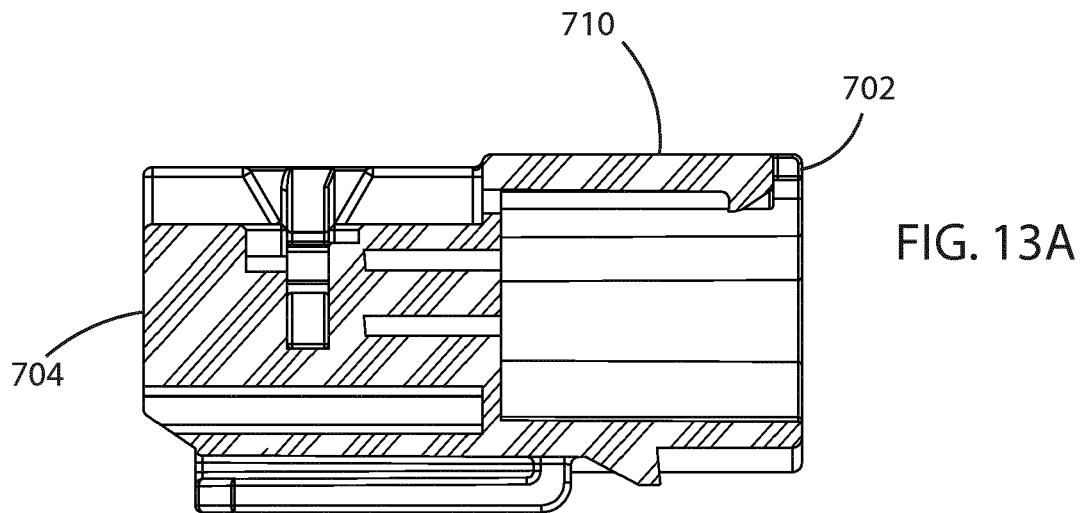


FIG. 12C



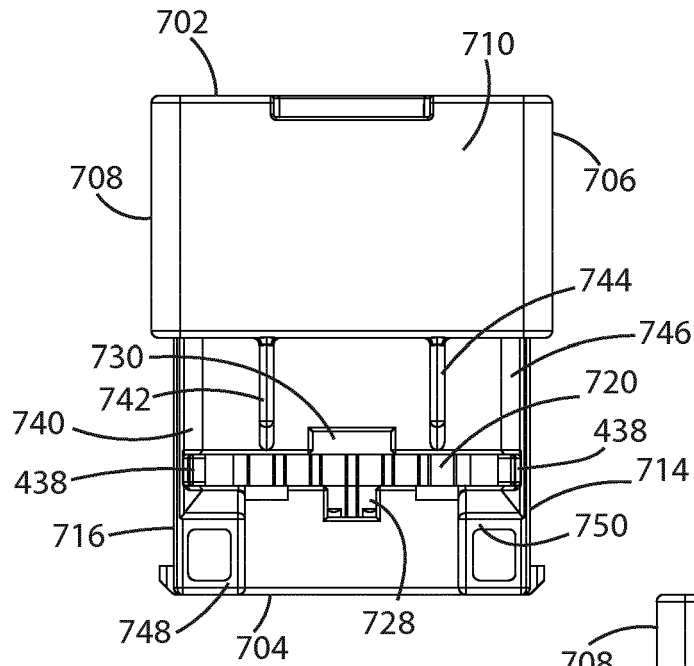


FIG. 14A

FIG. 14B

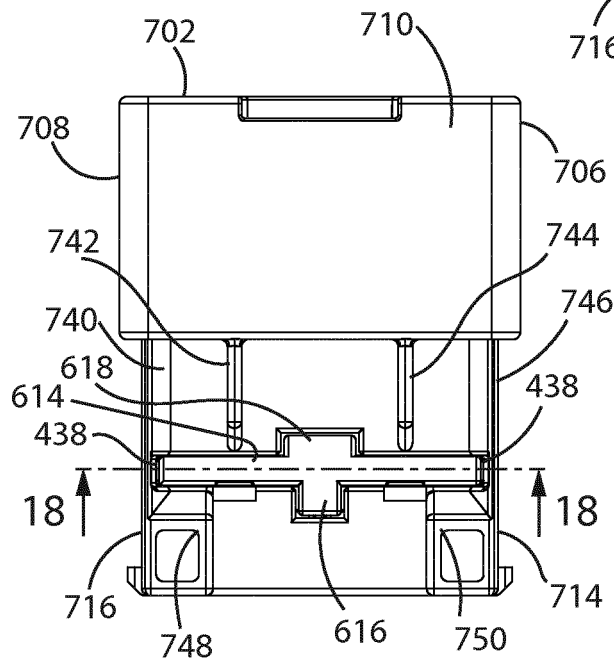
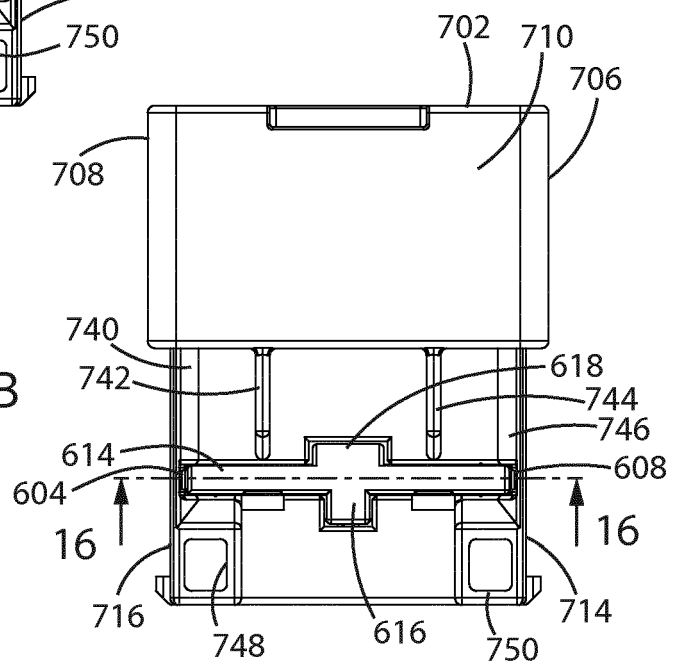


FIG. 14C

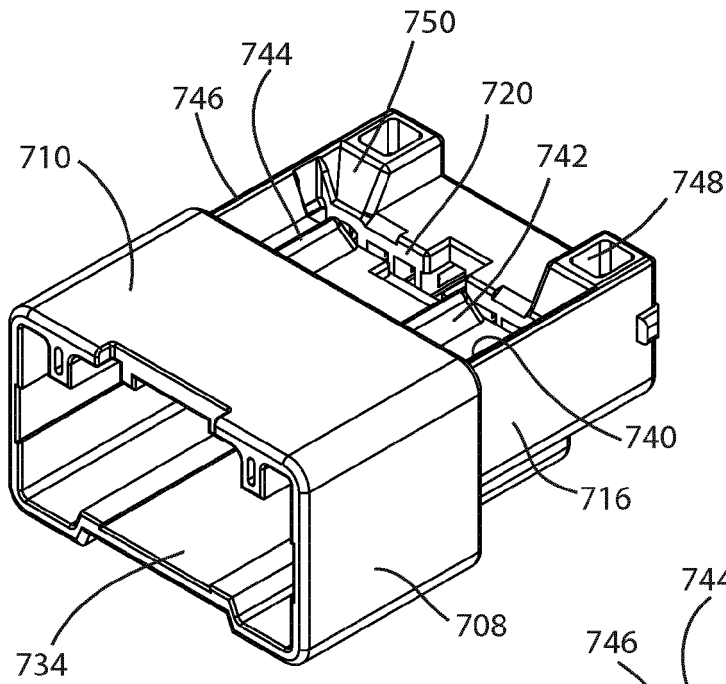


FIG. 15A

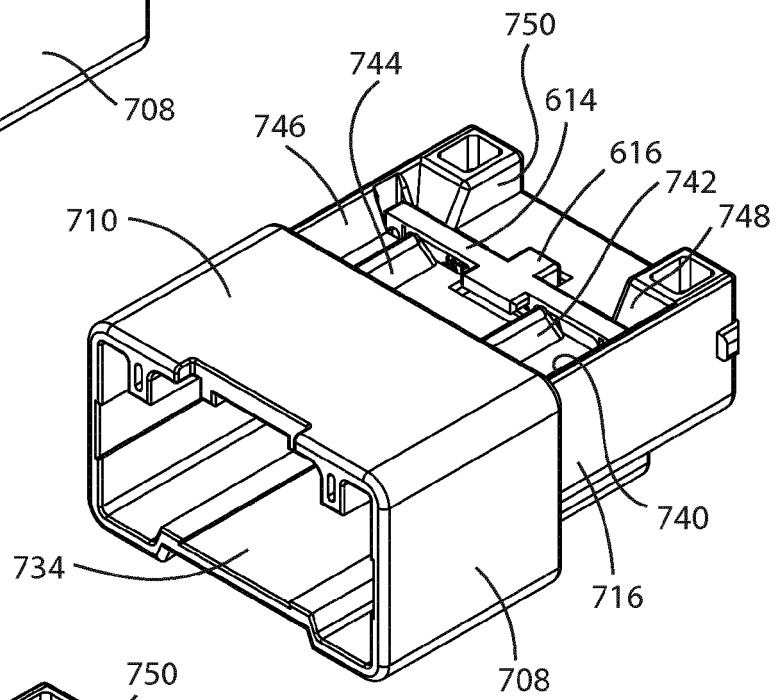


FIG. 15B

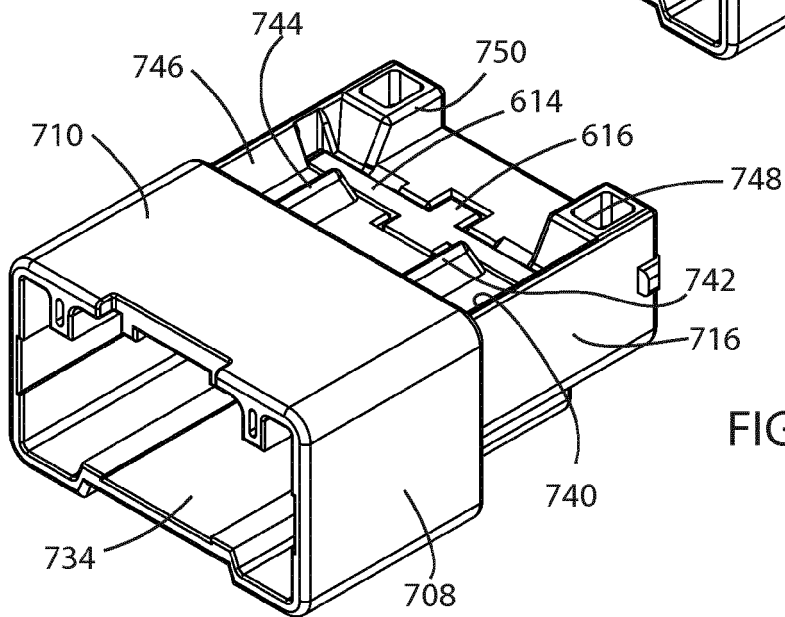


FIG. 15C

FIG. 16

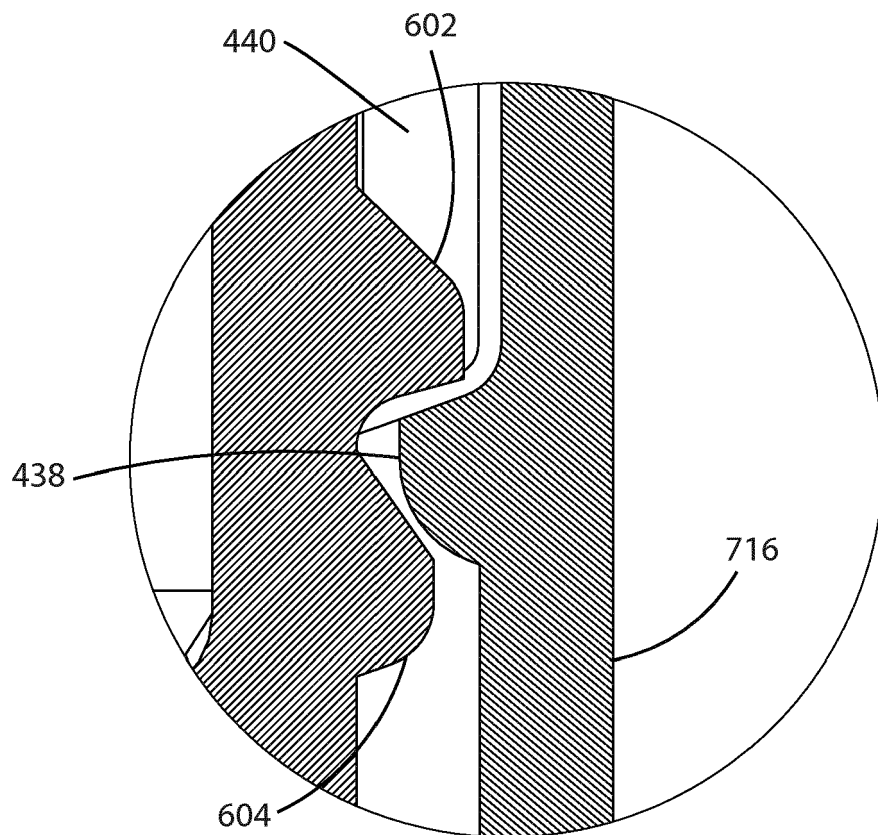
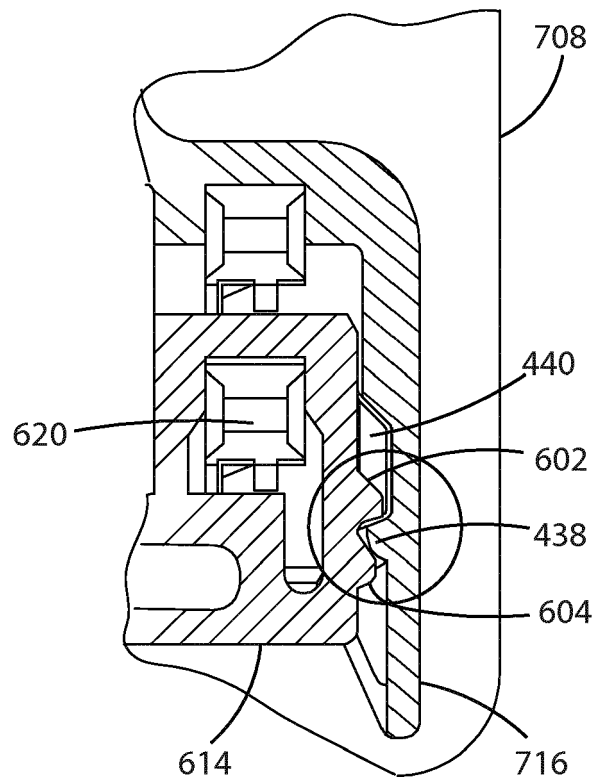


FIG. 17

FIG. 18

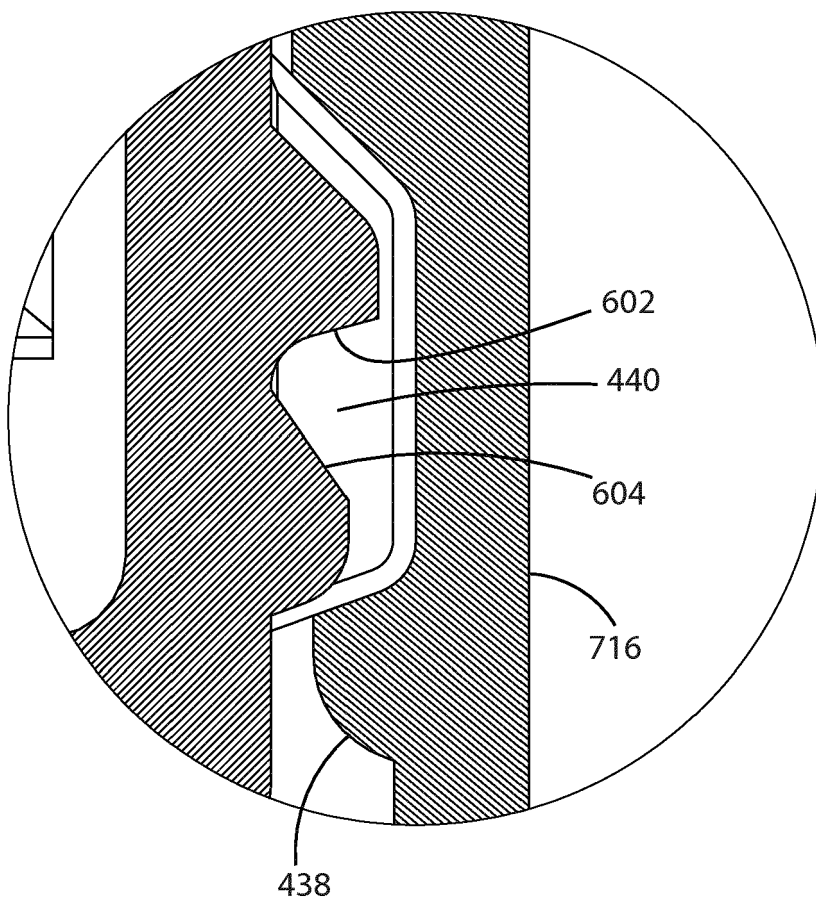
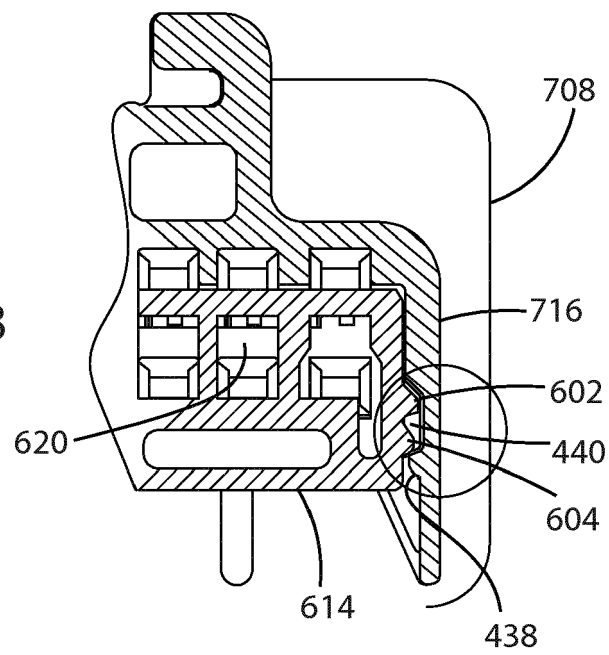


FIG. 19

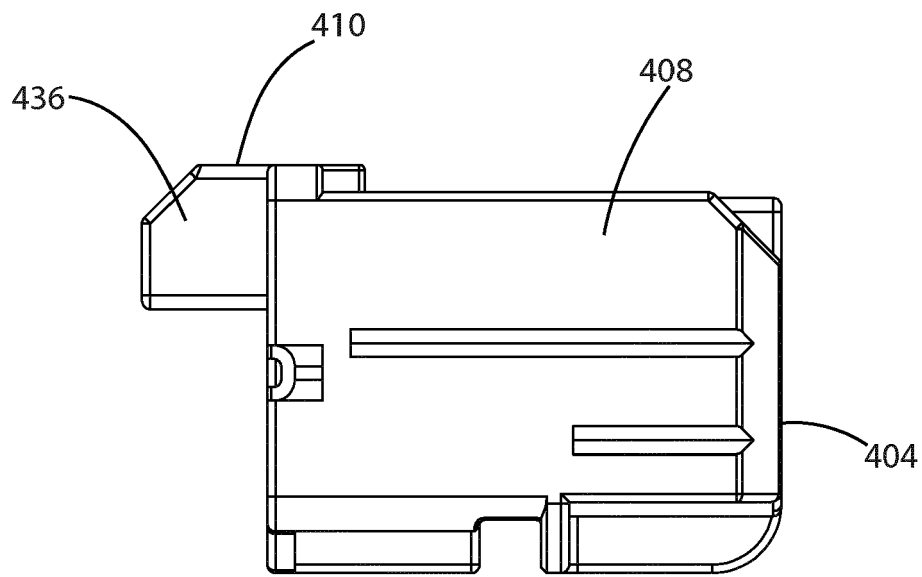


FIG. 20

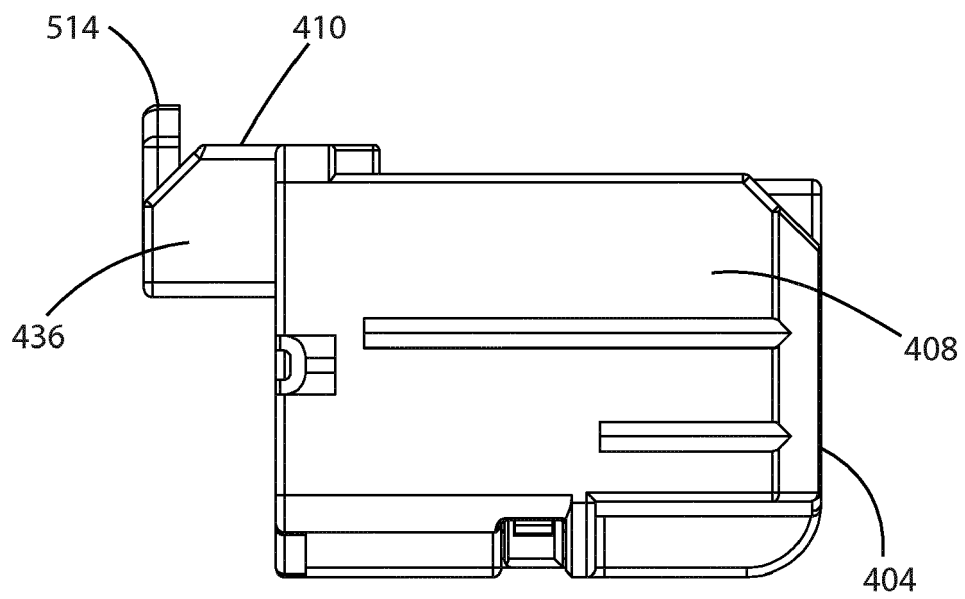


FIG. 21

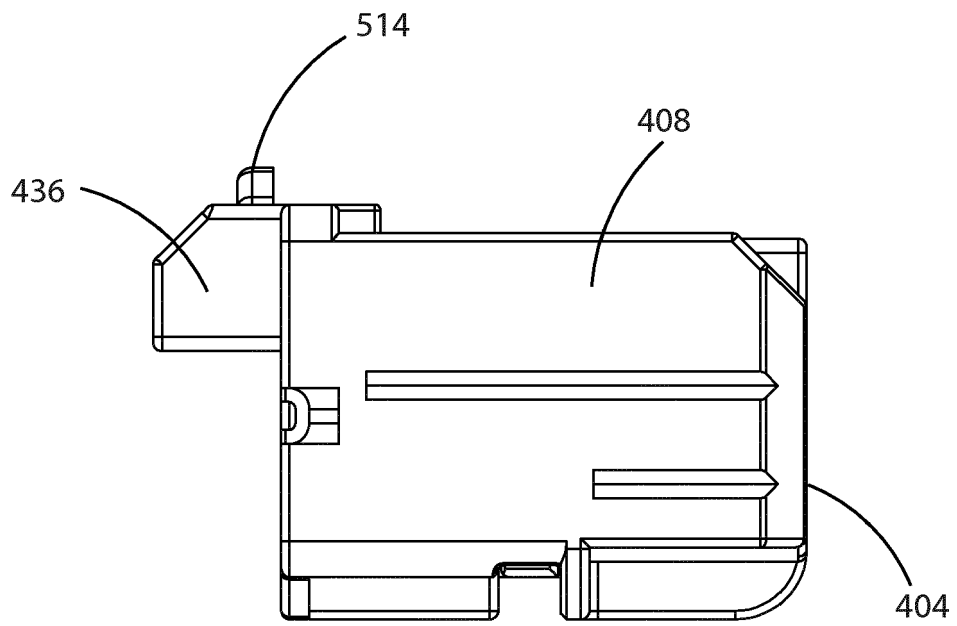


FIG. 22

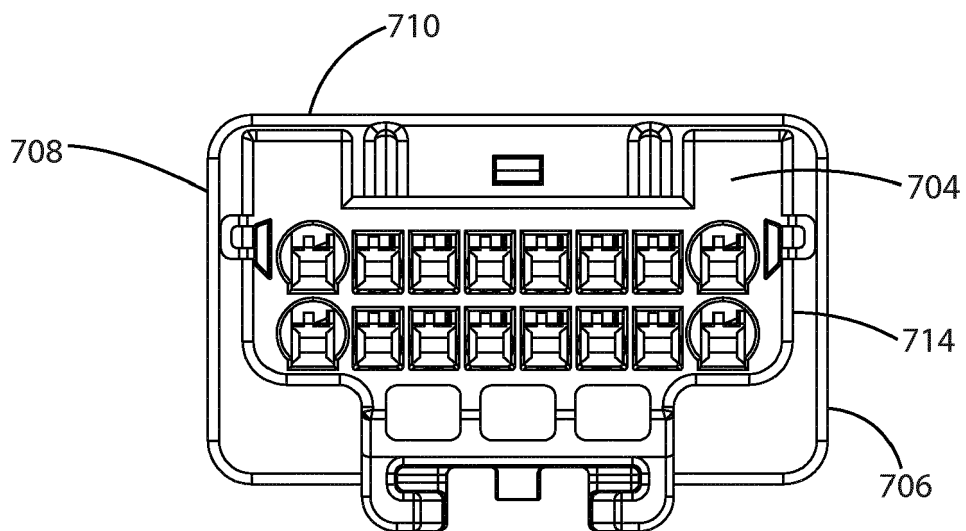


FIG. 23

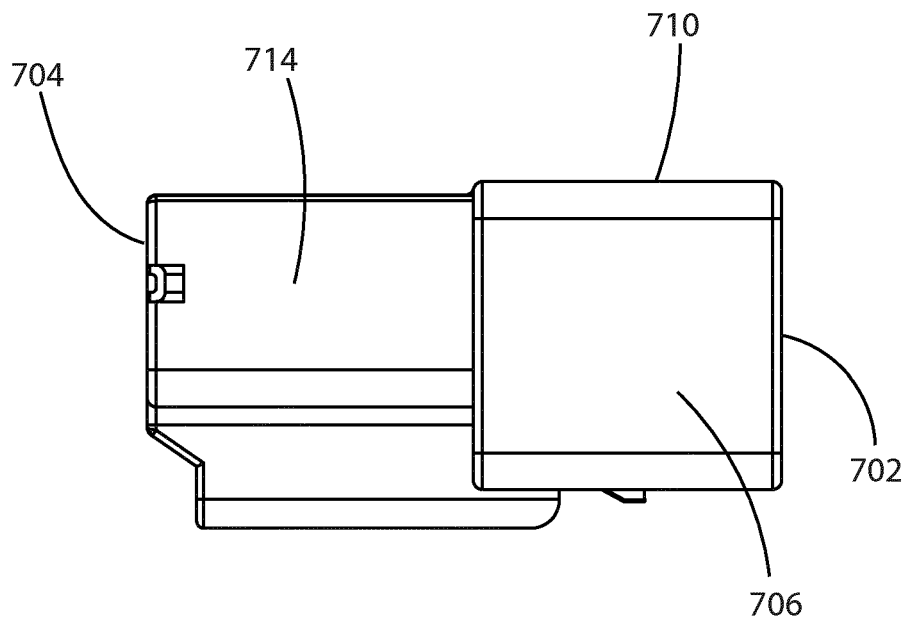


FIG. 24

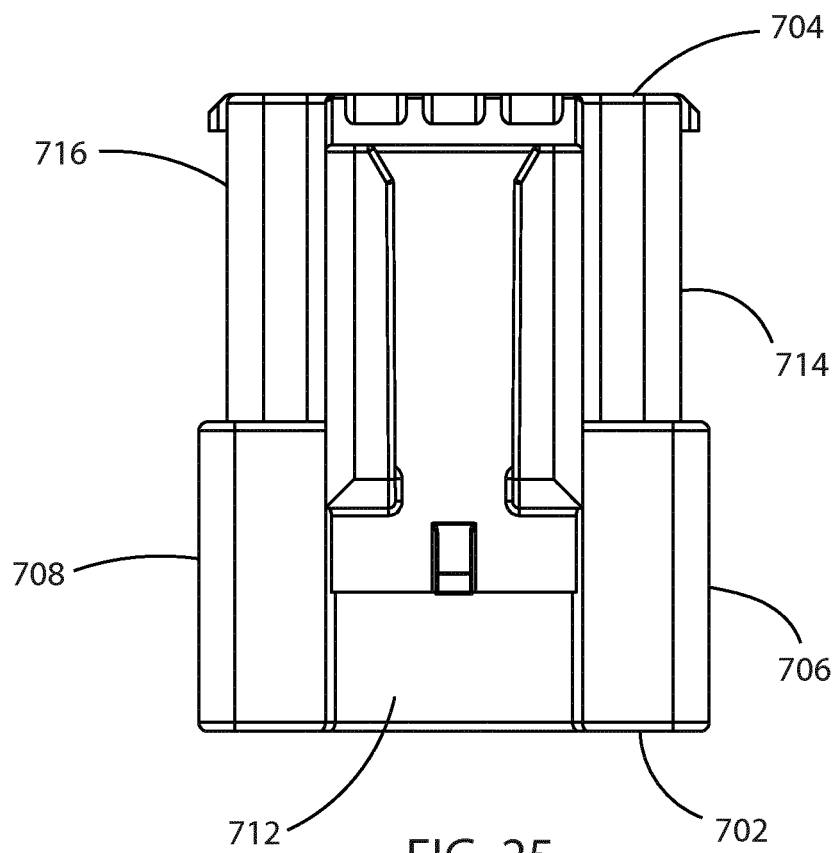


FIG. 25

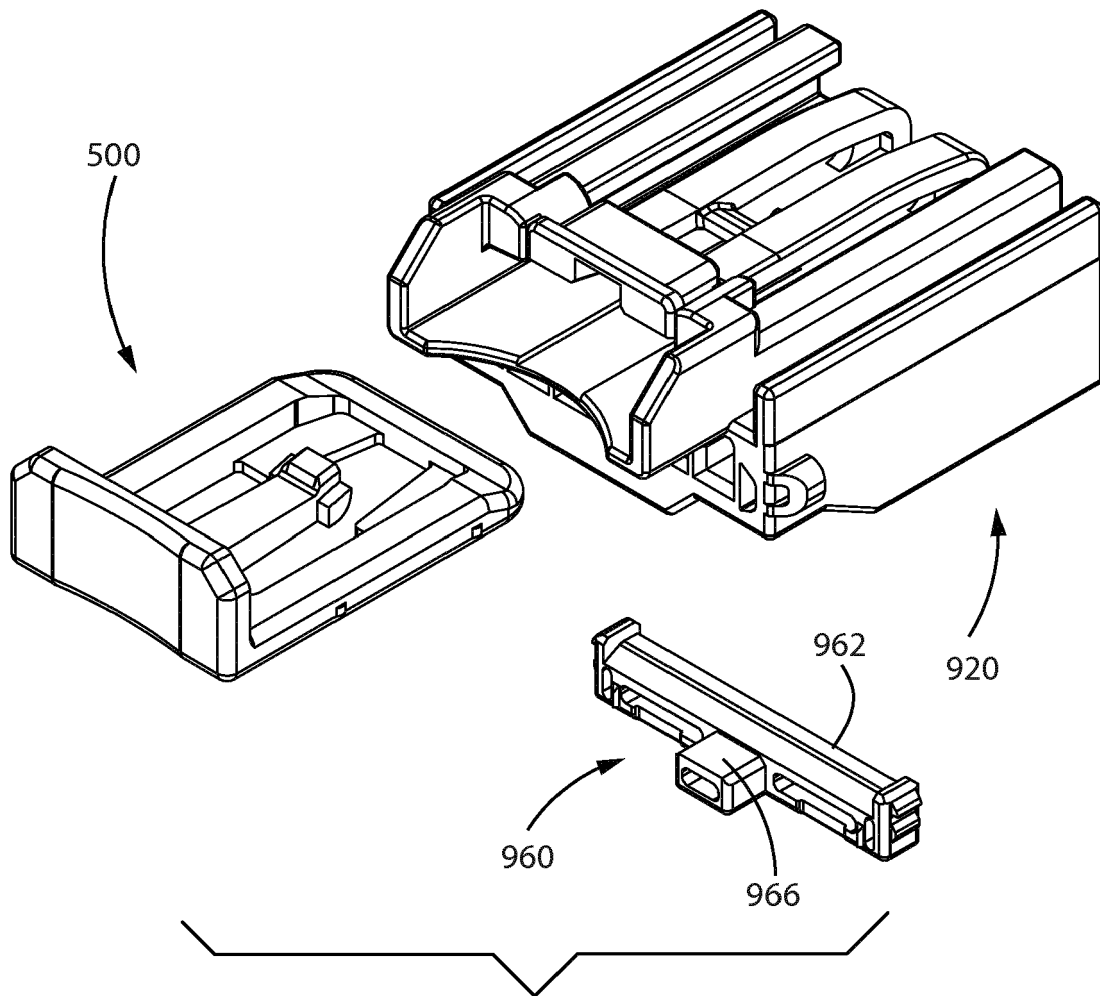
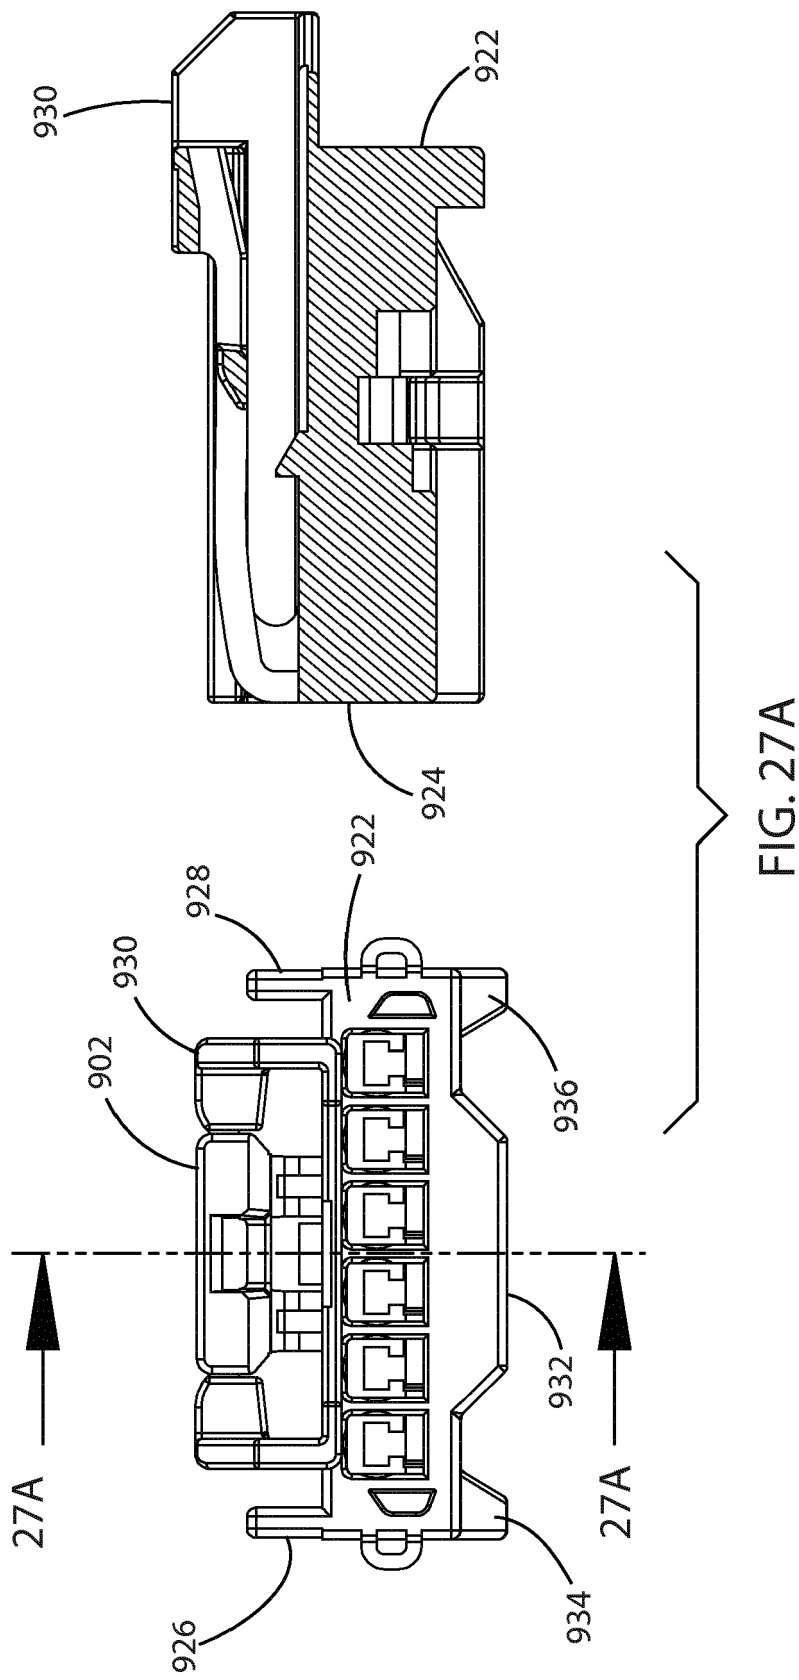
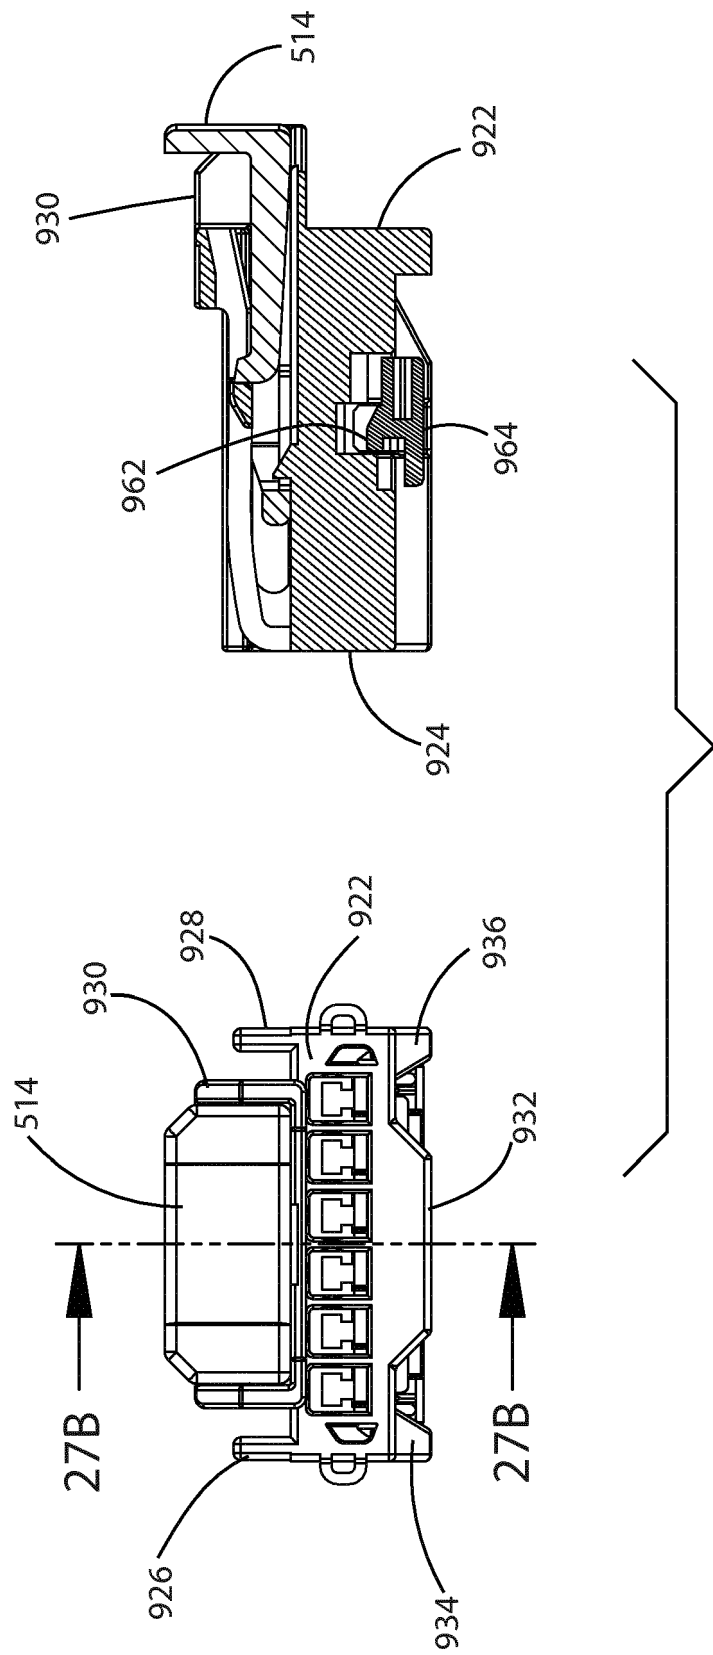


FIG. 26





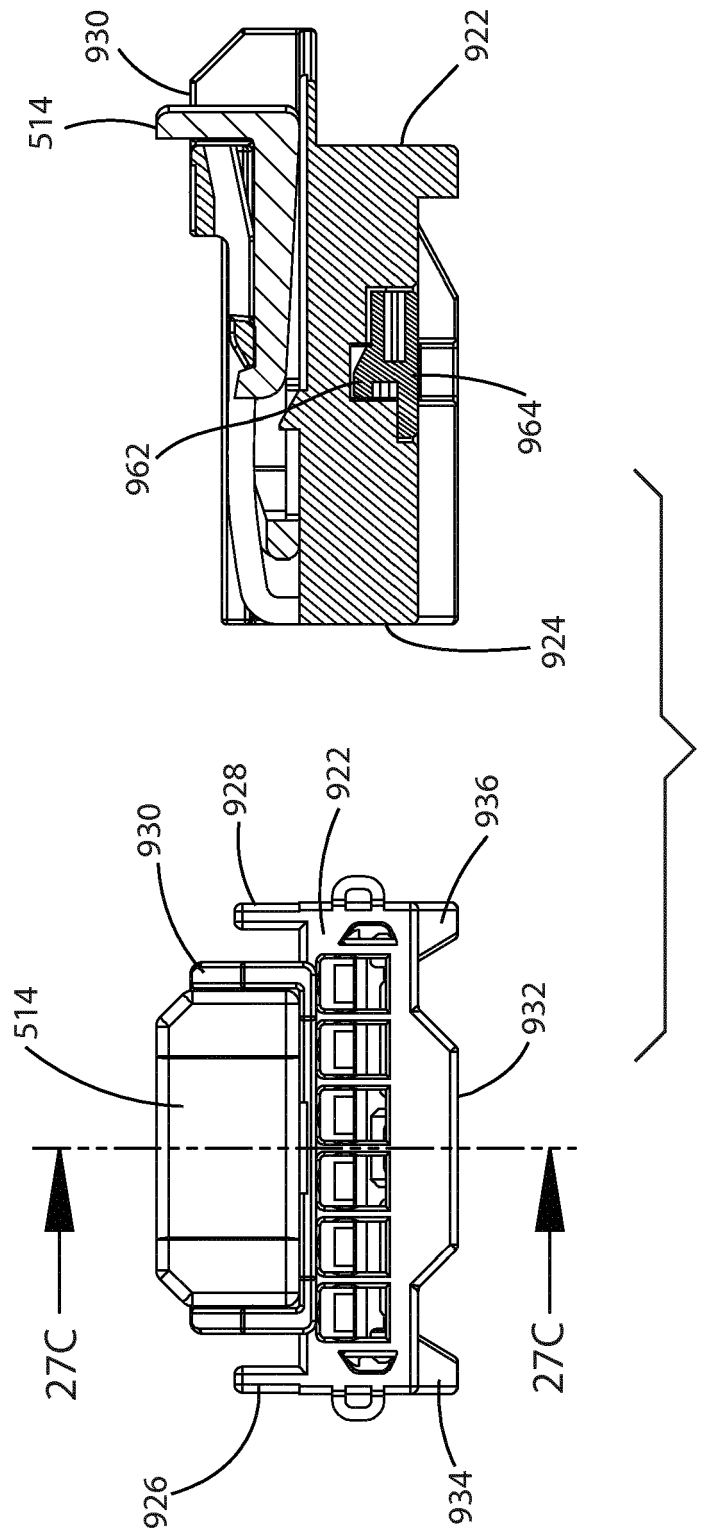
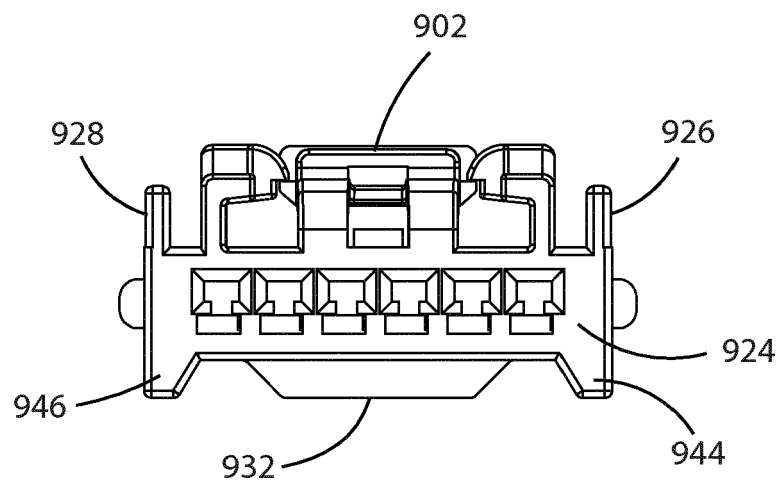
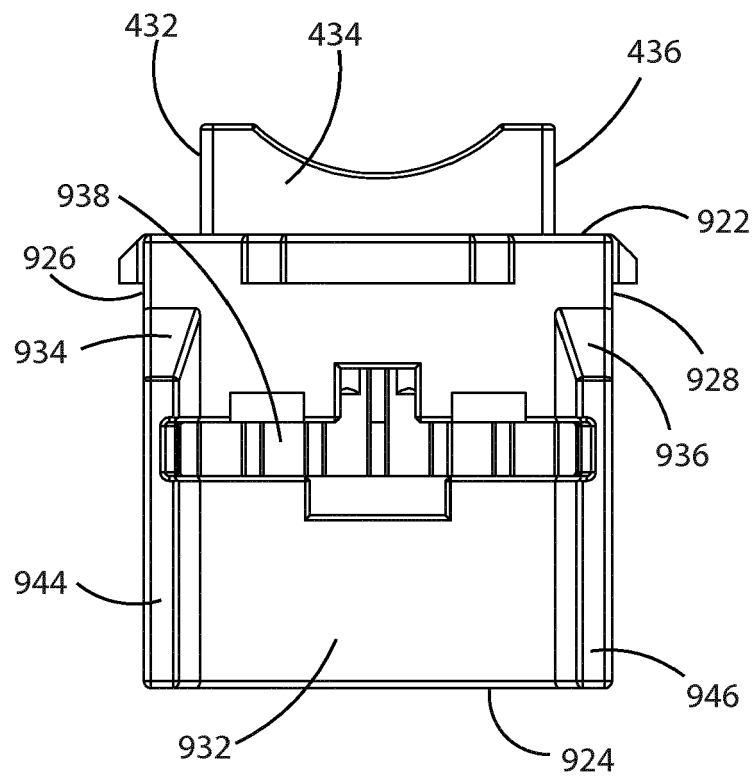
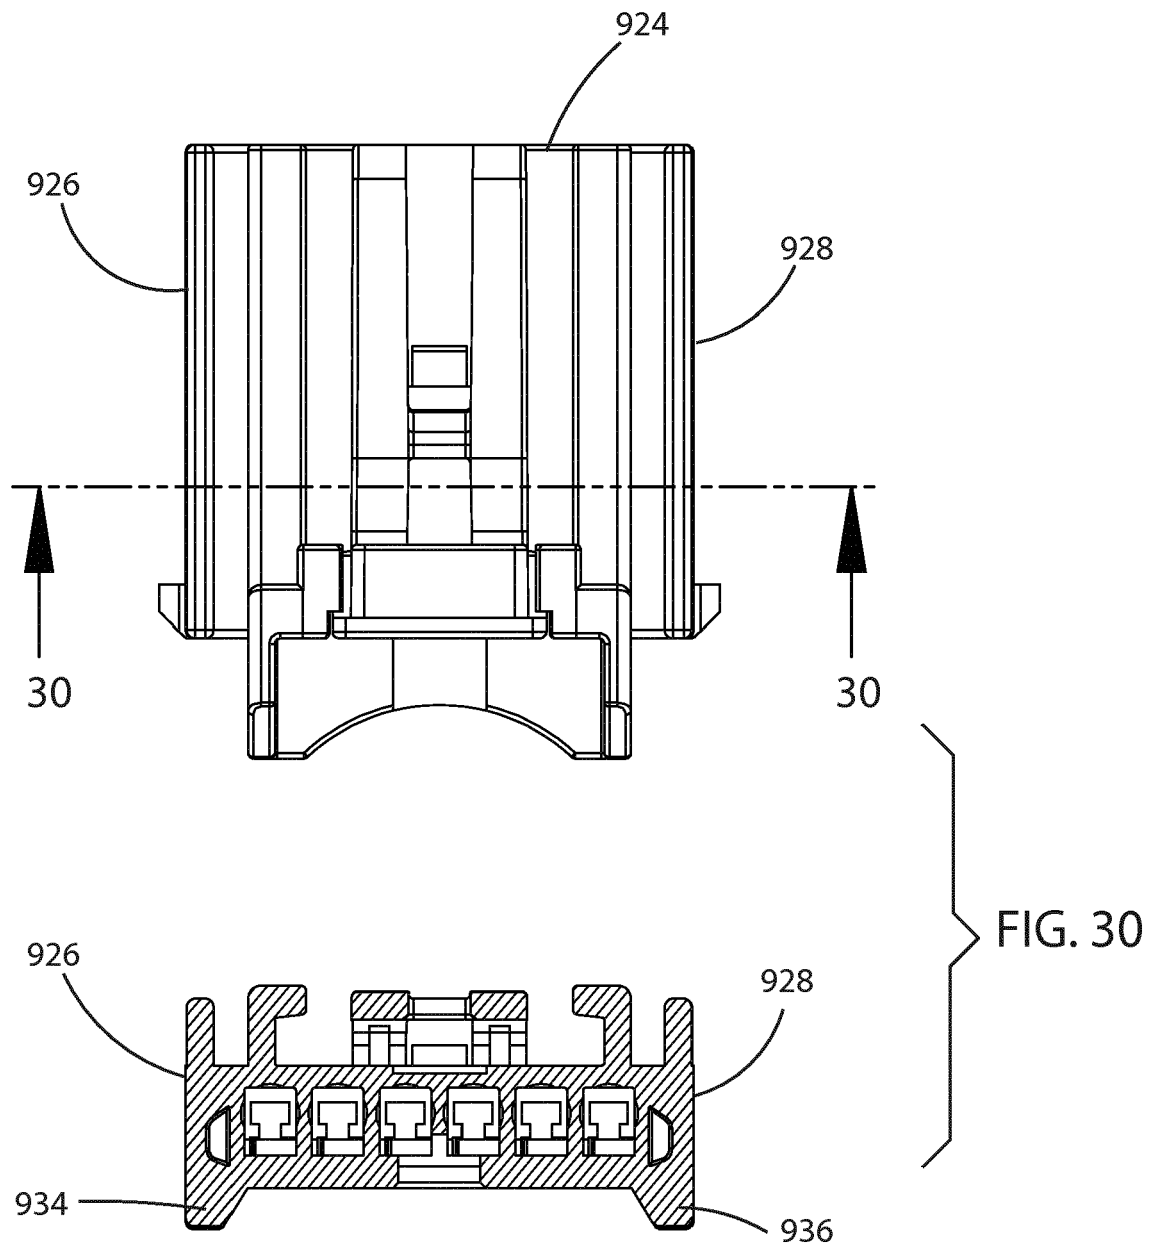


FIG. 27C





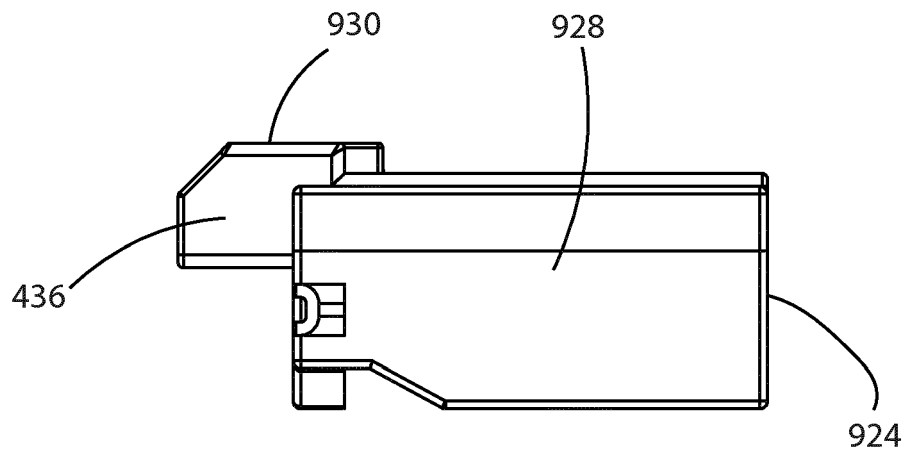


FIG. 31

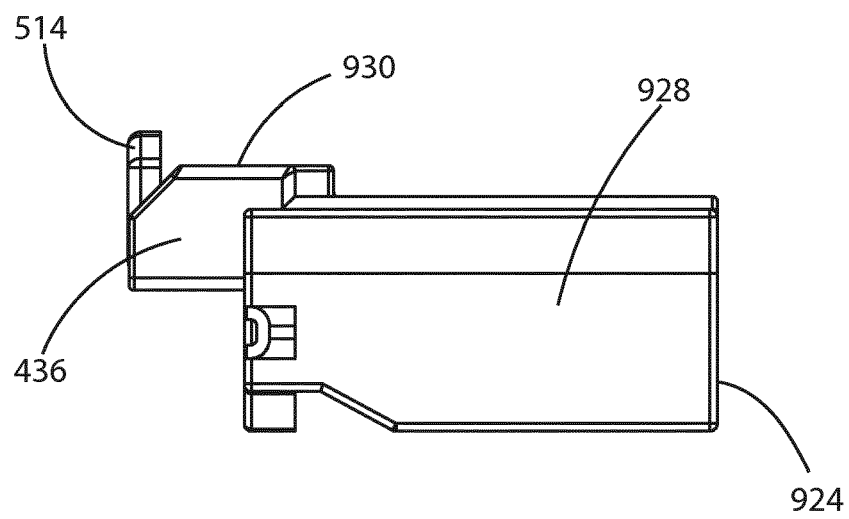


FIG. 32

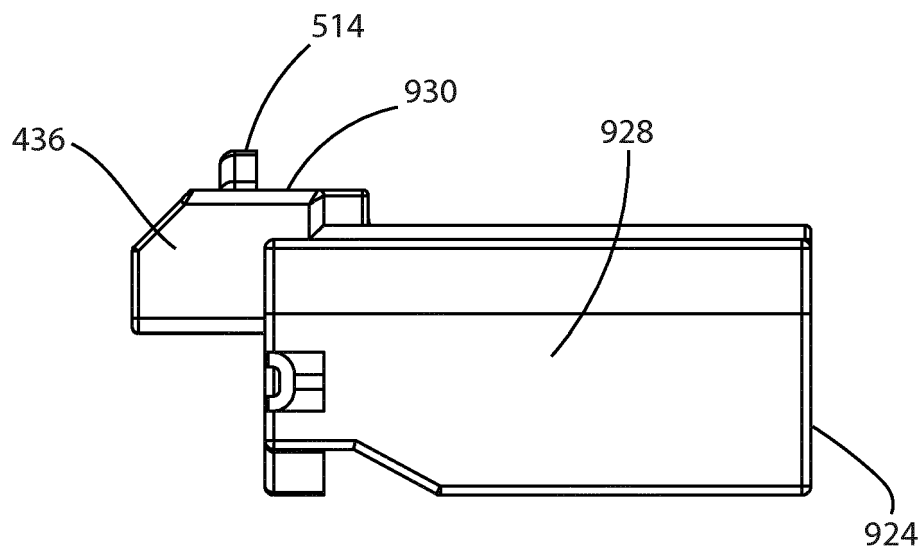


FIG. 33

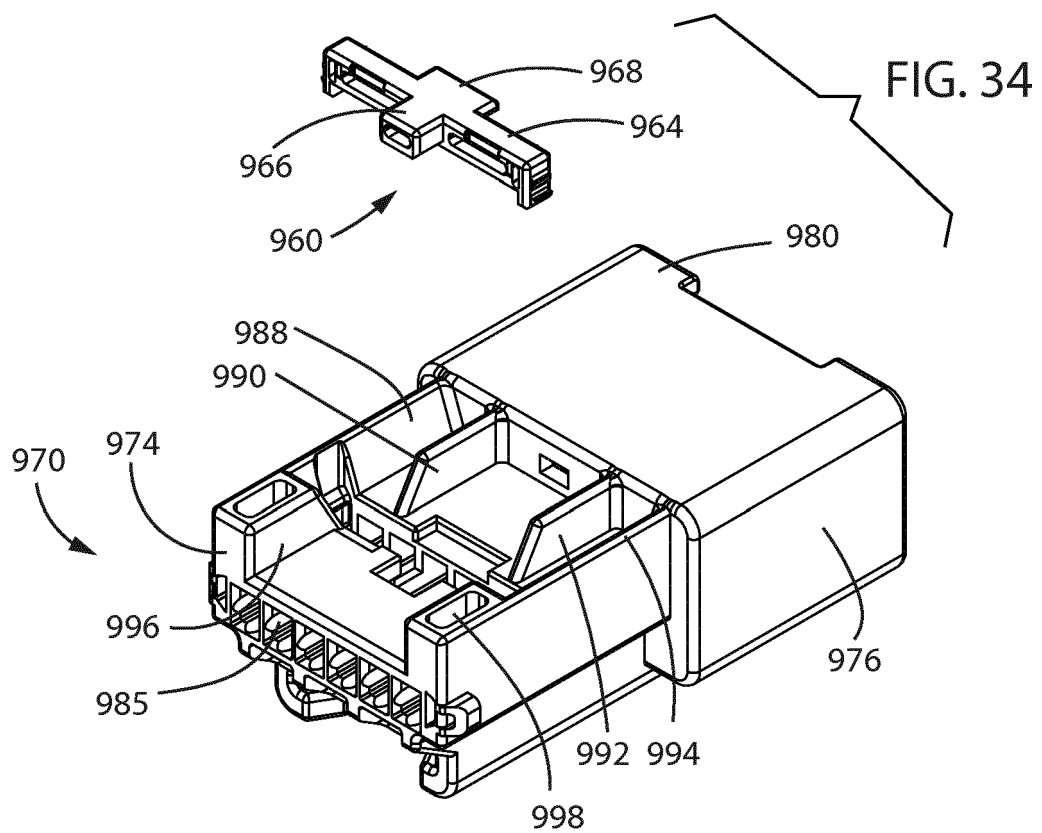


FIG. 34

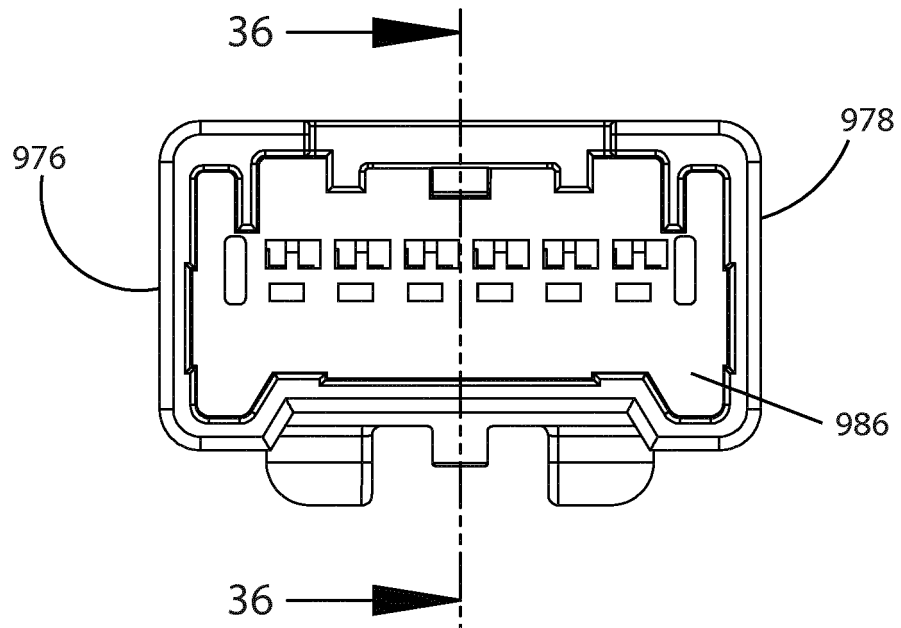


FIG. 35

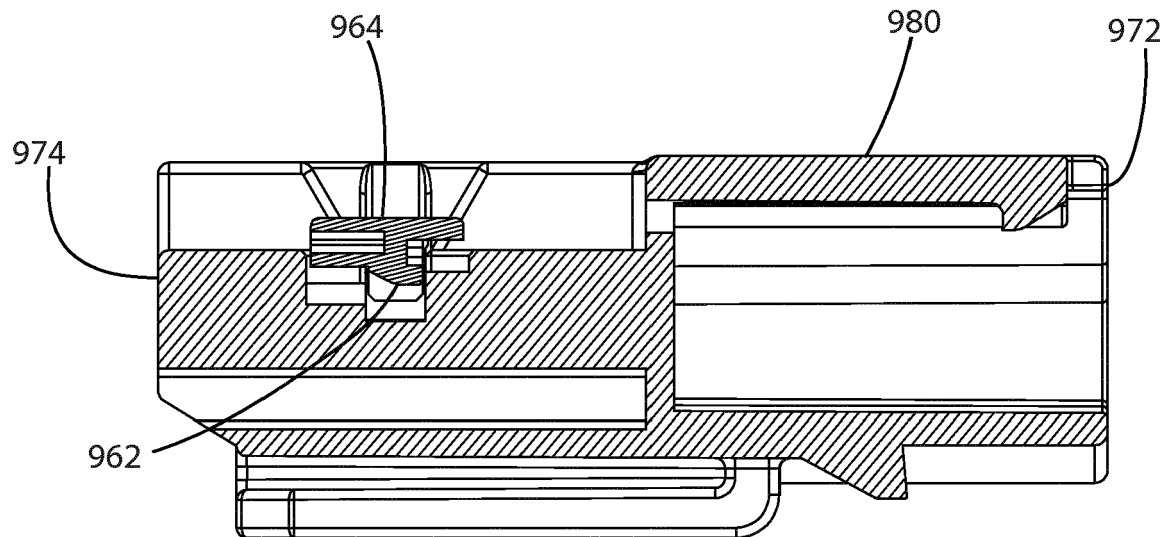


FIG. 36

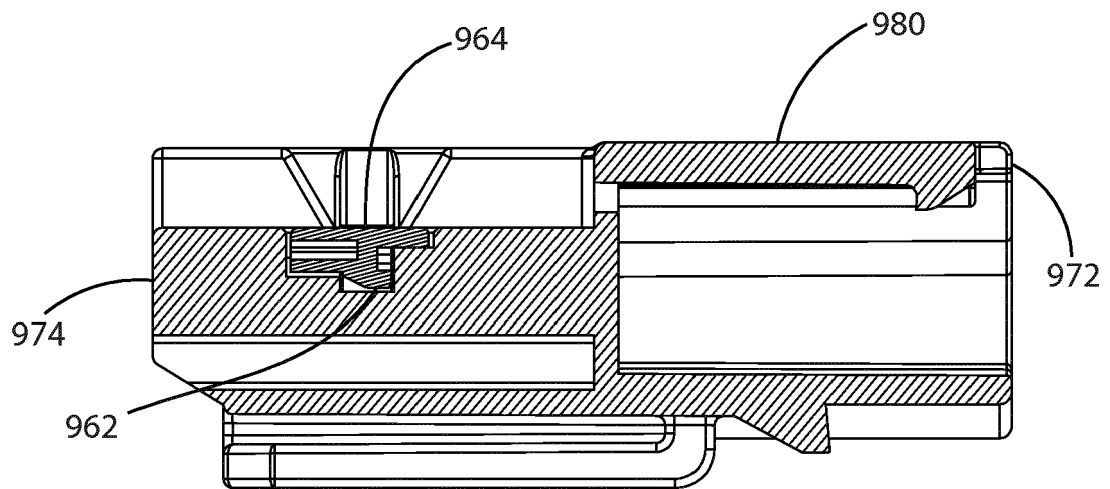


FIG. 37

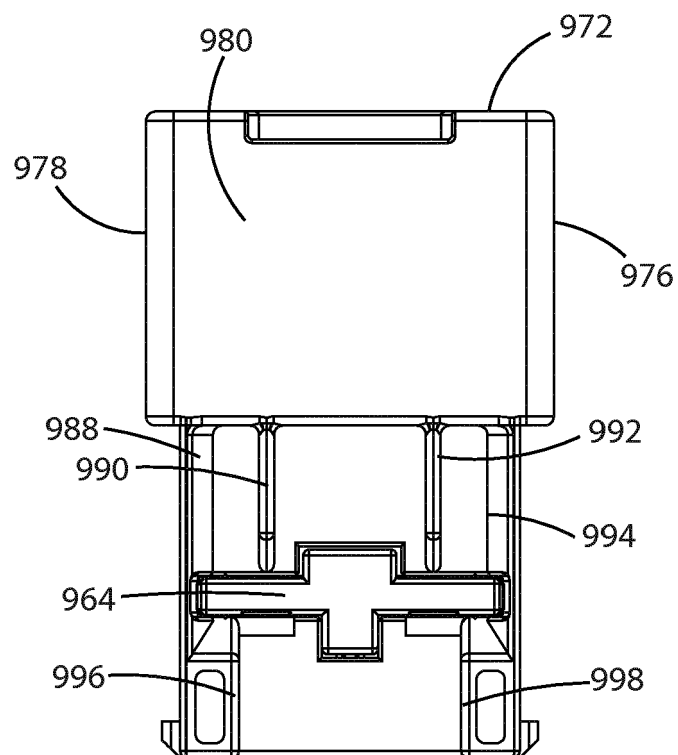
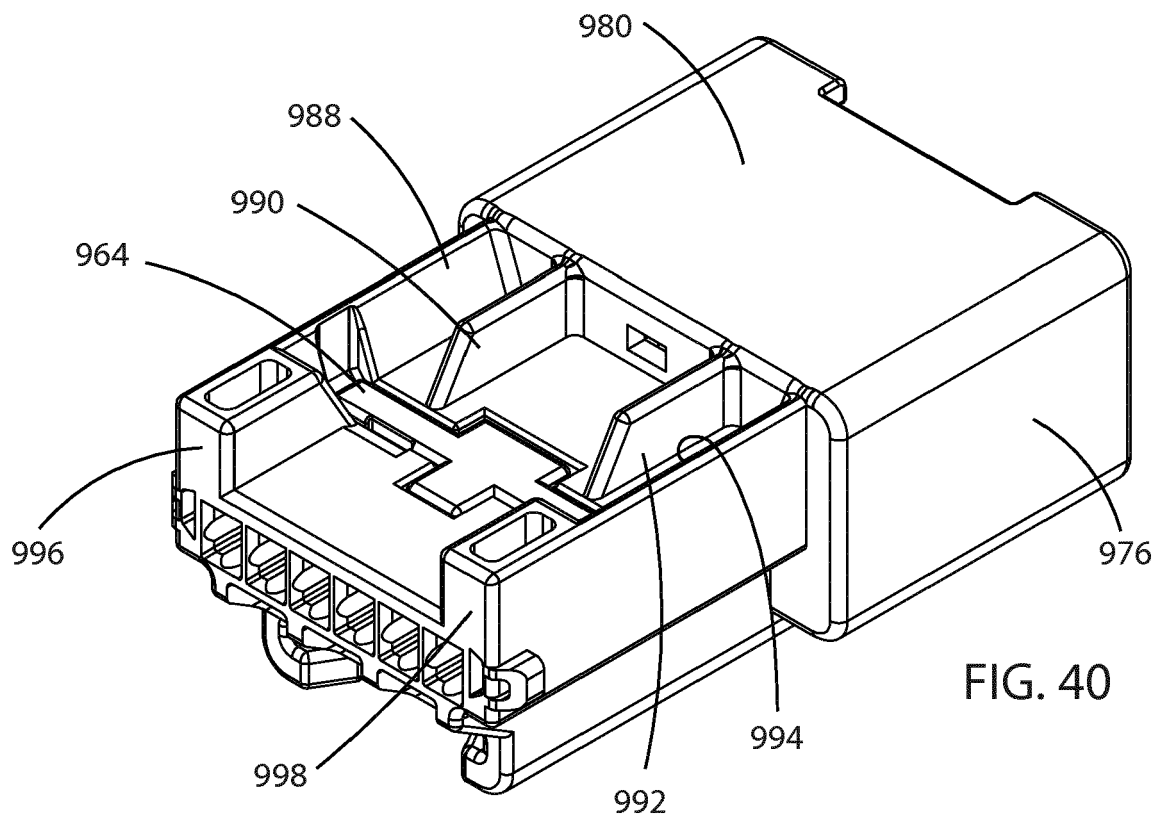
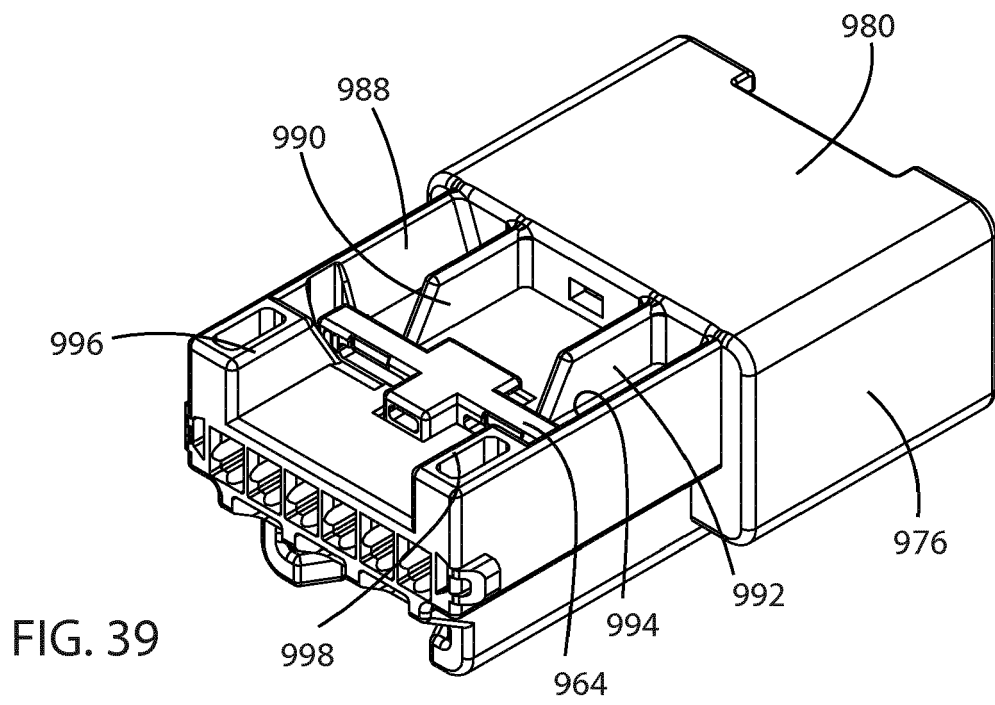


FIG. 38



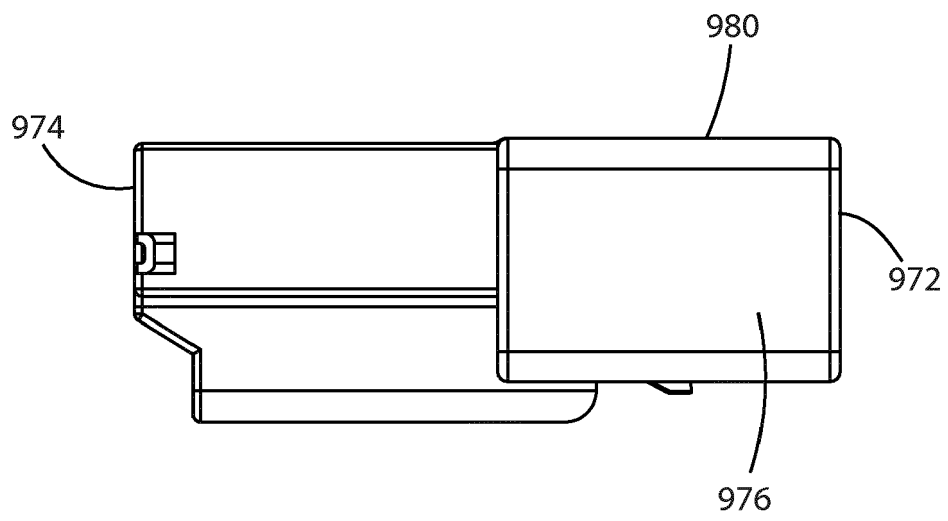


FIG. 41

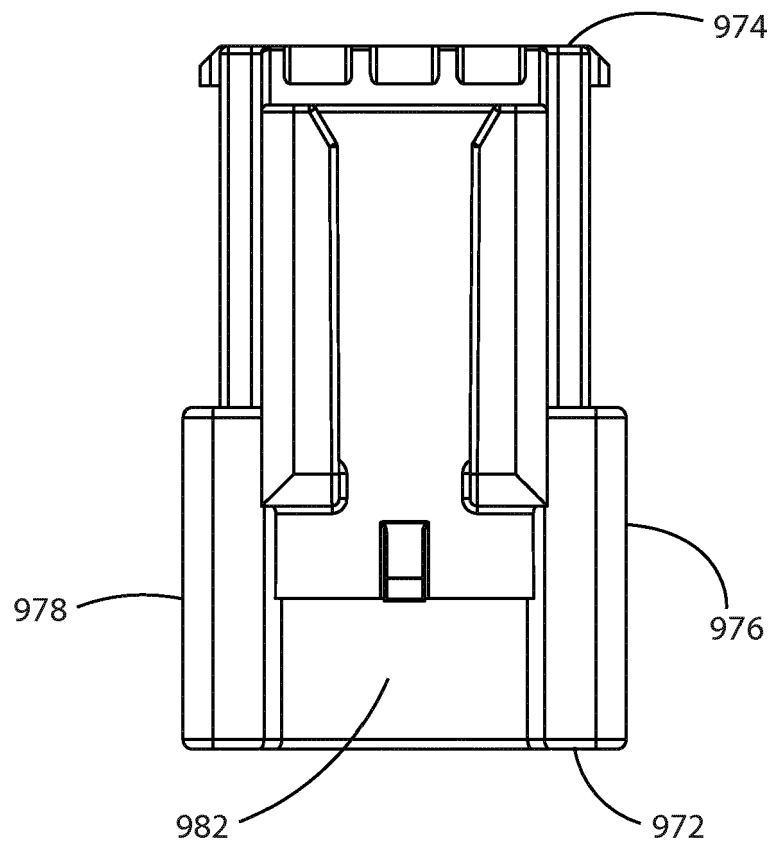


FIG. 42

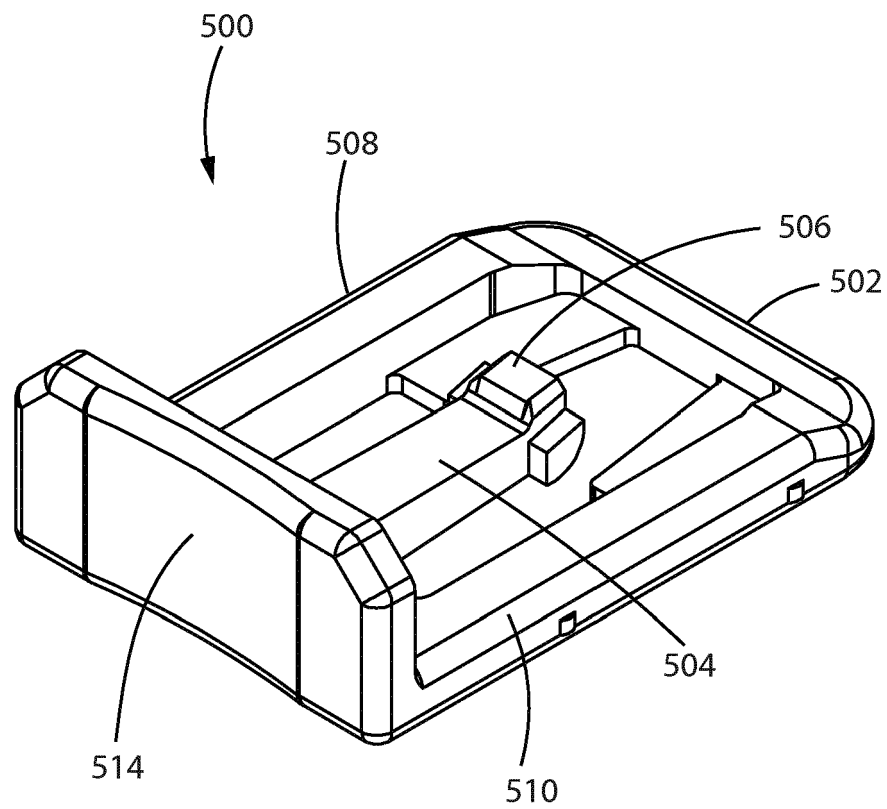


FIG. 43



EUROPEAN SEARCH REPORT

Application Number
EP 17 20 7747

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 6 135 802 A (NAKAMURA HIDETO [JP]) 24 October 2000 (2000-10-24)	1-6, 11-13,15	INV. H01R43/26
Y	* figures 1,2 *	7-10,14	H01R13/436 H01R13/641
X	US 5 830 013 A (SAITO HITOSHI [JP] ET AL) 3 November 1998 (1998-11-03)	16-20	ADD. H01R13/627 H01R13/639
Y	* figures 1,2 *	10	
A	* column 5, line 10 - column 5, line 10 * * column 5, line 45 - column 5, line 45 *	1-9, 11-15	
Y	US 6 068 507 A (POPA ALEXANDER [DE]) 30 May 2000 (2000-05-30)	7-9,14	
A	* figure 1 *	1-6, 10-13, 15-20	
A,P	US 2017/179643 A1 (HOLUB FRANKLIN A [US]) 22 June 2017 (2017-06-22) * figures 1-30 *	1-20	
			TECHNICAL FIELDS SEARCHED (IPC)
			H01R
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 22 March 2018	Examiner Skaloumpakas, K
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 17 20 7747

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

22-03-2018

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6135802 A	24-10-2000	CN 1221239 A	30-06-1999
		DE 69812568 D1	30-04-2003
		DE 69812568 T2	04-03-2004
		EP 0926773 A1	30-06-1999
		JP 3278051 B2	30-04-2002
		JP H11185880 A	09-07-1999
		US 6135802 A	24-10-2000

US 5830013 A	03-11-1998	NONE	

US 6068507 A	30-05-2000	DE 69737280 T2	18-10-2007
		JP 3060296 B2	10-07-2000
		JP H10177880 A	30-06-1998
		US 6068507 A	30-05-2000

US 2017179643 A1	22-06-2017	US 2017179643 A1	22-06-2017
		US 2017179646 A1	22-06-2017
