

(19)



(11)

**EP 3 320 797 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:  
**14.08.2019 Bulletin 2019/33**

(51) Int Cl.:  
**A44B 11/25 (2006.01)**

(21) Application number: **17197236.7**

(22) Date of filing: **19.10.2017**

(54) **LATCH DEVICE**

VERRIEGELUNGSVORRICHTUNG

DISPOSITIF DE VERROUILLAGE

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**

(30) Priority: **10.11.2016 TW 016217198 U**

(43) Date of publication of application:  
**16.05.2018 Bulletin 2018/20**

(73) Proprietor: **Brogent Technologies Inc. Kaohsiung City 80661 (TW)**

(72) Inventors:  
• **CHIEN, Ke-Cheng 80661 Kaohsiung City (TW)**

- **TANG, Wei-Ching 80661 Kaohsiung City (TW)**
- **HUANG, Chih-Chiang 80661 Kaohsiung City (TW)**
- **LIAN, Guo-Sen 80661 Kaohsiung City (TW)**
- **CHIU, Shih-Kuang 80661 Kaohsiung City (TW)**

(74) Representative: **Lang, Christian LangPatent Anwaltskanzlei Ingolstädter Straße 5 80807 München (DE)**

(56) References cited:  
**EP-A1- 2 614 739 DE-U1-202012 012 254 TW-U- M 473 859**

**EP 3 320 797 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**Description****BACKGROUND OF THE INVENTION****a) Field of the Invention**

[0001] The present invention relates to a latch device, and more particularly to a latch device for seat belt.

**b) Description of the Prior Art**

[0002] Exciting recreational facilities are installed in amusement parks for providing customers a better, joyful and refresh experience. Moreover, with advanced development of virtual reality, every amusement park is equipped with haptic simulation theater, in which seat belts central control system is essential for securing customer safety.

[0003] Please refer to FIG. 1, which concerns Taiwan Patent No. M473859, a latch 200 for seat belt 100. The seat belt 100 is connected to a latch plate with two latching holes, and the latch 200 has an insertion slot for inserting the latch plate. Two vertical locking disks, and an electromagnetic lock and a pressing lock for engaging with the two vertical locking disks are attached inside the latch 200, so that the latch plate of seat belt 100 is secured inside the latch 200.

[0004] In addition, the latch 200 only can be unlatched by means of releasing both the electromagnetic lock and the manual pressing lock, and central control console only can detect whether the electromagnetic lock is powered up, but cannot confirm latched state of the vertical locking disks, so it needs staff to confirm latched state of seat belt 100 one by one.

[0005] Furthermore, dark ambient condition is essential for a haptic simulation theater, which can let customers enjoy realistic experiences, but it is hard for customers to find and latch the latch 200 with the seat belt 100 in a dark theater.

[0006] From the above descriptions, certain problems still exist with current latch for seat belt:

1. Unable to confirm a latched state via central control console

[0007] Central control console only can detect whether the electromagnetic lock is powered up, but cannot confirm latched state of the vertical locking disks, so it needs staff to confirm latched state of seat belt 100, which is possible to increase risk of accidents.

2. Unable to find a latch in the dark

[0008] Dark ambient condition is essential for a haptic simulation theater, which can let customers enjoy realistic experiences, but it is hard for customers to find a latch on a seat in such dark room.

3. Unable to comply with strict safety regulations

[0009] Regulations and standards of recreational facilities vary from country to country, if latched state of the two vertical locking disks cannot be monitored, it may not comply with safety regulations and standards in some countries.

4. Possible to increase risk of accidents

[0010] It is hard to detect rotatory position of each lock cylinders in a conventional latch. When one of lock cylinders has a breakdown and cannot be detected from its appearance, and central control console is also unable to receive breakdown information, the other good lock cylinder will still be secured to the latch plate, which enables the damaged latch still be utilized. Under these circumstances, once the good lock cylinder has a breakdown, accident will happen.

**SUMMARY OF THE INVENTION**

[0011] Therefore, an objective of an embodiment of the present invention is to provide a latch device selectively secured to a latch plate device. The latch plate device comprises a latch plate with two latching holes, while the latch device comprises a housing unit, a disk unit, an electromagnetic lock unit, a pressing lock unit, and a detecting unit.

[0012] The housing unit includes a housing, which has a pressing hole and an insertion slot.

[0013] The disk unit includes a supporting rod positioned through the housing, and two vertical disks pivotally arranged to the supporting rod. A hook, a first engaging portion and a second engaging portion are disposed round an outer perimeter of the two disks.

[0014] The electromagnetic lock unit includes two electromagnetic mechanisms fixed inside the housing, two retractable bars respectively connected to the two electromagnetic mechanisms, and two electromagnetic latches respectively connected to the two retractable bars.

[0015] The pressing lock unit includes a press button slidingly connected to the pressing hole, and a button latch connected to the press button.

[0016] The detecting unit includes two detectors for respectively detecting position of the two electromagnetic latches.

[0017] The two vertical disks can move between an unlatched position and a latched position. When the two vertical disks are on the unlatched position, the latch plate can be inserted from the insertion slot and the two vertical disks can be pushed to the latched position. When the two vertical disks are on the latched position, the two electromagnetic latches are respectively latched with the two first engaging portions, and concurrently the button latch is latched with the two second engaging portions, so that the two vertical disks cannot either move or inter-

ferre with the latching holes, and the latch plate device can be secured to the latch device.

**[0018]** Another technique of an embodiment of the present invention is that the present invention further includes an illuminating unit, wherein an illuminator is disposed inside the housing.

**[0019]** Another technique of an embodiment of the present invention is that the disk unit further includes two disk springs for respectively moving the two vertical disks to the unlatched position, and one end of the disk springs are respectively connected to the two vertical disks, and the other ends are connected to the housing.

**[0020]** Another technique of an embodiment of the present invention is that the electromagnetic lock unit further includes two electromagnetic lock springs, which respectively enables the two electromagnetic latches to push against the two first engaging portions, and one end of the two electromagnetic lock springs are respectively connected to the two electromagnetic latches, while the other ends are connected to the housing.

**[0021]** Another technique of an embodiment of the present invention is that the pressing lock unit further includes two pressing lock springs, which enables the button latch to be push against the two second engaging portions, and one end of the two pressing lock springs are connected to the press button, while the other ends are connected to the housing.

**[0022]** Another technique of an embodiment of the present invention is that the present invention further includes a forcible release unit, wherein a release hole is opened on the press button, and a release for inserting into the release hole to push the two electromagnetic latches and the button latch.

**[0023]** Another technique of an embodiment of the present invention is that the housing unit further includes a fixing flange protruding from bottom of the housing.

**[0024]** Another technique of an embodiment of the present invention is that the insertion slot is provided with a wall for framing a guide passage.

**[0025]** Another technique of an embodiment of the present invention is that the electromagnetic lock unit further includes an electromagnetic lock guide rod disposed inside the housing, and two electromagnetic channels respectively disposed inside the two electromagnetic latches and positioned through by the electromagnetic lock guide rod.

**[0026]** Another technique of an embodiment of the present invention is that the pressing lock unit further includes two pressing lock guide rods disposed inside the housing, and two pressing lock channels disposed on the press button and positioned through by the two pressing lock guide rods.

**[0027]** An advantage of an embodiment of the invention is that by combination of the housing unit, the disk unit, the electromagnetic lock unit, and the pressing lock unit, when the latch plate is inserted into the insertion slot, the two electromagnetic latches can be securely latched with the two first engaging portions, and interfere

with the two vertical disks, so that the latch plate device can be fixed inside the latch device. Furthermore, the two detectors can respectively detect position of the electromagnetic latches for confirming whether the two vertical disks are on the latched position, and whether the two electromagnetic latches are latched with the two first engaging portions, so that the central control console of the electromagnetic mechanism can confirm the latched state of the latch device.

## BRIEF DESCRIPTION OF THE DRAWINGS

### [0028]

FIG. 1 is an exploded perspective view of Taiwan Patent No. M473859, a latch for seat belt;

FIG. 2 is an exploded perspective view of a first preferred embodiment according to the present invention;

FIG. 3 is a partially exploded perspective view depicting detailed arrangement of the first preferred embodiment;

FIG. 4 is a cross-sectional side view depicting a latched state of the first preferred embodiment;

FIG. 5 is an operational side view in partial section depicting an electromagnetic lock unit of the first preferred embodiment;

FIG. 6 is a cross-sectional side view depicting an unlatched state of the first preferred embodiment;

FIG. 7 is a side view depicting the latch device secured to a latch device is detected by a detector;

FIG. 8 is a side view depicting the latch device not secured to a latch device is detected by a detector.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

**[0029]** Specific structural and functional details disclosed herein will become apparent from the following description of the preferred embodiment of the present invention taken in conjunction with the accompanying drawings.

**[0030]** With reference to FIGs. 2 and 3, a preferred embodiment according to an embodiment of the present invention is depicted, which applies to a latch device selectively secured to a latch plate device 2. The latch plate device 2 comprises a latch plate 21 with two latching holes 22, while the latch device comprises a housing unit 3, a disk unit 4, an electromagnetic lock unit 5, a pressing lock unit 6, a detecting unit 7, an illuminating unit 8, and a forcible release unit 9.

**[0031]** The housing unit 3 includes a housing 31, which has a pressing hole 32 and an insertion slot 33, and a fixing flange 34 protruding from bottom of the housing 31. The housing 31 is provided with a frame 311, and a cover 312 mounted on the frame 311. The insertion slot 33 is provided with a wall 332 for framing a guide passage 331. The wall 332 is presented as a Y-shaped radian in

an opening of the guide passage 331, and width inside the guide passage 331 can match with width of the latch plate 21, so that the latch plate 21 can be fit into the insertion slot 33.

**[0032]** A lock hole opened on the fixing flange 34 for fixing the latch device on one side of a seat (not shown in the drawings), and a seat belt is disposed on the other side of the seat to connect to the latch plate device 2, so that an occupant can be securely held in a seat, which can prevent accident when haptic feedback seats are out of work.

**[0033]** The disk unit 4 includes a supporting rod 41 positioned through the housing 31, two vertical disks 42 pivotally arranged on the supporting rod 41, and two disk springs 43. The two vertical disks 42 can rotate around the supporting rod 41 within a limited angle. A hook 421, a first engaging portion 422, a second engaging portion 423, and a limiting portion 424 are disposed around an outer perimeter of the two disks. One end of the two disk springs 43 are respectively connected to the two vertical disks 42, and the other ends are connected to two side walls inside the housing 31.

**[0034]** With reference to FIGs. 4, 5 and 6, the two vertical disks 42 can move between an unlatched and a latched position. The two disk springs 43 will respectively pull the two vertical disks 42 for rotating around the supporting rod 41 at an angle until inner wall of the housing 31 reaches the limiting portion 424. Preferably, a horizontal rod is disposed on the inner wall of the housing 31 for blocking the limiting portion 424, so that the two vertical disks 42 are forced to be on the unlatched position. When the two vertical disks 42 are on the unlatched position, the latch plate 21 can be inserted from the insertion slot 33 and push the two vertical disks 42 against tension of the two disk springs 43, so that the two vertical disks 42 are reversely moved to the latched position.

**[0035]** The electromagnetic lock unit 5 includes two electromagnetic mechanisms 51 fixedly disposed on the rear end of the housing 31, two retractable bars 52 respectively attracted and controlled by the two electromagnetic mechanisms 51, two electromagnetic latches 53 respectively connected to the two retractable bars 52, two electromagnetic lock springs 54, an electromagnetic lock guide rod 55 disposed inside the housing 31, and two electromagnetic channels 56 respectively disposed on the two electromagnetic latches 53 and positioned through by the electromagnetic lock guide rod 55. The one end of the two electromagnetic lock springs 54 are respectively connected to the two electromagnetic latches 53, and the other ends are connected to the inside of the housing 31.

**[0036]** When the latch plate 21 is inserted into the insertion slot 33, the two hooks 421 will be pushed for moving the two vertical disks 42 to the latched position. The two electromagnetic lock springs 54 respectively enable the two electromagnetic latches 53 to pull against the two first engaging portions 422, so that the two electromagnetic latches 53 can respectively interfere with the two

vertical disks 42. As a result, the two vertical disks 42 cannot move, which causes the two latch holes 22 of the latch plate 21 to be fixed.

**[0037]** The two electromagnetic mechanisms 51 are electromagnetic elements, when being powered on, magnetic attraction will be produced for pulling the two retractable bars 52, so that the two electromagnetic latches 53 can be separated from the two first engaging portions 422. Meanwhile, the press button 61 is pressed to separate the button latch 62 from the two first engaging portions 423, and the elasticity of the two disk springs 43 can enable the two vertical disks 42 to move to the unlatched position, so that the latch plate 2 can be ejected.

**[0038]** When the two electromagnetic mechanisms 51 are not powered on, the two electromagnetic latches 53 are respectively moved toward the two vertical disks 42 by the two electromagnetic springs 54, and respectively reach the outer perimeter of the two vertical disks 42 waiting for insertion of the latch plate device 2. When the latch plate 21 of the latch plate device 2 is inserted into the insertion slot 33, the latch plate 21 concurrently pushes the hooks 421 of the two vertical disks 42, so that the two vertical disks 42 can move to the latched position, and the two electromagnetic latches 53 can be respectively moved to the two first engaging portions 422 by the two electromagnetic springs 54.

**[0039]** The electromagnetic lock guide rod 55 is positioned through the electromagnetic channels 56 for controlling the movement of the two electromagnetic latches 53, so when the two electromagnetic lock springs 54 pull the two electromagnetic latches 53, the two electromagnetic latches 53 can precisely engage with the two first engaging portions 422, and the electromagnetic lock guide rod 55 further provides force to the two electromagnetic latches 53 to interfere with the two vertical disks 42, so that the two vertical disks 42 are unable to rotate.

**[0040]** The pressing lock unit 6 includes a press button 61 slidingly connected to the press hole 32, a button latch 62 connected to the press button 61, two pressing lock springs 63, two pressing lock guide rods 64 disposed inside the housing 31, and two pressing lock channels 65 disposed on the press button 61 and positioned through by the pressing lock guide rods 64. One end of the two pressing lock springs 63 are respectively connected to two side faces of the press button 61, and the other ends are connected to the inside of the housing 31.

**[0041]** When the latch plate 21 is inserted into the insertion slot 33, and concurrently pushes the two hooks 421 for moving the two vertical disks 42 to the latched position, elasticity of the two pressing lock springs 63 pulls the press button 61, so that the button latch 62 concurrently interfere with the two second engaging portions 423. As a result, the button latch 62 can respectively interfere with the two vertical disks 42, and the two vertical disks 42 cannot move, so that the two latch holes 22 of the latch plate 21 can be secured.

**[0042]** The press button 61 is exposed outside from the pressing hole 32 for a hand press. When the press

button 61 is pressed against elasticity of the two pressing lock springs 63, the button latch 62 is separated from the two second engaging portions 423. When the two electromagnetic latches 53 are separated from the two first engaging portions 422 by the two electromagnetic mechanisms 51, elasticity of the two disk springs 43 can move the two vertical disks 42 to the unlatched position, and the latch plate device 2 is ejected.

**[0043]** When the press button 61 is released by hand, the two button latches 62 move toward the two vertical disks 42 via the two pressing lock springs 63, and respectively reach the outer perimeter of the two vertical disks 42 waiting for insertion of the latch plate device 2. When the latch plate 21 is inserted into the insertion slot 33, the latch plate 21 concurrently pushes the hooks 421 of the two vertical disks 42, so that the two vertical disks 42 can move to the latched position, and elasticity of the two pressing lock springs 63 enable the button latch 62 to push against the two first engaging portions 422.

**[0044]** The two pressing lock channels 65 are respectively positioned through by the two pressing lock guide rods 64, and the two pressing lock guide rods 64 are parallel to the two pressing lock channels 65 for controlling the movement of the button latches 62, so when the two pressing lock springs 63 pull the press button 61, the button latch 62 can precisely engage with the two second engaging portions 423, and the two pressing lock guide rods 64 further provides force to the button latch 62 to interfere with the two vertical disks 42, so that the two vertical disks 42 are unable to move.

**[0045]** When the two vertical disks 42 are on the latched position, the two electromagnetic latches 53 are respectively latched with the two first engaging portions 422, and the button latch 62 is concurrently latched with the two second engaging portions 423, so that the two vertical disks 42 are unable to move due to dual locking from the electromagnetic lock unit 5 and the pressing lock unit 6, and interfere with the two latching holes 22. As a result, the latch plate device 2 is latched with the latch device by the two latch holes 22.

**[0046]** With reference to FIG. 7 and 8, the detecting unit 7 includes two detectors 71 disposed inside the housing 31 for detecting position of the two electromagnetic latches 53. In the preferred embodiment, an infrared sensor is served as a detector 71, wherein an infrared emitter and an infrared receiver are provided, and two light barrier members 72 are respectively disposed on the two electromagnetic latches 53. When the two vertical disks 42 are on the latched position, the two electromagnetic latches 53 move toward the two vertical disks 42 by the pushing force of the two electromagnetic lock springs 54 and push against the two first engaging portions 422, so the two light barrier members 72 won't block infrared light, and the infrared receiver can receive infrared light, and can respectively transmit latched state information of the latch device to central control console. In this case, the two detectors 71 can be replaced by any other detecting unit, and shall not be construed as limiting the invention.

**[0047]** It is worth mentioning that the hook 421, the first engaging portion 422 and the second engaging portion 423 disposed around the outer perimeter of the two vertical disks 42 enable the two latching holes 22, two electromagnetic latches 53, and button latch 62 to be engaged securely only when being on the latched position.

**[0048]** When the two vertical disks 42 are on the unlatched position, the two electromagnetic latches 53 and the button latch 62 reach only the outer perimeter of the two vertical disks 42, which enables the two light barrier members 72 to move to a specific place for blocking infrared light, so that the infrared receiver cannot receive infrared light, and the two detectors 71 can respectively transmit accurate latched state information to the central control console.

**[0049]** The illuminating unit 8 includes an illuminator 81 disposed inside the housing 31. In the preferred embodiment, the illuminator 81 is disposed in a space above the two retractable bars 52, and can emit light after being powered on. In addition, the housing 31 surrounds its inner mechanism and electronic construction, and the light emitted by the illuminator 81 will pass through the insertion slot 33 to the outside, so that the users can find the insertion slot 33 and insert the latch plate 21 into the insertion slot 33 in a dark room.

**[0050]** The latch device further comprises a forcible release unit 9, which includes a release hole 91 opened on the press button 61, and a release 92 being able to insert into the release hole 91 for pushing the two electromagnetic latches 53 and the button latch 62. The release 92 is provided with a first pushing portion for pushing the two electromagnetic latches 53, and a second pushing portion for pushing the press button 61. The distance between the first and the second pushing portions is equal to the pushing distance between the two electromagnetic latches 53 and the press button 61, so that the release 92 can be inserted into the release hole 91, and when pressing the press button 61, the two electromagnetic latches 53 and the button latch 62 are concurrently separated from the two first engaging portions 422 and the second engaging portion 423 by the release 92. As a result, the disk unit 4 is unlatched and the latch plate 21 can be removed from the insertion slot 33.

**[0051]** The two electromagnetic mechanisms 51 produces electromagnetic force by electricity, which separates the two electromagnetic latches 53 from the two first engaging portions 422. When electricity control is out of work and the two electromagnetic latches 53 cannot be separated from the two first engaging portions 422, the disk unit 4 cannot be unlatched by the press button 61. Under this circumstance, the release 92 is necessary for unlatching.

**[0052]** It is hard to detect rotary position of each lock cylinders in a conventional latch. When a breakdown is occurred in one of lock cylinders, it is difficult to detect such breakdown from its appearance, and the central control console is also unable to receive breakdown information. However, the other well-functioning lock cyl-

inder will still be secured to the latch plate, which leads the unperceived malfunctioned latch still be utilized. During operation of haptic feedback facilities, once the rest of well-functioning lock cylinder has a breakdown, latch plate will be pulled out immediately and cause accidents.

**[0053]** The light barrier members 72 are respectively disposed on the electromagnetic latches 53, and the two detectors 71 confirm the latched state of the two vertical disks 42 by means of double detection. Once one of the vertical disks 42 is out of work, the central control console can immediately obtain information to prevent the customers from seating themselves in a malfunctioned seat, and notify the technical staff of repair, which can improve the safety of conventional latches.

**[0054]** The inventor would like to emphasize that the present invention uses the two detectors 71 for respectively detecting the position of the two retractable bars 52, which can respectively confirm whether the two vertical disks 42 are on the latched position, and whether the two electromagnetic latches 53 are pushed into the two first engaging portions 422. Furthermore, the detected information of each detector 71 will be transmitted to the central control console, so that the central control console can respectively confirm whether the two lock cylinders of each latch device are well-functioning or not. Therefore, the objective that two independent lock cylinders are disposed in a latch device can be obtained by the present invention.

**[0055]** When the central control console finds that one of the detectors 71 is out of work, even though the latch plate 21 can successfully insert into the insertion slot 33, the central control console still can detect one of the vertical disks 42 is out of work, and notify the technical staff of repair, so that the two lock cylinders can function well and ensure passengers safety.

**[0056]** With the aforementioned descriptions, the following benefits of the present method can be obtained:

#### 1. Transmitting latched state information

**[0057]** When the two electromagnetic latches 53 move toward the two vertical disks 42 by pushing force of the two electromagnetic lock springs 54 and push against the two first engaging portions 422, the two light barrier member 72 are unable to block infrared light emitted from the infrared emitter, so that the infrared receiver can respectively receive infrared signal and can transmit latched state information of the latch device to central control console.

#### 2. Ensuring passengers safety

**[0058]** The hook 421, the first engaging portion 422 and the second engaging portion 423 disposed around the outer perimeter of the two vertical disks 42 enable the two latching holes 22, two electromagnetic latches 53, and button latch 62 to be engaged securely only when being on the latched position. When the two vertical disks

42 are on the unlatched position, the two electromagnetic latches 53 and the button latch 62 reach only the outer perimeter of the two vertical disks 42, which enables the two light barrier members 72 to move to a specific place for blocking infrared light.

#### 3. Identifying position under dark ambient condition

**[0059]** The dim light emitted by the illuminator 81 will pass through the insertion slot 33 to the outside, so that the users can find the insertion slot 33 and insert the latch plate 21 into the insertion slot 33 in a dark room.

#### 4. Avoiding the continual use of a malfunctioned latch device

**[0060]** When the central control console finds that one of the detectors 71 is out of work, it will determine one of the vertical disks 42 is out of work and stop operation of haptic feedback facilities, and notify the technical staff of repair, so that the two lock cylinders can function well to ensure the passengers safety. Thus, the present invention is capable of avoiding the continual use of a malfunctioned latch device.

**[0061]** In conclusion, the two infrared detectors 71 disposed on the space beside the two retractable bars 52 can respectively detect the two light barrier members 72 interlocked with the two electromagnetic latches 53 for respectively confirming rotary position of the two vertical disks 42. The illuminating unit 8 disposed in the space above the two retractable bars 52 can help the users find the insertion slot 33 in a dark room. Therefore, the objective can be obtained by the present invention.

**[0062]** The foregoing detailed description is merely in relation to a preferred embodiment and shall not be construed as limiting the invention. It is to be understood that many other possible modifications and variations can be made without departing from the scope of the invention as hereinafter claimed.

## Claims

1. A latch device, applied to selectively secure a latch plate device (2), wherein it comprises a latch plate (21) with two latching holes (32), comprising:

a housing unit (3), including a housing (31), which has a pressing hole (32) and an insertion slot (33);

a disk unit (4), including a supporting rod (41) positioned through the housing (31), and two vertical disks (42) pivotally arranged to the supporting rod (41), around an outer perimeter of the two vertical disks (42) being placed with a hook (421), a first engaging portion (422) and a second engaging portion (423);

an electromagnetic lock unit (5), including two

- electromagnetic mechanisms (51) fixed arranged inside the housing (31), two retractable bars (52) respectively connected to the two electromagnetic mechanisms (51), and two electromagnetic latches (53) respectively connected to the two retractable bars (52); a pressing lock unit (6), including a press button (61) slidably connected to the press hole (32), and a button latch (62) connected to the press button (61); the latch device is **characterized in that** it comprises:
- a detecting unit (7), including two detectors (71), which are disposed inside the housing (31) for detecting the position of the two electromagnetic latches (53); wherein the two vertical disks (42) can be moved between an unlatched position and a latched position, and when the two vertical disks (42) are on the unlatched position, the latch plate (21) can be inserted from the insertion slot (33) and push the two vertical disks (42) to the latched position; when the two vertical disks (42) are on the latched position, the two electromagnetic latches (53) are respectively latched with the two first engaging portions (422), and the button latch is concurrently latched with the two second engaging portions (423), so that the two vertical disks (42) cannot either move or interfere respectively with the two latching holes (22), and the latch plate device (2) can be secured to the latch device.
2. The latch device as claimed in claim 1, further includes an illuminating unit (8), wherein an illuminator (81) is disposed inside the housing (31).
  3. The latch device as claimed in claim 2, wherein the disk unit (4) further includes two disk springs (43) for respectively moving the two vertical disks (42) to the unlatched position, and one end of the disk springs (43) are respectively connected to the two vertical disks (42), and the other ends are connected to the housing (31).
  4. The latch device as claimed in claim 3, wherein the electromagnetic lock unit (5) further includes two electromagnetic lock springs, which respectively enables the two electromagnetic latches (53) to push against the two first engaging portions, and one end of the two electromagnetic lock springs (54) are respectively connected to the two electromagnetic latches (53), while the other ends are connected to the housing (31).
  5. The latch device as claimed in claim 4, wherein the pressing lock unit further includes two pressing lock springs (6), which enables the button latch (62) to be pushed against the two second engaging portions (423), and one end of the two pressing lock springs

(63) are connected to the press button (61), while the other ends are connected to the housing (31).

6. The latch device as claimed in claim 5, further includes a forcible release unit (9), wherein a release hole (91) is opened on the press button (61), and a release (92) for inserting into the release hole (91) to push the two electromagnetic latches (53) and the button latch (62).
7. The latch device as claimed in claim 6, wherein the housing unit (3) further includes a fixing flange (34) protruding from the bottom of the housing (31).
8. The latch device as claimed in claim 7, wherein the insertion slot (33) is provided with a wall (332) for framing a guide passage (331) .
9. The latch device as claimed in claim 8, wherein the electromagnetic lock unit (5) further includes an electromagnetic lock guide rod (64) disposed inside the housing, and two electromagnetic channels (65) respectively disposed inside the two electromagnetic latches (53) and positioned through by the electromagnetic lock guide rod (64).
10. The latch device as claimed in claim 9, wherein the pressing lock unit (6) further includes two pressing lock guide rods (64) disposed inside the housing (31), and two pressing lock channels (65) disposed on the press button (61) and positioned through by the two pressing lock guide rods (64).

#### 35 Patentansprüche

1. Verriegelungsvorrichtung, die zum selektiven Sichern einer Verriegelungsplattenvorrichtung (2) eingesetzt wird, wobei sie eine Verriegelungsplatte (21) mit zwei Einrastlöchern (32) umfasst, und die umfasst:
 

eine Gehäuseeinheit (3), die ein Gehäuse (31) beinhaltet, welches ein Druckloch (32) und einen Einführschlitz (33) aufweist,

eine Platteneinheit (4), die eine Stützstange (41), die durch das Gehäuse (31) angeordnet ist, und zwei vertikale Platten (42) beinhaltet, die schwenkbar an der Stützstange (41) angeordnet sind, wobei an einen äußeren Umfang der zwei vertikalen Platten (42) ein Haken (421), ein erster Eingriffsabschnitt (422) und ein zweiter Eingriffsabschnitt (423) angeordnet sind,

eine elektromagnetische Schließereinheit (5), die zwei elektromagnetische Mechanismen (51) umfasst, die fixiert in dem Gehäuse (31) angeordnet sind, wobei zwei zurückziehbare Leisten (52) entsprechend mit den zwei elektromagne-

- tischen Mechanismen (51) verbunden sind und zwei elektromagnetische Riegel (53) entsprechend mit den zurückziehbaren Leisten (52) verbunden sind,
- eine Druckschließeinheit (6), die einen Druckknopf (61) umfasst, der gleitend mit dem Druckloch (32) verbunden ist, und eine Knopfverriegelung (62), die mit dem Druckknopf (61) verbunden ist,
- wobei die Verriegelungsvorrichtung **dadurch gekennzeichnet ist, dass** sie umfasst:
- eine Detektionseinheit (7), die zwei Detektoren (71) umfasst, die in dem Gehäuse (31) angeordnet sind, um die Position der zwei elektromagnetischen Riegel (53) zu detektieren, wobei die zwei vertikalen Platten (42) zwischen einer nicht verriegelten Position und einer verriegelten Position bewegt werden können, und wobei die Verriegelungsplatte (21), wenn die zwei vertikalen Platten (42) in der nicht verriegelten Position sind, von dem Einführschlitz (33) eingesteckt werden kann und die zwei vertikalen Platten (42) zu der verriegelten Position schieben kann, und wobei die zwei elektromagnetischen Riegel (53), wenn die zwei vertikalen Platten (42) in der verriegelten Position sind, entsprechend mit den zwei ersten Eingriffsabschnitten (422) verriegelt sind und die Knopfverriegelung gleichzeitig mit den zwei zweiten Eingriffsabschnitten (423) verriegelt ist, so dass die vertikalen Platten (42) sich jeweils weder bewegen können noch die zwei Einrastlöcher (22) beeinträchtigen können und die Verriegelungsplattenvorrichtung (2) an der Verriegelungsvorrichtung gesichert werden kann.
2. Verriegelungsvorrichtung gemäß Anspruch 1, die ferner eine Beleuchtungseinheit (8) umfasst, wobei eine Beleuchtung (81) in dem Gehäuse (31) angeordnet ist
  3. Verriegelungsvorrichtung gemäß Anspruch 2, bei der die Platteneinheit (4) ferner zwei Scheibenfedern (43) beinhaltet, um entsprechend die zwei vertikalen Platten (42) zu der nicht verriegelten Position zu bewegen, wobei ein Ende der Scheibenfedern (43) entsprechend mit den zwei vertikalen Platten (42) verbunden ist und die anderen Enden mit dem Gehäuse (31) verbunden sind.
  4. Verriegelungsvorrichtung gemäß Anspruch 3, bei der die elektromagnetische Verriegelungseinheit (5) ferner zwei elektromagnetische Verriegelungsfedern umfasst, die es den zwei elektromagnetischen Riegeln (53) entsprechend erlauben, gegen die zwei ersten Eingriffsabschnitte zu drücken, und wobei ein Ende der zwei elektromagnetischen Verriegelungsfedern (54) entsprechend mit den zwei elektromagnetischen Riegeln (53) verbunden ist, während die anderen Enden mit dem Gehäuse (31) verbunden sind.
  5. Verriegelungsvorrichtung gemäß Anspruch 4, bei der die Druckschließeinheit ferner zwei drückende Verriegelungsfedern (6) beinhaltet, was es der Knopfverriegelung (62) ermöglicht, gegen die zwei zweiten Eingriffsabschnitte (423) gedrückt zu werden, und wobei ein Ende der zwei drückenden Verriegelungsfedern (63) mit dem Druckknopf (61) verbunden ist, während die anderen Enden mit dem Gehäuse (31) verbunden sind.
  6. Verriegelungsvorrichtung gemäß Anspruch 5, die ferner eine auslösbare Löseeinheit (9), wobei eine Löseöffnung (91) an dem Druckknopf (61) geöffnet wird, und einen Auslöser (92) zum Einstecken in das Löseloch (91) umfasst, um die zwei elektromagnetischen Riegel (53) und die Knopfverriegelung (62) zu drücken.
  7. Verriegelungsvorrichtung gemäß Anspruch 6, bei der die Gehäuseeinheit (3) ferner einen Fixierflansch (34) umfasst, der von dem Boden des Gehäuses (31) hervorsteht,
  8. Verriegelungsvorrichtung gemäß Anspruch 7, bei der der Einführschlitz (33) mit einer Wand (332) zum Einrahmen einer Führungspassage (331) ausgestattet ist.
  9. Verriegelungsvorrichtung gemäß Anspruch 8, bei der die elektromagnetische Verriegelungseinheit (5) ferner eine elektromagnetische Verriegelungsführungsstange (64), die in dem Gehäuse angeordnet ist, und zwei elektromagnetische Kanäle (65) umfasst, die entsprechend in den zwei elektromagnetischen Riegeln (53) angeordnet sind und durch die elektromagnetische Verriegelungsführungsstange (64) positioniert werden.
  10. Verriegelungsvorrichtung gemäß Anspruch 9, bei der die Druckschließeinheit (6) ferner zwei Druckschließführungsstangen (64), die in dem Gehäuse (31) angeordnet sind, und zwei Druckschließkanäle (65) beinhaltet, die an dem Druckknopf (61) angeordnet sind und durch die zwei Druckschließstangen (64) positioniert werden.

## Revendications

1. Dispositif de verrouillage appliqué pour fixer sélectivement un dispositif de plaque de verrouillage (2), dans lequel il comprend une plaque de verrouillage (21) avec deux trous de verrouillage (32), comprenant:

une unité de boîtier (3) incluant un boîtier (31) qui présente un trou de pressage (32) et une fente d'insertion (33);

une unité de disque (4) incluant une tige de support (41) positionnée au travers du boîtier (31), et deux disques verticaux (42) agencés de manière pivotante sur la tige de support (41), autour d'un périmètre extérieur de deux disques verticaux (42) placés avec un crochet (421), une première portion de mise en prise (422) et une seconde portion de mise en prise (423);

une unité de verrou électromagnétique (5), incluant deux mécanismes électromagnétiques (51) agencés de manière fixe dans le boîtier (31), deux barres rétractable (52) raccordées respectivement aux deux mécanismes électromagnétiques (51), et deux verrouillages électromagnétiques (53) raccordés respectivement aux deux barres rétractables (52);

une unité de verrou de pressage (6) incluant un bouton pression (61) raccordé par coulissement au trou de pressage (32), et un verrouillage de bouton (62) raccordé au bouton pression (61); le dispositif de verrouillage est **caractérisé en ce qu'il** comprend:

une unité de détection (7) incluant deux détecteurs (71) qui sont disposés dans le boîtier (31) pour la détection de la position de deux verrouillages électromagnétiques (53), dans lequel les deux disques verticaux (42) peuvent être déplacés entre une position déverrouillée et une position verrouillée, et lorsque les deux disques verticaux (42) sont sur la position déverrouillée, la plaque de verrouillage (21) peut être insérée de la fente d'insertion (33) et pousser les deux disques verticaux (42) dans la position verrouillée, lorsque les deux disques verticaux (42) sont sur la position verrouillée, les deux verrouillages électromagnétiques (53) sont verrouillés respectivement avec les deux premières portions de mise en prise (422), et le verrouillage de bouton est verrouillé simultanément avec les deux secondes portions de mise en prise (423) de sorte que les deux disques verticaux (42) ne puissent pas se déplacer ou interférer respectivement avec les deux trous de verrouillage (22), et le dispositif de plaque de verrouillage (2) peut être fixé au dispositif de verrouillage.

2. Dispositif de verrouillage selon la revendication 1, qui inclut en outre une unité d'éclairage (8), dans lequel une source lumineuse (81) est disposée dans le boîtier (31).
3. Dispositif de verrouillage selon la revendication 2, dans lequel l'unité de disque (4) inclut en outre deux ressorts de disque (43) pour le déplacement respectif de deux disques verticaux (42) dans la position

déverrouillée, et une extrémité des ressorts de disque (43) est respectivement raccordée aux deux disques verticaux (42), et les autres extrémités sont raccordées au boîtier (31).

4. Dispositif de verrouillage selon la revendication 3, dans lequel l'unité de verrou électromagnétique (5) inclut en outre deux ressorts de verrou électromagnétique, qui permet respectivement aux deux verrouillages électromagnétiques (53) de pousser contre les deux premières portions de mise en prise, et une extrémité des deux ressorts de verrou électromagnétique (54) est respectivement raccordée aux deux verrouillages électromagnétiques (53), alors que les autres extrémités sont raccordées au boîtier (31).
5. Dispositif de verrouillage selon la revendication 4, dans lequel l'unité de verrou de pressage inclut en outre deux ressorts de verrou de pressage (6) qui permet au verrouillage de bouton (62) d'être poussé contre les deux secondes portions de mise en prise (423), et une extrémité de deux ressorts de verrou de pressage (63) est raccordée au bouton pression (61) alors que les autres extrémités sont raccordées au boîtier (31).
6. Dispositif de verrouillage selon la revendication 5, qui inclut en outre une unité de libération forcée (9), dans lequel un trou de libération (91) est ouvert sur le bouton pression (61), et une libération (92) pour l'insertion dans le trou de libération (91) pour pousser les deux verrouillages électromagnétiques (53) et le verrouillage de bouton (62).
7. Dispositif de verrouillage selon la revendication 6, dans lequel l'unité de boîtier (3) inclut en outre une bride de fixation (34) faisant saillie du fond du boîtier (31).
8. Dispositif de verrouillage selon la revendication 7, dans lequel la fente d'insertion (33) est dotée d'une paroi (332) pour l'encadrement d'un passage de guidage (331).
9. Dispositif de verrouillage selon la revendication 8, dans lequel l'unité de verrou électromagnétique (5) inclut en outre une tige de guidage de verrou électromagnétique (64) disposée dans le boîtier, et deux canaux électromagnétiques (65) disposés respectivement dans les deux verrouillages électromagnétiques (53) et positionnés au travers par la tige de guidage de verrou électromagnétique (64).
10. Dispositif de verrouillage selon la revendication 9, dans lequel l'unité de verrou de pressage (6) inclut en outre deux tiges de guidage de verrou de pressage (64) disposées dans le boîtier (31), et deux

canaux de verrou de pressage (65) disposés sur le bouton pression (61) et positionnés au travers par les deux tiges de guidage de verrou de pressage (64).

5

10

15

20

25

30

35

40

45

50

55

10

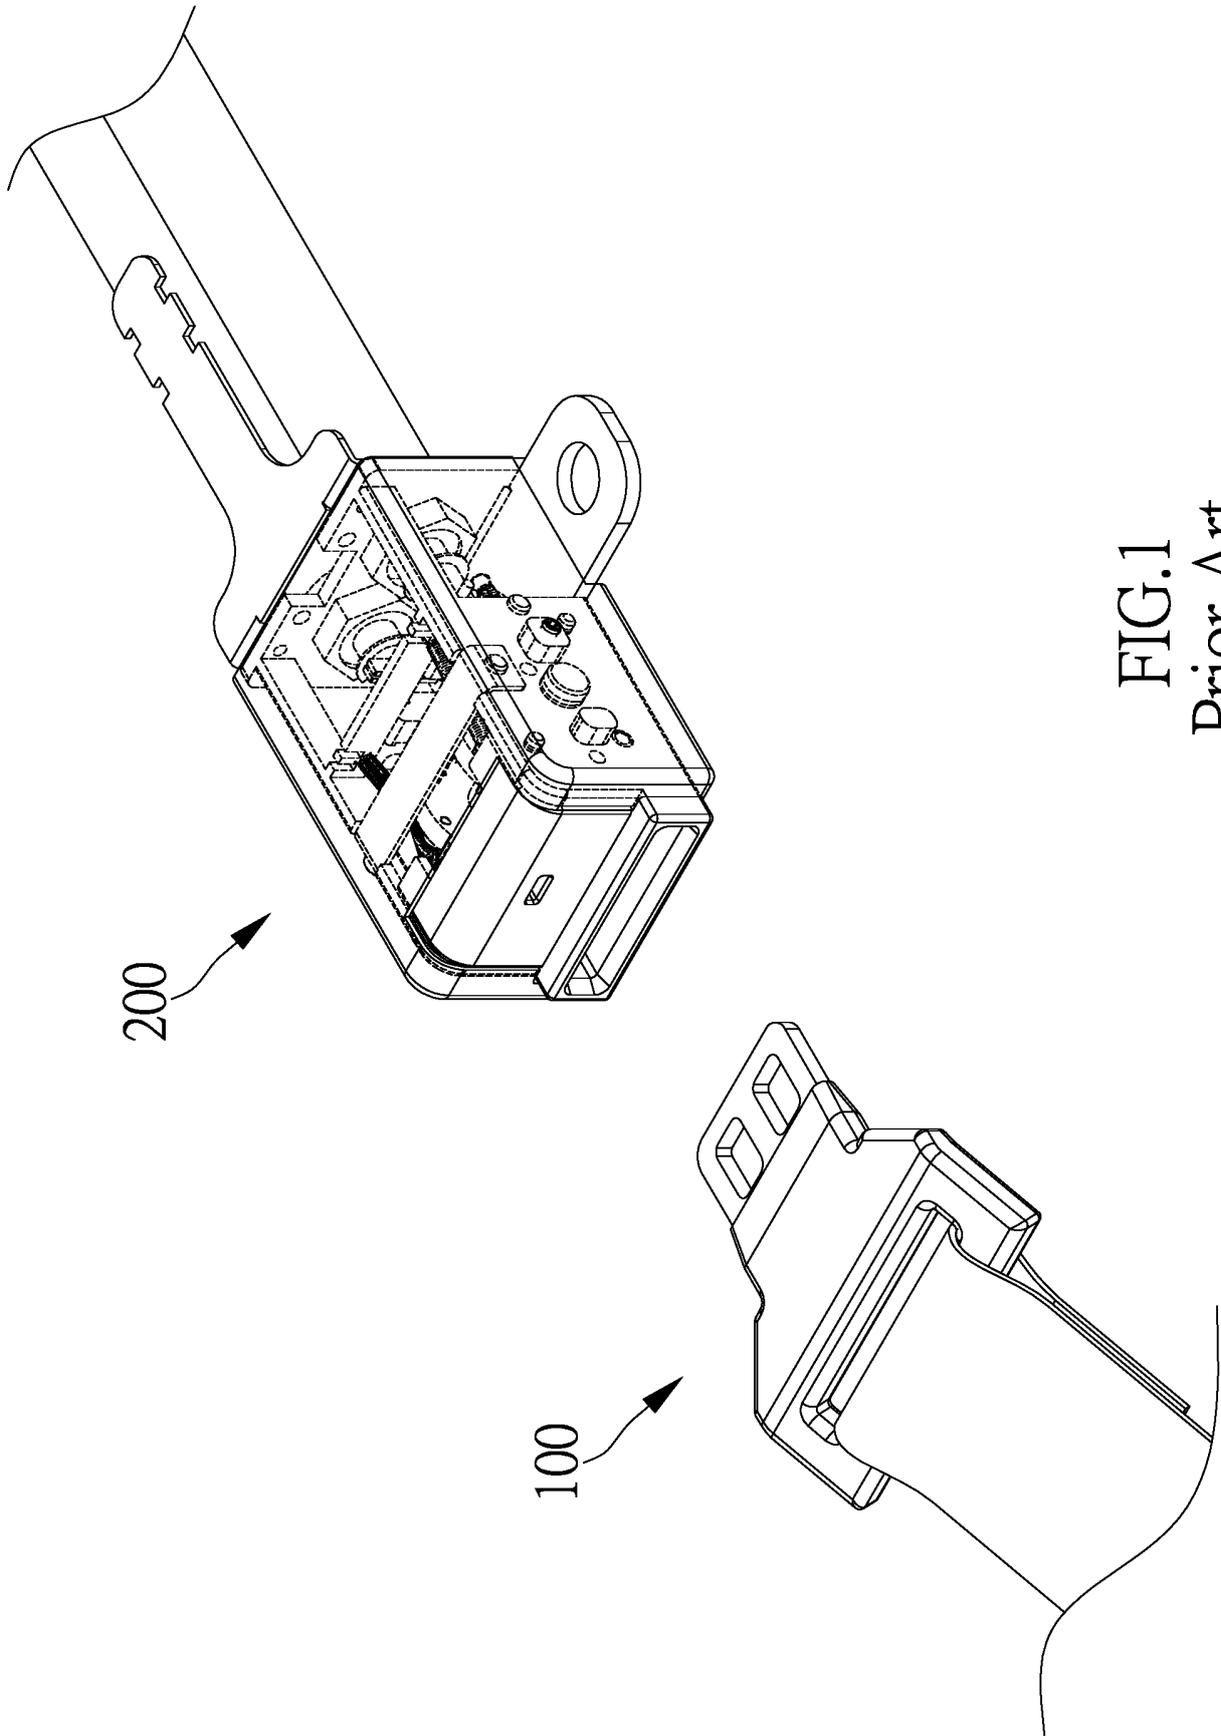


FIG. 1  
Prior Art

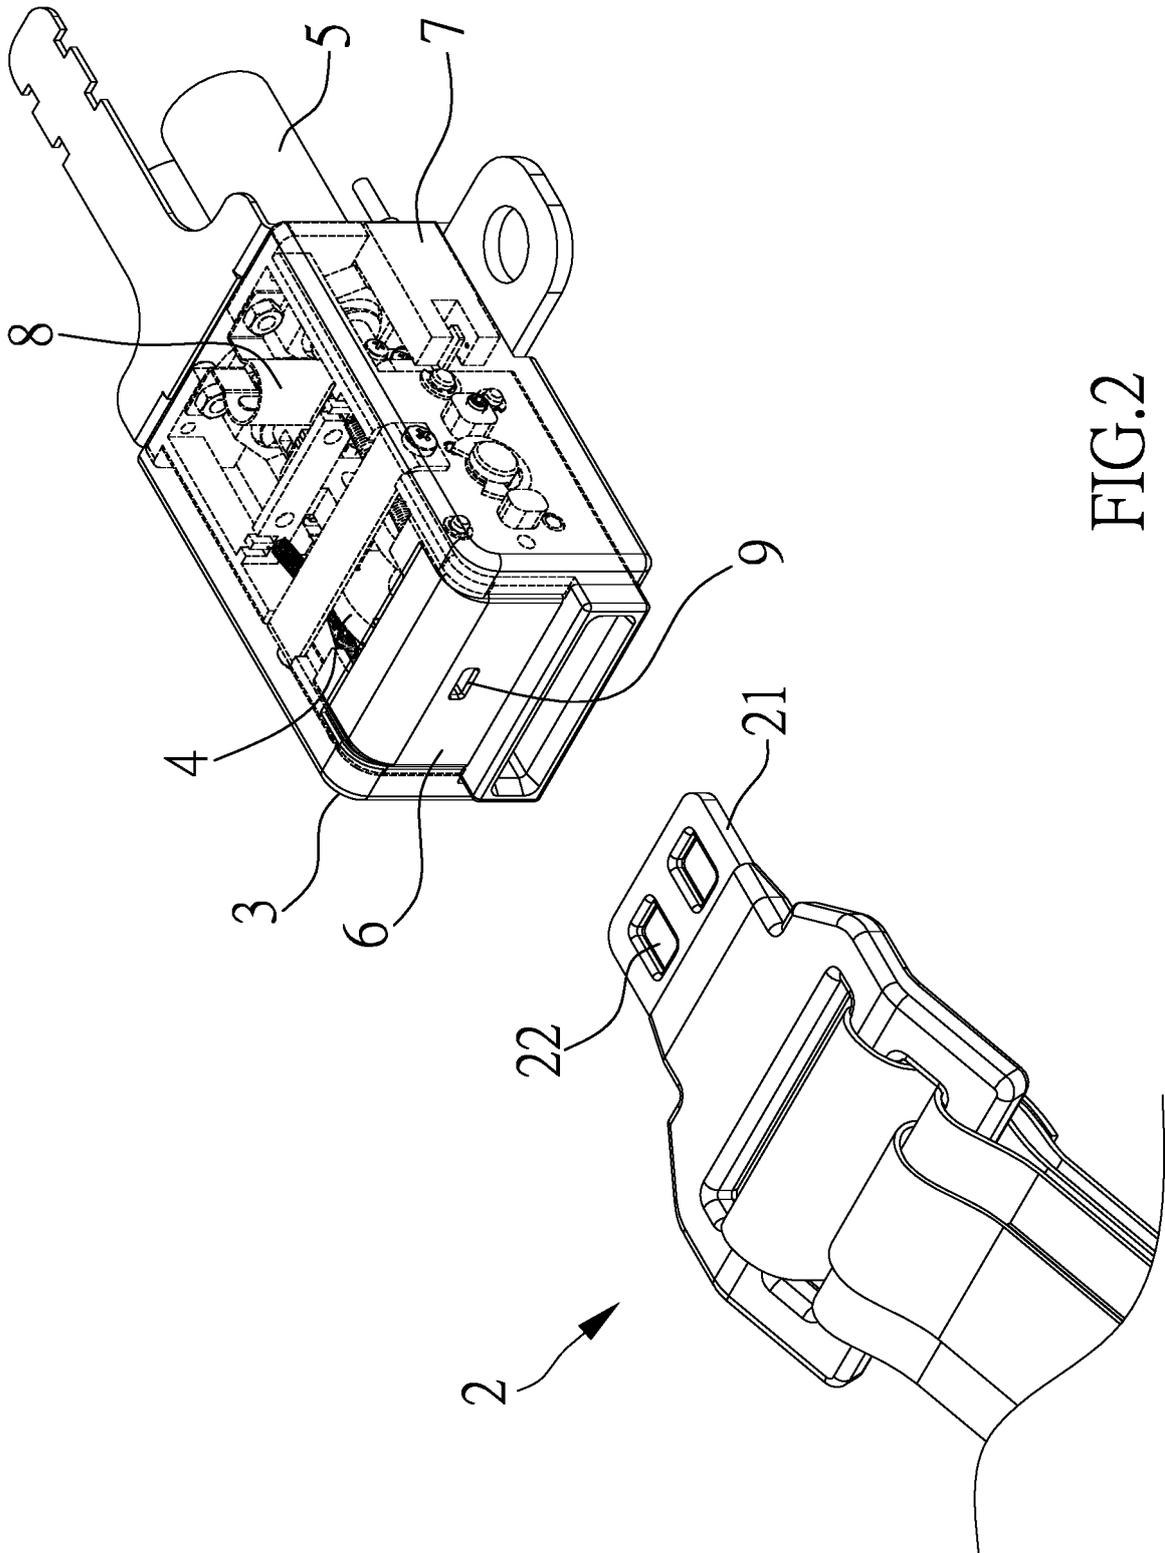


FIG.2

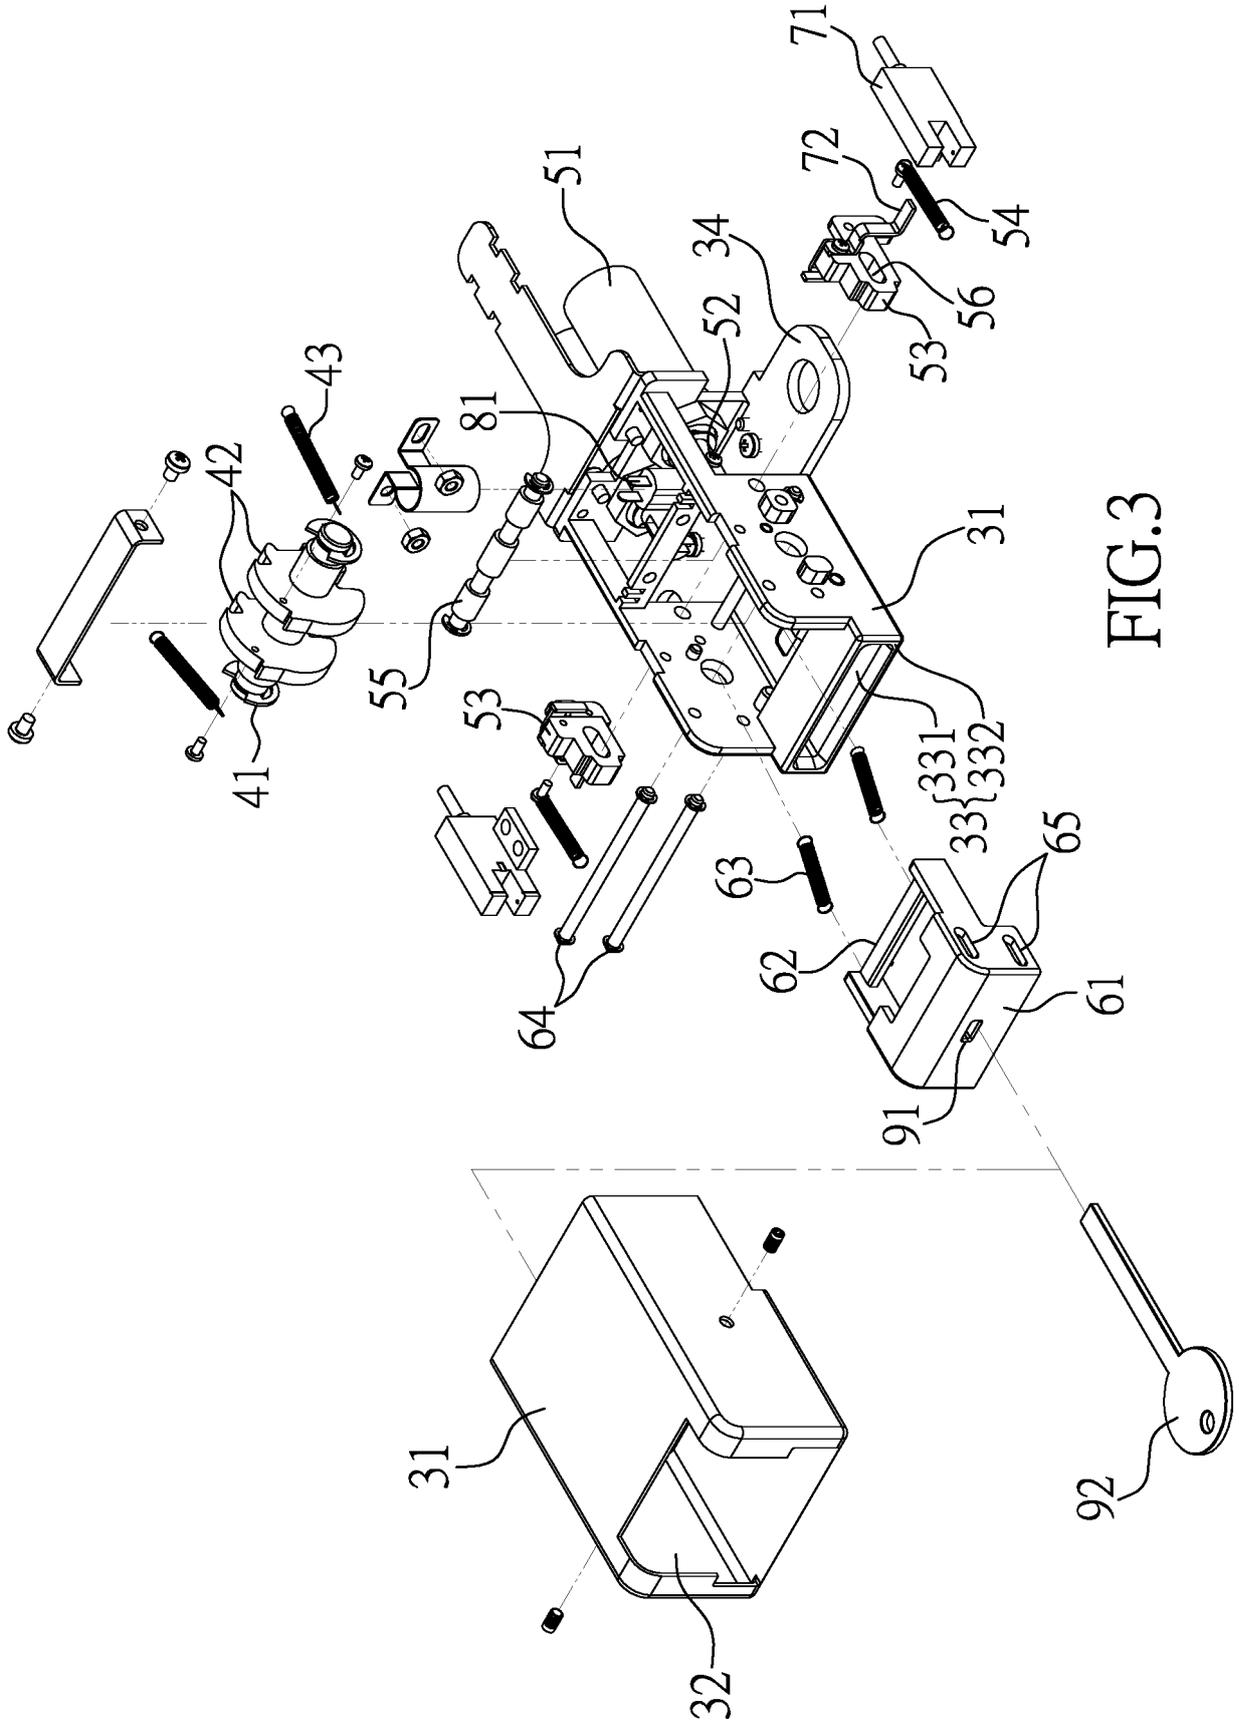


FIG.3

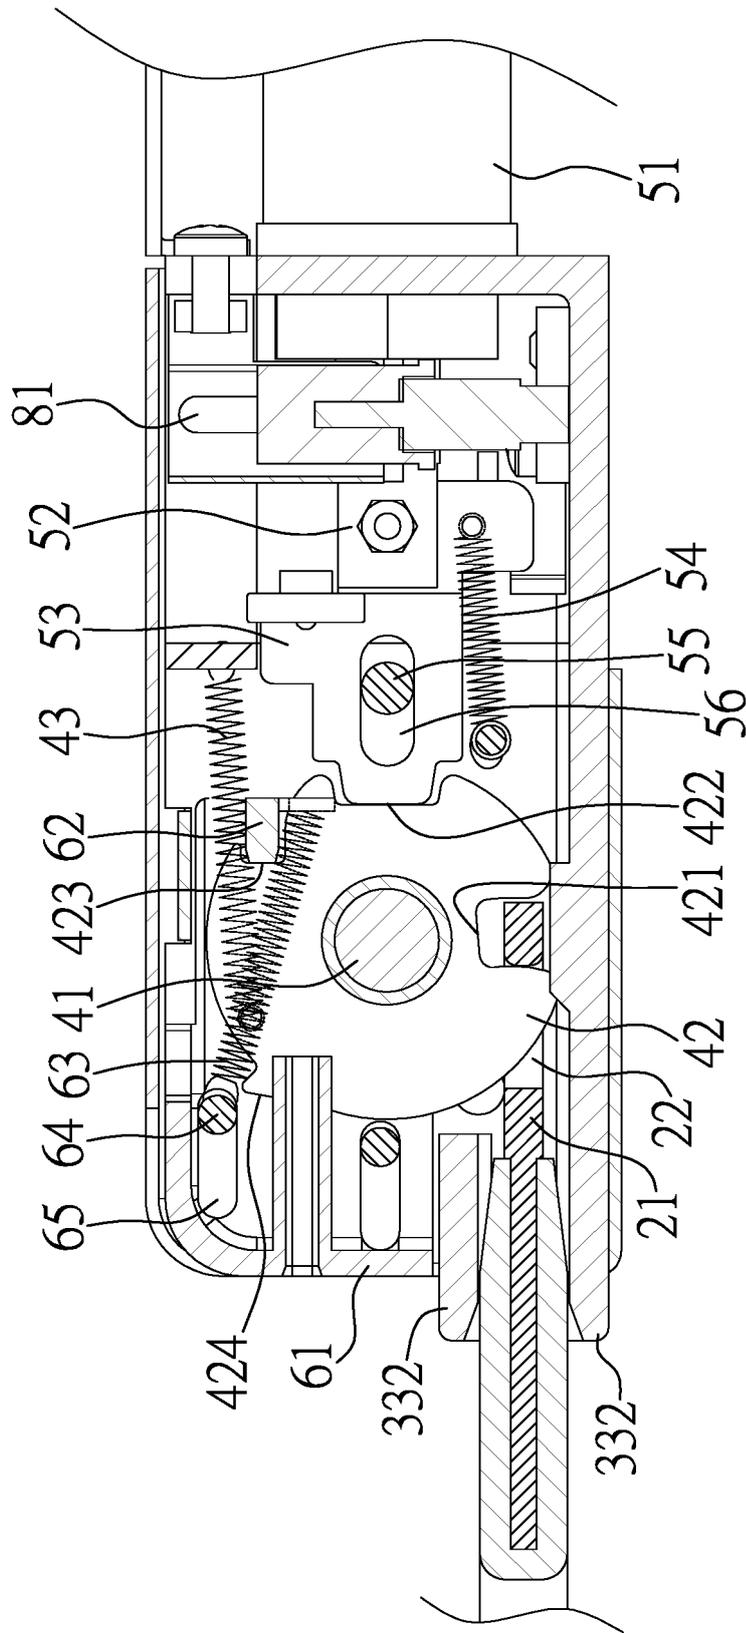


FIG.4

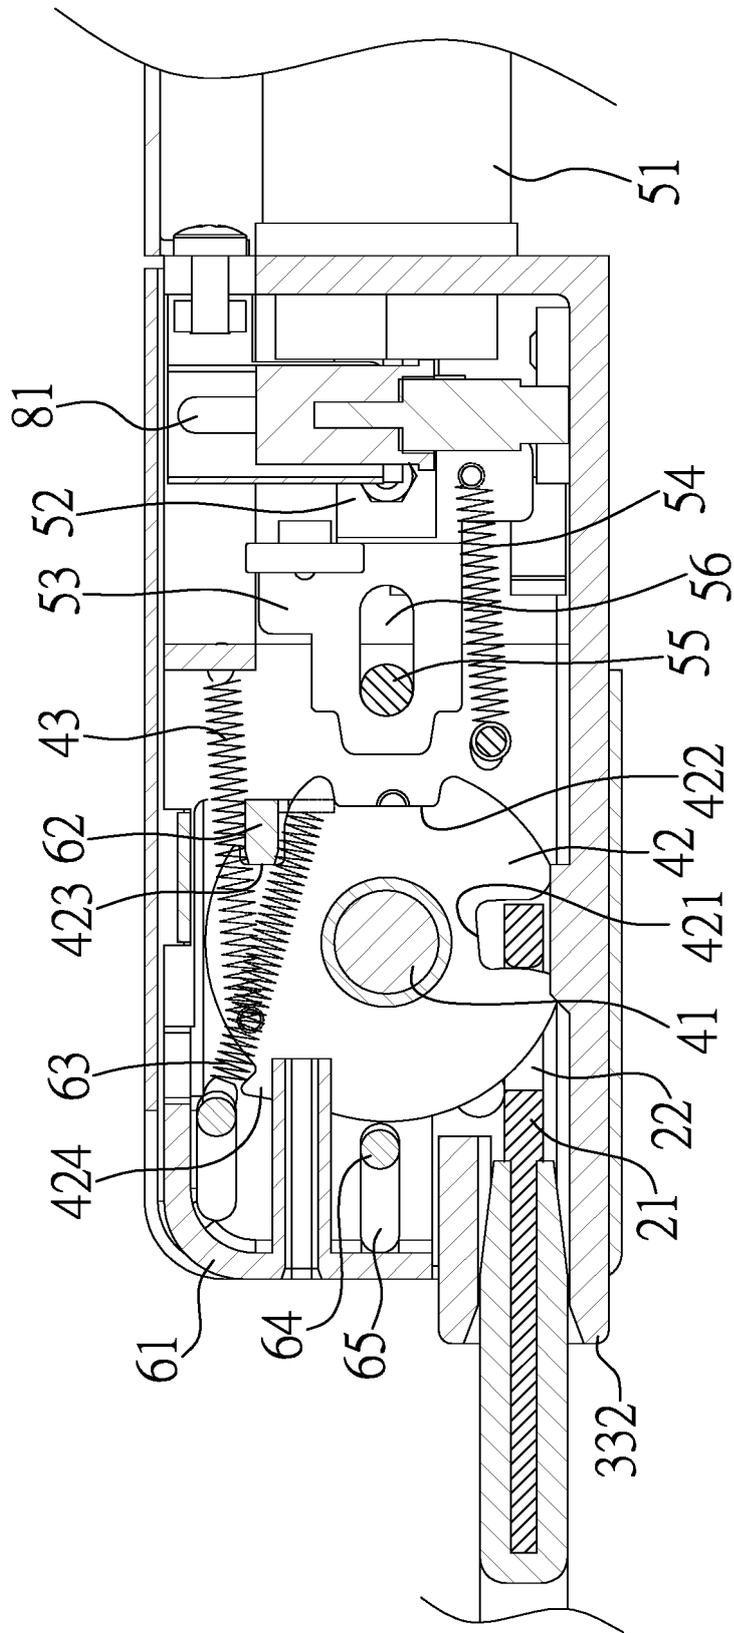


FIG. 5

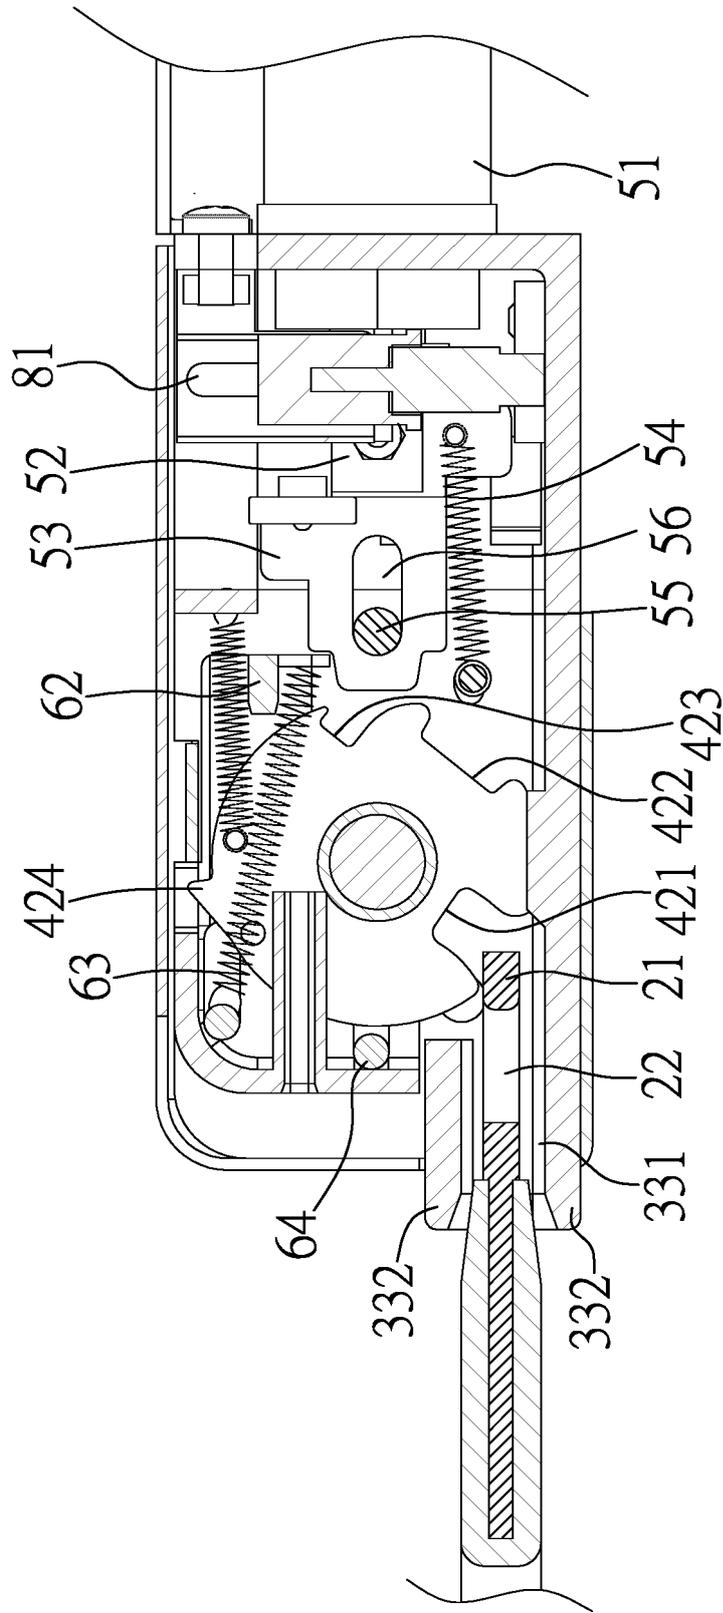


FIG.6

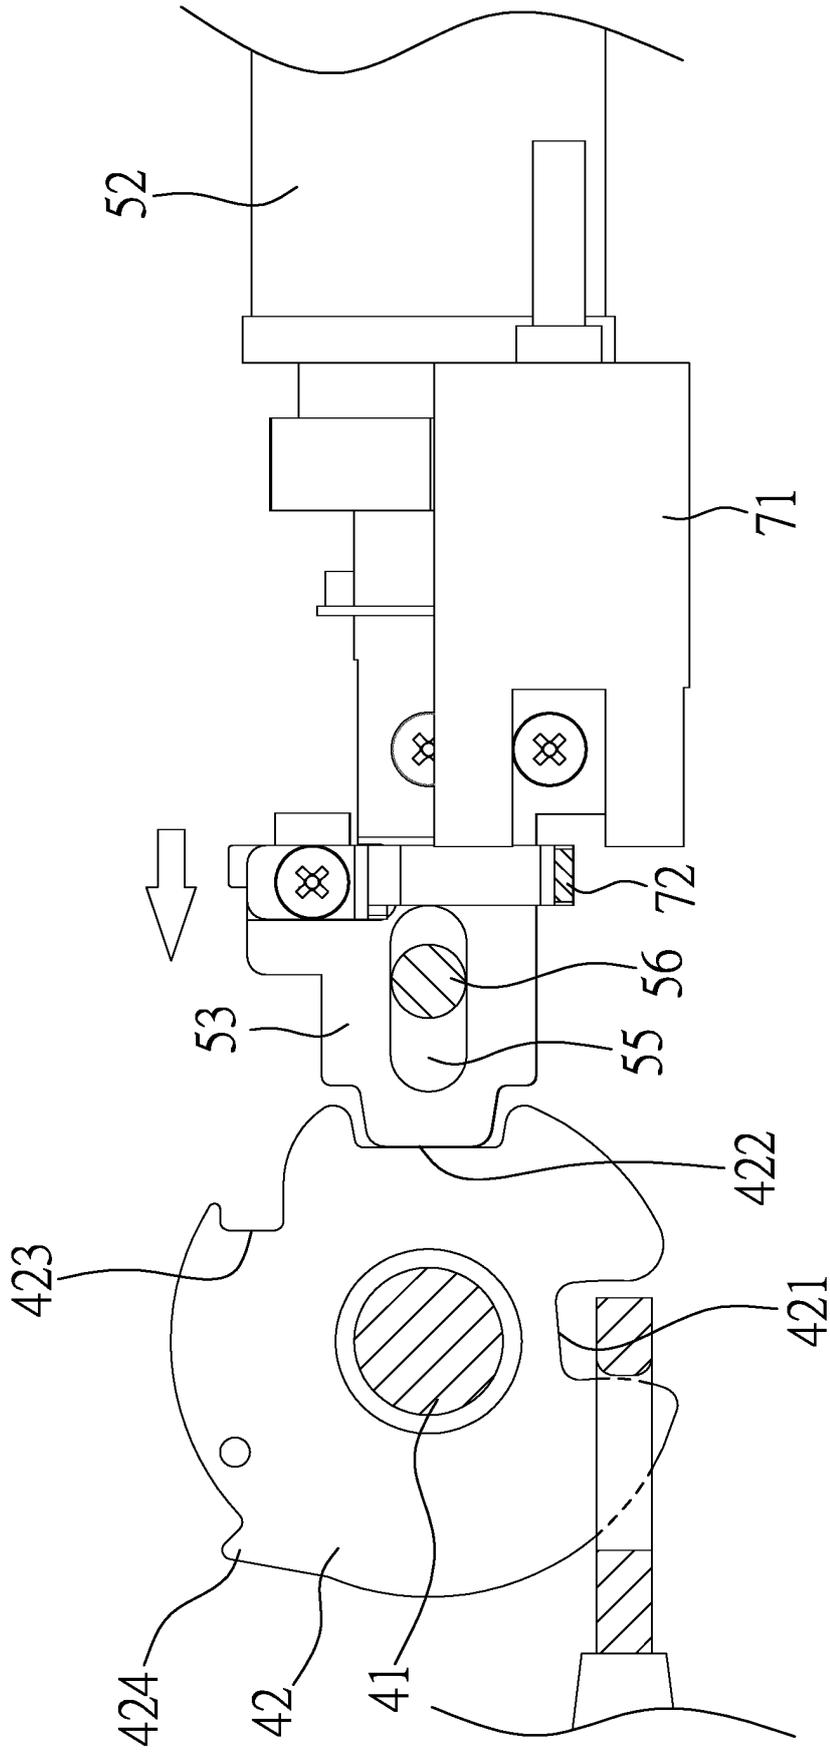


FIG. 7

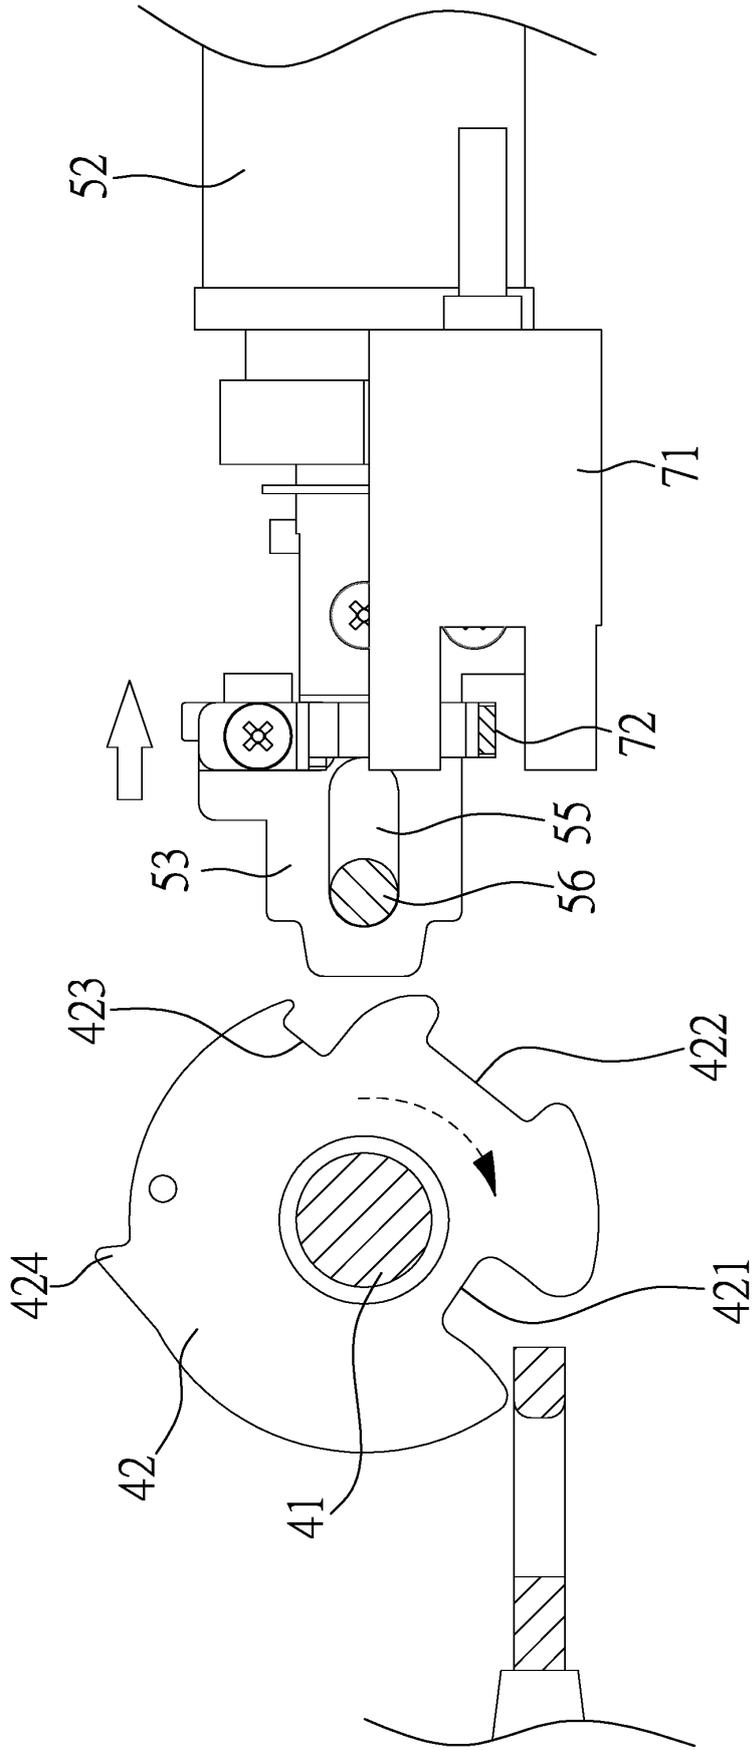


FIG.8

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- TW 473859 M [0003] [0028]