



(11) **EP 3 322 966 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
15.07.2020 Bulletin 2020/29

(51) Int Cl.:
G01N 1/08 (2006.01) **G01N 3/42** (2006.01)
G01N 33/24 (2006.01) **E02D 1/04** (2006.01)
E02D 1/02 (2006.01)

(21) Application number: **16825238.5**

(86) International application number:
PCT/US2016/042449

(22) Date of filing: **15.07.2016**

(87) International publication number:
WO 2017/011731 (19.01.2017 Gazette 2017/03)

(54) **DOWNHOLE STINGER GEOTECHNICAL SAMPLING AND IN SITU TESTING TOOL**

BOHRLOCH-STINGER FÜR GEOTECHNISCHE PROBENAHME UND IN-SITU-PRÜFWERKZEUG
ÉCHANTILLONNAGE GÉOTECHNIQUE DE RAMPE DE POSE DE FOND DE TROU ET OUTIL
D'ESSAI IN SITU

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **16.07.2015 US 201562193414 P**

(43) Date of publication of application:
23.05.2018 Bulletin 2018/21

(73) Proprietor: **ConocoPhillips Company
Houston, Texas 77079 (US)**

(72) Inventor: **HOLLOWAY, George Leon
Houston, Texas 77079 (US)**

(74) Representative: **Simpson, Paul Christopher et al
ConocoPhillips (U.K.) Limited
20th Floor
Angel Court
London EC2R 7HJ (GB)**

(56) References cited:
**FR-A- 1 603 725 US-A- 5 777 242
US-A1- 2008 257 636 US-A1- 2010 050 764
US-B1- 6 463 801**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD OF THE DISCLOSURE

[0001] The present invention generally relates to offshore geotechnical tools. More specifically, the present invention provides a system for ballistically inserting a geotechnical tool into a seafloor.

BACKGROUND OF THE DISCLOSURE

[0002] Geotechnical information of the seafloor is often needed for proper engineering design of structures such as fixed leg jacket structures, tension leg platforms, spread moorings, gravity based structures and pipelines. The cone penetrometer is an in situ testing tool that can be used to perform cone penetrometer test ("CPT") to gather geotechnical engineering properties of seafloor. For most offshore applications, a large deployment system is needed to deliver the cone penetrometer to the seafloor. Typically, the cone penetrometer gathers data as its cone shaped tip is pushed into the soil at a near static or static rate of speed. The standard push velocity is ~2 cm/sec ($\pm 25\%$) according to industry accepted American Society for Testing and Material (ASTM) protocol. Readings are taken continuously every 1 cm to 5 cm or so to obtain continuously sampled static data. The length of the cone rod determines depth of push and varies typically from about 1.5 m to 4.5 m depending upon which system or specific tool is employed. In general, static CPT requires large and expensive equipment that can provide a stable platform at the seabed. Utilized from the stable platform, the cone penetrometer can then be inserted with a steady pressure at a controlled rate.

[0003] Various tools have been developed to deploy cone penetrometers in offshore environments. For deep-water investigations, a cone penetrometer can be operated in conjunction with wire-line drilling techniques with equipment mounted on a large drill vessel. Since the cone penetrometer is pushed at a constant rate, any drill string that secures the cone penetrometer to the vessel must remain immobilized so that the tool is essentially unaffected by vessel motion during the push. Immobilization of the drill string can be accomplished using a weighted seabed frame (SBF) that is designed to allow the drill string to be attached to the heavy weighted seabed frame (e.g., ~20,000 lbs). The SBF is normally lowered to the seabed prior to spudding a borehole from a large winch on the deck of the vessel. The SBF is lowered through a large center well through the vessel. The drill rig is usually positioned over the large center well. Drilling heave compensators are used for both the drillstring and SBF to reduce influence of sea waves. When the drill string is at a desired depth, hydraulic rams on the SBF are activated and clamp onto the drill string. Once the clamps grip the drill pipe firmly, weight of the SBF is added onto the drill string and allows the drill pipe to be essentially motionless (since it is now tied to the seafloor). The added weight

of the SBF on the drill pipe provides the heave compensators with enough resistance to allow the drill string and SBF to remain motionless during the insertion of the cone penetrometer into the seabed.

[0004] A recently developed offshore cone penetrometer tool is "allowed to free fall" into the seafloor to gather both static and dynamic CPT data. As used herein, the term "static CPT data" refers to CPT data collected when a cone penetrator is pushed at a static rate (typically at ~2 cm/s). As used herein, the term "dynamic CPT data" refers to collection of CPT data at a non-static rate (much faster than 2 cm/s). An example of an offshore cone penetrometer system was described in a paper entitled "'CPT Stinger' - An Innovative Method to Obtain CPT Data for Integrated Geoscience Studies" presented at Offshore Technology Conference (May 2-5, 2011).

[0005] In this offshore cone penetrometer system, the cone sensor portion is installed using a large piston corer weight-head and allowed to free-fall and penetrate into the sediment to about 20 m. During this time, dynamic CPT data is gathered. Once the offshore cone penetrometer tool is embedded, the cone tip can be pushed down to about 40 m at a static push rate (~2 cm/s). The offshore cone penetrometer tool is designed to quickly assess soil properties by converting the dynamic CPT data to static CPT data using velocity algorithms. One of the main drawbacks of the offshore cone penetrometer tool is that the tool requires the use of a large seabed frame and heave compensator system. One primary limitation of the Stinger CPT tool is that it cannot measure CPT data beyond ~40 m (~20 m of dynamic data and ~20 m of static data).

[0006] US5777242A describes apparatus for delivering a tool for subsea soil analysis and sampling, wherein the tool is mounted to a hydraulic piston in a cylinder mounted to drill string. The cylinder is steadily pressurized resulting in a controlled, slow or "static" delivery of the tool into the ground.

SUMMARY OF THE DISCLOSURE

[0007] According to the invention a system is provided as described in the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008]

FIGS. 1A-1B illustrates a dynamic delivery system with cone penetrometer before (FIG. 1A) and after stroke (FIG. 1B).

FIGS. 2A-2B illustrates a dynamic delivery system with soil sampler before (FIG. 2A) and after stroke (FIG. 2B).

DETAILED DESCRIPTION

[0009] Turning now to the detailed description of the

preferred arrangement or arrangements of the present invention, it should be understood that the inventive features and concepts may be manifested in other arrangements and that the scope of the invention is not limited to the embodiments described or illustrated.

[0010] The following examples of certain embodiments of the invention are given. Each example is provided by way of explanation of the invention, one of many embodiments of the invention, and the following examples should not be read to limit the scope of the invention.

[0011] The present invention provides offshore dynamic delivery systems and methods for deploying geotechnical tools in an offshore environment. Certain testing tools take measurements (e.g., tip resistance, sleeve resistance, pore pressure, friction, etc.) in situ while soil samplers (e.g., piston sampler) collect soil samples that are analyzed above water. The geotechnical tools can be in situ testing probe (e.g., cone penetrometer), soil sampler, or any other compatible tool that can be inserted into seafloor. The dynamic delivery system includes mechanisms that allow the geotechnical tool to be ballistically inserted into the soil during a stroke action. As such, the offshore dynamic delivery system allow soil samples or geotechnical data to be collected very rapidly at greater depths without compromising quality of sample or data.

[0012] The dynamic delivery system also allows in situ testing or sampling of soil without the need for a large drill vessel equipped with a heave compensator, center well, or SBF. The collected CPT data can include, for example, pore pressure data with depth prior to conductor/casing installation, accurate heat flow measurements for hydrate assessment, cost effective data for accurate foundation concept evaluation, as well as geotechnical data for temperature profile measurements, soil shear strength, and the like. Other advantages of the present invention include, but are not limited to, the following:

- Dynamic CPT data is collected from within a borehole deployed tool without using a reaction mass (e.g., sea bed frame) to immobilize the drill string
- Smaller vessels without a large center well or heave compensation system can be used to deploy the tool system
- Heave compensation system is not needed due to the speed in which the tool is activated
- Equipment cost is significantly reduced
- Time associated with obtaining soil sample (e.g., exploration rigs can run triple stands of drill pipe instead of a single joint of pipe that is typically deployed from geotechnical drill ship) is significantly reduced
- System allows other sensors/tools to be deployed
- Any drilling fluid introduced into the drill string can be used to build up fluid pressure

[0013] FIGS. 1A-1B illustrate the dynamic delivery system of the present invention featuring a cone penetrometer **10** before (FIG. 1A) and after stroke (FIG. 1B) action

of its hydraulic piston **6**. The dynamic delivery system includes a carrier tube **1** that serves to house some key elements of the dynamic delivery system. These elements include a fixed rod **7** that runs along the axial length of the carrier tube **1** and an inner tube **4** that is concentric to the carrier tube **1** and disposed between the carrier tube **1** and the fixed rod **7**. The cone penetrometer **10** is outfitted at the bottom portion of the inner tube **4**. The drill head **11** is installed at the bottom portion of the carrier tube **1**.

[0014] The hydraulic piston **6** and inner tube **4** rests inside a hydraulic cylinder **5** that is defined by the inner diameter of the carrier tube **1**. The hydraulic piston **6** sits above the inner tube **4** and the two are moveable in unison (upward or downward) along the fixed rod **7**. The fixed rod **7** may include anti-spiral grooves that prevents rotational movement of the cone penetrometer **10**. Vertical movement of the hydraulic piston **6** is restricted by shear pins **8** which locks the hydraulic piston in place before the stroke. As shown, the shear pins **8** are installed into the slots for the shear pins. Shear pin bushings **13** are installed on either side of the piston to help ensure repeatable shoot off pressures.

[0015] As shown, the top portion of the carrier tube **1** is connected to an extension tube **2** (e.g., drill string). An upward seal **3** (e.g., packer) covers the extension tube **2** with an opening in the seal that allows fluids to be introduced into the system. In one embodiment, fluids can be introduced into the system (bolded arrow indicates direction of fluid) via a compression device (e.g., a pump) that compresses fluids under the upward seal **3**. The compressed fluid can build up pressure inside the system that leads to the eventual failure of the shear pins **8** and ballistic firing of the hydraulic piston **6**. At predetermined pressure, the piston is instantaneously accelerated and forces the cone penetrometer **11** into the soil at the bottom of the borehole. The velocity of the firing is regulated by built up fluid pressure, which can be controlled by number of shear pins and/or material of the shear pins. Landing sub **9** can also be fashioned or installed at or near the top portion of the carrier sub **1**. The landing sub **9** has an inner diameter smaller than the carrier tube **1** and essentially provides shoulders that allows certain housed elements to be seated.

[0016] Initially, the dynamic delivery system is positioned slightly above seafloor and then fired to obtain a cone penetrometer measurement that starts at the seafloor interface. The carrier tube is then advanced into the seafloor by the length of the initial CPT embedment. As shown in FIG. 1A, a portion of the carrier tube **1** is drilled/inserted into the soil before stroke takes place. During the stroke, the cone penetrometer **10** and at least a portion of the inner tube **4** are ballistically inserted deeper into the soil. This ballistic insertion is possible because the drill head **11** has an opening that allows elements housed inside the carrier tube **1** to thrust into the soil in coordination with movement of the hydraulic piston **6** (FIG. 1B).

[0017] A speed control device **12** allows fluid under pressure to pass into the hydraulic cylinder **5** at varying flow rate in order to control descent velocity rate of the hydraulic piston **6**. Vent sub **15** and snubber **16** prevent damage to the dynamic delivery system if the system is accidentally fired above the seafloor or without sufficient sediment to retard the driving force before reaching end of the stroke. Quick release mechanism **14** allows the system to be easily and repeatedly broken down into at least two main parts for improved handling. A cup type or spear type control knob **17** is used to latch onto a wireline overshot to catch and recover the geotechnical tool back to the surface. This process is repeated for each advancement of the CPT.

[0018] Because the CPT is not controlled in its advancement rate, it does not require a seabed frame to provide reaction for a heave compensator since insertion of the CPT is < 2 sec. (i.e., less than typical ocean wave length period). Since the CPT is inserted so fast, it is unaffected by vessel heave cause by the sea state at the time of operation.

[0019] FIGS. 2A-2B illustrate a dynamic delivery system featuring a soil sampler **18** in place of the cone penetrometer **11** shown in FIGS. 1A-1B. The soil sampler **18** includes a sampler vents **19** and sampler valve **20** designed to help collect a soil sample. During ballistic insertion, soil flows through the soil sampler **18** and out of the sampler vents **19**. As soon as the sampler enters the soil at a high acceleration from the stored energy within the drill pipe, the sampler de-accelerates as it advances into the virgin soil.

[0020] In one embodiment, the soil sampler **18** can be configured into various lengths. Because the soil sampler is not controlled in its advancement rate, it does not require a seabed frame to provide reaction for a heave compensator since insertion of the sample barrel is < 2 sec. (i.e., less than typical ocean wave length period). Since the soil sampler is inserted so fast, it is unaffected by vessel heave cause by the sea state at the time of operation.

[0021] When the system stops at a pre-set depth, the soil at that depth inside the sampler is captured by the sampler valve **20** at the top of the soil sampler **18**. Valve closure is accomplished by upward movement of the soil sampler **18** when the drill string (i.e., extension tube, carrier tube and drill bit) are raised above the bottom of the hole or when the system is lifted with a wireline retrieval tool.

[0022] Referring to both embodiments shown in FIGS. 1A-2B, the carrier tube **1** may be lowered into the sea from a vessel via connection to a series of extension tubes (i.e., drillstring). The housed elements are lowered into the carrier portion (carrier tube **1**) via a wireline or allowed to free fall with the extension tubes resting on a landing shoulder (landing sub **9**) within the carrier portion of the tool. A compression system **18** (e.g., pump) is connected to the top of the extension tube so that a seal is formed between the top of the extension tubes and the

inner portion of the tool when properly seated in the carrier. No external locking arrangement is needed to hold the inner tube in place. This sealing allows fluid in the extension tubes to be compressed with the introduction of additional fluid which results in a pressure build up. The inner elements are then fired into the formation under this pressure buildup of fluid in the extension tubes. The actual firing pressure (i.e. force) is dependent the type of material that are used in the selection of the shear pins. A number of firing pressure combinations are available based in the type and strength of shear pins used.

[0023] Upon reaching the maximum shear force offered by the available shear pins selected, the inner elements are instantaneously accelerated into the formation where the soil resistance eventually slows the tools advancement rate with a decreasing acceleration until it reaches the lessor of its maximum penetration or a shorter length based on the amount of resistance that the soil achieves with side wall contact from the probe or sample barrel. A hydraulic cylinder constitutes part of the carrier tube so that the piston forms a seal directly against the inner wall of the carrier tube. The seal is provided on the outer circumferential portion of the inner tube with the carrier tube which seals the hydraulic cylinder to allow the analysis to take place.

[0024] Upon recovery to deck, raw data file generated from the ballistic insertion can be analyzed and processed into acceleration, velocity, and depth measurements using the same electronic memory module that is deployed with the CPT. The soil sample collected is identical to industry standard 3" Shelby tubes.

[0025] In closing, it should be noted that the discussion of any reference is not an admission that it is prior art to the present invention, especially any reference that may have a publication date after the priority date of this application. At the same time, each and every claim below is hereby incorporated into this detailed description or specification as additional embodiments of the present invention.

[0026] Although the systems and processes described herein have been described in detail, it should be understood that various changes, substitutions, and alterations can be made without departing from the scope of the invention as defined by the following claims. Those skilled in the art may be able to study the preferred embodiments and identify other ways to practice the invention that are not exactly as described herein. It is the intent of the inventors that variations and equivalents of the invention are within the scope of the claims, while the description, abstract and drawings are not to be used to limit the scope of the invention. The invention is specifically intended to be as broad as the claims below and their equivalents.

Claims

1. An offshore system for in situ testing of soil or col-

lection of soil samples comprising:

- a) a carrier tube (1) comprising an upper end and a lower end, wherein the carrier tube comprising an outer diameter and an inner diameter and wherein the inner diameter of the carrier tube defines a hydraulic cylinder;
 - b) a drill bit (11) shaped or installed at or near the lower end of the carrier tube (1);
 - c) a series of extension tubes (2) extending upward from the upper end of the carrier tube;
 - d) an upward seal (3) that seals top portion of the extension tubes;
 - e) a compression system (18) for introducing compressed fluid under the upward seal;
 - f) a fixed rod (7) that runs through the hydraulic cylinder;
 - g) a hydraulic piston (6) disposed in the hydraulic cylinder, wherein the hydraulic piston is moveable along the fixed rod;
 - h) an inner tube (4) disposed between the carrier tube and the hydraulic piston, wherein lower portion of the inner tube includes either a cone penetrometer (10) or soil sampler (18) having a valve (20) that allows collection of a soil sample after the insertion; **characterized by**
 - i) a landing sub (9) shaped or installed at or near the upper end of the carrier tube, wherein inner diameter of the landing sub is smaller than the inner diameter of the carrier tube (1);
 - j) one or more shear pins (8) configured to restrict displacement of the hydraulic piston (6) until a sufficient fluid pressure is built up, wherein sufficient fluid pressure leads to failure of the one or more shear pins (8), whereby the cone penetrometer (10) or soil sampler (18) is ballistically inserted into the soil during downward displacement of the hydraulic piston.
2. The offshore system of claim 1, wherein the hydraulic cylinder includes a passage for buildup of fluid pressure above the hydraulic piston (6).
 3. The offshore system of claim 1, further comprising a speed control device that allows fluid under pressure to pass into the hydraulic cylinder at varying flow rate that controls descent velocity rate of the hydraulic piston (6).
 4. The offshore system of claim 1, further comprising hardened shear pin bushing.
 5. The offshore system of claim 1, further comprising a venting device that retards driving force during stroke of the hydraulic piston (6).
 6. The offshore system of claim 1, wherein the system includes a cone penetrometer (10), and wherein the

hydraulic piston is keyed with anti-spiral grooves to prevent rotation of the cone penetrometer.

7. The offshore system of claim 1, wherein the system includes a cone penetrometer (10), and further comprising a processor for converting dynamic data parameter measurements into electrical signals.
8. The offshore system of claim 1, wherein the system includes a cone penetrometer (10), and further comprising:
 - a battery; and
 - memory configured to store measurement data obtained from the cone penetrometer.
9. The offshore system of claim 1, wherein the system includes a cone penetrometer (10), and wherein the cone penetrometer comprises:
 - an electronic data processing system that summarizes dynamic data from the cone penetrometer; and
 - a display that converts dynamic data into one or more parameters selected from the group consisting of: acceleration, velocity, and depth.
10. The offshore system of claim 1, wherein the system includes a soil sampler (18) having a valve (20) that allows collection of a soil sample after the insertion, and wherein the soil sampler has an outer diameter of about 3 inches.
11. The offshore system of claim 1, wherein the system includes a soil sampler (18) having a valve (20) that allows collection of a soil sample after the insertion, and wherein the valve allows soil to flow through the soil sampler during downward movement the soil sampler.
12. The offshore system of claim 1, wherein the system includes a soil sampler (18) having a valve (20) that allows collection of a soil sample after the insertion, and wherein the valve closes during upward movement of the soil sampler.
13. The offshore system of claim 1, wherein the system includes a soil sampler (18) having a valve (20) that allows collection of a soil sample after the insertion, and further comprising a processor for processing data generated from the ballistic insertion into acceleration, velocity, or depth measurement.

Patentansprüche

1. Offshore-System zum in-situ Prüfen von Boden oder zur Sammlung von Bodenproben, umfassend:

- a) ein Trägerrohr (1), umfassend ein oberes Ende und ein unteres Ende, wobei das Trägerrohr einen Außendurchmesser und einen Innendurchmesser umfasst und wobei der Innendurchmesser des Trägerrohrs einen hydraulischen Zylinder definiert;
- b) einen am oder in der Nähe vom unteren Ende des Trägerrohrs (1) geformte oder installierte Bohrmeißel (11);
- c) eine Reihe von Verlängerungsrohren (2), die sich von dem oberen Ende des Trägerrohrs nach oben gerichtet erstrecken;
- d) eine nach oben gerichtete Dichtung (3), die Oberabschnitt der Verlängerungsrohre abdichtet;
- e) ein Kompressionssystem (18) zum Einleiten komprimierten Fluids unter die nach oben gerichtete Dichtung;
- f) eine fixierte Stange (7), die durch den hydraulischen Zylinder hindurch verläuft;
- g) einen in dem hydraulischen Zylinder angeordneten hydraulischen Kolben (6), wobei der hydraulische Kolben entlang der fixierten Stange beweglich ist;
- h) ein zwischen dem Trägerrohr und dem hydraulischen Kolben angeordnetes Innenrohr (4), wobei unterer Abschnitt des Innenrohrs entweder ein Kegelpenetrometer (10) oder Bodenprobenehmer (18) beinhaltet, das/der ein Ventil (20) aufweist, das nach dem Einbringen Sammlung einer Bodenprobe ermöglicht; **gekennzeichnet durch**
- i) einen am oder in der Nähe von dem oberen Ende des Trägerrohrs geformten oder installierten Anlandestutzen (9), wobei der Innendurchmesser des Anlandestutzens kleiner ist als der Innendurchmesser des Trägerrohrs (1);
- j) einen oder mehrere Scherstifte (8), konfiguriert, um Verschiebung des hydraulischen Kolbens (6) einzuschränken, bis ein ausreichender Fluiddruck aufgebaut ist, wobei ausreichender Fluiddruck zum Ausfall des einen oder der mehreren Scherstifte (8) führt, wobei das Kegelpenetrometer (10) oder der Bodenprobenehmer (18) während nach unten gerichteter Verschiebung des hydraulischen Kolbens ballistisch in den Boden eingebracht wird.
2. Offshore-System nach Anspruch 1, wobei der hydraulische Zylinder einen Durchgang zum Aufbau von Fluiddruck oberhalb des hydraulischen Kolbens (6) beinhaltet.
3. Offshore-System nach Anspruch 1, weiter umfassend eine Temposteuvorrichtung, die Fluid unter Druck ermöglicht, bei variierender Durchflussrate, die die Abstiegsgeschwindigkeitsrate des hydraulischen Kolbens (6) steuert, in den hydraulischen Zylinder überzugehen.
4. Offshore-System nach Anspruch 1, weiter umfassend gehärtete Scherstiftbuchse.
5. Offshore-System nach Anspruch 1, weiter umfassend eine Belüftungsvorrichtung, die Antriebskraft während Hubs des hydraulischen Kolbens (6) hemmt.
6. Offshore-System nach Anspruch 1, wobei das System ein Kegelpenetrometer (10) beinhaltet und wobei der hydraulische Kolben mit Anti-Spiralkerben verkeilt ist, um Rotation des Kegelpenetrometers zu verhindern.
7. Offshore-System nach Anspruch 1, wobei das System ein Kegelpenetrometer (10) beinhaltet, und weiter umfassend einen Prozessor zum Umwandeln dynamischer Datenparametermessungen in elektrische Signal.
8. Offshore-System nach Anspruch 1, wobei das System ein Kegelpenetrometer (10) beinhaltet, und weiter umfassend:
- eine Batterie; und
- einen Speicher, konfiguriert, um Messungsdaten, die von dem Kegelpenetrometer erhalten wurden, zu speichern.
9. Offshore-System nach Anspruch 1, wobei das System ein Kegelpenetrometer (10) beinhaltet, und wobei das Kegelpenetrometer umfasst:
- ein elektronisches Datenverarbeitungssystem, das dynamische Daten von dem Kegelpenetrometer zusammenfasst; und
- eine Anzeige, die dynamische Daten in ein oder mehrere Parameter umwandelt, ausgewählt aus der Gruppe, bestehend aus: Beschleunigung, Geschwindigkeit und Tiefe.
10. Offshore-System nach Anspruch 1, wobei das System einen Bodenprobenehmer (18) beinhaltet, der ein Ventil (20) aufweist, das Sammlung einer Bodenprobe nach dem Einbringen ermöglicht, und wobei der Bodenprobenehmer einen Außendurchmesser von etwa 3 Zoll aufweist.
11. Offshore-System nach Anspruch 1, wobei das System einen Bodenprobenehmer (18) beinhaltet, der ein Ventil (20) aufweist, das Sammlung einer Bodenprobe nach dem Einbringen ermöglicht, und wobei das Ventil Boden ermöglicht, während nach unten gerichteter Bewegung des Bodenprobenehmers durch den Bodenprobenehmer hindurch zu fließen.

12. Offshore-System nach Anspruch 1, wobei das System einen Bodenprobenehmer (18) beinhaltet, der ein Ventil (20) aufweist, das Sammlung einer Bodenprobe nach dem Einbringen ermöglicht, und wobei sich das Ventil während nach oben gerichteter Bewegung des Bodenprobenehmers schließt. 5
13. Offshore-System nach Anspruch 1, wobei das System einen Bodenprobenehmer (18) beinhaltet, der ein Ventil (20) aufweist, das Sammlung einer Bodenprobe nach dem Einbringen ermöglicht, und weiter umfassend einen Prozessor zum Verarbeiten von aus dem ballistischen Einbringen erzeugten Daten in Beschleunigung, Geschwindigkeit oder Tiefenmessung. 10 15

Revendications

1. Système en mer pour le test in situ d'un sol ou la collecte d'échantillons de sol comprenant : 20
- a) un tube porteur (1) comprenant une extrémité supérieure et une extrémité inférieure, dans lequel le tube porteur comprend un diamètre externe et un diamètre interne et dans lequel le diamètre interne du tube porteur définit un vérin hydraulique ; 25
 - b) un trépan de forage (11) mis en forme ou installé au niveau ou près de l'extrémité inférieure du tube porteur (1) ; 30
 - c) une série de tubes d'extension (2) s'étendant vers le haut depuis l'extrémité supérieure du tube porteur ;
 - d) un joint ascendant (3) qui scelle la partie supérieure des tubes d'extension ; 35
 - e) un système de compression (18) pour introduire un fluide comprimé sous le joint ascendant ;
 - f) une tige fixe (7) qui traverse le vérin hydraulique ; 40
 - g) un piston hydraulique (6) disposé dans le vérin hydraulique, dans lequel le piston hydraulique peut se déplacer le long de la tige fixe ;
 - h) un tube interne (4) disposé entre le tube porteur et le piston hydraulique, dans lequel la partie inférieure du tube interne inclut soit un pénétromètre à cône (10), soit un échantillonneur de sol (18) présentant une valve (20) qui permet la collecte d'un échantillon de sol après l'insertion ; 50
- caractérisé par**
- i) un raccord de pose (9) mis en forme ou installé au niveau ou près de l'extrémité supérieure du tube porteur, dans lequel le diamètre interne du raccord de pose est inférieure au diamètre interne du tube porteur (1) ; 55
 - j) une ou plusieurs goupilles de cisaillement (8) configurées pour restreindre le déplacement du

piston hydraulique (6) jusqu'à ce qu'une pression de fluide suffisante se soit accumulée, dans lequel une pression de fluide suffisante conduit à la rupture des une ou plusieurs goupilles de cisaillement (8), selon lequel le pénétromètre à cône (10) ou l'échantillonneur de sol (18) est inséré de manière balistique dans le sol pendant le déplacement descendant du piston hydraulique.

2. Système en mer selon la revendication 1, dans lequel le vérin hydraulique inclut un passage pour l'accumulation d'une pression de fluide au-dessus du piston hydraulique (6).
3. Système en mer selon la revendication 1, comprenant en outre un dispositif de commande de vitesse qui permet à un fluide sous pression de passer dans le vérin hydraulique à un débit variable qui commande la vitesse de descente du piston hydraulique (6).
4. Système en mer selon la revendication 1, comprenant en outre une bague durcie de goupille de cisaillement.
5. Système en mer selon la revendication 1, comprenant en outre un dispositif de purge qui retarde la force motrice pendant la course du piston hydraulique (6).
6. Système en mer selon la revendication 1, dans lequel le système inclut un pénétromètre à cône (10), et dans lequel le piston hydraulique est claveté avec des rainures anti-spirales pour empêcher la rotation du pénétromètre à cône.
7. Système en mer selon la revendication 1, dans lequel le système inclut un pénétromètre à cône (10), et comprenant en outre un processeur pour convertir des mesures de paramètres de données dynamiques en signaux électriques.
8. Système en mer selon la revendication 1, dans lequel le système inclut un pénétromètre à cône (10), et comprenant en outre :
une batterie ; et
une mémoire configurée pour stocker des données de mesure obtenues à partir du pénétromètre à cône.
9. Système en mer selon la revendication 1, dans lequel le système inclut un pénétromètre à cône (10), et dans lequel le pénétromètre à cône comprend :
un système électronique de traitement de données qui résume les données dynamiques provenant du pénétromètre à cône ; et

un affichage qui convertit les données dynamiques en un ou plusieurs paramètres sélectionnés dans le groupe consistant en : l'accélération, la vitesse et la profondeur.

5

10. Système en mer selon la revendication 1, dans lequel le système inclut un échantillonneur de sol (18) présentant une valve (20) qui permet la collecte d'un échantillon de sol après l'insertion, et dans lequel l'échantillonneur de sol présente un diamètre interne d'environ 3 pouces. 10
11. Système en mer selon la revendication 1, dans lequel le système inclut un échantillonneur de sol (18) présentant une valve (20) qui permet la collecte d'un échantillon de sol après l'insertion, et dans lequel la valve permet au sol de s'écouler à travers l'échantillonneur de sol pendant le mouvement descendant de l'échantillonneur de sol. 15
12. Système en mer selon la revendication 1, dans lequel le système inclut un échantillonneur de sol (18) présentant une valve (20) qui permet la collecte d'un échantillon de sol après l'insertion, et dans lequel la valve se ferme pendant le mouvement ascendant de l'échantillonneur de sol. 20 25
13. Système en mer selon la revendication 1, dans lequel le système inclut un échantillonneur de sol (18) présentant une valve (20) qui permet la collecte d'un échantillon de sol après l'insertion, et comprenant en outre un processeur pour traiter des données générées par l'insertion balistique dans en mesure d'accélération, de vitesse ou de profondeur. 30 35

40

45

50

55

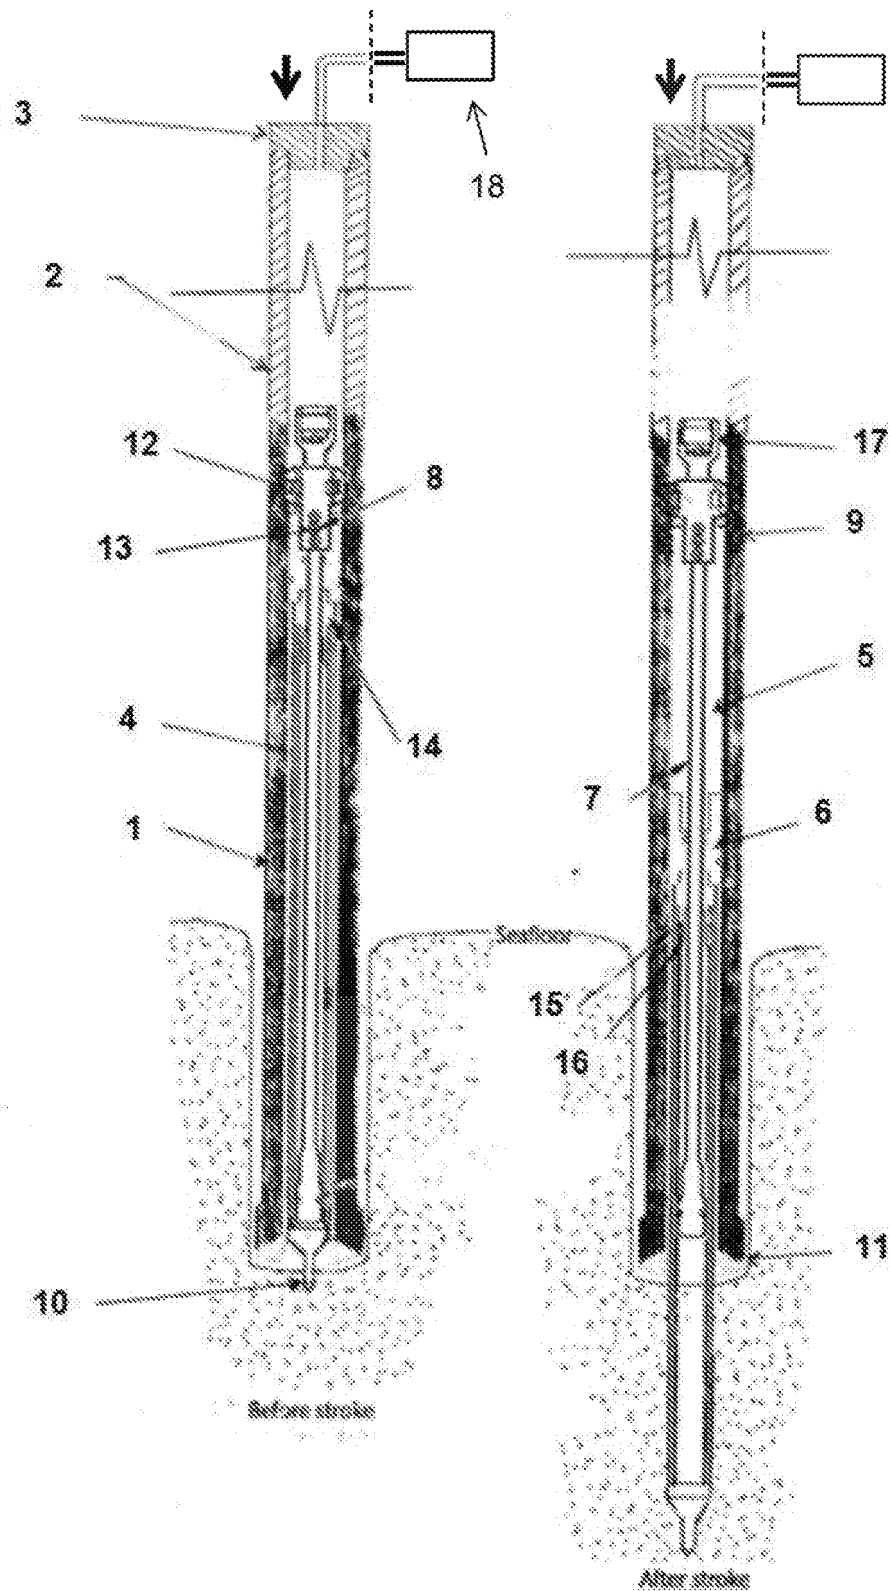


FIG. 1A

FIG. 1B

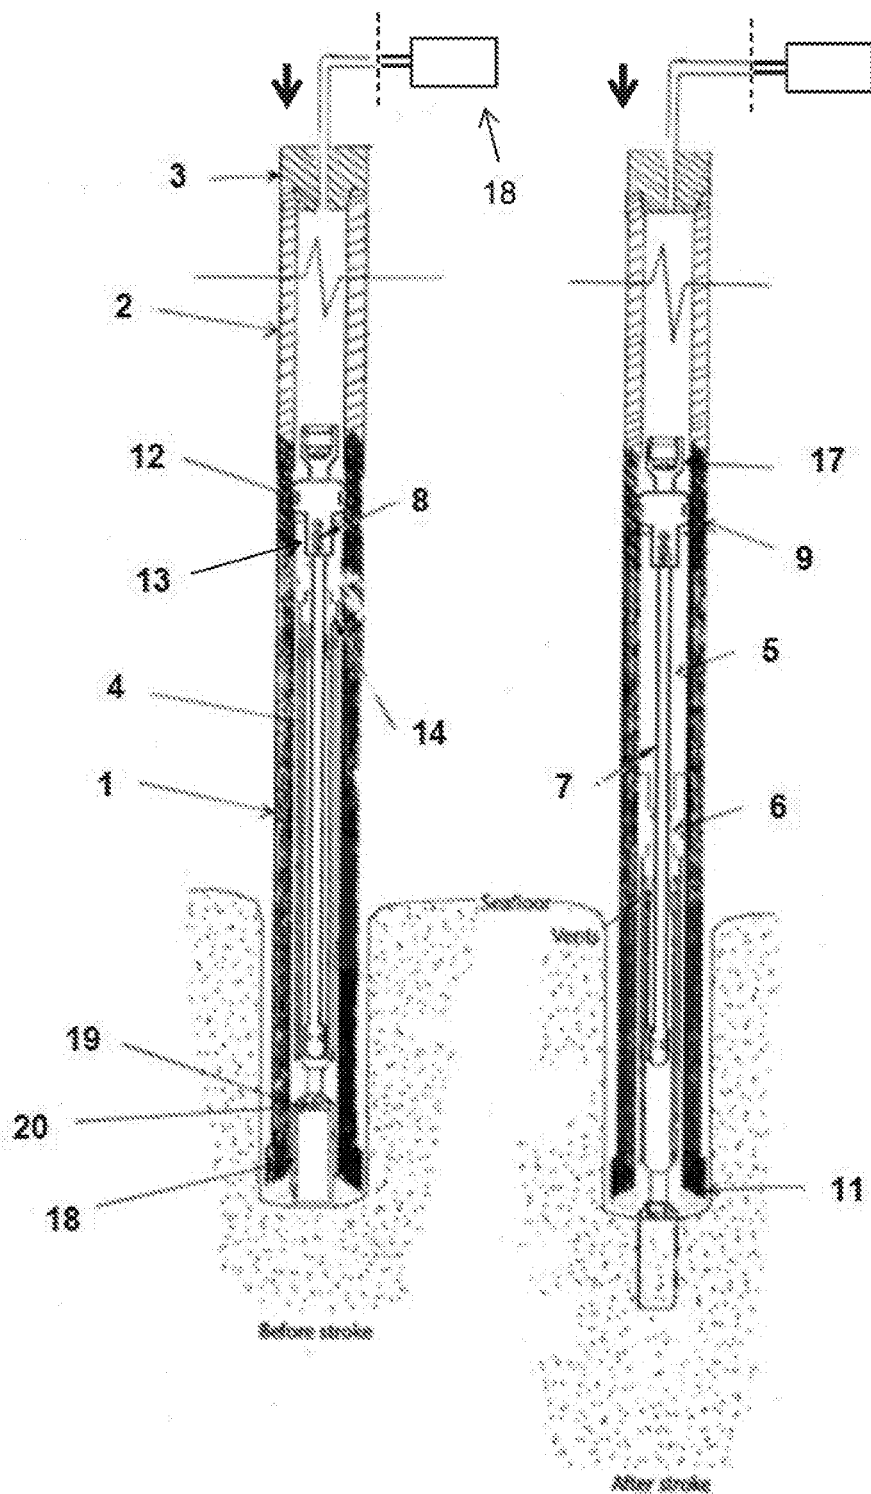


FIG. 2A

FIG. 2B

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5777242 A [0006]

Non-patent literature cited in the description

- CPT Stinger' - An Innovative Method to Obtain CPT Data for Integrated Geoscience Studies. *Offshore Technology Conference*, 02 May 2011 [0004]