



Europäisches
Patentamt
European
Patent Office
Office européen
des brevets



(11)

EP 3 327 086 A1

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art. 153(4) EPC

(43) Date of publication:

30.05.2018 Bulletin 2018/22

(51) Int Cl.:

C08L 71/12 (2006.01)

C08K 5/521 (2006.01)

C08K 5/5313 (2006.01)

C08L 23/10 (2006.01)

C08L 53/02 (2006.01)

(21) Application number: **16827401.7**

(22) Date of filing: **20.06.2016**

(86) International application number:

PCT/JP2016/002962

(87) International publication number:

WO 2017/013833 (26.01.2017 Gazette 2017/04)

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

Designated Extension States:

BA ME

Designated Validation States:

MA MD

(30) Priority: **22.07.2015 JP 2015145182**

(71) Applicant: **Asahi Kasei Kabushiki Kaisha
Chiyoda-ku
Tokyo 101-8101 (JP)**

(72) Inventors:

- INAGAKI, Nozomi
Tokyo 101-8101 (JP)**
- YAMAMOTO, Mihoko
Tokyo 101-8101 (JP)**

(74) Representative: **Strehl Schübel-Hopf & Partner
Maximilianstrasse 54
80538 München (DE)**

(54) RESIN COMPOSITION AND MOLDED ARTICLE

(57) Provided are a resin composition and a shaped product having excellent smoke generation properties and chemical resistance. The resin composition and the shaped product contain: a polyphenylene ether resin (I); a polypropylene resin (II); a hydrogenated block copolymer (III) that is a hydrogenated product of a block copolymer including a polymer block A and a polymer block B in which the total amount of vinyl bonding is 30-90%; and

a phosphate ester compound (IV). Relative to 100 parts by mass, in total, of components (I) and (II), component (I) is 40-99 parts by mass, component (II) is 1-60 parts by mass, component (III) is 1-20 parts by mass, and component (IV) is 5-45 parts by mass. A partition ratio of component (IV) present in a fraction that dissolves in chloroform and component (IV) present in a fraction that dissolves in o-dichlorobenzene is 10 or more.

Description**TECHNICAL FIELD**

5 [0001] This disclosure relates to a resin composition and a shaped product.

BACKGROUND

10 [0002] Although polypropylene has excellent shaping processability, water resistance, oil resistance, acid resistance, alkali resistance, and so forth, it is also known to have poor heat resistance and rigidity. Accordingly, a known technique of compounding polyphenylene ether with polypropylene may be adopted to obtain a resin composition having enhanced properties in terms of heat resistance, rigidity, and so forth.

15 [0003] Examples of techniques for further imparting flame retardance on this resin composition include a commonly adopted technique of adding a halogen-containing compound and antimony trioxide. However, since flame retardants such as halogen-containing compounds and antimony trioxide are undesirable from a viewpoint of environmental health, there is demand for improved flame retardance imparting techniques, such as techniques using flame retardants that do not contain halogen-containing compounds, antimony trioxide, or the like.

20 [0004] Examples of known techniques for responding to this demand include a technique of compounding a flame retardant such as a metal salt of phosphinic acid with a polyphenylene ether resin and a polypropylene resin (for example, refer to PTL 1 to 3). Moreover, PTL 4 and 5 disclose the use of another flame retardant or flame retardant synergist in addition to a metal salt of phosphinic acid to obtain a resin composition having even better flame retardance.

CITATION LIST

25 Patent Literature

[0005]

30 PTL 1: JP 2010-540716 A
 PTL 2: WO 2011/129129 A1
 PTL 3: JP 2013-14691 A
 PTL 4: JP 2014-159513 A
 PTL 5: JP 2014-210839 A

35 **SUMMARY**

(Technical Problem)

40 [0006] However, although flame retardance can be obtained in the resin compositions described in the aforementioned patent literature, the chemical resistance that is characteristic of a resin composition containing a polyphenylene ether resin and a polypropylene resin may be lost. In particular, it has been reported that in a case in which a liquid organophosphate is also used in such a resin composition as described in PTL 4 and 5, stability of morphology of the resin composition is lost, resistance to machine oil and mold cleaning agents is reduced, and the resin composition may be affected by such chemicals during shaping processing, leading to cracking. Moreover, these resin compositions suffer from a problem that, in a case in which the content of the polyphenylene ether resin is increased in order to increase flame retardance and shaping fluidity, the density of smoke generated during burning increases and smoke generation properties are negatively affected.

45 [0007] Accordingly, an objective of this disclosure is to provide a resin composition and a shaped product having excellent smoke generation properties and chemical resistance.

50

(Solution to Problem)

55 [0008] As a result of diligent investigation conducted to solve the problems set forth above, the inventors discovered that these problems can be beneficially solved through a resin composition and a shaped product that contain a polyphenylene ether resin, a polypropylene resin, a hydrogenated block copolymer having a specific structure, and a phosphate ester compound as a flame retardant in specific proportions, and particularly in which a partition ratio of phosphate ester compound present in a fraction that dissolves in chloroform and phosphate ester compound present in a fraction that dissolves in o-dichlorobenzene is within a specific range. The inventors completed the present disclosure based on

these discoveries.

[0009] Specifically, this disclosure provides the following.

[1] A resin composition comprising:

5 a polyphenylene ether resin (I);
 a polypropylene resin (II);
 a hydrogenated block copolymer (III) that is an at least partially hydrogenated product of a block copolymer including a polymer block A of mainly a vinyl aromatic compound and a polymer block B of mainly a conjugated diene compound in which a total amount of 1,2-vinyl bonding and 3,4-vinyl bonding is 30% to 90%; and
 10 a phosphate ester compound (IV), wherein
 relative to 100 parts by mass, in total, of the polyphenylene ether resin (I) and the polypropylene resin (II):

15 the polyphenylene ether resin (I) is contained in an amount of 40 parts by mass to 99 parts by mass;
 the polypropylene resin (II) is contained in an amount of 1 part by mass to 60 parts by mass;
 the hydrogenated block copolymer (III) is contained in an amount of 1 part by mass to 20 parts by mass; and
 20 the phosphate ester compound (IV) is contained in an amount of 5 parts by mass to 45 parts by mass, and upon dissolution of the resin composition in chloroform, a ratio $(IV)_{(I)}/(IV)_{(II)}$ is 10 or more, where $(IV)_{(I)}$ represents content of the phosphate ester compound (IV) present in a fraction that dissolves in chloroform and $(IV)_{(II)}$ represents content of the phosphate ester compound (IV) present in a fraction that dissolves in o-dichlorobenzene.


[2] The resin composition according to the foregoing [1], wherein
 the ratio $(IV)_{(I)}/(IV)_{(II)}$ is 250 or less.

[3] The resin composition according to the foregoing [1], wherein
 the ratio $(IV)_{(I)}/(IV)_{(II)}$ is 199 or less.


[4] The resin composition according to any one of the foregoing [1] to [3], wherein
 the ratio $(IV)_{(I)}/(IV)_{(II)}$ is 15 to 199.

[5] The resin composition according to any one of the foregoing [1] to [4], further comprising

30 3 parts by mass to 15 parts by mass of at least one phosphinate salt (V) selected from the group consisting of:
 a phosphinate salt represented by formula (1)

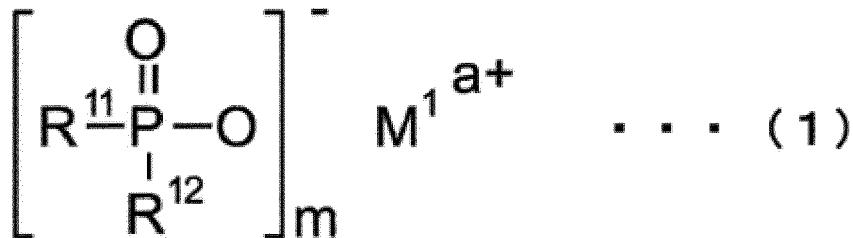

45 where R^{11} and R^{12} are each, independently of one another, a linear or branched alkyl group having a carbon number of 1 to 6 and/or an aryl group having a carbon number of 6 to 10, M^1 is at least one selected from the group consisting of a calcium ion, a magnesium ion, an aluminum ion, a zinc ion, a bismuth ion, a manganese ion, a sodium ion, a potassium ion, and a protonated nitrogenous base, a is an integer of 1 to 3, m is an integer of 1 to 3, and $\text{a} = \text{m}$; and
 a diphosphinate salt represented by formula (2)

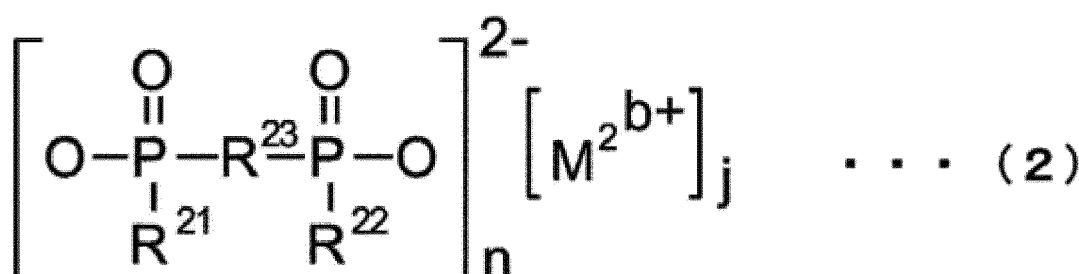

where R^{21} and R^{22} are each, independently of one another, a linear or branched alkyl group having a carbon number of 1 to 6 and/or an aryl group having a carbon number of 6 to 10, R^{23} is a linear or branched alkylene group having a carbon number of 1 to 10, an arylene group having a carbon number of 6 to 10, an alkylarylene group having a carbon number of 6 to 10, or an arylalkylene group having a carbon number of 6 to 10, M^2 is at least one selected from the group consisting of a calcium ion, a magnesium ion, an aluminum ion, a zinc ion, a bismuth ion, a manganese ion, a sodium ion, a potassium ion, and a protonated nitrogenous base, b is an integer of 1 to 3, n is an integer of 1 to 3, j is an integer of 1 or 2, and $b \cdot j = 2n$.

[6] The resin composition according to any one of the foregoing [1] to [5], wherein the total amount of 1,2-vinyl bonding and 3,4-vinyl bonding in the conjugated diene compound of the polymer block B is 65% to 90%, and

the conjugated diene compound of the polymer block B includes butadiene.

[7] The resin composition according to any one of the foregoing [1] to [6], wherein the phosphate ester compound (IV) includes a condensed phosphate ester.

[8] The resin composition according to any one of the foregoing [1] to [7], wherein

the resin composition has a morphology in which a phase containing the polyphenylene ether resin (I) and a phase containing the polypropylene resin (II) are co-continuous or a morphology in which a phase containing the polypropylene resin (II) is a matrix.

[9] A shaped product comprising the resin composition according to any one of the foregoing [1] to [8].

20 (Advantageous Effect)

[0010] According to this disclosure, it is possible to provide a resin composition and a shaped product having excellent smoke generation properties and chemical resistance.

25 BRIEF DESCRIPTION OF THE DRAWING

[0011] In the accompanying drawing,

FIG. 1 provides an overview of Production Methods 1 to 7 used in production of resin compositions in examples and comparative examples of this disclosure.

30 DETAILED DESCRIPTION

[0012] The following provides a detailed description of an embodiment of this disclosure (hereinafter, referred to as the "present embodiment"). However, this disclosure is not limited to the following embodiment and may be implemented with various alterations that are within the essential scope thereof.

(Resin composition)

[0013] A resin composition of the present embodiment contains a polyphenylene ether resin (I), a polypropylene resin (II), hydrogenated block copolymer (III), and a phosphate ester compound (IV), and may optionally contain a phosphinate salt (V), a thermoplastic resin (VI) other than components (I) and (II), and an additive (VII) other than components (I) to (VI).

[0014] The following describes the components in the resin composition of the present embodiment.

[0015] The resin composition of the present embodiment has excellent smoke generation properties with the density of smoke generated during burning being low, and has excellent chemical resistance with the tensile strength retention rate after chemical immersion being high.

[0016] Moreover, a preferred resin composition of the present embodiment has excellent flame retardance. In the present embodiment, excellent flame retardance is defined as a flame retardance level of V-1 or higher in a UL94 vertical burning test.

50 -Polyphenylene ether resin (I)-

[0017] The polyphenylene ether resin (I) used in the present embodiment may be, but is not specifically limited to, a polyphenylene ether, a modified polyphenylene ether, or a mixture of both. Component (I) may be one type used individually, or two or more types used in combination.

[0018] From a viewpoint of further improving flame retardance of the resin composition, the reduced viscosity of component (I) is preferably 0.25 dL/g or more, and more preferably 0.28 dL/g or more, and is preferably 0.45 dL/g or less, more preferably 0.36 dL/g or less, and particularly preferably 0.35 dL/g or less. The reduced viscosity can be controlled through the polymerization time and the amount of catalyst.


[0019] The reduced viscosity can be measured as η_{sp}/c of a 0.5 g/dL chloroform solution at a temperature of 30°C. Specifically, the reduced viscosity can be measured by a method described in the subsequent EXAMPLES section.

--Polyphenylene ether--

5

[0020] The polyphenylene ether may be, but is not specifically limited to, a homopolymer formed from a repeating unit structure represented by the following formula (3) or a copolymer including a repeating unit structure represented by the following formula (3).

10

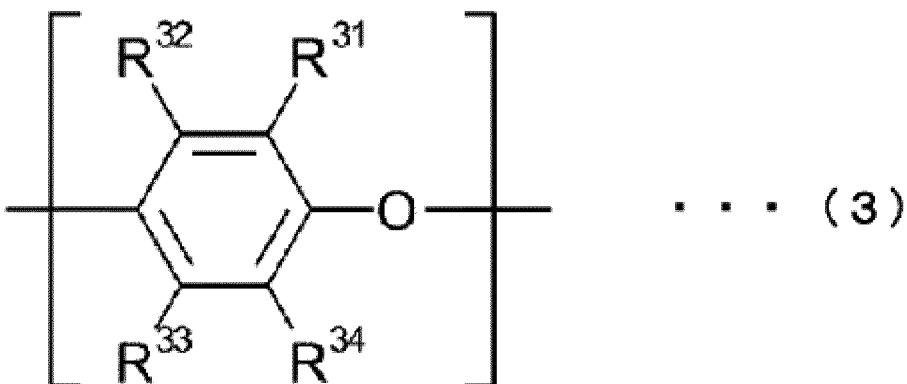

15

20

[In formula (3), R³¹, R³², R³³, and R³⁴ are each, independently of one another, a monovalent group selected from the group consisting of a hydrogen atom, a halogen atom, a primary alkyl group having a carbon number of 1 to 7, a secondary alkyl group having a carbon number of 1 to 7, a phenyl group, a haloalkyl group, an aminoalkyl group, an oxyhydrocarbon group, and an oxyhalohydrocarbon group in which a halogen atom and an oxygen atom are separated by at least two carbon atoms.]

[0021] Commonly known examples can be used as the polyphenylene ether without any specific limitations. Specific examples of polyphenylene ethers that can be used include homopolymers such as poly(2,6-dimethyl-1,4-phenylene ether), poly(2-methyl-6-ethyl-1,4-phenylene ether), poly(2-methyl-6-phenyl-1,4-phenylene ether), and poly(2,6-dichloro-1,4-phenylene ether); and copolymers such as copolymerized products of 2,6-dimethylphenol with another phenol such as 2,3,6-trimethylphenol or 2-methyl-6-butylphenol. Poly(2,6-dimethyl-1,4-phenylene ether) and a copolymer of 2,6-dimethylphenol and 2,3,6-trimethylphenol are preferable, and poly(2,6-dimethyl-1,4-phenylene ether) is more preferable.

[0022] The method by which the polyphenylene ether is produced is not specifically limited and may be a conventional and commonly known method. Specific examples of polyphenylene ether production methods that can be used include a method described in US 3306874 A in which a polyphenylene ether is produced through oxidative polymerization of 2,6-xylenol, for example, using a complex of a cuprous salt and an amine as a catalyst, and methods described in US 3306875 A, US 3257357 A, US 3257358 A, JP S52-17880 B, JP S50-51197 A, and JP S63-152628 A.

40

--Modified polyphenylene ether--

[0023] The modified polyphenylene ether may be, but is not specifically limited to, a modified polyphenylene ether obtained through grafting or addition of a styrene polymer or derivative thereof to the polyphenylene ether described above. The percentage mass increase due to grafting or addition is not specifically limited, but relative to 100 mass% of the modified polyphenylene ether, is preferably 0.01 mass% or more, and is preferably 10 mass% or less, more preferably 7 mass% or less, and particularly preferably 5 mass% or less.

[0024] The method by which the modified polyphenylene ether is produced is not specifically limited and may, for example, be a method in which the polyphenylene ether described above and a styrene polymer or derivative thereof are caused to react in a molten state, solution state, or slurry state at 80°C to 350°C in the presence or absence of a radical precursor.

[0025] In a case in which the polyphenylene ether resin (I) used in the present embodiment is a mixture of a polyphenylene ether and a modified polyphenylene ether, the mixing ratio of the polyphenylene ether and the modified polyphenylene ether may be any ratio without any specific limitations.

55

-Polypropylene resin (II)-

[0026] The polypropylene resin (II) used in the present embodiment may be, but is not specifically limited to, a poly-

propylene, a modified polypropylene, or a mixture of both. Component (II) may be one type used individually, or two or more types used in combination.

[0027] From a viewpoint of inhibiting draw-down during burning and improving the balance of fluidity and mechanical strength of the resin composition, the weight average molecular weight (Mw) of component (II) is preferably 400,000 or more, more preferably 700,000 or more, and particularly preferably 750,000 or more, and is preferably 1,500,000 or less, and more preferably 1,300,000 or less.

[0028] The weight average molecular weight (Mw) can be determined by gel permeation chromatography (hereinafter, also referred to as "GPC") according to a conventional and commonly known method. Although no specific limitations are made, the mobile phase in the GPC may, for example, be o-dichlorobenzene and the standard material in the GPC may, for example, be polystyrene. More specifically, the weight average molecular weight (Mw) can be measured by a method described in the subsequent EXAMPLES section.

--Polypropylene--

[0029] The polypropylene may be, but is not specifically limited to, a homopolymer or copolymer having propylene as a repeating unit structure. A crystalline propylene homopolymer, a crystalline propylene-ethylene block copolymer, or a mixture of a crystalline propylene homopolymer and a crystalline propylene-ethylene block copolymer is preferable.

[0030] The crystalline propylene-ethylene block copolymer may be, but is not specifically limited to, a block copolymer having a crystalline propylene homopolymer portion and a propylene-ethylene random copolymer portion.

[0031] From a viewpoint of inhibiting draw-down during burning and improving the balance of fluidity and mechanical strength of the resin composition, the melt flow rate (hereinafter, also referred to as the "MFR") of the polypropylene is preferably 0.1 g/10 min or more, and more preferably 0.3 g/10 min or more, and is preferably 10 g/10 min or less, more preferably 6 g/10 min or less, and particularly preferably 3 g/10 min or less.

[0032] The MFR can be measured in accordance with ISO 1133 under conditions of a temperature of 230°C and a load of 2.16 kg. More specifically, the MFR can be measured by a method described in the subsequent EXAMPLES section.

[0033] The method by which the polypropylene is produced is not specifically limited and may be a commonly known method.

[0034] Specific examples of polypropylene production methods that can be used include a method in which propylene is polymerized at a temperature of 0°C to 100°C and a pressure of 3 atm to 100 atm in the presence of a polymerization catalyst composition containing an alkyl aluminum compound and a titanium trichloride catalyst or a halogenated titanium catalyst or the like supported on a support such as magnesium chloride.

[0035] In this method, a chain transfer agent such as hydrogen may be added to adjust the molecular weight of the polymer.

[0036] Moreover, besides the polymerization catalyst composition, an electron donor compound may be further contained in the polymerization system in this method as an internal donor component or an external donor component to increase isotacticity of the resultant polypropylene and polymerization activity of the polymerization system. The electron donor compound that is used is not specifically limited and may be a commonly known electron donor compound. Specific examples of electron donor compounds that can be used include ester compounds such as ϵ -caprolactone, methyl methacrylate, ethyl benzoate, and methyl toluate; phosphite esters such as triphenyl phosphite and tributyl phosphite; phosphoric acid derivatives such as hexamethylphosphoric triamide; alkoxy ester compounds; esters of aromatic monocarboxylic acids; aromatic alkylalkoxysilanes; aliphatic hydrocarbon alkoxysilanes; various ether compounds; various alcohols; and various phenols.

[0037] The polymerization process in the above method may be a batch process or a continuous process. Moreover, the polymerization method may, for example, be solution polymerization or slurry polymerization using a solvent such as butane, pentane, hexane, heptane, or octane, bulk polymerization in the monomer without a solvent, or gas-phase polymerization in a gaseous polymer.

[0038] Among polypropylene production methods, the method by which a crystalline propylene-ethylene block copolymer, in particular, is produced may be, but is not specifically limited to, a method including a first step of obtaining a crystalline propylene homopolymer portion and a second step of obtaining a propylene-ethylene copolymer portion bonded to the crystalline propylene homopolymer portion through copolymerization of the crystalline propylene homopolymer portion with ethylene and other α -olefins added as necessary. No specific limitations are placed on other α -olefins that may be used and examples thereof include propylene, 1-butene, and 1-hexene.

--Modified polypropylene--

[0039] The modified polypropylene may be, but is not specifically limited to, a modified polypropylene obtained through grafting or addition of an α , β -unsaturated carboxylic acid or a derivative thereof (for example, an acid anhydride or ester)

to the polypropylene described above. The percentage mass increase due to the grafting or addition is not specifically limited, but relative to 100 mass% of the modified polypropylene, is preferably 0.01 mass% or more, and is preferably 10 mass% or less, more preferably 7 mass% or less, and particularly preferably 5 mass% or less.

[0040] The method by which the modified polypropylene is produced is not specifically limited and may, for example, be a method in which the polypropylene described above and an α,β -unsaturated carboxylic acid or derivative thereof are caused to react in a molten state, solution state, or slurry state at 30°C to 350°C in the presence or absence of a radical precursor.

[0041] In a case in which the polypropylene resin (II) used in the present embodiment is a mixture of a polypropylene and a modified polypropylene, the mixing ratio of the polypropylene and the modified polypropylene may be any ratio without any specific limitations.

-Hydrogenated block copolymer (III)-

[0042] The hydrogenated block copolymer resin (III) used in the present embodiment may be, but is not specifically limited to, an unmodified hydrogenated block copolymer, a modified hydrogenated block copolymer, or a mixture of both. Component (III) may be one type used individually, or two or more types used in combination.

[0043] Component (III) acts as a mixing agent or impact resistance imparting agent for the components (I) and (II).

[0044] The hydrogenated block copolymer resin (III) is a product obtained through at least partial hydrogenation of a block copolymer including a polymer block A of mainly a vinyl aromatic compound and a polymer block B of mainly a conjugated diene compound. The total amount of 1,2-vinyl bonding and 3,4-vinyl bonding in the conjugated diene compound of the polymer block B (hereinafter, also referred to as the "total amount of vinyl bonding"; described further below) is 30% to 90%.

[0045] The following describes matter relating to the modified and unmodified hydrogenated block copolymers.

--Polymer block A of mainly vinyl aromatic compound---

[0046] The polymer block A of mainly a vinyl aromatic compound may be, but is not specifically limited to, a homopolymer block of a vinyl aromatic compound or a copolymer block of a vinyl aromatic compound and a conjugated diene compound.

[0047] Note that "mainly of a vinyl aromatic compound" in the case of the polymer block A means that the content of a vinyl aromatic compound portion in the polymer block A prior to hydrogenation is more than 50 mass%. This content is preferably 70 mass% or more, and more preferably 80 mass% or more, and may be 100 mass% or less.

[0048] Examples of the vinyl aromatic compound forming the polymer block A include, but are not specifically limited to, styrene, α -methylstyrene, vinyltoluene, p-tert-butylstyrene, and diphenylethylene. The vinyl aromatic compound is preferably styrene. One vinyl aromatic compound may be used individually, or two or more vinyl aromatic compounds may be used in combination.

[0049] From a viewpoint of improving heat creeping-resistance of the resin composition, the number average molecular weight (Mn) of the polymer block A is preferably 15,000 or more, more preferably 20,000 or more, and particularly preferably 25,000 or more, and is preferably 100,000 or less.

[0050] The number average molecular weight (Mn) can be determined by GPC (mobile phase: chloroform; standard material: polystyrene) according to a conventional and commonly known method. More specifically, the number average molecular weight (Mn) can be measured by a method described in the subsequent EXAMPLES section.

--Polymer block B of mainly conjugated diene compound---

[0051] The polymer block B of mainly a conjugated diene compound may be, but is not specifically limited to, a homopolymer block of a conjugated diene compound or a copolymer block of a conjugated diene compound and a vinyl aromatic compound.

[0052] Note that "mainly of a conjugated diene compound" in the case of the polymer block B means that the content of a conjugated diene compound portion of the polymer block B prior to hydrogenation is more than 50 mass%. From a viewpoint of increasing fluidity of the resin composition, this content is preferably 70 mass% or more, and more preferably 80 mass% or more, and may be 100 mass% or less.

[0053] Examples of the conjugated diene compound forming the polymer block B include, but are not specifically limited to, butadiene, isoprene, 1,3-pentadiene, and 2,3-dimethyl-1,3-butadiene. The conjugated diene compound is preferably butadiene, isoprene, or a combination thereof, and is more preferably butadiene. One conjugated diene compound may be used individually, or two or more conjugated diene compounds may be used in combination.

[0054] From a viewpoint of increasing compatibility of the polymer block B with component (II), the total amount of 1,2-vinyl bonding and 3,4-vinyl bonding in the microstructure (conjugated diene compound bonding mode) of the polymer block B is 30% or more, preferably 45% or more, and more preferably 65% or more, and is 90% or less.

[0055] The total amount of 1,2-vinyl bonding and 3,4-vinyl bonding (total amount of vinyl bonding) refers to the total amount of 1,2-vinyl bonding and 3,4-vinyl bonding in the polymer block B prior to hydrogenation as a proportion relative to the total amount of 1,2-vinyl bonding, 3,4-vinyl bonding, and 1,4-conjugated bonding. The total amount of vinyl bonding can be determined through measurement using an infrared spectrophotometer and calculation in accordance with the method described in Analytical Chemistry, Volume 21, No. 8, August 1949.

[0056] The method by which the block copolymer including the polymer block A and the polymer block B is synthesized is not specifically limited and may, for example, be a commonly known method such as anionic polymerization.

[0057] The block structure of the block copolymer of the modified and unmodified hydrogenated block copolymers is not specifically limited. For example, a structure such as A-B, A-B-A, B-A-B-A, (A-B)₄M, or A-B-A-B-A, where "A" represents polymer block A and "B" represents polymer block B, may be used as component (III). Note that (A-B)₄M is a reaction residue of a polyfunctional coupling agent such as silicon tetrachloride (M = Si) or tin tetrachloride (M = Sn), a residue of an initiator such as a polyfunctional organolithium compound, or the like.

[0058] The molecular structure of the block copolymer of the modified and unmodified hydrogenated block copolymers is not specifically limited and may, for example, be a linear structure, a branched structure, a radial structure, or a combination of these structures.

[0059] Moreover, the distribution of the vinyl aromatic compound in the molecular chain of the polymer block A included in the block copolymer and the distribution of the conjugated diene compound in the molecular chain of the polymer block B included in the block copolymer are not specifically limited and may, for example, be a random distribution, a tapered distribution (i.e., a distribution in which monomer portions increase or decrease along the molecular chain), a partial block-shaped distribution, or a combination of these distributions.

[0060] In a case in which the block copolymer includes a plurality of polymer blocks A or polymer blocks B, these polymer blocks A or polymer blocks B may each have the same structure or may have different structures.

[0061] With regards to the overall block copolymer including the polymer block A and the polymer block B, from a viewpoint of improving fluidity, impact resistance, and external appearance of the hydrogenated block copolymer (III) and reducing weld formation, the vinyl aromatic compound content in the block copolymer prior to hydrogenation is preferably 20 mass% or more, and more preferably 30 mass% or more, and is preferably 95 mass% or less, and more preferably 80 mass% or less.

[0062] The content of the vinyl aromatic compound can be measured using an ultraviolet spectrophotometer.

[0063] The number average molecular weight (M_n) of the block copolymer prior to hydrogenation is preferably 5,000 or more, more preferably 10,000 or more, and particularly preferably 30,000 or more, and is preferably 1,000,000 or less, more preferably 800,000 or less, and particularly preferably 500,000 or less.

[0064] The number average molecular weight can be measured by GPC (mobile phase: chloroform; standard material: polystyrene) according to a conventional and commonly known method.

[0065] The molecular weight distribution (M_w/M_n) of the block copolymer prior to hydrogenation is preferably 10 or less, more preferably 8 or less, and particularly preferably 5 or less.

[0066] The molecular weight distribution (M_w/M_n) can be calculated by determining the weight average molecular weight (M_w) by GPC (mobile phase: chloroform; standard material: polystyrene) according to a conventional and commonly known method, and then dividing the weight average molecular weight (M_w) by the number average molecular weight (M_n).

[0067] The method by which the block copolymer is hydrogenated is not specifically limited and may, for example, be a method in which hydrogenation is performed under conditions of a reaction temperature of 0 °C to 200°C and a hydrogen pressure of 0.1 MPa to 15 MPa using (1) a supported heterogeneous hydrogenation catalyst of a metal such as Ni, Pt, Pd, or Ru supported on carbon, silica, alumina, diatomaceous earth, or the like, (2) a Ziegler-type hydrogenation catalyst in which a transition metal salt such as an organic acid salt or acetylacetone salt of Ni, Co, Fe, Cr, or the like and a reducing agent such as an organoaluminum reducing agent are used, or (3) a homogeneous hydrogenation catalyst in which an organometallic compound of Ti, Ru, Rh, Zr, or the like, referred to as an organometallic complex, is used.

[0068] The hydrogenation rate of the conjugated diene compound portion of the polymer block B in the modified and unmodified hydrogenated block copolymers is not specifically limited, but from a viewpoint of increasing heat resistance of the resin composition, is preferably 50% or more, more preferably 80% or more, and particularly preferably 90% or more relative to the total number of double bonds originating from the conjugated diene compound.

[0069] The hydrogenation rate can be measured using a nuclear magnetic resonance (NMR) spectrometer.

[0070] The method by which the modified and unmodified hydrogenated block copolymers are produced is not specifically limited and may be a commonly known method. Specific examples of commonly known production methods that can be used include those described in JP S47-11486 A, JP S49-66743 A, JP S50-75651 A, JP S54-126255 A, JP S56-10542 A, JP S56-62847 A, JP S56-100840 A, JP H02-300218 A, GB 1130770 A, US 3281383 A, US 3639517 A, GB 1020720 A, US 3333024 A, and US 4501857 A.

[0071] The following describes matter relating particularly to the modified hydrogenated block copolymer.

(Modified hydrogenated block copolymer)

[0072] The modified hydrogenated block copolymer is a product obtained through grafting or addition of an α,β -unsaturated carboxylic acid or a derivative thereof (for example, an acid anhydride or an ester) to the unmodified hydrogenated block copolymer described above.


[0073] The percentage mass increase due to the grafting or addition is not specifically limited, but relative to 100 mass% of the unmodified hydrogenated block copolymer, is preferably 0.01 mass% or more, and is preferably 10 mass% or less, more preferably 7 mass% or less, and particularly preferably 5 mass% or less.

[0074] The method by which the modified hydrogenated block copolymer is produced is not specifically limited and may, for example, be a method in which the unmodified hydrogenated block copolymer and an α,β -unsaturated carboxylic acid or derivative thereof are caused to react in a molten state, solution state, or slurry state at 80°C to 350°C in the presence or absence of a radical precursor.

-Phosphate ester compound (IV)-

[0075] The phosphate ester compound (IV) that may optionally be used in the present embodiment is not specifically limited and any phosphate ester compound (phosphate ester compound, condensed phosphate ester compound, or the like) that has an effect of improving resin composition flame retardance can be used. Examples include triphenyl phosphate, phenyl bisdodecyl phosphate, phenyl bisneopentyl phosphate, phenyl-bis(3,5,5'-trimethyl-hexyl phosphate), ethyl diphenyl phosphate, 2-ethyl-hexyl di(p-tolyl)phosphate, bis(2-ethylhexyl)-p-tolyl phosphate, tritoly phosphate, bis(2-ethylhexyl)phenyl phosphate, tri(nonylphenyl)phosphate, di(dodecyl)-p-tolyl phosphate, tricresyl phosphate, dibutylphenyl phosphate, 2-chloro-ethyl diphenyl phosphate, p-tolyl bis(2,5,5'-trimethylhexyl)phosphate, 2-ethylhexyl diphenyl phosphate, bisphenol A bis(diphenyl phosphate), diphenyl-(3-hydroxyphenyl)phosphate, bisphenol A bis(dicresyl phosphate), resorcinol bis(diphenyl phosphate), resorcinol bis(dixylenyl phosphate), 2-naphthyl diphenyl phosphate, 1-naphthyl diphenyl phosphate, and di(2-naphthyl)phenyl phosphate.

[0076] In particular, it is preferable that the phosphate ester compound (IV) has, as a main component, at least one selected from the group consisting of aromatic condensed phosphate ester compounds represented by the following formula (4)

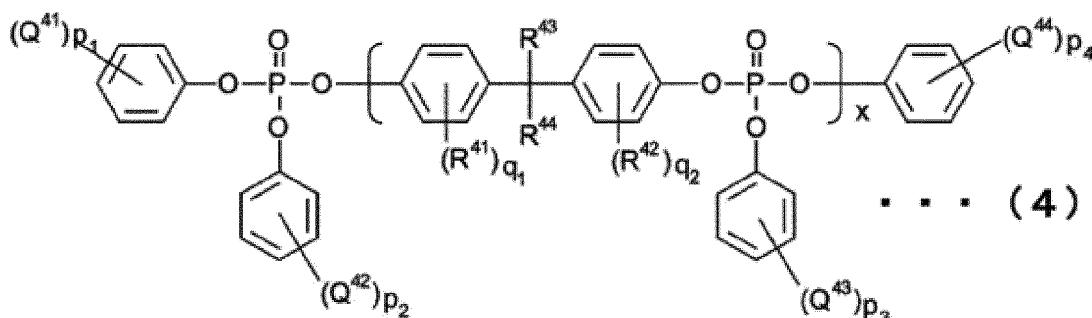

[in formula (5), Q⁵¹, Q⁵², Q⁵³, and Q⁵⁴ are each, independently of one another, an alkyl group having a carbon number of 1 to 6; R⁵¹ is a methyl group; y is an integer of 0 or more; r₁, r₂, r₃, and r₄ are each an integer of 0 to 3; and s₁ is an integer of 0 to 2].


[0077] Note that the condensed phosphate ester compounds represented by formula (4) and formula (5) may each include a plurality of types of molecules, and n is preferably an integer of 1 to 3 for each of the molecules.

[0078] In a suitable phosphate ester compound (IV) having at least one selected from the group consisting of condensed phosphate ester compounds represented by formula (4) and formula (5) as a main component, overall, the average value of n is preferably 1 or more. This suitable phosphate ester compound (IV) can normally be acquired as a mixture containing 90% or more of compounds for which n is 1 to 3, and besides the compounds for which n is 1 to 3, also containing polymeric products for which n is 4 or more and other by-products.

-Phosphinate salt (V)-


[0079] The phosphinate salt (V) that is used in the present embodiment may, for example, be at least one selected from the group consisting of:

a phosphinate salt represented by the following formula (1)

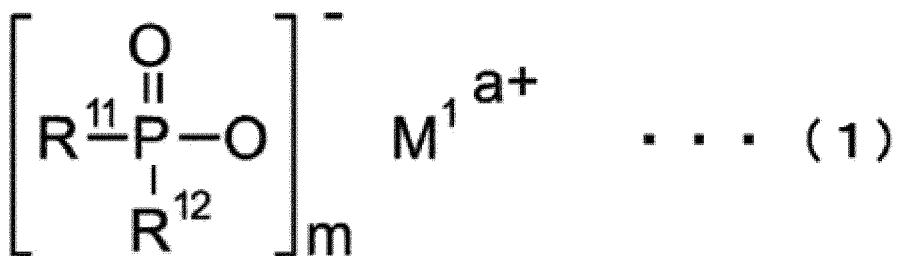

[in formula (1), R¹¹ and R¹² are each, independently of one another, a linear or branched alkyl group having a carbon number of 1 to 6 and/or an aryl group having a carbon number of 6 to 10; M¹ is at least one selected from the group consisting of a calcium ion, a magnesium ion, an aluminum ion, a zinc ion, a bismuth ion, a manganese ion, a sodium ion, a potassium ion, and a protonated nitrogenous base; a is an integer of 1 to 3; m is an integer of 1 to 3; and a = m]; and

a diphosphinate salt represented by the following formula (2)

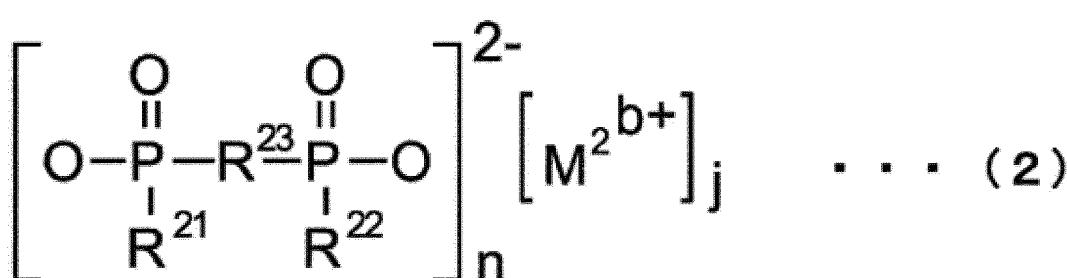

[in formula (2), R²¹ and R²² are each, independently of one another, a linear or branched alkyl group having a carbon number of 1 to 6 and/or an aryl group having a carbon number of 6 to 10; R²³ is a linear or branched alkylene group having a carbon number of 1 to 10, an arylene group having a carbon number of 6 to 10, an alkylarylene group having a carbon number of 6 to 10, or an arylalkylene group having a carbon number of 6 to 10; M² is at least one selected from the group consisting of a calcium ion, a magnesium ion, an aluminum ion, a zinc ion, a bismuth ion, a manganese ion, a sodium ion, a potassium ion, and a protonated nitrogenous base; b is an integer of 1 to 3; n is an integer of 1 to 3; j is an integer of 1 or 2; and b·j = 2n].

[0080] Moreover, the phosphinate salt (V) may be a mixture of a phosphinate salt represented by formula (1) and a diphosphinate salt represented by formula (2).

[0081] Examples of such phosphinate salts (V) include, but are not specifically limited to, calcium dimethylphosphinate, magnesium dimethylphosphinate, aluminum dimethylphosphinate, zinc dimethylphosphinate, calcium ethylmethylphosphinate, magnesium ethylmethylphosphinate, aluminum ethylmethylphosphinate, zinc ethylmethylphosphinate, calcium

diethylphosphinate, magnesium diethylphosphinate, aluminum diethylphosphinate, zinc diethylphosphinate, calcium methyl-n-propylphosphinate, magnesium methyl-n-propylphosphinate, aluminum methyl-n-propylphosphinate, zinc methyl-n-propylphosphinate, calcium methane di(methylphosphinate), magnesium methane di(methylphosphinate), aluminum methane di(methylphosphinate), zinc methane di(methylphosphinate), calcium benzene-1,4-(dimethylphosphinate), magnesium benzene-1,4-(dimethylphosphinate), aluminum benzene-1,4-(dimethylphosphinate), zinc benzene-1,4-(dimethylphosphinate), calcium methylphenylphosphinate, magnesium methylphenylphosphinate, aluminum methylphenylphosphinate, zinc methylphenylphosphinate, calcium diphenylphosphinate, magnesium diphenylphosphinate, aluminum diphenylphosphinate, and zinc diphenylphosphinate. The phosphinate salt (V) is preferably calcium dimethylphosphinate, aluminum dimethylphosphinate, zinc dimethylphosphinate, calcium ethylmethylphosphinate, aluminum ethylmethylphosphinate, zinc ethylmethylphosphinate, calcium diethylphosphinate, aluminum diethylphosphinate, or zinc diethylphosphinate, and more preferably aluminum diethylphosphinate.

[0082] Examples of commercially available products that can be used as the phosphinate salt (V) include, but are not specifically limited to, Exolit® (Exolit is a registered trademark in Japan, other countries, or both) OP1230, OP1240, OP1311, OP1312, OP930, and OP935 produced by Clariant (Japan) K.K.

-Thermoplastic resin (VI) other than components (I) and (II)-

[0083] Examples of thermoplastic resins (VI) other than components (I) and (II) that may optionally be used in the present embodiment include, but are not specifically limited to, polystyrene, syndiotactic polystyrene, and high impact polystyrene.

-Additive (VII) other than components (I) to (VI)-

[0084] Examples of additives (VII) other than components (I) to (VI) that may optionally be used in the present embodiment include, but are not specifically limited to, vinyl aromatic compound-conjugated diene compound block copolymers, olefin elastomers, antioxidants, metal deactivators, heat stabilizers, flame retardants other than components (IV) and (V) (for example, ammonium polyphosphate compounds, magnesium hydroxide, aromatic halogen-containing flame retardants, silicone flame retardants, and zinc borate), fluorine-containing polymers, plasticizers (for example, low molecular weight polyethylene, epoxidized soybean oil, polyethylene glycol, and esters of fatty acids), flame retardant synergists such as antimony trioxide, weather (light) resistance modifiers, nucleating agents for polyolefins, slip agents, organic or inorganic fillers or reinforcers other than component (IV) (for example, carbon black, titanium oxide, calcium carbonate, mica, kaolin, glass fiber, glass flake, and conductive carbon black), various colorants, and mold release agents.

[0085] The following describes the proportions of components in the resin composition of the present embodiment.

[0086] From a viewpoint of increasing flame retardance, chemical resistance, and shaping fluidity of the resin composition, the content of component (I) in the resin composition of the present embodiment, relative to 100 parts by mass, in total, of components (I) and (II), is 40 parts by mass or more, preferably 50 parts by mass or more, and more preferably 65 parts by mass or more, and is 99 parts by mass or less, preferably 80 parts by mass or less, and more preferably 75 parts by mass or less.

[0087] Moreover, from a viewpoint of increasing flame retardance, chemical resistance, and shaping fluidity of the resin composition, the content of component (II) in the resin composition of the present embodiment, relative to 100 parts by mass, in total, of components (I) and (II), is 1 part by mass or more, preferably 20 parts by mass or more, and more preferably 25 parts by mass or more, and is 60 parts by mass or less, preferably 50 parts by mass or less, and more preferably 35 parts by mass or less.

[0088] Furthermore, from a viewpoint of increasing flame retardance, chemical resistance, and shaping fluidity of the resin composition, the content of component (III) in the resin composition of the present embodiment, relative to 100 parts by mass, in total, of components (I) and (II), is 1 part by mass or more, preferably 2 parts by mass or more, more preferably 3 parts by mass or more, and particularly preferably 5 parts by mass or more, and from a viewpoint of preventing detachment from a shaped piece, is 20 parts by mass or less, and preferably 15 parts by mass or less.

[0089] Also, from a viewpoint of increasing flame retardance, chemical resistance, and shaping fluidity of the resin composition in a good balance, the content of component (IV) in the resin composition of the present embodiment is 5 parts by mass or more, and preferably 10 parts by mass or more, and is 45 parts by mass or less, and preferably 30 parts by mass or less.

[0090] Moreover, from a viewpoint of increasing flame retardance of the resin composition, the content of component (V) in the resin composition of the present embodiment is preferably 3 parts by mass or more, and more preferably 4 parts by mass or more, and is preferably 15 parts by mass or less, and more preferably 12 parts by mass or less.

[0091] Furthermore, the content of component (VI) in the resin composition of the present embodiment is not specifically limited so long as the effects disclosed herein are not lost and may, for example, be 0 parts by mass to 400 parts by mass.

[0092] In the resin composition of the present embodiment, a ratio $(IV)_{(I)}/(IV)_{(II)}$ of content $(IV)_{(I)}$ of the phosphate ester

compound (IV) present in a fraction that dissolves in chloroform relative to content (IV)_(II) of the phosphate ester compound (IV) present in a fraction that dissolves in o-dichlorobenzene is 10 or more from a viewpoint of improving smoke generation properties and chemical resistance of the resin composition. This ratio (IV)_(I)/(IV)_(II) is preferably 15 or more, and more preferably 20 or more, and is preferably 250 or less, more preferably 199 or less, even more preferably 99 or less, and particularly preferably 50 or less.

[0093] More specifically, (IV)_(I) and (IV)_(II) can be calculated by the following procedure.

[0094] First, the resin composition of the present embodiment is dissolved in chloroform to obtain a chloroform fraction. The polyphenylene ether resin (I), the hydrogenated block copolymer (III), and the like dissolve in the chloroform, but almost none of the polypropylene resin (II) dissolves. Next, a residue fraction that remains without dissolving in the chloroform is dissolved in o-dichlorobenzene to obtain an o-dichlorobenzene fraction. The polypropylene resin (II) and the like that do not dissolve in the chloroform dissolve in the o-dichlorobenzene. Thereafter, methanol is used to perform reprecipitation with respect to the o-dichlorobenzene solution. In this reprecipitation, it is mainly resin components such as the polypropylene resin (II) that reprecipitate and not non-resin components. The content (IV)_(I) of the phosphate ester compound (IV) present in the chloroform fraction and the content (IV)_(II) of the phosphate ester compound (IV) present in the reprecipitated product are calculated by measuring the absolute mass of the phosphate ester compound (IV) contained in the chloroform fraction and reprecipitated product obtained in this manner (for example, measurement of the concentration of a phosphorus component contained in the chloroform fraction and the reprecipitated product by inductively coupled plasma mass spectrometry (ICP-MS)).

[0095] Examples of techniques by which the partition ratio of (IV)_(I) and (IV)_(II) can be controlled include a technique in which, in production of the resin composition described further below, the polypropylene resin (II) is fed into an extruder in a partitioned manner from a plurality of raw material feeding inlets, a technique in which a temperature profile of a kneading machine in melt-kneading is adjusted, a technique in which the timing of addition of component (IV) is adjusted, and a method in which the positioning of kneading discs in barrel screw configuration is optimized.

(Morphology of resin composition)

[0096] From a viewpoint of expression of chemical resistance, the morphology in the resin composition of the present embodiment is preferably a morphology in which a polyphenylene ether resin (I) phase and a polypropylene resin (II) phase are co-continuous or a morphology in which a polypropylene resin (II) phase forms a matrix, and is more preferably a morphology in which a polypropylene resin (II) phase forms a matrix. The polyphenylene ether resin (I) phase is a phase that contains the polyphenylene ether resin (I) and may be composed of the polyphenylene ether resin (I). The polypropylene resin (II) phase is a phase that contains the polypropylene resin (II) and may be composed of the polypropylene resin (II).

[0097] Methods by which the morphology may be controlled to obtain a morphology such as described above include a method in which the compounding ratio of the polyphenylene ether resin (I), the polypropylene resin (II), and the phosphate ester compound (IV) is adjusted and in which the polypropylene resin (II) is fed into an extruder in a partitioned manner from a plurality of raw material feeding inlets.

[0098] Note that the morphology of the resin composition can be observed using a transmission electron microscope (TEM) or the like.

(Production method of resin composition)

[0099] The resin composition of the present embodiment can be produced by melt-kneading the components (I) to (IV) set forth above, and also the components (V) to (VII) as necessary.

[0100] No specific limitations are placed on the production method of the resin composition of the present embodiment so long as the components (I) to (IV), and also the components (V) to (VII) as necessary, can be melt-kneaded.

[0101] One suitable production method for the resin composition of the present embodiment includes a step (1-1) of melt-kneading all of component (I) and all or some of components (II) and (III) to obtain a kneaded product, a step (1-2) of adding the remainder of components (II) and (III) to the kneaded product obtained in step (1-1) (excluding a case in which all of components (II) and (III) are added in step (1-1)) and performing further melt-kneading to obtain a kneaded product, and a step (1-3) of adding all of component (IV) to the kneaded product obtained in step (1-2) and performing further melt-kneading.

[0102] A suitable production method for the resin composition of the present embodiment may be a method in which melt-kneading is performed over multiple stages. These multiple stages are not specifically limited other than being two or more stages.

[0103] This method in the present embodiment may, for example, include a step in which all of component (I), some of component (II), all of component (III), and all of component (IV) are melt-kneaded in a first stage to obtain pellets, and a step in which the pellets obtained in the first stage, the remainder of component (II), and, as necessary, components

(I) to (VII) are added and further melt-kneaded in a second stage. In such a case, all of component (II) may alternatively be added in the second stage.

[0104] Moreover, another suitable production method for the resin composition of the present embodiment is a masterbatch method in which a resin composition (masterbatch) containing specific components in a high concentration is prepared in advance, and the masterbatch is subsequently diluted to obtain a resin composition containing each component in a desired concentration.

[0105] This method in the present embodiment may, for example, include a step in which all of component (I), some of component (II), all of component (III), and all of component (IV) are melt-kneaded in a first stage to obtain masterbatch pellets containing component (IV) in a higher concentration than in the final composition, and a step in which the masterbatch pellets, the remainder of component (II), and, as necessary, components (V) to (VII) are added and further melt-kneaded in a second stage to obtain the final composition. In this case, all of component (II) may alternatively be added in the second stage.

[0106] Examples of melt-kneading machines that can suitably be used to perform melt-kneading of the components in a production method such as set forth above include, but are not specifically limited to, heated melt-kneading machines such as an extruder (for example, a single screw extruder or a multiscrew extruder such as a twin screw extruder), a roller, a kneader, a Brabender Plastograph, and a Banbury mixer. In particular, a twin screw extruder is preferable from a viewpoint of kneading performance. Specific examples of twin screw extruders that can be used include the ZSK series produced by Coperion Inc., the TEM series produced by Toshiba Machine Co., Ltd., and the TEX series produced by The Japan Steel Works, Ltd.

[0107] The following describes a preferred embodiment of a case in which an extruder such as a single screw extruder, twin screw extruder, or other multiscrew extruder is used.

[0108] The type, specifications, and so forth of the extruder are not specifically limited and may be commonly known examples thereof.

[0109] L/D of the extruder (barrel effective length/barrel internal diameter) is preferably 20 or more, and more preferably 30 or more, and is preferably 75 or less, and more preferably 60 or less.

[0110] The extruder preferably has a configuration including different raw material feeding inlets at two or more locations, vacuum vents at two or more locations, and liquid addition pumps (described further below) at one or more locations. In terms of positioning of the equipment described above, from a viewpoint of density of generated smoke and expression of chemical resistance, it is more preferable that, in the direction of raw material flow, a first raw material feeding inlet is located at an upstream side, a first vacuum vent is located further downstream than the first raw material feeding inlet, a second raw material feeding inlet is located further downstream than the first vacuum vent, a liquid addition pump is located further downstream than the second raw material feeding inlet, and a second vacuum vent is located further downstream than the liquid addition pump.

[0111] The method by which a raw material is fed at the second raw material feeding inlet is not specifically limited and may be a method in which the raw material is simply added from an opening in an upper part of the raw material feeding inlet or a method in which the raw material is added from a side opening using a forced side feeder. In particular, a method in which the raw material is added from a side opening using a forced side feeder is preferable from a viewpoint of stable feeding.

[0112] The melt-kneading temperature in melt-kneading of the components may normally be 270°C to 320°C.

[0113] In particular, it is preferable that the temperature between the first raw material feeding inlet and the second raw material feeding inlet is set as at least 300°C and not higher than 320°C from a viewpoint of expression of smoke generation properties and chemical resistance of the resin composition.

[0114] Moreover, from a viewpoint of expression of smoke generation properties and chemical resistance of the resin composition, it is preferable that the set temperature for between the first raw material feeding inlet and the second raw material feeding inlet and the set temperature for a section further downstream than the second raw material feeding inlet differ from one another. Specifically, it is preferable that the set temperature for between the first raw material feeding inlet and the second raw material feeding inlet is at least 300°C and not higher than 320°C, and that the set temperature for the section further downstream than the second raw material feeding inlet is at least 270°C and lower than 300°C.

[0115] The configuration of a screw included in a barrel is not specifically limited and may be a configuration in which right-handed, left-handed, orthogonal (N-type), and back-conveying (L-type) kneading disc elements are provided as appropriate. In particular, a configuration in which at least one orthogonal (N-type) kneading disc element and at least one back-conveying (L-type) kneading disc element are provided between the first raw material feeding inlet and the second raw material feeding inlet, and in which at least one orthogonal (N-type) kneading disc element is provided between the liquid addition pump and the vacuum vent located further downstream than the liquid addition pump is preferable since this configuration enables control of the dispersion state of the phosphate ester compound (IV) to within a specific range.

[0116] Although no specific limitations are placed on the screw rotation speed, the screw rotation speed may normally

be 100 rpm to 1,200 rpm, and is preferably 200 rpm to 700 rpm from a viewpoint of smoke generation properties and expression of chemical resistance.

[0117] In a case in which a liquid raw material is to be added, the liquid raw material can be added by using a liquid addition pump or the like in a cylinder section of the extruder to directly feed the liquid raw material into the cylinder. The liquid addition pump may be, but is not specifically limited to, a gear pump, a flange pump, or the like, and is preferably a gear pump. In this case, from a viewpoint of reducing the load on the liquid addition pump and improving raw material operability, it is preferable to lower the viscosity of the liquid raw material by using a heater or the like to heat a tank in which the liquid raw material is stored or a section that forms a flow path of the liquid raw material, such as piping between the tank and the liquid addition pump and piping between the pump and the extruder cylinder.

[0118] In terms of the addition position of the phosphate ester compound (IV), a ratio L1/L of the length L1 from the first raw material feeding inlet to the addition position of the phosphate ester compound relative to the total barrel effective length L is preferably 0.2 to 0.75 since this enables control of the dispersion state of the phosphate ester compound (IV) to within a specific range. The value of L1/L is more preferably 0.25 to 0.7, and even more preferably 0.3 to 0.6.

(Shaped product)

[0119] A shaped product of the present embodiment is formed from the resin composition of the present embodiment set forth above.

[0120] The shaped product of the resin composition of the present embodiment is not specifically limited and examples thereof include automotive components, interior and exterior components of electrical devices, other components, and so forth. Examples of automotive components include, but are not specifically limited to, exterior components such as bumpers, fenders, door panels, various moldings, emblems, engine hoods, wheel caps, roofs, spoilers, and various aero parts; interior components such as instrument panels, console boxes, and trims; battery case components for secondary batteries installed in vehicles, electric vehicles, hybrid electric vehicles, and the like; and lithium ion secondary battery components. Examples of interior and exterior components of electrical devices include, but are not specifically limited to, components used in various computers and peripheral equipment thereof, other office automation equipment, televisions, video recorders, cabinets for various disc players, chassis, refrigerators, air conditioners, and LCD projectors. Examples of other components include wires and cables obtained by applying a coating on a metal conductor or optical fiber, fuel cases for solid methanol batteries, water pipes for fuel cells, water cooling tanks, boiler exterior cases, ink peripheral components and parts for inkjet printers, furniture (chairs, etc.), chassis, water piping, and joints.

(Production method of shaped product)

[0121] The shaped product of the present embodiment can be produced through shaping of the resin composition of the present embodiment set forth above.

[0122] The production method of the shaped product of the present embodiment may be, but is not specifically limited to, injection molding, extrusion molding, profile extrusion molding, blow molding, compression molding, or the like, and is preferably injection molding from a viewpoint of more effectively obtaining the effects disclosed herein.

EXAMPLES

[0123] The following describes embodiments of this disclosure based on examples, but this disclosure is not limited to these examples.

[0124] Raw materials used for resin compositions and shaped products in the examples and comparative examples were as follows.

-Polyphenylene ether resin (I)-

[0125]

(I-i): Polyphenylene ether obtained through oxidative polymerization of 2,6-xylenol and having a reduced viscosity (η_{sp}/c : 0.5 g/dL chloroform solution) of 0.33

(I-ii): Polyphenylene ether obtained through oxidative polymerization of 2,6-xylenol and having a reduced viscosity (η_{sp}/c : 0.5 g/dL chloroform solution) of 0.42

[0126] Note that the reduced viscosity was measured as η_{sp}/c of a 0.5 g/dL chloroform solution at a temperature of 30°C.

-Polypropylene resin (II)-

[0127]

5 (II-i): Polypropylene homopolymer having an MFR of 0.4 g/10 min
 (II-ii): Polypropylene homopolymer having an MFR of 5.9 g/10 min
 (II-iii): Polypropylene homopolymer having an MFR of 15 g/10 min

10 **[0128]** Note that the MFR was measured in accordance with ISO 1133 under conditions of a temperature of 230°C and a load of 2.16 kg.

-Hydrogenated block copolymer (III)-

[0129]

15 (III): Polymer synthesized as described below

20 **[0130]** A block copolymer having a B-A-B-A block structure in which the polymer blocks A were formed from polystyrene and the polymer blocks B were formed from polybutadiene was synthesized by a commonly known method. The synthesized block copolymer was hydrogenated by a commonly known method. Polymer modification was not performed. The physical properties of the unmodified hydrogenated block copolymer that was obtained were as follows.

(III-i): B-A-B-A type

25 Polystyrene content in block copolymer prior to hydrogenation: 44%
 Number average molecular weight (Mn) of block copolymer prior to hydrogenation: 95,000
 Number average molecular weight (Mn) of polystyrene blocks: 41,800
 Number average molecular weight (Mn) of polybutadiene blocks: 53,200
 Molecular weight distribution (Mw/Mn) of block copolymer prior to hydrogenation: 1.06
 Total amount of vinyl bonding (amount of 1,2-vinyl bonding) in polybutadiene blocks prior to hydrogenation: 75%
 30 Hydrogenation rate of polybutadiene portion of polybutadiene blocks: 99.9%

35 **[0131]** The vinyl aromatic compound content was measured using an ultraviolet spectrophotometer. The number average molecular weight (Mn) was determined by GPC (mobile phase: chloroform; standard material: polystyrene) according to a conventional and commonly known method. The molecular weight distribution (Mw/Mn) was calculated by determining the weight average molecular weight (Mw) by GPC (mobile phase: chloroform; standard material: polystyrene) according to a conventional and commonly known method, and then dividing the weight average molecular weight (Mw) by the number average molecular weight (Mn). The total amount of vinyl bonding was determined through measurement using an infrared spectrophotometer and calculation in accordance with the method described in Analytical Chemistry, Volume 21, No. 8, August 1949. The hydrogenation rate was measured using a nuclear magnetic resonance (NMR) spectrometer.

-Phosphate ester compound (IV)-

[0132]

45 (IV): E890 (condensed phosphate ester compound) produced by Daihachi Chemical Industry Co., Ltd.

-Phosphinate salt (V)-

[0133]

(V): Exolit OP1230 (corresponding to formula (1)) produced by Clariant (Japan) K.K.

[0134] The following raw material was used particularly in resin compositions of the comparative examples.

55 (III-x): A-B-A type
 Polystyrene content in block copolymer prior to hydrogenation: 65%
 Number average molecular weight (Mn) of block copolymer prior to hydrogenation: 53,000

Number average molecular weight (Mn) of polystyrene blocks: 34,800
 Number average molecular weight (Mn) of polybutadiene blocks: 18,700
 Molecular weight distribution (Mw/Mn) of block copolymer prior to hydrogenation: 1.23
 Total amount of vinyl bonding (amount of 1,2-vinyl bonding) in polybutadiene blocks prior to hydrogenation: 9%
 5 Hydrogenation rate of polybutadiene portion of polybutadiene blocks: 99.9%

[0135] Physical property measurement methods (1) to (4) in the examples and comparative examples were as follows.

10 (1) Calculation of ratio $(IV)_{(I)}/(IV)_{(II)}$

[0136] A resin composition produced as described below was sampled into a filter paper thimble in an amount of 2 g and Soxhlet extraction was performed for 8 hours at 65°C to 75°C using 120 mL of chloroform to separate a residue fraction (A) on the filter paper thimble and a chloroform-soluble fraction (B). The chloroform-soluble fraction (B) was taken to be a fraction of the resin composition that dissolves in chloroform.

[0137] With respect to the residue fraction (A) on the filter paper thimble, 50 mL of 150°C o-dichlorobenzene was added and high-temperature centrifugal separation (150°C, twice for 30 minutes at 12,000 rpm) was performed to separate a residue fraction (C) and an o-dichlorobenzene-soluble fraction (D). The o-dichlorobenzene-soluble fraction (D) was further subjected to reprecipitation through addition of methanol to separate a methanol-insoluble fraction (E) and a methanol-soluble fraction (F). The finally obtained methanol-insoluble fraction (E) was taken to be a fraction of the resin composition that dissolves in o-dichlorobenzene.

[0138] The concentration of a phosphorus component extracted in the chloroform-soluble fraction (B) and the methanol-insoluble fraction (E) obtained through this operation was measured by inductively coupled plasma mass spectrometry (ICP-MS). The measured phosphorus component concentration was used to calculate the absolute mass of component (IV) present in the soluble fraction (B) and the absolute mass of component (IV) present in the insoluble fraction (E).

[0139] Since polyphenylene ether dissolves in chloroform and polypropylene dissolves in o-dichlorobenzene but does not dissolve in chloroform, $(IV)_{(I)}$ indirectly indicates the content of phosphate ester in polyphenylene ether and $(IV)_{(II)}$ indirectly indicates the content of phosphate ester in polypropylene.

25 These calculated absolute masses were taken to be the content $(IV)_{(I)}$ of component (IV) present in a fraction of the resin composition that dissolves in chloroform and the content $(IV)_{(II)}$ of component (IV) present in a fraction of the resin composition that dissolves in o-dichlorobenzene. Moreover, the ratio $(IV)_{(I)}/(IV)_{(II)}$ of $(IV)_{(I)}$ relative to $(IV)_{(II)}$ was calculated.

[0140] Since polyphenylene ether dissolves in chloroform and polypropylene dissolves in o-dichlorobenzene but does not dissolve in chloroform, $(IV)_{(I)}$ indirectly indicates the content of phosphate ester in polyphenylene ether and $(IV)_{(II)}$ indirectly indicates the content of phosphate ester in polypropylene.

30 (2) Smoke generation properties

[0140] The generated-smoke density of obtained resin composition pellets was measured in accordance with ASTM D662 (flaming mode), and the amount of smoke generation (Ds) was measured. In terms of evaluation criteria, a lower measured value was judged to indicate better smoke generation properties.

35 (3) Electrolysis solution-resistance

[0141] A solution (electrolysis solution) prepared by dissolving lithium hexafluorophosphate in a mixed solution of 1:1:1 ethylene carbonate:propylene carbonate:diethylene carbonate such as to have a concentration of 1 mol/L was used as an immersion test solution.

[0142] Obtained resin pellets were fed into a small-size injection molding machine (product name: IS-100GN; produced by Toshiba Machine Co., Ltd.) set to a cylinder temperature of 250°C and were molded under conditions of a mold temperature of 70°C, an injection pressure of 70 MPa, an injection time of 20 seconds, and a cooling time of 15 seconds to prepare an ISO dumbbell-shaped specimen for evaluation.

[0143] The prepared dumbbell-shaped specimen was immersed in the immersion test solution for 300 hours at 60°C and was subsequently removed from the immersion test solution. The tensile strength of the dumbbell-shaped specimen after immersion was measured in accordance with ISO 527-1. The tensile strength of the dumbbell-shaped specimen after immersion as a proportion relative to the tensile strength of a dumbbell-shaped specimen that had not been treated in the immersion test solution was calculated as a tensile strength retention rate (indicated in % in the subsequently described Tables 1 and 2). In terms of evaluation criteria, a higher measured value was judged to indicate a better tensile strength retention rate and chemical resistance.

45 (4) Chemical resistance

[0144] Obtained resin pellets were fed into a small-size injection molding machine (product name: IS-100GN; produced by Toshiba Machine Co., Ltd.) set to a cylinder temperature of 270°C and were molded under conditions of a mold

temperature of 70°C, an injection pressure of 75 MPa, an injection time of 20 seconds, and a cooling time of 15 seconds to obtain a flat plate of 150 mm × 150 mm × 3 mm.

[0145] A specimen of 75 mm × 12.7 mm × 3 mm was cut out from the flat plate and was set in a bending form designed to enable continuous variation of strain of the specimen. Chemicals described below were applied onto the surface of the specimen and were left for 48 hours under conditions of 23 °C and 50% RH. After 48 hours had passed, strain was applied to the specimen and the end position of the bending form at which cracking of the surface of the specimen occurred was measured to determine the critical strain (%), which indicates strain at the limit at which cracking does not occur. In terms of evaluation criteria, a larger value for the critical strain was judged to indicate better chemical resistance.

[0146] The chemicals used in this chemical resistance test were as follows.

- Salad oil (produced by Nissin Foods)
- Mold cleaning agent (Super 102C produced by Somax Co., Ltd.)
- Grease (MOLYCOTE EM-30L produced by Dow Corning Toray)

15 (5) Flame retardance

[0147] Obtained resin composition pellets were fed into a small-size injection molding machine (product name: IS-100GN; produced by Toshiba Machine Co., Ltd.) set to a cylinder temperature of 240°C and were molded under conditions of a mold temperature of 70°C and an injection pressure of 60 MPa to prepare five specimens (thickness 1.6 mm) for UL94 vertical burning test measurement. The flame retardance of these five specimens was evaluated based on the UL94 vertical burning test method. A flame was brought into contact with each specimen for 10 seconds and then removed, and the burning time until a flame on the specimen extinguished after removal was taken to be t1 (s). Thereafter, a flame was brought into contact with the specimen for a further 10 seconds and then removed, and the burning time until a flame on the specimen extinguished after removal was taken to be t2 (s). For each of the five specimens, the average value of t1 and t2 was determined as the average burning time. Moreover, a longest burning time among the 10 measurements of t1 and t2 was determined as the longest burning time. A judgment of V-0, V-1, V-2, or HB was made based on UL94 regulations. In particular, a resin composition was judged to be preferable when the flame retardance level was determined to be V-1 or higher.

30 (6) Morphology

[0148] An ultrathin slice of 80 nm in thickness was prepared from an obtained resin composition pellet using an ultramicrotome, the slice was dyed using ruthenium tetroxide, and the resultant sample was observed at ×10,000 magnification using a TEM (HT7700 produced by Hitachi High-Technologies Corporation).

[0149] The following describes the examples and comparative examples in detail.

[0150] A twin screw extruder (ZSK-25 produced by Coperion Inc.) was used as a melt-kneading machine for producing resin compositions in the examples and comparative examples. L/D of the extruder was 35.

[0151] The twin screw extruder had a configuration including, in a direction of raw material flow, a first raw material feeding inlet located at an upstream side, a second raw material feeding inlet located further downstream than the first raw material feeding inlet, a liquid addition pump located further downstream than the second raw material feeding inlet, and a vacuum vent located between the first raw material feeding inlet and the second raw material feeding inlet. An additional liquid addition pump and vacuum vent were provided further downstream than the first raw material feeding inlet as necessary, and the positions thereof were appropriately changed as necessary.

[0152] The extruder used in the examples and comparative examples had 12 barrels and the screw configuration in these barrels was as follows.

- R1-R2-N-N-R3-R3-B (third to fourth barrels in subsequently described Production Method 1)
- L (fifth barrel in subsequently described Production Method 1)
- R2-N-L-R3 (eighth barrel in subsequently described Production Method 1)
- R3-R3-N-L-R3 (ninth to eleventh barrels in subsequently described Production Method 1)

[0153] Note that the meanings of abbreviations for kneading discs used to denote the screw configuration are as follows.

- R1: Kneading disc right (L/D = 1.44)
- R2: Kneading disc right (L/D = 0.96)
- R3: Kneading disc right (L/D = 0.48)
- L: Kneading disc left (L/D = 0.48)
- N (N-type): Kneading disc neutral (L/D = 1.04)

- B (L-type): Double flight screw back-conveying (L/D = 0.48)

[0154] Moreover, resin composition pellets were produced using 7 production methods (Production Methods 1 to 7) illustrated in FIG. 1 by altering the positions of raw material feeding inlets, vacuum vents, and liquid addition pumps, the set temperature of each barrel, and the addition position of component (IV).

(Examples 1 to 15 and Comparative Examples 1 to 20)

[0155] The twin screw extruder set-up as described above was used to melt-knead components (I) to (V) with the composition and production conditions shown in Tables 1 and 2 at a discharge rate of 15 kg/hr to produce resin composition pellets.

[0156] In the examples and comparative examples, physical property tests were carried out by the previously described measurement methods (1) to (4). The results are shown in Tables 1 and 2.

15

20

25

30

35

40

45

50

55

Table 1-1

		Example 1	Example 2	Example 3	Example 4	Example 5	Example 6	Example 7	Example 8	Example 9	Example 10	Example 11	Example 12	Example 13
Resin composition	Component (I)	Parts by mass	70	70	70	70	70	70	70	80	60	45	70	70
	Component (II)	Parts by mass	30	30	30	30	30	30	30	20	40	55	30	30
	Component (III)	Parts by mass	10	10	10	10	10	10	10	10	10	10	10	10
	Component (IV)	Parts by mass	15	15	15	15	15	15	15	17	14	15	15	15
	Component (V)	Parts by mass	7	7	0	7	7	7	7	6	10	7	7	7
	Total amount of vinyl bonding in polymer block B of component (III)		%	75	75	75	75	75	75	75	75	75	75	75
	Production method	-	Production Method 1	Production Method 2	Production Method 1	Production Method 1	Production Method 1	Production Method 2	Production Method 1	Production Method 1	Production Method 1	Production Method 1	Production Method 2	Production Method 6
	Screw rotation speed		rpm	300	300	300	300	300	300	300	300	300	300	300
	Component (I-i)		70	70	70	70	70	0	0	80	60	45	0	0
	Component (I-ii)		0	0	0	0	0	70	70	0	0	0	70	70
Resin composition production method	First raw material feeding	Component (II-i)	10	10	0	0	0	0	10	10	10	10	0	0
	inlet	Component (II-ii)	0	0	0	10	0	10	0	0	0	0	10	10
	production	Component (II-iii)	0	0	0	0	10	0	0	0	0	0	0	0
	method	Component (III-i)	10	10	10	10	10	10	10	10	10	10	10	10
		Component (III-x)	0	0	0	0	0	0	0	0	0	0	0	0

(continued)

		Exam- ple 1	Exam- ple 2	Exam- ple 3	Exam- ple 4	Exam- ple 5	Exam- ple 6	Exam- ple 7	Exam- ple 8	Exam- ple 9	Exam- ple 10	Exam- ple 11	Exam- ple 12	Exam- ple 13
Second raw material feeding	Component (II-i)	20	20	0	0	0	0	0	20	10	30	45	0	0
	Component (II-ii)	0	0	0	20	0	20	0	0	0	0	0	20	20
	Component (II-iii)	0	0	0	0	20	0	0	0	0	0	0	0	0
	Component (V)	7	7	0	7	7	7	7	7	6	10	7	7	7
Liquid addition pump	Component (IV)	15	15	15	15	15	15	15	17	14	15	15	15	15

(continued)

		Example 1	Example 2	Example 3	Example 4	Example 5	Example 6	Example 7	Example 8	Example 9	Example 10	Example 11	Example 12	Example 13
Partition ratio of component (IV)	(IV) _(I) /(IV) _(II)	99.0	130	49.0	32.3	15.7	89.5	117	32.3	99.0	49.0	99.0	278	235
				Example 1	Example 2	Example 3	Example 4	Example 5	Example 6	Example 7	Example 8	Example 9	Example 10	Example 11
	(1) Co-continuous component (I) phase and component (II) phase	Yes	Yes	No	No	No	Yes	Yes	No	Yes	No	No	No	Yes
Morphology		Example 1	Example 2	Example 3	Example 4	Example 5	Example 6	Example 7	Example 8	Example 9	Example 10	Example 11	Example 12	Example 13
	(2) Component (II) phase forms matrix	No	No	Yes	Yes	Yes	No	No	Yes	No	Yes	Yes	No	No
	(3) Neither of (1) and (2) applies	No	No	No	No	No	No	No	No	No	No	No	No	No
Resin composition physical properties	Generated smoke density Ds	378	389	265	357	351	366	380	297	405	311	302	486	470
	Electrolysis solution-resistance	Tensile strength retention rate (%)	75	72	85	77	78	76	74	70	65	82	76	58
Physical property evaluation results	Salad oil-resistance	0.70	0.69	0.76	0.72	0.72	0.73	0.68	0.60	0.56	0.73	0.71	0.65	0.68
	Mold cleaning agent-resistance	1.63	1.60	1.72	1.62	1.64	1.69	1.55	1.47	1.41	1.70	1.66	1.33	1.38
	Chemical resistance													

5

10

15

20

25

30

35

40

45

50

55

Table 1-2

		Example 14		Example 15	
Resin composition	Component (I)	Parts by mass	70	70	70
	Component (II)	Parts by mass	30	30	30
	Component (III)	Parts by mass	10	10	10
	Component (IV)	Parts by mass	15	15	15
	Component (V)	Parts by mass	7	7	7
	Total amount of vinyl bonding in polymer block B of component (III)	%	75	75	75
	Production method step	First stage	Second stage	First stage	Second stage
Production method		Production Method 1	Production Method 1	Production Method 1	Production Method 1
First raw material feeding inlet	Component (I-i)	70	0	70	0
	Component (I-ii)	0	0	0	0
	Component (II-i)	10	20	0	30
	Component (II-ii)	0	0	0	0
	Component (II-iii)	0	0	0	0
	Component (II-i)	10	0	10	0
	Component (III-x)	0	0	0	0
Pellets prepared in first stage		105		95	
Second raw material feeding inlet	Component (II-i)	0	0	0	0
	Component (II-ii)	0	0	0	0
	Component (II-iii)	0	0	0	0
	Component (V)	0	7	0	7
Liquid addition pump		Component (IV)	Parts by mass	15	0
				15	0

(continued)

		Example 14	Example 15
Partition ratio of component (IV)	$(IV)_{II}/(IV)_{III}$	269	312
Morphology	(1) Co-continuous components (I) phase and component (II) phase (2) Component (II) phase forms matrix (3) Neither of (1) and (2) applies	No No Yes	No No Yes
Resin composition physical properties	Smoke generation properties Electrolysis solution-resistance	Generated-smoke density Ds Tensile strength retention rate (%)	449 57
Physical property evaluation results	Chemical resistance Flame retardance	Salad oil-resistance Mold cleaning agent-resistance Grease-resistance Rank	0.60 1.31 0.94 V-1

Table 2-1

		Comparative Example 1	Comparative Example 2	Comparative Example 3	Comparative Example 4	Comparative Example 5	Comparative Example 6	Comparative Example 7	Comparative Example 8	Comparative Example 9	Comparative Example 10
Resin composition	Component (I)	70	70	70	70	70	70	70	70	70	70
	Component (II)	30	30	30	30	30	30	30	30	30	30
	Component (III)	0	10	10	0	10	0	10	10	0	10
	Component (IV)	15	0	48	0	0	48	48	15	15	15
	Component (V)	7	7	0	12	12	0	0	7	7	7
	Total amount of vinyl bonding in polymer block B of component (III)	%	-	75	75	75	-	75	75	-	75
Production method		Production Method 1	Production Method 3								
Screw rotation speed		rpm	300	300	300	300	300	300	300	300	300
First raw material feeding inlet	Component (I-i)	70	70	70	70	0	70	70	70	70	70
	Component (I-ii)	0	0	0	0	70	0	0	0	0	0
	Component (II-i)	10	30	10	10	10	0	0	0	30	10
	Component (II-ii)	0	0	0	0	0	10	0	0	0	0
	Component (II-iii)	0	0	0	0	0	0	10	0	0	0
	Component (III-i)	0	10	10	0	10	0	10	10	0	10
Resin composition production method	Component (III-x)	0	0	0	0	0	0	0	0	10	0
	Component (II-i)	20	0	20	20	0	0	0	0	20	20
	Component (II-ii)	0	0	0	0	0	20	0	0	0	0
	Component (II-iii)	0	0	0	0	0	0	20	0	0	0
	Component (V)	7	7	0	12	12	0	0	7	7	7
	Liquid addition pump	Parts by mass	15	0	48	0	0	48	48	15	15

(continued)

	Comparative Example (IV) _(i) /(IV) _(ii)	Comparative Example 1	Comparative Example 2	Comparative Example 3	Comparative Example 4	Comparative Example 5	Comparative Example 6	Comparative Example 7	Comparative Example 8	Comparative Example 9	Comparative Example 10
Partition ratio of component (IV)	32.3	-	1.38	-	-	1.22	1.04	0.61	80	9.3	
Morphology	(1) Co-continuous component (I) phase and component (II) phase	Yes	No	No	Yes	Yes	No	No	Yes	Yes	Yes
	(2) Component (II) phase forms matrix	No	Yes	No							
	(3) Neither of (1) and (2) applies	No	No	Yes	No	No	Yes	Yes	No	No	No
Resin composition physical properties	Smoke generation properties	Generated-smoke-density DS	439	477	422	1049	1362	447	504	724	402
	Electrolysis solution-resistance	Tensile strength retention rate	44	46	32	74	68	28	26	37	50
Physical property evaluation results	Salad oil-resistance	0.36	0.37	0.32	0.65	0.55	0.21	0.15	0.37	0.40	0.51
Chemical	Mold cleaning agent-resistance	1.08	1.07	0.63	1.59	1.38	0.64	0.51	0.81	1.06	1.35
	Chemical resistance	0.66	0.66	0.39	1.05	0.94	0.19	0.17	0.44	0.72	0.89
	Flame retardance	Rank	V-0	V-1	HB	V-1	HB	HB	V-1	V-0	V-1

Table 2-2

		Comparative Example 11	Comparative Example 12	Comparative Example 13	Comparative Example 14	Comparative Example 15
Resin composition	Component (I)	70	70	70	70	70
	Component (II)	30	30	30	30	30
	Component (III)	10	10	10	10	10
	Component (IV)	15	15	15	15	15
	Component (V)	7	7	7	7	7
	Total amount of vinyl bonding in polymer block B of component (III)	%	75	75	75	75
Resin composition production method	Production method	-	Production Method 4	Production Method 3	Production Method 4	Production Method 7
	Screw rotation speed	rpm	300	300	300	300
	Component (I-i)		70	0	0	0
	Component (I-ii)		0	70	70	70
	Component (II-i)		10	0	0	0
	Component (II-ii)		0	10	10	10
	Component (II-iii)		0	0	0	0
	Component (III-i)		10	10	10	10
	Component (III-x)		0	0	0	0
	Component (II-i)		20	0	0	0
Second raw material feeding inlet	Component (II-ii)		0	20	20	20
	Component (II-iii)		0	0	0	0
	Component (V)		7	7	7	7
	Liquid addition pump	Component (IV)	Parts by mass	15	15	15

(continued)

		Comparative Example 11	Comparative Example 12	Comparative Example 13	Comparative Example 14	Comparative Example 15
Partition ratio of component (IV)	$(IV)_{(i)} / (IV)_{(II)}$	6.9	8.7	5.5	9.1	4.2
Morphology	(1) Co-continuous component (I) phase and component (II) phase	Yes	Yes	Yes	Yes	Yes
	(2) Component (II) phase forms matrix	No	No	No	No	No
	(3) Neither of (1) and (2) applies	No	No	No	No	No
Resin composition physical properties	Smoke generation properties	Generated-smoke density Ds	433	410	418	433
	Electrolysis solution-resistance	Tensile strength retention rate (%)	49	52	46	53
	Physical property evaluation results	Salad oil-resistance	0.47	0.41	0.42	0.44
Chemical resistance	Mold cleaning agent-resistance	Critical strain (%)	1.28	1.26	1.13	1.29
	Grease-resistance		0.86	0.85	0.79	0.88
	Flame retardance	Rank	V-1	V-1	V-1	V-1

Table 2-3

		Comparative Example 16	Comparative Example 17	Comparative Example 18	Comparative Example 19	Comparative Example 20
Resin composition	Component (I)	70	70	70	70	70
	Component (II)	30	30	30	30	30
	Component (III)	10	10	10	10	10
	Component (IV)	15	15	15	15	15
	Component (V)	7	7	7	7	7
	Total amount of vinyl bonding in polymer block B of component (III)	%	75	75	75	75
Production method step		First stage	Second stage	First stage	Second stage	First stage
Production method		Production Method 1				

(continued)

		Comparative Example 16	Comparative Example 17	Comparative Example 18	Comparative Example 19	Comparative Example 20
First raw material feeding inlet	Component (I-i)	70	0	70	0	70
	Component (I-ii)	0	0	0	0	0
	Component (I-iii)	30	0	25	5	25
	Component (II-i)	0	0	0	0	20
	Component (II-ii)	Parts by mass	0	0	0	20
	Component (II-iii)	0	0	0	0	10
	Component (III-i)	10	0	10	0	0
	Component (III-x)	0	0	0	0	0
	Pellets prepared in first stage	-	110	-	105	-
	Component (II-i)	0	0	0	0	0
Resin composition production method	Component (II-ii)	Parts by mass	0	0	0	0
	Component (II-iii)	0	0	0	0	0
	Component (V)	0	7	0	7	0
	Liquid addition pump	Parts by mass	0	15	0	15
	Component (IV)			15	0	15

(continued)

		Comparative Example 16	Comparative Example 17	Comparative Example 18	Comparative Example 19	Comparative Example 20
Morphology	Partition ratio of component (IV) (IV) _(i) /(IV) _(II)	0.49	1.3	4.6	3.0	1.7
	(1) Co-continuous component (I) phase and component (II) phase	Yes	Yes	Yes	Yes	Yes
	(2) Component (II) phase forms matrix	No	No	No	No	No
(3) Neither of (1) and (2) applies	No	No	No	No	No	No
Resin composition-physical properties	Smoke generation properties	Generated-smoke density Ds	768	709	425	492
	Electrolysis solution-resistance	Tensile strength-re-tention rate (%)	32	36	42	38
	Physical property evaluation results	Salad oil-resistance	0.33	0.34	0.35	0.31
		Mold cleaning agent-resistance	0.75	0.78	1.05	0.81
		Chemical resistance				0.80
		Grease-resistance	0.42	0.41	0.65	0.50
Flame retardance	Rank	V-1	V-1	V-0	V-0	V-1

[0157] As shown in Tables 1 and 2, the resin compositions of Examples 1 to 15 had excellent smoke generation properties with low generated-smoke density during burning, and excellent chemical resistance with a high tensile strength retention rate after chemical immersion compared to the resin compositions of Comparative Examples 1 to 20.

5 INDUSTRIAL APPLICABILITY

[0158] According to this disclosure, it is possible to provide a resin composition and a shaped product having excellent smoke generation properties and chemical resistance. A shaped product containing the presently disclosed resin composition can be suitably used for automotive components, interior and exterior components of electrical devices, other 10 components, and so forth.

Claims

15 1. A resin composition comprising:

a polyphenylene ether resin (I);
 a polypropylene resin (II);
 a hydrogenated block copolymer (III) that is an at least partially hydrogenated product of a block copolymer 20 including a polymer block A of mainly a vinyl aromatic compound and a polymer block B of mainly a conjugated diene compound in which a total amount of 1,2-vinyl bonding and 3,4-vinyl bonding is 30% to 90%; and a phosphate ester compound (IV), wherein
 relative to 100 parts by mass, in total, of the polyphenylene ether resin (I) and the polypropylene resin (II):

25 the polyphenylene ether resin (I) is contained in an amount of 40 parts by mass to 99 parts by mass; the polypropylene resin (II) is contained in an amount of 1 part by mass to 60 parts by mass; the hydrogenated block copolymer (III) is contained in an amount of 1 part by mass to 20 parts by mass; and the phosphate ester compound (IV) is contained in an amount of 5 parts by mass to 45 parts by mass, and upon dissolution of the resin composition in chloroform, a ratio $(IV)_{(I)}/(IV)_{(II)}$ is 10 or more, where $(IV)_{(I)}$ 30 represents content of the phosphate ester compound (IV) present in a fraction that dissolves in chloroform and $(IV)_{(II)}$ represents content of the phosphate ester compound (IV) present in a fraction that dissolves in o-dichlorobenzene.


35 2. The resin composition according to claim 1, wherein
 the ratio $(IV)_{(I)}/(IV)_{(II)}$ is 250 or less.

3. The resin composition according to claim 2, wherein
 the ratio $(IV)_{(I)}/(IV)_{(II)}$ is 199 or less.

40 4. The resin composition according to any one of claims 1 to 3,
 wherein
 the ratio $(IV)_{(I)}/(IV)_{(II)}$ is 15 to 199.


45 5. The resin composition according to any one of claims 1 to 4, further comprising
 3 parts by mass to 15 parts by mass of at least one phosphinate salt (V) selected from the group consisting of:

a phosphinate salt represented by formula (1)

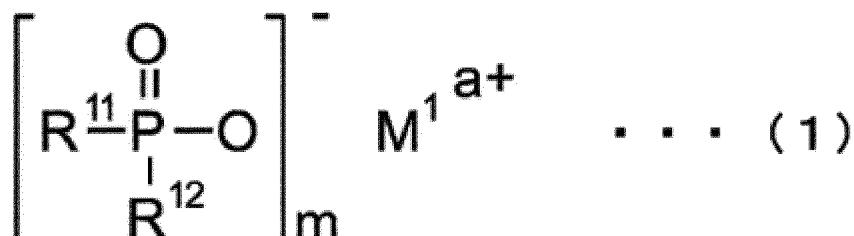

where R^{11} and R^{12} are each, independently of one another, a linear or branched alkyl group having a carbon

number of 1 to 6 and/or an aryl group having a carbon number of 6 to 10, M¹ is at least one selected from the group consisting of a calcium ion, a magnesium ion, an aluminum ion, a zinc ion, a bismuth ion, a manganese ion, a sodium ion, a potassium ion, and a protonated nitrogenous base, a is an integer of 1 to 3, m is an integer of 1 to 3, and a = m; and
 5 a diphosphinate salt represented by formula (2)

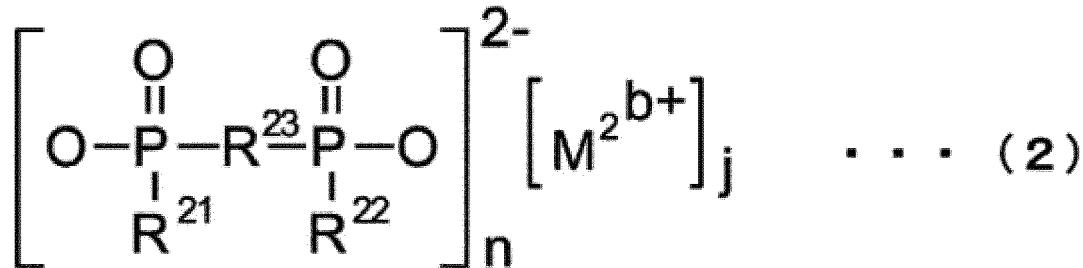

where R²¹ and R²² are each, independently of one another, a linear or branched alkyl group having a carbon number of 1 to 6 and/or an aryl group having a carbon number of 6 to 10, R²³ is a linear or branched alkylene group having a carbon number of 1 to 10, an arylene group having a carbon number of 6 to 10, an alkylarylene group having a carbon number of 6 to 10, or an arylalkylene group having a carbon number of 6 to 10, M² is at least one selected from the group consisting of a calcium ion, a magnesium ion, an aluminum ion, a zinc ion, a bismuth ion, a manganese ion, a sodium ion, a potassium ion, and a protonated nitrogenous base, b is an integer of 1 to 3, n is an integer of 1 to 3, j is an integer of 1 or 2, and b·j = 2n.

25 6. The resin composition according to any one of claims 1 to 5, wherein
 the total amount of 1,2-vinyl bonding and 3,4-vinyl bonding in the conjugated diene compound of the polymer block
 B is 65% to 90%, and
 the conjugated diene compound of the polymer block B includes butadiene.

30 7. The resin composition according to any one of claims 1 to 6, wherein
 the phosphate ester compound (IV) includes a condensed phosphate ester.

35 8. The resin composition according to any one of claims 1 to 7, wherein
 the resin composition has a morphology in which a phase containing the polyphenylene ether resin (I) and a phase
 containing the polypropylene resin (II) are co-continuous or a morphology in which a phase containing the polypro-
 pylene resin (II) is a matrix.

40 9. A shaped product comprising the resin composition according to any one of claims 1 to 8.

45

50

55

FIG. 1A

[Production Method 1]

	First feeding inlet	Second feeding inlet	Liquid addition pump	Vacuum vent	Vacuum vent
C1	C2	C3	C4	C5	C6
		R1R2NNR3R3B	L		R2NLR3
Screw configuration					R3R3NLR3

320°C

L1/L = 0.54**[Production Method 2]**

	First feeding inlet	Second feeding inlet	Liquid addition pump	Vacuum vent	Vacuum vent
C1	C2	C3	C4	C5	C6
		R1R2NNR3R3B	L		R2NLR3
Screw configuration					R3R3NLR3

320°C

L1/L = 0.54**[Production Method 3]**

	First feeding inlet	Second feeding inlet	Liquid addition pump	Vacuum vent	Vacuum vent
C1	C2	C3	C4	C5	C6
		R1R2NNR3R3B	L		R2NLR3
Screw configuration					R3R3NLR3

270°C

L1/L = 0.54**[Production Method 4]**

	First feeding inlet	Second feeding inlet	Liquid addition pump	Vacuum vent	Vacuum vent
C1	C2	C3	C4	C5	C6
		R1R2NNR3R3B	L		R2NLR3
Screw configuration					R3R3NLR3

270°C

L1/L = 0.96

FIG. 1B

[Production Method 5]

	First feeding inlet	Second feeding inlet				Liquid addition pump				Vacuum vent	
Screw configuration	C1 C2 C3 C4 C5 C6 C7 C8 C9 C10 C11 C12										
	R1R2NNR3R3B	L				R2NLR3	C9	C10	C11	C12	
Set temperature	320°C					R3R3NLR3					

$$\mathbf{L1/L = 0.79}$$

[Production Method 6]

	First feeding inlet	Second feeding inlet				Liquid addition pump				Vacuum vent	
Screw configuration	C1 C2 C3 C4 C5 C6 C7 C8 C9 C10 C11 C12										
	R2R2R2	L				R2R2R3R3	C9	C10	C11	C12	
Set temperature	320°C					R3R3NLR3					

$$\mathbf{L1/L = 0.54}$$

[Production Method 7]

	First feeding inlet	Second feeding inlet				Liquid addition pump				Vacuum vent	
Screw configuration	C1 C2 C3 C4 C5 C6 C7 C8 C9 C10 C11 C12										
	R1R2NNR3R3B	L									
Set temperature	320°C					R2R2R2	C9	C10	C11	C12	

$$\mathbf{L1/L = 0.54}$$

INTERNATIONAL SEARCH REPORT		International application No. PCT/JP2016/002962												
5	A. CLASSIFICATION OF SUBJECT MATTER <i>C08L71/12(2006.01)i, C08K5/521(2006.01)i, C08K5/5313(2006.01)i, C08L23/10(2006.01)i, C08L53/02(2006.01)i</i>													
10	According to International Patent Classification (IPC) or to both national classification and IPC													
15	B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) <i>C08L1/00-101/14, C08K3/00-13/08</i>													
20	Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched <i>Jitsuyo Shinan Koho 1922-1996 Jitsuyo Shinan Toroku Koho 1996-2016 Kokai Jitsuyo Shinan Koho 1971-2016 Toroku Jitsuyo Shinan Koho 1994-2016</i>													
25	Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)													
30	C. DOCUMENTS CONSIDERED TO BE RELEVANT													
35	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left; padding: 2px;">Category*</th> <th style="text-align: left; padding: 2px;">Citation of document, with indication, where appropriate, of the relevant passages</th> <th style="text-align: left; padding: 2px;">Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td style="padding: 2px;">A</td> <td style="padding: 2px;">JP 2014-159513 A (Asahi Kasei Chemicals Corp.), 04 September 2014 (04.09.2014), entire text (Family: none)</td> <td style="padding: 2px; text-align: center;">1-9</td> </tr> <tr> <td style="padding: 2px;">A</td> <td style="padding: 2px;">JP 2014-210839 A (Asahi Kasei Chemicals Corp.), 13 November 2014 (13.11.2014), entire text (Family: none)</td> <td style="padding: 2px; text-align: center;">1-9</td> </tr> <tr> <td style="padding: 2px;">A</td> <td style="padding: 2px;">JP 2011-255652 A (Asahi Kasei Chemicals Corp.), 22 December 2011 (22.12.2011), entire text (Family: none)</td> <td style="padding: 2px; text-align: center;">1-9</td> </tr> </tbody> </table>		Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	A	JP 2014-159513 A (Asahi Kasei Chemicals Corp.), 04 September 2014 (04.09.2014), entire text (Family: none)	1-9	A	JP 2014-210839 A (Asahi Kasei Chemicals Corp.), 13 November 2014 (13.11.2014), entire text (Family: none)	1-9	A	JP 2011-255652 A (Asahi Kasei Chemicals Corp.), 22 December 2011 (22.12.2011), entire text (Family: none)	1-9
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.												
A	JP 2014-159513 A (Asahi Kasei Chemicals Corp.), 04 September 2014 (04.09.2014), entire text (Family: none)	1-9												
A	JP 2014-210839 A (Asahi Kasei Chemicals Corp.), 13 November 2014 (13.11.2014), entire text (Family: none)	1-9												
A	JP 2011-255652 A (Asahi Kasei Chemicals Corp.), 22 December 2011 (22.12.2011), entire text (Family: none)	1-9												
40	<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.													
45	<p>* Special categories of cited documents:</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; vertical-align: top;"> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </td> <td style="width: 50%; vertical-align: top;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p> </td> </tr> </table>		<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>										
<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>													
50	Date of the actual completion of the international search 28 July 2016 (28.07.16)	Date of mailing of the international search report 09 August 2016 (09.08.16)												
55	Name and mailing address of the ISA/ Japan Patent Office 3-4-3, Kasumigaseki, Chiyoda-ku, Tokyo 100-8915, Japan	Authorized officer Telephone No.												

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2016/002962

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
5	A JP 2010-180325 A (Aron Kasei Co., Ltd.), 19 August 2010 (19.08.2010), entire text (Family: none)	1-9
10	A JP 2003-535180 A (Samsung General Chemicals Co., Ltd.), 25 November 2003 (25.11.2003), entire text & US 2004/0014850 A1 entire text & WO 2001/092410 A1 & EP 1297066 A1 & DE 60107249 D & KR 10-2001-0107429 A & AU 6076501 A & CN 1432045 A	1-9
15	A JP 2010-540716 A (Sabic Innovative Plastics I.P. B.V.), 24 December 2010 (24.12.2010), entire text & JP 5422561 B & US 2009/0088501 A1 entire text & US 2009/0088502 A1 & US 2009/0084577 A1 & US 2011/0266024 A1 & WO 2009/042369 A2 & EP 2217647 A1 & EP 2664647 A1 & EP 2664648 A1 & CN 101855283 A & CN 103265805 A	1-9
20		
25		
30		
35		
40		
45		
50		
55		

Form PCT/ISA/210 (continuation of second sheet) (January 2015)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2010540716 A [0005]
- WO 2011129129A1 A [0005]
- JP 2013014691 A [0005]
- JP 2014159513 A [0005]
- JP 2014210839 A [0005]
- US 3306874 A [0022]
- US 3306875 A [0022]
- US 3257357 A [0022]
- US 3257358 A [0022]
- JP 52017880 B [0022]
- JP S5051197 A [0022]
- JP S63152628 A [0022]
- JP S4711486 A [0070]
- JP S4966743 A [0070]
- JP S5075651 A [0070]
- JP S54126255 A [0070]
- JP S5610542 A [0070]
- JP S5662847 A [0070]
- JP S56100840 A [0070]
- JP H02300218 A [0070]
- GB 1130770 A [0070]
- US 3281383 A [0070]
- US 3639517 A [0070]
- GB 1020720 A [0070]
- US 3333024 A [0070]
- US 4501857 A [0070]

Non-patent literature cited in the description

- *Analytical Chemistry*, August 1949, vol. 21 (8 [0055] [0131])