

(19)



(11)

EP 3 333 423 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

11.05.2022 Bulletin 2022/19

(51) International Patent Classification (IPC):

F04B 43/04^(2006.01) F04B 45/047^(2006.01)

(52) Cooperative Patent Classification (CPC):

F04B 45/047

(21) Application number: **17200870.8**

(22) Date of filing: **09.11.2017**

(54) **MINIATURE FLUID CONTROL DEVICE**

MINIATURFLUIDSTEUERUNGSVORRICHTUNG

DISPOSITIF DE RÉGULATION DE FLUIDES MINIATURE

(84) Designated Contracting States:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

• **Han, Yung-Lung**

Science-Based Industrial Park, Hsinchu (TW)

• **Huang, Chi-Feng**

Science-based Industrial Park, Hsinchu (TW)

(30) Priority: **10.11.2016 TW 105136555**

(43) Date of publication of application:

13.06.2018 Bulletin 2018/24

(74) Representative: **2K Patentanwälte Blasberg**

Kewitz & Reichel

Partnerschaft mbB

Schumannstrasse 27

60325 Frankfurt am Main (DE)

(73) Proprietor: **Microjet Technology Co., Ltd**
Hsinchu (TW)

(56) References cited:

EP-A1- 3 203 079 CN-U- 205 383 064

(72) Inventors:

• **Mou, Hao-Jan**

Science-Based Industrial Park, Hsinchu (TW)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD OF THE INVENTION

[0001] The present invention relates to a fluid control device, and more particularly to a fluid control device for use with a slim and silent miniature pneumatic device.

BACKGROUND OF THE INVENTION

[0002] With the advancement of science and technology, fluid transportation devices used in many sectors such as pharmaceutical industries, computer techniques, printing industries or energy industries are developed toward elaboration and miniaturization. The fluid transportation devices are important components that are used in for example micro pumps, micro atomizers, printheads or industrial printers. Therefore, it is important to provide an improved structure of the fluid transportation device.

[0003] For example, in the pharmaceutical industries, pneumatic devices or pneumatic machines use motors or pressure valves to transfer gases. However, due to the volume limitations of the motors and the pressure valves, the pneumatic devices or the pneumatic machines are bulky in volume. In other words, the conventional pneumatic device fails to meet the miniaturization requirement, and is not suitable to be installed in or co-operated with a portable equipment. Moreover, during operations of the motor or the pressure valve, annoying noise is readily generated.

[0004] Therefore, there is a need of providing a miniature fluid control device with small, miniature, silent, portable and comfortable benefits in order to eliminate the above drawbacks.

[0005] EP 3 203 079 A1, discloses a generic miniature fluid control device for use with a miniature pneumatic device, but does not does not disclose the dimensions of the piezoelectric ceramic plate and of the suspension plate defined in claim 1

[0006] CN 205 383 064 U1 discloses a generic miniature fluid control device for use with a miniature pneumatic device, but does not does not disclose the dimensions of the piezoelectric ceramic plate and of the suspension plate defined in claim 1

SUMMARY OF THE INVENTION

[0007] It is an object of the present invention to provide a miniature fluid control device for use with a miniature pneumatic device that is more efficient for production and use.

[0008] This problem is solved by a miniature fluid control device for use with a miniature pneumatic device as claimed by claim 1. Further advantageous embodiments are the subject-matter of the dependent claims.

[0009] The present invention provides a miniature fluid control device for use with a portable or wearable equip-

ment or machine. When a piezoelectric ceramic plate is operated at a high frequency, a pressure gradient is generated in the fluid channels of the miniature fluid control device to facilitate the gas to flow at a high speed. Moreover, since there is an impedance difference between the feeding direction and the exiting direction, the gas can be transmitted from the inlet side to the outlet side. Consequently, the miniature pneumatic device is small, slim, portable and silent.

[0010] In the miniature fluid control device for use with a miniature pneumatic device as claimed by claim 1, the gas inlet plate, the resonance plate and the piezoelectric actuator are stacked on each other sequentially. A gap is formed between the resonance plate and the piezoelectric actuator to define a first chamber. When the piezoelectric actuator is actuated, the gas is fed into the miniature fluid control device through the at least one inlet of the gas inlet plate, converged to the central cavity through the at least one convergence channel, transferred through the central aperture of the resonance plate, introduced into the first chamber, transferred downwardly through a vacant space between the at least one bracket of the piezoelectric actuator, and exited from the miniature fluid control device.

[0011] The above contents of the present invention will become more readily apparent to those ordinarily skilled in the art after reviewing the following detailed description and accompanying drawings, in which:

BRIEF DESCRIPTION OF THE DRAWINGS

[0012]

FIG 1A is a schematic exploded view illustrating a miniature pneumatic device according to an embodiment of the present invention and taken along a first viewpoint;

FIG. 1B is a schematic assembled view illustrating the miniature pneumatic device of FIG. 1A;

FIG. 2A is a schematic exploded view illustrating the miniature pneumatic device according to the embodiment of the present invention and taken along a second viewpoint;

FIG. 2B is a schematic assembled view illustrating the miniature pneumatic device of FIG. 2A;

FIG. 3A is a schematic perspective view illustrating the piezoelectric actuator of the miniature pneumatic device of FIG. 1A and taken along the front side;

FIG. 3B is a schematic perspective view illustrating the piezoelectric actuator of the miniature pneumatic device of FIG. 1A and taken along the rear side;

FIG. 3C is a schematic cross-sectional view illustrating the piezoelectric actuator of the miniature pneumatic device of FIG. 1A;

FIGS. 4A to 4C schematically illustrate various exemplary piezoelectric actuator used in the miniature pneumatic device of the present invention;

FIGS. 5A to 5E schematically illustrate the actions

of the miniature fluid control device of the miniature pneumatic device of FIG. 1A;

FIG. 6A schematically illustrate a gas-collecting operation of the gas collecting plate and the miniature valve device of the miniature pneumatic device of FIG. 1A;

FIG 6B schematically illustrate a gas-releasing operation of the gas collecting plate and the miniature valve device of the miniature pneumatic device of FIG. 1A;

FIGS. 7A to 7E schematically illustrate a gas-collecting operation of the miniature pneumatic device of FIG. 1A; and

FIG 8 schematically illustrate the gas-releasing actions or the pressure-reducing actions of the miniature pneumatic device of FIG. 1A.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0013] The present invention will now be described more specifically with reference to the following embodiments. It is to be noted that the following description of preferred embodiments is presented herein for purpose of illustration and description only.

[0014] In the following description reference is made to the output pressure of the device: said pressure is expressed in mmHg, wherein 1 mmHg corresponds to 133,3 Pa.

[0015] The present invention provides a miniature pneumatic device. The miniature pneumatic device may be used in many sectors such as pharmaceutical industries, energy industries, computer techniques or printing industries for transporting gases.

[0016] Please refer to FIGS. 1A, 1B, 2A, 2B and 7A to 7E. FIG. 1A is a schematic exploded view illustrating a miniature pneumatic device according to an embodiment of the present invention and taken along a first viewpoint. FIG. 1B is a schematic assembled view illustrating the miniature pneumatic device of FIG. 1A. FIG. 2A is a schematic exploded view illustrating the miniature pneumatic device according to the embodiment of the present invention and taken along a second viewpoint. FIG. 2B is a schematic assembled view illustrating the miniature pneumatic device of FIG. 2A. FIGS. 7A to 7E schematically illustrate a gas-collecting operation of the miniature pneumatic device of FIG. 1A.

[0017] As shown in FIGS. 1A and 2A, the miniature pneumatic device 1 comprises a miniature fluid control device 1A and a miniature valve device 1B. In this embodiment, the miniature fluid control device 1A comprises a housing 1a, a piezoelectric actuator 13, a first insulation plate 141, a conducting plate 15 and a second insulation plate 142. The housing 1a comprises a gas collecting plate 16 and a base 10. The base 10 is composed of a gas inlet plate 11 and a resonance plate 12. The piezoelectric actuator 13 is aligned with the resonance plate 12. The gas inlet plate 11, the resonance plate 12, the

piezoelectric actuator 13, the first insulation plate 141, the conducting plate 15, the second insulation plate 142 and the gas collecting plate 16 are stacked on each other sequentially to be assembled while an outward surface of the gas inlet plate 11 is towards an input side. Moreover, the piezoelectric actuator 13 comprises a suspension plate 130, an outer frame 131, at least one bracket 132 and a piezoelectric ceramic plate 133. In this embodiment, the miniature valve device 1B comprises a valve film 17 and a gas outlet plate 18.

[0018] As shown in FIG. 1A, the gas collecting plate 16 comprises a bottom plate and a sidewall 168 protruding from the edges of the bottom plate. The gas collecting plate 16 has a length and a width both in the range between 4mm and 10mm. Meanwhile, the length/width ratio of the gas collecting plate 16 is preferably in the range between 0.4 and 2.5. The bottom plate and the sidewall 168 collaboratively define an accommodation space 16a where the piezoelectric actuator 13 is disposed within.

The structure of the miniature pneumatic device 1 in assembled state, taken from the front side, is shown in FIG. 1B and FIGS. 7A to 7E. As the miniature fluid control device 1A and the miniature valve device 1B are combined together, the valve film 17 and the gas outlet plate 18 of the miniature valve device 1B are stacked on each other and positioned on the bottom side of the gas collecting plate 16 of the miniature fluid control device 1A. Please refer to FIG. 1A and FIG. 2B, the gas outlet plate 18 has a pressure-releasing perforation 181 and an outlet structure 19. The outlet structure 19 is adapted to be in communication with an inner space inside a target equipment (not shown), and the pressure-releasing perforation 181 is adapted to discharge the gas inside the miniature valve device 1B. As so, the gas pressure of the inner space of the target equipment can be released.

[0019] The miniature pneumatic device 1 in assembled state allows a gas to be fed into the miniature fluid control device 1A through at least one inlet 110 of the gas inlet plate 11 from the input side. The piezoelectric actuator 13 is operable to be activated, and in response of the actions of the piezoelectric actuator 13, the gas is transferred downwardly through plural pressure chambers to the miniature valve device 1B. In the miniature valve device 1B, the gas is transferred in one direction, being discharged from the outlet structure 19 and flows into the inner space of the target equipment (not shown). As a result, the pressure of the gas in the inner space of the target equipment is accumulated.

[0020] Please refer to FIGS. 1A and 2A again. The gas inlet plate 11 of the miniature fluid control device 1A comprises a first surface 11b, a second surface 11a and the at least one inlet 110. In this embodiment, the gas inlet plate 11 has four inlets 110. The inlets 110 run through the first surface 11b and the second surface 11a of the gas inlet plate 11, and the second surface 11a is towards exterior of the miniature pneumatic device 1 where is defined as the input side. In response to the action of the atmospheric pressure, the gas is introduced into the min-

ature fluid control device 1A through the inlets 110. As shown in FIG. 2A, at least one convergence channel 112 is formed on the first surface 11b of the gas inlet plate 11, and is in communication with the at least one inlet 110 of the gas inlet plate 11. The number of the convergence channel 112 is identical to the number of the inlet 110. In this embodiment, the gas inlet plate 11 has four convergence channels 112. It is noted that the number of the at least one convergence channel 112 and the number of the at least one inlet 110 may be varied according to the practical requirements. Moreover, a central cavity 111 is formed on the central of the first surface 11b of the gas inlet plate 11 and located at the intersection of the four convergence channels 112 that forming a convergence chamber for temporarily storing the gas. The central cavity 111 is in communication with all of the convergence channels 112, such that the gas entered by the inlets 110 would be introduced into the at least one convergence channel 112 and is guided to the central cavity 111. In this embodiment, the at least one inlet 110, the at least one convergence channel 112 and the central cavity 111 of the gas inlet plate 11 are integrally formed.

[0021] Preferably but not exclusively, the gas inlet plate 11 is made of stainless steel. The thickness of the gas inlet plate 11 is in the range between 0.3mm and 0.5mm, and preferably 0.4mm. In some embodiments, the depth of the convergence chamber defined by the central cavity 111, is equal to the depth of the at least one convergence channel 112, both of which are preferably in the range between 0.15mm and 0.25mm. The resonance plate 12 is made of a flexible material, which is preferably but not exclusively copper. The resonance plate 12 further has a central aperture 120 corresponding to the central cavity 111 of the gas inlet plate 11 that providing the gas for flowing through. The thickness of the resonance plate 12 is in the range between 0.02mm and 0.07mm, and preferably 0.04mm.

[0022] FIG. 3A is a schematic perspective view illustrating the piezoelectric actuator of the miniature pneumatic device of FIG. 1A and taken along the front side. FIG. 3B is a schematic perspective view illustrating the piezoelectric actuator of the miniature pneumatic device of FIG. 1A and taken along the rear side. FIG. 3C is a schematic cross-sectional view illustrating the piezoelectric actuator of the miniature pneumatic device of FIG. 1A. As shown in FIGS. 3A, 3B and 3C, the piezoelectric actuator 13 comprises the suspension plate 130, the outer frame 131, the at least one bracket 132, and the piezoelectric ceramic plate 133. The piezoelectric ceramic plate 133 is attached on a first surface 130b of the suspension plate 130. In response to an applied voltage, the piezoelectric ceramic plate 133 would be subjected to a curvy vibration. The suspension plate 130 comprises a middle portion 130d and a periphery portion 130e. When the piezoelectric ceramic plate 133 is subjected to the curvy vibration, the suspension plate 130 is also subjected to the curvy vibration and vibrates from the middle portion 130d to the periphery portion 130e. The at least

one bracket 132 is connected between the suspension plate 130 and the outer frame 131, while the two ends of the bracket 132 are connected with the outer frame 131 and the suspension plate 130 respectively that the bracket 131 can elastically support the suspension plate 130. At least one vacant space 135 is formed between the bracket 132, the suspension plate 130 and the outer frame 131 for allowing the gas to go through. The type of the suspension plate 130 and the outer frame 131, and the type and the number of the at least one bracket 132 may be varied according to the practical requirements. Moreover, a conducting pin 134 is protruding outwardly from the outer frame 131 so as to be electrically connected with an external circuit (not shown).

[0023] In this embodiment, the suspension plate 130 has a bulge 130c that makes the suspension plate 130 a stepped structure. The bulge 130c is formed on a second surface 130a of the suspension plate 130, wherein the second surface 130a is opposing to the first surface 130b. The bulge 130c may be a circular convex structure, the thickness of which is in the range between 0.02mm and 0.08mm, and preferably 0.03mm. Preferably but not exclusively, the diameter of the bulge 130c is 0.55 times as large as a length of a shortest side of the suspension plate 130. As shown in FIGS. 3A and 3C, a top surface of the bulge 130c of the suspension plate 130 is coplanar with a second surface 131a of the outer frame 131, while the second surface 130a of the suspension plate 130 is coplanar with a second surface 132a of the bracket 132. Moreover, there is a drop of specified amount from the bulge 130c of the suspension plate 130 (or the second surface 131a of the outer frame 131) to the second surface 130a of the suspension plate 130 (or the second surface 132a of the bracket 132). As shown in FIGS. 3B and 3C, a first surface 130b of the suspension plate 130, a first surface 131b of the outer frame 131 and a first surface 132b of the bracket 132 are coplanar with each other. The piezoelectric ceramic plate 133 is attached on the first surface 130b of the suspension plate 130. The suspension plate 130 may be a square plate structure with two flat surfaces but the type of the suspension plate 130 may be varied according to the practical requirements. In this embodiment, the suspension plate 130, the at least bracket 132 and the outer frame 131 are integrally formed and produced by using a metal plate (e.g., a stainless steel plate). The thickness of the suspension plate 130 is 0.2mm. The length of the suspension plate 130 is in the range between 2.5mm and 3.5mm. The width of the suspension plate 130 is in the range between 2.5mm and 3.5mm. The thickness of the outer frame 131 is in the range between 0.1mm and 0.4mm, and preferably 0.3mm.

[0024] The piezoelectric ceramic plate 133 has the same shape with the suspension plate 130 but in smaller size, which means the longest side of the piezoelectric ceramic plate 133 is always equal to or shorter than the longest side of the suspension plate 130. As the suspension plate 130 has a square shape in this embodiment,

the piezoelectric ceramic plate 133 also has a square shape. The thickness of the piezoelectric ceramic plate 133 is 0.10mm. A length of a side of the piezoelectric ceramic plate 133 is equal to or less than a length of a side of the suspension plate 130. Meanwhile, the length of the side of the piezoelectric ceramic plate 133 is in the range between 2.5mm and 3.5mm. In some other embodiments, the suspension plate 130 and the piezoelectric ceramic plate 133 may have a rectangular shape, and the width and the length of the rectangular shape is in the range between 2.5mm and 3.5mm.

[0025] Preferably, the suspension plate 130 of the piezoelectric actuator 13 used in the miniature pneumatic device 1 of the present invention is a square suspension plate. In comparison with the circular suspension plate (e.g., the circular suspension plate j0 with the types (j)~(1) as shown in FIG. 4A), the square suspension plate can make the miniature pneumatic device 1 more power-saving.

[0026] Generally, the consumed power of the capacitive load at the resonance frequency is positively related to the resonance frequency. Since the resonance frequency of the square suspension plate is obviously lower than that of the circular square suspension plate, the consumed power of the square suspension plate is lower. Since the square suspension plate is more power-saving than the circular suspension plate, the piezoelectric actuator 13 with the square suspension plate is suitably used in the portable/wearable devices.

[0027] FIGS. 4A, 4B and 4C schematically illustrate various exemplary piezoelectric actuator used in the miniature pneumatic device of the present invention. As shown in the drawings, the suspension plate 130, the outer frame 131 and the at least one bracket 132 of the piezoelectric actuator 13 have various types.

[0028] FIG. 4A schematically illustrates the types (a)~(1) of the piezoelectric actuator. In the type (a), the outer frame a1 and the suspension plate a0 are square, the outer frame a1 and the suspension plate a0 are connected with each other through eight brackets a2, each two of which are disposed by one side of the square suspension plate a0. Several vacant spaces a3 are formed between the brackets a2, the suspension plate a0 and the outer frame a1 for allowing the gas to go through. In the type (i), the outer frame i1 and the suspension plate i0 are also square, but the outer frame i1 and the suspension plate i0 are connected with each other through merely two brackets i2. In addition, the outer frame i1 and the suspension plate i0 in each of the types (b)~(h) are also square. In each of the types (j)~(1), the suspension plate is circular, and the outer frame has a square with arc-shaped corners. For example, in the type (j), the suspension plate j0 is circular, and the outer frame has a square with arc-shaped corners.

[0029] FIG. 4B schematically illustrates the types (m)~(r) of the piezoelectric actuator. In these types (m)~(r), the suspension plate 130 and the outer frame 131 are square. In the type (m), the outer frame m1 and

the suspension plate m0 are square, the outer frame m1 and the suspension plate m0 are connected with each other through four brackets m2, each of which is disposed by one side of the suspension plate m0. Meanwhile, a vacant space m3 is formed between the brackets m2, the suspension plate m0 and the outer frame m1. The bracket m2 has two ends m2' and m2" respectively connected with the outer frame m1 and the suspension plate m0. The two ends m2' and m2" are opposed to each other and arranged along the same horizontal line.

[0030] In the type (n), the outer frame n1 and the suspension plate n0 are also connected with each other through four brackets n2, and a vacant space n3 is formed between the brackets n2, the suspension plate n0 and the outer frame n1. Nonetheless, the two ends n2' and n2" of the bracket n2, which are respectively connected with the outer frame n1 and the suspension plate n0, are not arranged along the same horizontal line. Instead, the two ends n2' and n2" are inclined at 0~45 degrees with respect to the horizontal line.

[0031] In the type (o), the outer frame o1 and the suspension plate o0 are square, the outer frame o1 and the suspension plate o0 are connected with each other through four brackets o2 in circular profiles, and a vacant space o3 is formed between each two of the brackets o2, the suspension plate o0 and the outer frame o1. The bracket o2 includes a connecting part and two ends o2' and o2". The end o2' of the bracket o2 is connected with the outer frame o1. The end o2" of the bracket o2 is connected with the suspension plate o0. The two ends o2' and o2" are opposed to each other and arranged along the same horizontal line.

[0032] In the type (p), the outer frame p1 and the suspension plate p0 are square, the outer frame p1 and the suspension plate p0 are connected with each other through four brackets p2, and a vacant space p3 is formed between each two of the brackets p2, the suspension plate p0 and the outer frame p1. The bracket p2 includes a first connecting part p20, an intermediate part p21 and a second connecting part p22. The intermediate part p21 is formed in the vacant space p3 and in parallel with the outer frame p1 and the suspension plate p0. The first connecting part p20 is arranged between the intermediate part p21 and the suspension plate p0. The second connecting part p22 is arranged between the intermediate part p21 and the outer frame p1. The first connecting part p20 and the second connecting part p22 are opposed to each other and arranged along the same horizontal line.

[0033] More specifically, the intermediate part p21 is a bar perpendicular to both the first connecting part p20 and the second connecting part p22, which makes the bracket p2 in the shape of a cross. Thus, the whole structure of the bracket p2 is strengthened, which is beneficial for vibration of the suspension plate p0 in a fixed direction. Meanwhile, the bracket p2 can be made of a material with a lesser rigidity, and therefore increases vibration frequency of the suspension plate p0. As a result, the

gas pressure output efficiency could be improved.

[0034] In the type (q), the outer frame q1, the suspension plate q0, the bracket q2 and the vacant space q3 are similar to those of the type (m) and the type (o). Each side of the suspension plate q0 is connected with the corresponding side of the outer frame q1 through two connecting parts q2. The two ends q2' and q2'' of each connecting part q2 are opposed to each other and arranged along the same horizontal line. In the type (r), the outer frame r1, the suspension plate r0, the bracket r2 and the vacant space r3 are similar to those of the above embodiments. However, the bracket r2 is a V-shaped connecting part. That is, the bracket r2 is connected with the outer frame r1 and the suspension plate r0 at an inclined angle 0~45 degrees. An end r2'' of the bracket r2 is connected with the suspension plate r0, and two ends r2' of the bracket r2 are connected with the outer frame r1. That is, the ends b2' and b2'' are not arranged along the same horizontal line.

[0035] FIG. 4C schematically illustrates the types (s)~(x) of the piezoelectric actuator. The structures of the types (s)~(x) are similar to those of the types (m)~(r), respectively. However, in the types (s)~(x), the suspension plate 130 of the piezoelectric actuator 13 has a bulge 130c. The bulges 130c in the types (s)~(x) are indicated as s4, t4, u4, v4, w4 and x4, respectively. Regarding the types (m)~(r) and the types (s)~(x) of the piezoelectric actuator, the suspension plate 130 is square for achieving power-saving efficacy, and both the stepped structure with bulge and the flat structure with two flat surfaces are in the scope of the present invention. Meanwhile, the number of the brackets 132 between the outer frame 131 and the suspension plate 130 may be varied according to the practical requirements. The suspension plate 130, the outer frame 131 and the at least one bracket 132 may be integrally formed with each other, and produced by but not limited to a conventional machining process, a photolithography and etching process, a laser machining process, an electroforming process, an electric discharge machining process and so on.

[0036] Please refer to FIGS. 1A and 2A again. The miniature fluid control device 1A further comprises the first insulation plate 141, the conducting plate 15 and the second insulation plate 142. The first insulation plate 141, the conducting plate 15 and the second insulation plate 142 are stacked on each other sequentially and located under the piezoelectric actuator 13. The profiles of the first insulation plate 141, the conducting plate 15 and the second insulation plate 142 substantially match the profile of the outer frame 131 of the piezoelectric actuator 13. The first insulation plate 141 and the second insulation plate 142 are made of an insulating material (e.g. a plastic material) for providing insulating efficacy. The conducting plate 15 is made of an electrically conductive material (e.g. a metallic material) for providing electrically conducting efficacy. Moreover, the conducting plate 15 has a conducting pin 151 so as to be electrically connected with an external circuit (not shown).

[0037] FIGS. 5A to 5E schematically illustrate the actions of the miniature fluid control device of the miniature pneumatic device of FIG. 1A. As shown in FIG. 5A, the gas inlet plate 11, the resonance plate 12, the piezoelectric actuator 13, the first insulation plate 141, the conducting plate 15 and the second insulation plate 142 of the miniature fluid control device 1A are stacked on each other sequentially. Moreover, there is a gap g0 between the resonance plate 12 and the outer frame 131 of the piezoelectric actuator 13, which is formed and maintained by a filler (e.g. a conductive adhesive) inserted therein in this embodiment. The gap g0 ensures the proper distance between the resonance plate 12 and the bulge 130c of the suspension plate 130, so that the contact interference is reduced and the generated noise is largely reduced.

[0038] Please refer to FIGS. 5A to 5E again. A convergence chamber is defined by the resonance plate 12 and the central cavity 111 of the gas inlet plate 11 collaboratively for converging the gas. A first chamber 121 is formed between the resonance plate 12 and the piezoelectric actuator 13, and is in communication with the convergence chamber through the central aperture 120 of the resonance plate 12. Meanwhile, the peripheral regions of the first chamber 121 are in communication with the underlying miniature valve device 1B through the vacant spaces 135 of the piezoelectric actuator 13.

[0039] Please refer to FIG. 5B. When the miniature fluid control device 1A of the miniature pneumatic device 1 is enabled, the piezoelectric actuator 13 is actuated in response to an applied voltage. Consequently, the piezoelectric actuator 13 vibrates along a vertical direction in a reciprocating manner, while the brackets 132 are served as the fulcrums. The resonance plate 12 except for the part of it fixed on the gas inlet plate 11 is hereinafter referred as a movable part 12a, while the rest is referred as a fixed part 12b. Since the resonance plate 12 is light and thin, the movable part 12a vibrates along with the piezoelectric actuator 13 because of the resonance of the piezoelectric actuator 13. In other words, the movable part 12a is reciprocated and subjected to a curvy deformation.

[0040] As shown in FIG. 5C, during the vibration of the movable part 12a of the resonance plate 12, the movable part 12a moves down till being contacted with the bulge 130c of the suspension plate 130. In the meantime, the volume of the first chamber 121 is shrunk and a middle space which was communicating with the convergence chamber is closed. As a result, the pressure gradient occurs to push the gas in the first chamber 121 moving toward peripheral regions of the first chamber 121 and flowing downwardly through the vacant spaces 135 of the piezoelectric actuator 13.

[0041] Please refer to FIG. 5D, which illustrates consecutive action following the action in FIG. 5C. The movable part 12a has returned its original position when the piezoelectric actuator 13 has ascended at a vibration displacement d to an upward position. Consequently, the

volume of the first chamber 121 is consecutively shrunk-en that generating the pressure gradient which makes the gas in the first chamber 121 continuously pushed toward peripheral regions and results in an exterior gas continuously fed into the inlets 110 of the gas inlet plate 11 and transferred to the central cavity 111.

[0042] Then, as shown in FIG. 5E, the resonance plate 12 moves upwardly, which is caused by the resonance of the upward motion of the piezoelectric actuator 13. Under this circumstance, the volume of the first chamber 121 expands, which results in suction applied to the gas in the central cavity 111. The gas in the central cavity 111 is transferred to the first chamber 121 through the central aperture 120 of the resonance plate 12, then transferred downwardly through the vacant spaces 135 of the piezoelectric actuator 13, exiting from the miniature fluid control device 1A.

[0043] From the above description, please notice the gap g_0 between the resonance plate 12 and the piezo-electric actuator 13 providing space for vibration of the resonance plate 12. That is, the thickness of the gap g_0 affects the amplitude of vibration of the resonance plate 12. A difference x between the gap g_0 and the vibration displacement d of the piezoelectric actuator 13 is given by a formula: $x = g_0 - d$. A series of tests about the maximum output pressure of the miniature pneumatic device 1 corresponding to different values of x are performed. In case that $x \leq 0\mu\text{m}$, the miniature pneumatic device 1 generates noise. In case that $x = 1\sim 5\mu\text{m}$, the maximum output pressure of the miniature pneumatic device 1 reaches 350mmHg. In case that $x = 5\sim 10\mu\text{m}$, the maximum output pressure of the miniature pneumatic device 1 is 250mmHg. In case that $x = 10\sim 15\mu\text{m}$, the maximum output pressure of the miniature pneumatic device 1 is 150mmHg. The relationships between the difference x and the maximum output pressure are listed in Table 1 below. The data shown in Table 1 are obtained when the operating voltage is in the range between $\pm 10\text{V}$ and $\pm 20\text{V}$. A pressure gradient is generated in the fluid channels of the miniature fluid control device 1A to facilitate the gas to flow at a high speed. Moreover, since there is an impedance difference between the feeding direction and the exiting direction, the gas can be transmitted from the input side to the inner space of the target equipment. Even if the inner space of the target equipment has a certain gas pressure, the miniature fluid control device 1A still has the capability of pushing out the gas as well as achieving the silent efficacy.

Table 1:

Test	X	Maximum output pressure
1	$x = 1\sim 5\mu\text{m}$	350mmHg
2	$x = 5\sim 10\mu\text{m}$	250mmHg
3	$x = 10\sim 15\mu\text{m}$	150mmHg

[0044] In some embodiments, the vibration frequency of the resonance plate 12 along the vertical direction in the reciprocating manner is identical to the vibration frequency of the piezoelectric actuator 13. That is, the resonance plate 12 and the piezoelectric actuator 13 are synchronously vibrated along the upward direction or the downward direction. It is noted that numerous modifications and alterations of the actions of the miniature fluid control device 1A may be made while retaining the teachings of the invention.

[0045] Please refer to FIGS. 1A, 2A, 6A and 6B. FIG. 6A schematically illustrate a gas-collecting operation of the gas collecting plate and the miniature valve device of the miniature pneumatic device of FIG. 1A. FIG. 6B schematically illustrate a gas-releasing operation of the gas collecting plate and the miniature valve device of the miniature pneumatic device of FIG. 1A. As shown in FIGS. 1A and 6A, the valve film 17 and the gas outlet plate 18 of the miniature valve device 1B are stacked on each other sequentially. Moreover, the miniature valve device 1B cooperates with the gas collecting plate 16 of the miniature fluid control device 1A.

[0046] In this embodiment, the gas collecting plate 16 comprises a first surface 160 and a second surface 161 (also referred as a fiducial surface). The first surface 160 of the gas collecting plate 16 is concaved to define a gas-collecting chamber 162 which accommodates the piezo-electric actuator 13. The gas that is transferred downwardly by the miniature fluid control device 1A is temporarily accumulated in the gas-collecting chamber 162. The gas collecting plate 16 has a first perforation 163 and a second perforation 164. A first end of the first perforation 163 and a first end of the second perforation 164 are in communication with the gas-collecting chamber 162. A second end of the first perforation 163 and a second end of the second perforation 164 are respectively in communication with a first pressure-releasing chamber 165 and a first outlet chamber 166, which are formed on the second surface 161 of the gas collecting plate 16. Moreover, the gas collecting plate 16 has a raised structure 167 corresponding to the first outlet chamber 166. For example, the raised structure 167 includes but is not limited to a cylindrical post. The raised structure 167 is located at a level higher than the second surface 161 of the gas collecting plate 16. Moreover, a thickness of the raised structure 167 is in a range between 0.1mm and 0.55mm, and preferably 0.2mm.

[0047] The gas outlet plate 18 comprises a pressure-releasing perforation 181, an outlet perforation 182, a first surface 180 (also referred as a fiducial surface) and a second surface 187. The pressure-releasing perforation 181 and the outlet perforation 182 run through the first surface 180 and the second surface 187. The first surface 180 of the gas outlet plate 18 is concaved to define a second pressure-releasing chamber 183 and a second outlet chamber 184. The pressure-releasing perforation 181 is located at a center of the second pressure-releasing chamber 183. Moreover, the gas outlet plate

18 further comprises a communication channel 185 between the second pressure-releasing chamber 183 and the second outlet chamber 184 for allowing the gas to go through. A first end of the outlet perforation 182 is in communication with the second outlet chamber 184. A second end of the outlet perforation 182 is in communication with an outlet structure 19 to gain access to the inner space of the target equipment. The outlet structure 19 is connected with the target equipment (not shown). The equipment is for example but not limited to a gas-pressure driving equipment.

[0048] The valve film 17 comprises a valve opening 170 and plural positioning openings 171 (see FIG. 1A). The thickness of the valve film 17 is in the range between 0.1mm and 0.3mm, and preferably 0.2mm.

[0049] After the gas collecting plate 16, the valve film 17 and the gas outlet plate 18 are combined together, the pressure-releasing perforation 181 of the gas outlet plate 18 is aligned with the first perforation 163 of the gas collecting plate 16, the second pressure-releasing chamber 183 of the gas outlet plate 18 is aligned with the first pressure-releasing chamber 165 of the gas collecting plate 16, and the second outlet chamber 184 of the gas outlet plate 18 is aligned with the first outlet chamber 166 of the gas collecting plate 16. The valve film 17 is arranged between the gas collecting plate 16 and the gas outlet plate 18 for blocking the communication between the first pressure-releasing chamber 165 and the second pressure-releasing chamber 183. The valve opening 170 of the valve film 17 is arranged between the second perforation 164 and the outlet perforation 182. Moreover, the valve opening 170 of the valve film 17 is aligned with the raised structure 167 corresponding to the first outlet chamber 166 of the gas collecting plate 16. Due to such arrangement of the single valve opening 170, the gas can be transferred through the miniature valve device 1B in one direction in response to the pressure difference.

[0050] In this embodiment, the gas outlet plate 18 has the convex structure 181a beside a first end of the pressure-releasing perforation 181. Preferably but not exclusively, the convex structure 181a is a cylindrical post. The thickness of the convex structure 181a is in the range between 0.1mm and 0.55mm, and preferably 0.2mm. The top surface of the convex structure 181a is located at a level higher than the first surface 180 of the gas outlet plate 18. Consequently, the pressure-releasing perforation 181 can be quickly contacted with and closed by the valve film 17. Moreover, the convex structure 181a can provide a pre-force against the valve film 17 to achieve a good sealing effect.

[0051] In this embodiment, the gas outlet plate 18 further comprises a position-limiting structure 188. The thickness of the position-limiting structure 188 is 0.2mm. The position-limiting structure 188 is disposed within the second pressure-releasing chamber 183. Preferably but not exclusively, the position-limiting structure 188 is a ring-shaped structure. While the gas-collecting operation of the miniature valve device 1B is performed, the posi-

tion-limiting structure 188 can assist in supporting the valve film 17 and avoid collapse of the valve film 17. Consequently, the valve film 17 can be opened or closed more quickly.

[0052] Hereinafter, the gas-collecting operation of the miniature valve device 1B will be illustrated with reference to FIG. 6A. In case that the gas from the miniature fluid control device 1A is being transferred downwardly to the miniature valve device 1B, or the ambient air pressure is higher than the gas pressure of the inner space of the target equipment which is in communication with the outlet structure 19, the gas will be transferred from the miniature fluid control device 1A to the gas-collecting chamber 162 of the gas collecting plate 16. Then, the gas is transferred downwardly to the first pressure-releasing chamber 165 and the first outlet chamber 166 through the first perforation 163 and the second perforation 164. In response to the downward gas, the flexible valve film 17 is subjected to a downward curvy deformation. Consequently, the volume of the first pressure-releasing chamber 165 is expanded, and the valve film 17 is in close contact with the first end of the pressure-releasing perforation 181 corresponding to the first perforation 163. Under this circumstance, the pressure-releasing perforation 181 of the gas outlet plate 18 is closed, and thus the gas within the second pressure-releasing chamber 183 is not leaked out from the pressure-releasing perforation 181. In this embodiment, the gas outlet plate 18 has the convex structure 181a beside of the first end of the pressure-releasing perforation 181. Due to the arrangement of the convex structure 181a, the pressure-releasing perforation 181 can be quickly closed by the valve film 17. Moreover, the convex structure 181a can provide a pre-force to achieve a good sealing effect. The position-limiting structure 188 is arranged around the pressure-releasing perforation 181 to assist in supporting the valve film 17 and avoid collapse of the valve film 17. On the other hand, the gas is transferred downwardly to the first outlet chamber 166 through the second perforation 164. In response to the downward gas, the valve film 17 corresponding to the first outlet chamber 166 is also subjected to the downward curvy deformation. Consequently, the valve opening 170 of the valve membrane 17 is correspondingly opened to the downward side. Under this circumstance, the gas is transferred from the first outlet chamber 166 to the second outlet chamber 184 through the valve opening 170. Then, the gas is transferred to the outlet structure 19 through the outlet perforation 182 and then transferred to the inner space of the target equipment which is in communication with the outlet structure 19. Consequently, the purpose of collecting the gas pressure is achieved.

[0053] Hereinafter, the gas-releasing operation of the miniature valve device 1B will be illustrated with reference to FIG. 6B. For performing the gas-releasing operation, the user may adjust the amount of the gas to be fed into the miniature fluid control device 1A, so that the gas is no longer transferred to the gas-collecting chamber

162. Alternatively, in case that the inner pressure of the target equipment which is in communication with the outlet structure 19 is higher than the ambient air pressure, which means the gas pressure of the inner space of the target equipment is greater than the gas pressure of the input side, the gas-releasing operation may be performed. Under this circumstance, the gas is transferred from the outlet structure 19 to the second outlet chamber 184 through the outlet perforation 182. Consequently, the volume of the second outlet chamber 184 is expanded, and the flexible valve film 17 corresponding to the second outlet chamber 184 is subjected to the upward curvy deformation. In addition, the valve film 17 is in close contact with the gas collecting plate 16. Consequently, the valve opening 170 of the valve film 17 is closed by the gas collecting plate 16. Moreover, the gas collecting plate 16 has the raised structure 167 corresponding to the first outlet chamber 166. Due to the arrangement of the raised structure 167, the flexible valve film 17 can be bent upwardly more quickly. Moreover, the raised structure 167 can provide a pre-force to achieve a good sealing effect of the valve opening 170. Since the valve opening 170 of the valve film 17 is contacted with and closed by the raised structure 167, the gas in the second outlet chamber 184 will not be reversely returned to the first outlet chamber 166. Consequently, the efficacy of avoiding gas leakage is enhanced. Moreover, since the gas in the second outlet chamber 184 is transferred to the second pressure-releasing chamber 183 through the communication channel 185, the volume of the second pressure-releasing chamber 183 is expanded. Consequently, the valve film 17 corresponding to the second pressure-releasing chamber 183 is also subjected to the upward curvy deformation. Since the valve film 17 is no longer in contact with the first end of the pressure-releasing perforation 181, the pressure-releasing perforation 181 is opened. Under this circumstance, the gas in the second pressure-releasing chamber 183 is outputted through the pressure-releasing perforation 181. Consequently, the pressure of the gas is released. Similarly, due to the convex structure 181a beside the pressure-releasing perforation 181 or the position-limiting structure 188 within the second pressure-releasing chamber 183, the flexible valve film 17 can be subjected to the upward curvy deformation more quickly. Consequently, the pressure-releasing perforation 181 can be quickly opened. After the gas-releasing operation in one direction is performed, the gas within the inner space of the target equipment is partially or completely exited to the surrounding. Under this circumstance, the gas pressure of the target equipment is reduced.

[0054] FIGS. 7A to 7E schematically illustrate the gas-collecting actions of the miniature pneumatic device of FIG. 2A. Please refer to FIGS. 1A, 2A and 7A to 7E. As shown in FIG. 7A, the miniature pneumatic device 1 comprises the miniature fluid control device 1A and the miniature valve device 1B. As mentioned above, the gas inlet plate 11, the resonance plate 12, the piezoelectric actuator 13, the first insulation plate 141, the conducting plate 15, the second insulation plate 142 and the gas collecting plate 16 of the miniature fluid control device 1A are stacked on each other sequentially. There is a gap g0 between the resonance plate 12 and the piezoelectric actuator 13. Moreover, the first chamber 121 is formed between the resonance plate 12 and the piezoelectric actuator 13. The valve film 17 and the gas outlet plate 18 of the miniature valve device 1B are stacked on each other and disposed under the gas collecting plate 16 of the miniature fluid control device 1A. The gas-collecting chamber 162 is arranged between the gas collecting plate 16 and the piezoelectric actuator 13. The first pressure-releasing chamber 165 and the first outlet chamber 166 are formed in the second surface 161 of the gas collecting plate 16. The second pressure-releasing chamber 183 and the second outlet chamber 184 are concavely formed in the first surface 180 of the gas outlet plate 18. In an embodiment, the operating voltage of the miniature pneumatic device 1 is in the range between $\pm 10V$ and $\pm 16V$. Moreover, due to the arrangements of the plural pressure chambers, the actuation of the piezoelectric actuator 13 and the vibration of the plate 12 and the valve film 17, the gas can be transferred downwardly.

[0055] As shown in FIG. 7B, the piezoelectric actuator 13 of the miniature fluid control device 1A is vibrated downwardly in response to the applied voltage. Consequently, the gas is fed into the miniature fluid control device 1A through the at least one inlet 110 of the gas inlet plate 11 from the input side. The gas is sequentially converged to the central cavity 111 through the at least one convergence channel 112 of the gas inlet plate 11, transferred through the central aperture 120 of the resonance plate 12, and introduced downwardly into the first chamber 121.

[0056] As the piezoelectric actuator 13 is actuated, the resonance of the resonance plate 12 occurs. Consequently, the resonance plate 12 is also vibrated along the vertical direction in the reciprocating manner. As shown in FIG. 7C, the resonance plate 12 is vibrated downwardly and contacted with the bulge 130c of the suspension plate 130 of the piezoelectric actuator 13. Due to the deformation of the resonance plate 12, the volume of the chamber corresponding to the central cavity 111 of the gas inlet plate 11 is expanded but the volume of the first chamber 121 is shrunken. Under this circumstance, the gas is pushed toward peripheral regions of the first chamber 121. Consequently, the gas is transferred downwardly through the vacant spaces 135 of the piezoelectric actuator 13. Then, the gas is transferred to the gas-collecting chamber 162 between the miniature fluid control device 1A and the miniature valve device 1B. After that, the gas is transferred downwardly to the first pressure-releasing chamber 165 and the first outlet chamber 166 through the first perforation 163 and the second perforation 164, which are in communication with the gas-collecting chamber 162. Consequently, when the

resonance plate 12 is vibrated along the vertical direction in the reciprocating manner, the gap g_0 between the resonance plate 12 and the piezoelectric actuator 13 is helpful to increase the amplitude of the resonance plate 12. That is, due to the gap g_0 between the resonance plate 12 and the piezoelectric actuator 13, the amplitude of the resonance plate 12 is increased when the resonance occurs.

[0057] As shown in FIG. 7D, the resonance plate 12 of the miniature fluid control device 1A is returned to its original position, and the piezoelectric actuator 13 is vibrated upwardly in response to the applied voltage. The difference x between the gap g_0 and the vibration displacement d of the piezoelectric actuator 13 is given by a formula: $x = g_0 - d$. A series of tests about the maximum output pressure of the miniature pneumatic device 1 corresponding to different values of x are performed. The operating voltage of the miniature pneumatic device 1 is in the range between $\pm 10V$ and $\pm 16V$. In case that $x = 1 \sim 5 \mu m$, the maximum output pressure of the miniature pneumatic device 1 is at least 300mmHg. Consequently, the volume of the first chamber 121 is also shrunk, and the gas is continuously pushed toward peripheral regions of the first chamber 121. Moreover, the gas is continuously transferred to the gas-collecting chamber 162, the first pressure-releasing chamber 165 and the first outlet chamber 166 through the vacant spaces 135 of the piezoelectric actuator 13. Consequently, the pressure in the first pressure-releasing chamber 165 and the first outlet chamber 166 will be gradually increased. In response to the increased gas pressure, the flexible valve film 17 is subjected to the downward curvy deformation. Consequently, the valve film 17 corresponding to the second pressure-releasing chamber 183 is moved downwardly and contacted with the convex structure 181a corresponding to the first end of the pressure-releasing perforation 181. Under this circumstance, the pressure-releasing perforation 181 of the gas outlet plate 18 is closed. In the second outlet chamber 184, the valve opening 170 of the valve film 17 corresponding to the outlet perforation 182 is opened downwardly. Then, the gas within the second outlet chamber 184 is transferred downwardly to the outlet structure 19 through the outlet perforation 182 and then transferred to the inner space of the target equipment which is in communication with the outlet structure 19. Consequently, the inner space of the target equipment is pressurized, and the purpose of collecting the gas pressure is achieved.

[0058] Then, as shown in FIG. 7E, the resonance plate 12 of the miniature fluid control device 1A is vibrated upwardly. Under this circumstance, the gas in the central cavity 111 of the gas inlet plate 11 is transferred to the first chamber 121 through the central aperture 120 of the resonance plate 12, and then the gas is transferred downwardly to the gas collecting plate 16 through the vacant space 135 of the piezoelectric actuator 13. As the gas pressure is continuously increased along the downward direction, the gas is continuously transferred to the gas-

collecting chamber 162, the second perforation 164, the first outlet chamber 166, the second outlet chamber 184 and the outlet perforation 182 and then transferred to the target equipment which is in communication with the outlet structure 19. Such pressure-collecting operation may be but not limited to be triggered by the pressure difference between the ambient pressure of the input side and the gas pressure of the inner space of the target equipment.

[0059] FIG. 8 schematically illustrate the gas-releasing actions or the pressure-reducing actions of the miniature pneumatic device of FIG. 1A. In case that the inner pressure of the target equipment is greater than the ambient air pressure of the input side, the gas-releasing operation (or a pressure-reducing operation) may be performed. As mentioned above, the user may adjust the amount of the gas to be fed into the miniature fluid control device 1A, so that the gas is no longer transferred to the gas-collecting chamber 162. Under this circumstance, the gas is transferred from the outlet structure 19 to the second outlet chamber 184 through the outlet perforation 182. Consequently, the volume of the second outlet chamber 184 is expanded, and the flexible valve film 17 corresponding to the second outlet chamber 184 is bent upwardly. In addition, the valve film 17 is in close contact with the raised structure 167 corresponding to the first outlet chamber 166. Since the valve opening 170 of the valve film 17 is closed by the raised structure 167, the gas in the second outlet chamber 184 will not be reversely returned to the first outlet chamber 166. Moreover, the gas in the second outlet chamber 184 is transferred to the second pressure-releasing chamber 183 through the communication channel 185, and then the gas in the second pressure-releasing chamber 183 is transferred to the pressure-releasing perforation 181. Under this circumstance, the gas-releasing operation is performed. After the gas-releasing operation of the miniature valve device 1B in one direction is performed, the gas within the inner space of the target equipment is partially or completely exited to the surrounding. Under this circumstance, the inner pressure of the equipment is reduced.

[0060] As mentioned above, the suspension plate 130 used in the present invention is a square suspension plate. As the length of the suspension plate 130 is reduced, the area of the suspension plate 130 is correspondingly reduced. Since the size of the suspension plate 130 is reduced, the rigidity of the suspension plate 130 is increased. Moreover, since the volume of the internal gas channel is reduced, the efficacy of pushing or compressing the gas is increased and the output pressure value is increased. Moreover, since the deformation of the suspension plate 130 in the horizontal direction is reduced while the suspension plate 130 is operating the vertical vibration, the piezoelectric actuator 13 is not readily inclined in the same vertical direction during operation. Moreover, since the collision interference between the suspension plate 13 and the resonance plate 12 or other components can be reduced, the noise is

reduced and the defect rate is reduced. All in all, as the size of the suspension plate 130 is reduced, the size of the piezoelectric actuator 13 can be correspondingly reduced. Under this circumstance, the output pressure is increased, the noise is reduced, and the product yield is enhanced. On the contrary, as the size of the suspension plate 130 is increased, the output pressure value becomes low, and the defect rate of the miniature pneumatic device is increased.

[0061] The suspension plate 130 and the piezoelectric ceramic plate 133 are the core components of the miniature pneumatic device 1. As the areas of the two components are reduced, the area and the weight of the miniature pneumatic device 1 are correspondingly reduced. Consequently, the miniature pneumatic device 1 can be easily installed in a portable/wearable device. Since the volume is reduced, the applications of the miniature pneumatic device 1 are expanded.

[0062] After the miniature fluid control device 1A and the miniature valve device 1B are combined together, the total thickness of the miniature pneumatic device 1 is in the range between 1.5mm and 4mm. Since the miniature pneumatic device is slim and portable, the miniature pneumatic device is suitably applied to medical equipment or any other appropriate equipment.

[0063] From the above descriptions, the present invention provides the miniature pneumatic device. The miniature pneumatic device comprises the miniature fluid control device and the miniature valve device. After the gas is fed into the miniature fluid control device through the inlet, the piezoelectric actuator is actuated. Consequently, a pressure gradient is generated in the fluid channels of the miniature fluid control device and the gas-collecting chamber to facilitate the gas to flow to the miniature valve device at a high speed. Moreover, due to the one-way valve film of the miniature valve device, the gas is transferred in one direction. Consequently, the pressure of the gas is accumulated to any equipment that is connected with the outlet structure, which is referred as the target equipment above. For performing a gas-releasing operation (or a pressure-reducing operation), the user may adjust the amount of the gas to be fed into the miniature fluid control device, so that the gas is no longer transferred to the gas-collecting chamber. Under this circumstance, the gas is transferred from the outlet structure to the second outlet chamber of the miniature valve device, then transferred to the second pressure-releasing chamber through the communication channel, and finally exited from the pressure-releasing perforation. By the miniature pneumatic device of the present invention, the gas can be quickly transferred while achieving silent efficacy. Moreover, due to the special configurations, the miniature pneumatic device of the present invention has small volume and small thickness. Consequently, the miniature pneumatic device is portable and suitable to be applied to medical equipment or any other appropriate equipment. In other words, the miniature pneumatic device of the present invention has sig-

nificant advantages that creating industrial values.

Claims

1. A miniature fluid control device (1A) for use with a miniature pneumatic device (1), the miniature fluid control device (1A) comprising:

a gas inlet plate (11) comprising at least one inlet (110), at least one convergence channel (112) and a central cavity (111), wherein a convergence chamber is defined by the central cavity (111), wherein after a gas is introduced into the at least one convergence channel (112) through the at least one inlet (110), the gas is guided by the at least one convergence channel (112) and converged to the convergence chamber;

a resonance plate (12) having a central aperture (120) corresponding to the convergence chamber of the gas inlet plate (11); and

a piezoelectric actuator (13) comprising a suspension plate (130), an outer frame (131) and a piezoelectric ceramic plate (133), wherein the outer frame (131) comprises at least one bracket (132), and the suspension plate (130) and the outer frame (131) are connected with each other through the at least one bracket (132), wherein the piezoelectric ceramic plate (133) is attached on a first surface (130b) of the suspension plate (130),

wherein the gas inlet plate (11), the resonance plate (12) and the piezoelectric actuator (13) are stacked on each other sequentially, and a gap (g0) is formed between the resonance plate (12) and the piezoelectric actuator (13) to define a first chamber (121), wherein when the piezoelectric actuator (13) is actuated, the gas is fed into the miniature fluid control device (1A) through the at least one inlet (110) of the gas inlet plate (11), converged to the central cavity (111) through the at least one convergence channel (112), transferred through the central aperture (120) of the resonance plate (12), introduced into the first chamber (121), transferred downwardly through a vacant space (135) between the at least one bracket (132) of the piezoelectric actuator (13), and exited from the miniature fluid control device (1A),

wherein a length of the piezoelectric ceramic plate (133) is equal to or less than a length of the suspension plate (130),

a thickness of the suspension plate (130) is 0.2mm, and

a thickness of the piezoelectric ceramic plate (133) is 0.1mm

characterized in that the length of the suspen-

- sion plate (130) is in a range between 2.5mm and 3.5mm, a width of the suspension plate (130) is in a range between 2.5mm and 3.5mm, and the length of the piezoelectric ceramic plate (133) is in a range between 2.5mm and 3.5mm, a width of the piezoelectric ceramic plate (133) is in a range between 2.5mm and 3.5mm.
2. The miniature fluid control device (1A) according to claim 1, wherein an operating voltage of the miniature fluid control device (1A) is $\pm 15V$, and when the miniature fluid control device (1A) is operated at the operating voltage, an output pressure of the miniature fluid control device (1A) is at least 39.9 kPa (300mmHg).
 3. The miniature fluid control device (1A) according to any of the preceding claims, wherein the suspension plate (130) further comprises a bulge (130c) formed on a second surface (130a) of the suspension plate (130), wherein a thickness of the bulge (130c) is in a range between 0.02mm and 0.08mm.
 4. The miniature fluid control device (1A) according to claim 3, wherein the thickness of the bulge (130c) is 0.03mm.
 5. The miniature fluid control device (1A) according to claim 3 or 4, wherein the bulge (130c) is a circular convex structure, and a diameter of the bulge (130c) is 0.55 times as large as a length of a shortest side of the suspension plate (130).
 6. The miniature fluid control device (1A) according to any of the preceding claims, wherein the miniature fluid control device (1A) further comprises at least one insulation plate (141, 142) and a conducting plate (15), wherein the at least one insulation plate (141, 142) and the conducting plate (15) are stacked on each other and located under the piezoelectric actuator (13).
 7. The miniature fluid control device (1A) according to any of the preceding claims, wherein the outer frame (131) of the piezoelectric actuator (13) is made of stainless steel, and a thickness of the outer frame (131) is in a range between 0.1mm and 0.4mm.
 8. The miniature fluid control device (1A) according to claim 7, wherein the thickness of the outer frame (131) is 0.3mm.
 9. The miniature fluid control device (1A) according to any of the preceding claims, wherein two first ends of the bracket (132) of the piezoelectric actuator (13) are connected with the outer frame (131), and a second end of the bracket (132) is connected with the suspension plate (130).

Patentansprüche

1. Miniatur-Fluidsteuerungsvorrichtung (1A) zur Verwendung mit einer Miniatur-Pneumatikvorrichtung (1), wobei die Miniatur-Fluidsteuerungsvorrichtung (1A) umfasst:

eine Gaseinlassplatte (11) mit mindestens einem Einlass (110), mindestens einem Konvergenzkanal (112) und einem zentralen Hohlraum (111), wobei eine Konvergenzkammer durch den zentralen Hohlraum (111) definiert ist, wobei nach dem Einleiten eines Gases in den mindestens einen Konvergenzkanal (112) durch den mindestens einen Einlass (110) das Gas durch den mindestens einen Konvergenzkanal (112) geführt wird und in der Konvergenzkammer zusammenläuft;

eine Resonanzplatte (12) mit einer zentralen Öffnung (120), die der Konvergenzkammer der Gaseinlassplatte (11) zugeordnet ist; und

einen piezoelektrischen Aktuator (13), der eine Aufhängungsplatte (130), einen äußeren Rahmen (131) und eine piezoelektrische Keramikplatte (133) umfasst, wobei der äußere Rahmen (131) mindestens eine Halterung (132) umfasst und die Aufhängungsplatte (130) und der äußere Rahmen (131) durch die mindestens eine Halterung (132) miteinander verbunden sind, wobei die piezoelektrische Keramikplatte (133) an einer ersten Oberfläche (130b) der Aufhängungsplatte (130) angebracht ist,

wobei die Gaseinlassplatte (11), die Resonanzplatte (12) und der piezoelektrische Aktuator (13) übereinander gestapelt angeordnet sind und ein Spalt (g0) zwischen der Resonanzplatte (12) und dem piezoelektrischen Aktuator (13) ausgebildet ist, um eine erste Kammer (121) zu definieren, wobei, wenn der piezoelektrische Aktuator (13) betätigt wird, das Gas in die Miniatur-Fluidsteuerungsvorrichtung (1A) durch den mindestens einen Einlass (110) der Gaseinlassplatte (11) zugeführt wird, durch den mindestens einen Konvergenzkanal (112) in den zentralen Hohlraum (111) zusammenläuft, durch die zentrale Öffnung (120) der Resonanzplatte (12) weitergeleitet, in die erste Kammer (121) eingeleitet, durch einen freien Raum (135) zwischen der mindestens einen Halterung (132) des piezoelektrischen Aktuators (13) nach unten weitergeleitet und aus der Miniatur-Fluidsteuerungsvorrichtung (1A) heraus geleitet wird,

dadurch gekennzeichnet, dass

die Länge der Aufhängungsplatte (130) in einem Bereich zwischen 2,5 mm und 3,5 mm liegt, eine Breite der Aufhängungsplatte (130) in einem Bereich zwischen 2,5 mm

- und 3,5 mm liegt; und
die Länge der piezoelektrischen Keramikplatte (133) in einem Bereich zwischen 2,5 mm und 3,5 mm liegt, eine Breite der piezoelektrischen Keramikplatte (133) in einem Bereich zwischen 2,5 mm und 3,5 mm liegt.
2. Miniatur-Fluidsteuerungsvorrichtung (1A) nach Anspruch 1, wobei eine Betriebsspannung der Miniatur-Fluidsteuerungsvorrichtung (1A) 15 V beträgt, und wenn die Miniatur-Fluidsteuerungsvorrichtung (1A) mit der Betriebsspannung betrieben wird, ein Ausgangsdruck der Miniatur-Fluidsteuerungsvorrichtung (1A) mindestens 39,9 kPa (300 mmHg) beträgt.
 3. Miniatur-Fluidsteuerungsvorrichtung (1A) nach einem der vorhergehenden Ansprüche, wobei die Aufhängungsplatte (130) ferner eine Auswölbung (130c) aufweist, die auf einer zweiten Oberfläche (130a) der Aufhängungsplatte (130) ausgebildet ist, wobei eine Dicke der Auswölbung (130c) in einem Bereich zwischen 0,02 mm und 0,08 mm liegt.
 4. Miniatur-Fluidsteuerungsvorrichtung (1A) nach Anspruch 3, wobei die Dicke der Auswölbung (130c) 0,03 mm beträgt.
 5. Miniatur-Fluidsteuerungsvorrichtung (1A) nach Anspruch 3 oder 4, wobei die Auswölbung (130c) eine kreisförmige konvexe Struktur ist und ein Durchmesser der Auswölbung (130c) 0,55 mal so groß wie eine Länge einer kürzesten Seite der Aufhängungsplatte (130) ist.
 6. Miniatur-Fluidsteuerungsvorrichtung (1A) nach einem der vorhergehenden Ansprüche, wobei die Miniatur-Fluidsteuerungsvorrichtung (1A) ferner mindestens eine isolierende Platte (141, 142) und eine leitende Platte (15) umfasst, wobei die mindestens eine isolierende Platte (141, 142) und die leitende Platte (15) übereinander gestapelt angeordnet sind und unterhalb des piezoelektrischen Aktuators (13) angeordnet sind.
 7. Miniatur-Fluidsteuerungsvorrichtung (1A) nach einem der vorhergehenden Ansprüche, wobei der äußere Rahmen (131) des piezoelektrischen Aktuators (13) aus rostfreiem Stahl hergestellt ist und eine Dicke des äußeren Rahmens (131) in einem Bereich zwischen 0,1 mm und 0,4 mm liegt.
 8. Miniatur-Fluidsteuerungsvorrichtung (1A) nach Anspruch 7, wobei die Dicke des äußeren Rahmens (131) 0,3 mm beträgt.
 9. Miniatur-Fluidsteuerungsvorrichtung (1A) nach ei-

nem der vorhergehenden Ansprüche, wobei zwei erste Enden der Halterung (132) des piezoelektrischen Aktuators (13) mit dem äußeren Rahmen (131) verbunden sind und ein zweites Ende der Halterung (132) mit der Aufhängungsplatte (130) verbunden ist.

Revendications

1. Un dispositif miniature de contrôle de fluides (1A) destiné à être utilisé avec un dispositif pneumatique miniature (1), le dispositif miniature de contrôle de fluides (1A) comprenant :

une plaque d'entrée de gaz (11) comprenant au moins une entrée (110), au moins un canal de convergence (112) et une cavité centrale (111), dans laquelle une chambre de convergence est définie par la cavité centrale (111), dans laquelle après qu'un gaz est introduit dans le au moins un canal de convergence (112) à travers la au moins une entrée (110), le gaz est guidé par le au moins un canal de convergence (112) et convergé vers la chambre de convergence ;

une plaque de résonance (12) ayant une ouverture centrale (120) correspondant à la chambre de convergence de la plaque d'entrée de gaz (11) ; et

un actionneur piézoélectrique (13) comprenant une plaque de suspension (130), un cadre extérieur (131) et une plaque de céramique piézoélectrique (133), dans lequel le cadre extérieur (131) comprend au moins un support (132), et la plaque de suspension (130) et le cadre extérieur (131) sont reliés l'un à l'autre par le biais du au moins un support (132), dans lequel la plaque de céramique piézoélectrique (133) est fixée sur une première surface (130b) de la plaque de suspension (130),

dans lequel la plaque d'entrée de gaz (11), la plaque de résonance (12) et l'actionneur piézoélectrique (13) sont empilés les uns sur les autres de manière séquentielle, et un espace (g0) est formé entre la plaque de résonance (12) et l'actionneur piézoélectrique (13) pour définir une première chambre (121), dans lequel lorsque l'actionneur piézoélectrique (13) est actionné, le gaz est introduit dans le dispositif miniature de contrôle de fluides (1A) à travers la au moins une entrée (110) de la plaque d'entrée de gaz (11), convergé vers la cavité centrale (111) à travers le au moins un canal de convergence (112), transféré à travers l'ouverture centrale (120) de la plaque de résonance (12), introduit dans la première chambre (121), transféré vers le bas à travers un espace libre (135) entre le au moins un support (132) de l'actionneur pié-

- zoélectrique (13), et sorti du dispositif miniature de contrôle de fluide (1A),
caractérisé en ce que
la longueur de la plaque de suspension (130) est dans une plage comprise entre 2,5 mm et 3,5 mm, une largeur de la plaque de suspension (130) est dans une plage comprise entre 2,5 mm et 3,5 mm ; et
la longueur de la plaque de céramique piézoélectrique (133) est comprise entre 2,5 mm et 3,5 mm, la largeur de la plaque de céramique piézoélectrique (133) est comprise entre 2,5 mm et 3,5 mm.
2. Le dispositif miniature de contrôle de fluides (1A) selon la revendication 1, dans lequel une tension de fonctionnement du dispositif miniature de contrôle de fluides (1A) est de 15V, et lorsque le dispositif miniature de contrôle de fluides (1A) fonctionne à la tension de fonctionnement, une pression de sortie du dispositif miniature de contrôle de fluides (1A) est d'au moins 39,9 kPa (300mmHg).
 3. Le dispositif miniature de contrôle de fluides (1A) selon l'une quelconque des revendications précédentes, dans lequel la plaque de suspension (130) comprend en outre un renflement (130c) formé sur une seconde surface (130a) de la plaque de suspension (130), dans lequel une épaisseur du renflement (130c) est dans une plage comprise entre 0,02 mm et 0,08 mm.
 4. Le dispositif miniature de contrôle de fluides (1A) selon la revendication 3, dans lequel l'épaisseur du renflement (130c) est de 0,03mm.
 5. Le dispositif miniature de contrôle de fluides (1A) selon la revendication 3 ou 4, dans lequel le renflement (130c) est une structure convexe circulaire, et un diamètre du renflement (130c) est 0,55 fois plus grand qu'une longueur d'un côté le plus court de la plaque de suspension (130).
 6. Le dispositif miniature de contrôle de fluides (1A) selon l'une quelconque des revendications précédentes, dans lequel le dispositif miniature de contrôle de fluides (1A) comprend en outre au moins une plaque d'isolation (141, 142) et une plaque conductrice (15), dans lequel la au moins une plaque d'isolation (141, 142) et la plaque conductrice (15) sont empilées l'une sur l'autre et situées sous l'actionneur piézoélectrique (13).
 7. Le dispositif miniature de contrôle de fluides (1A) selon l'une quelconque des revendications précédentes, dans lequel le cadre extérieur (131) de l'actionneur piézoélectrique (13) est en acier inoxydable, et une épaisseur du cadre extérieur (131) est

dans une plage comprise entre 0,1 mm et 0,4 mm.

8. Le dispositif miniature de contrôle de fluides (1A) selon la revendication 7, dans lequel l'épaisseur du cadre extérieur (131) est de 0,3 mm.
9. Le dispositif miniature de contrôle de fluides (1A) selon l'une quelconque des revendications précédentes, dans lequel deux premières extrémités du support (132) de l'actionneur piézoélectrique (13) sont reliées au cadre extérieur (131), et une seconde extrémité du support (132) est reliée à la plaque de suspension (130).

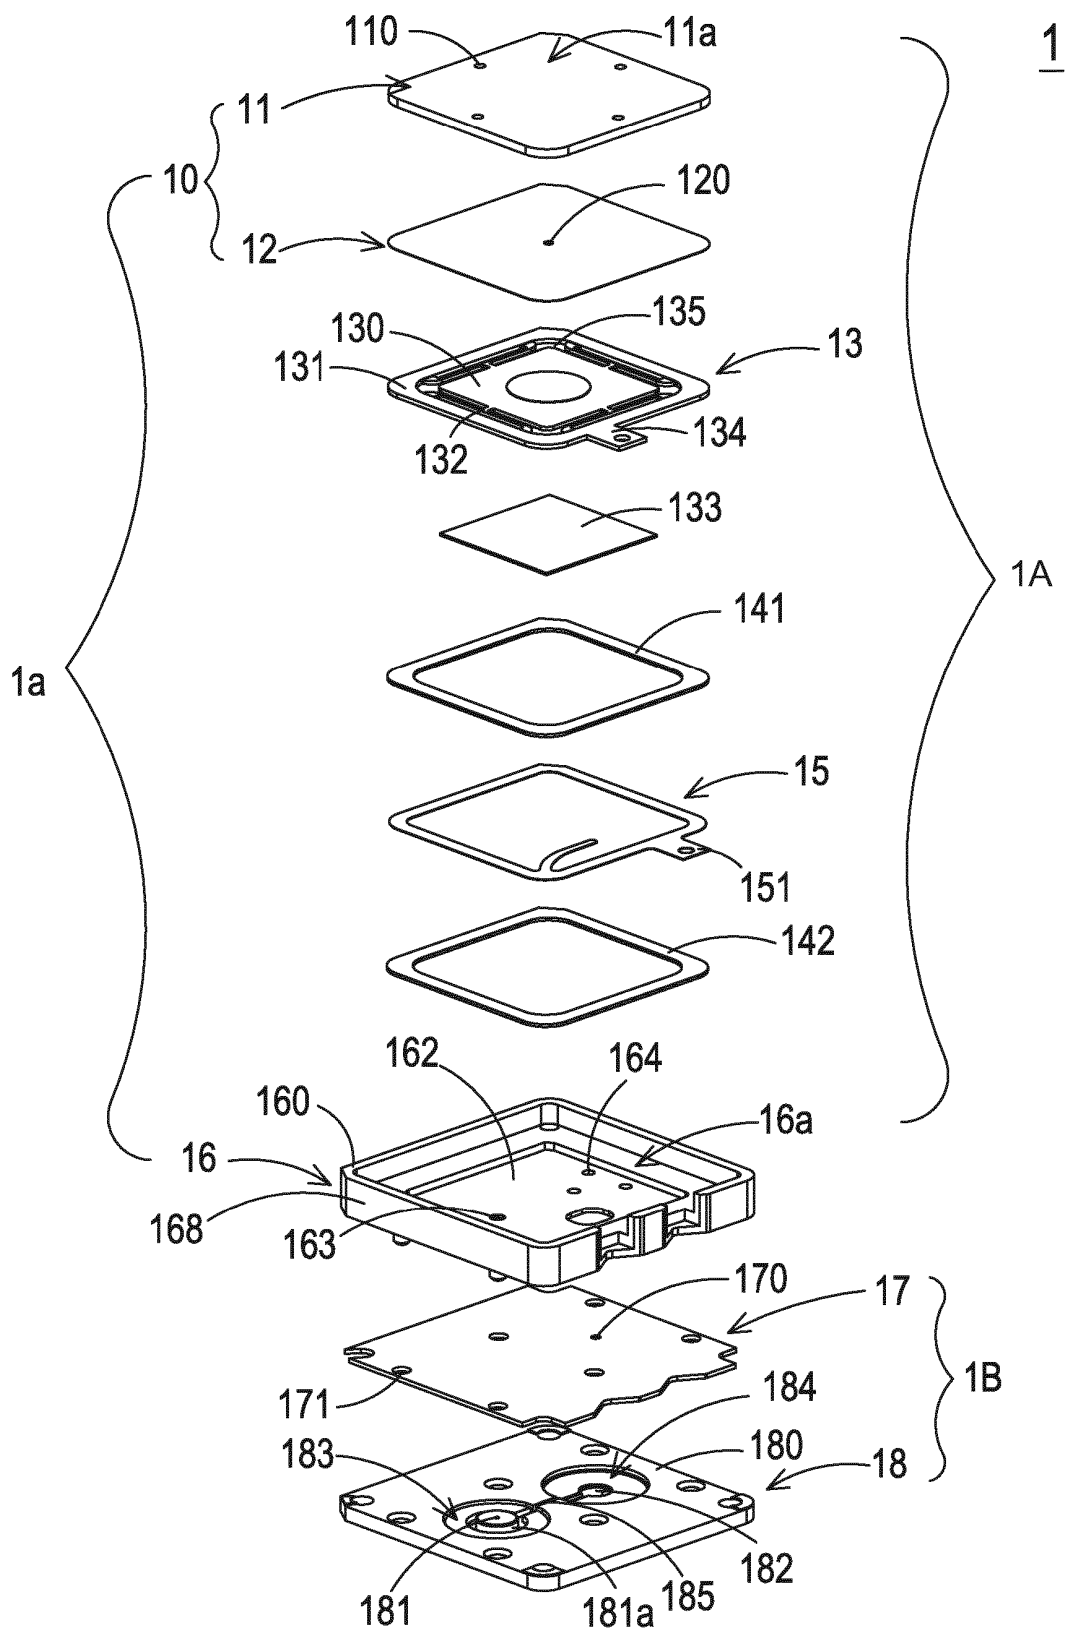


FIG.1A

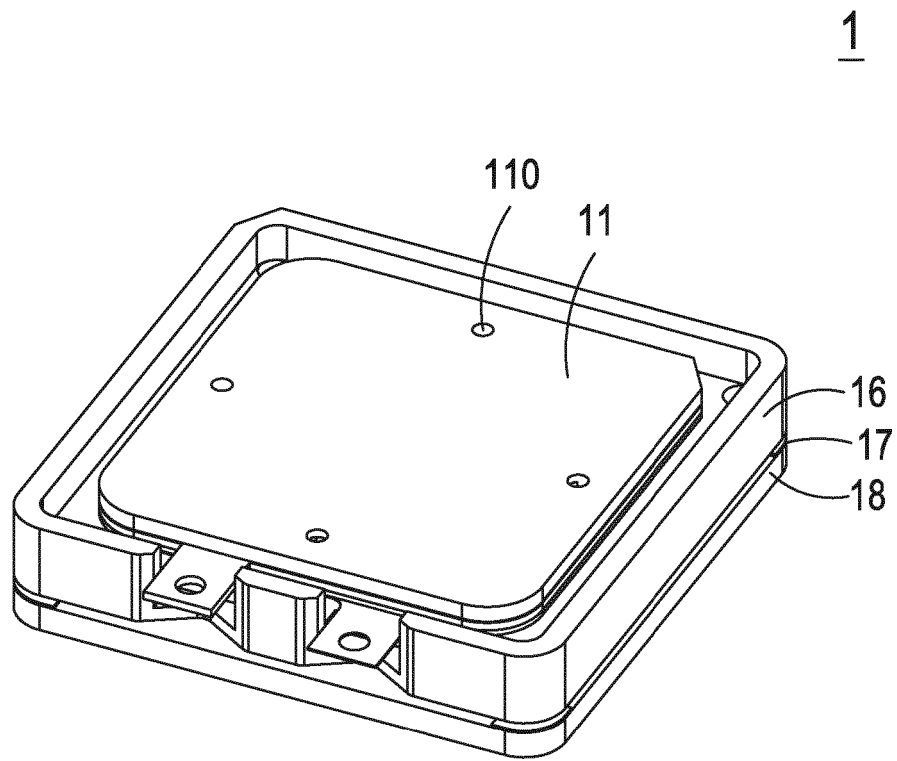


FIG.1B

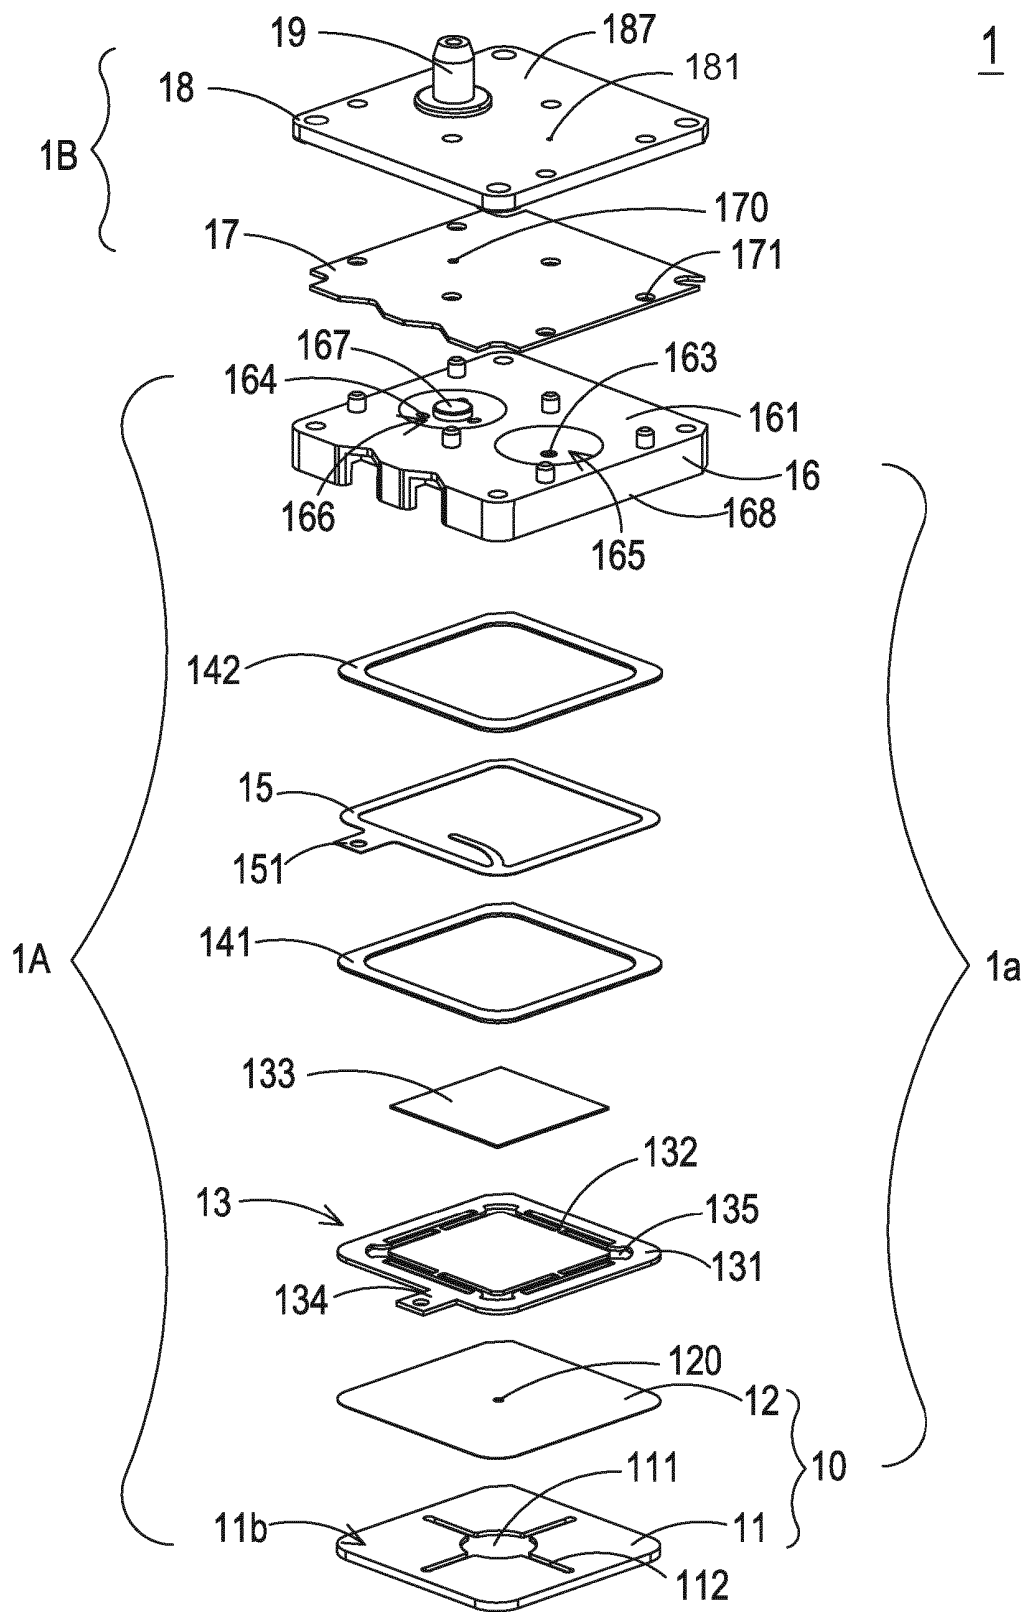


FIG.2A

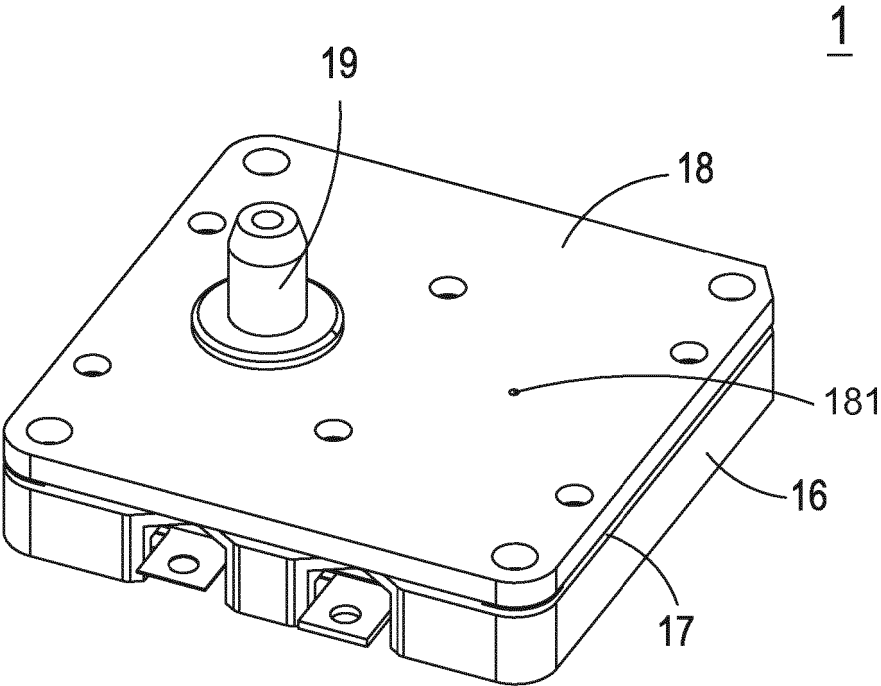


FIG.2B

13

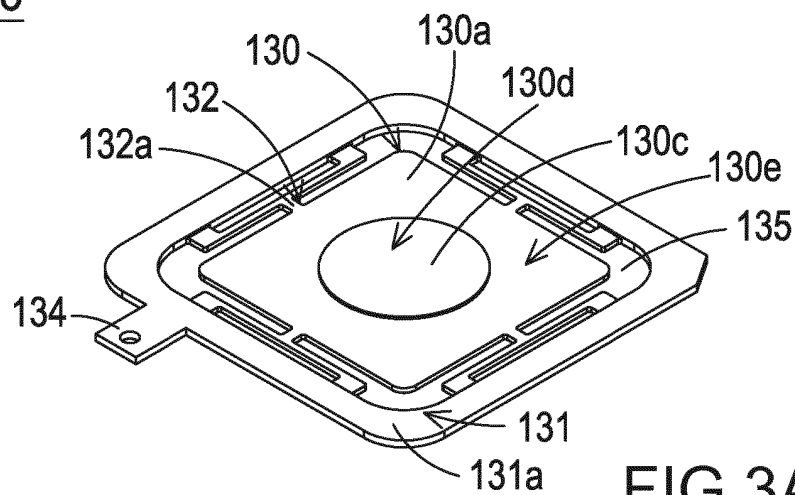


FIG.3A

13

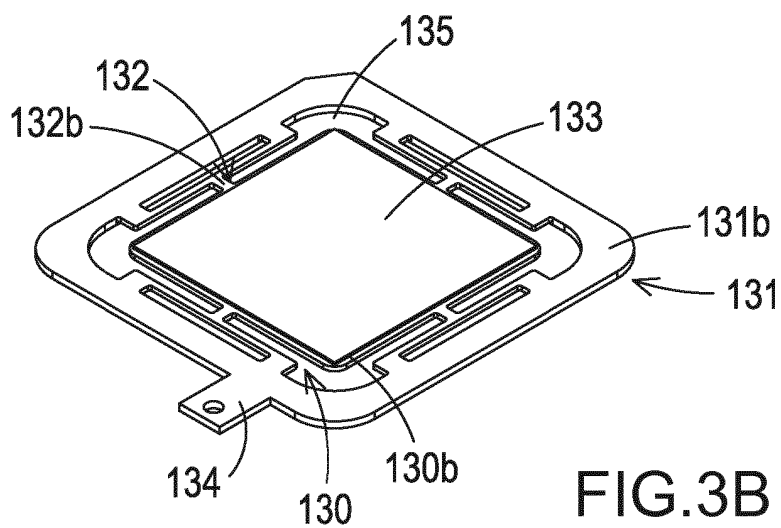


FIG.3B

13

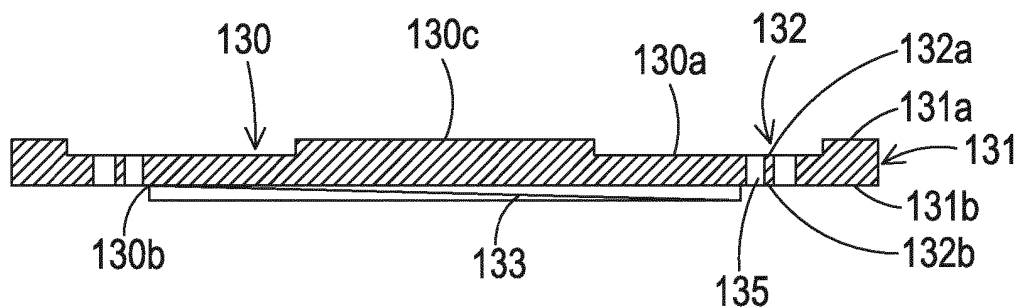


FIG.3C

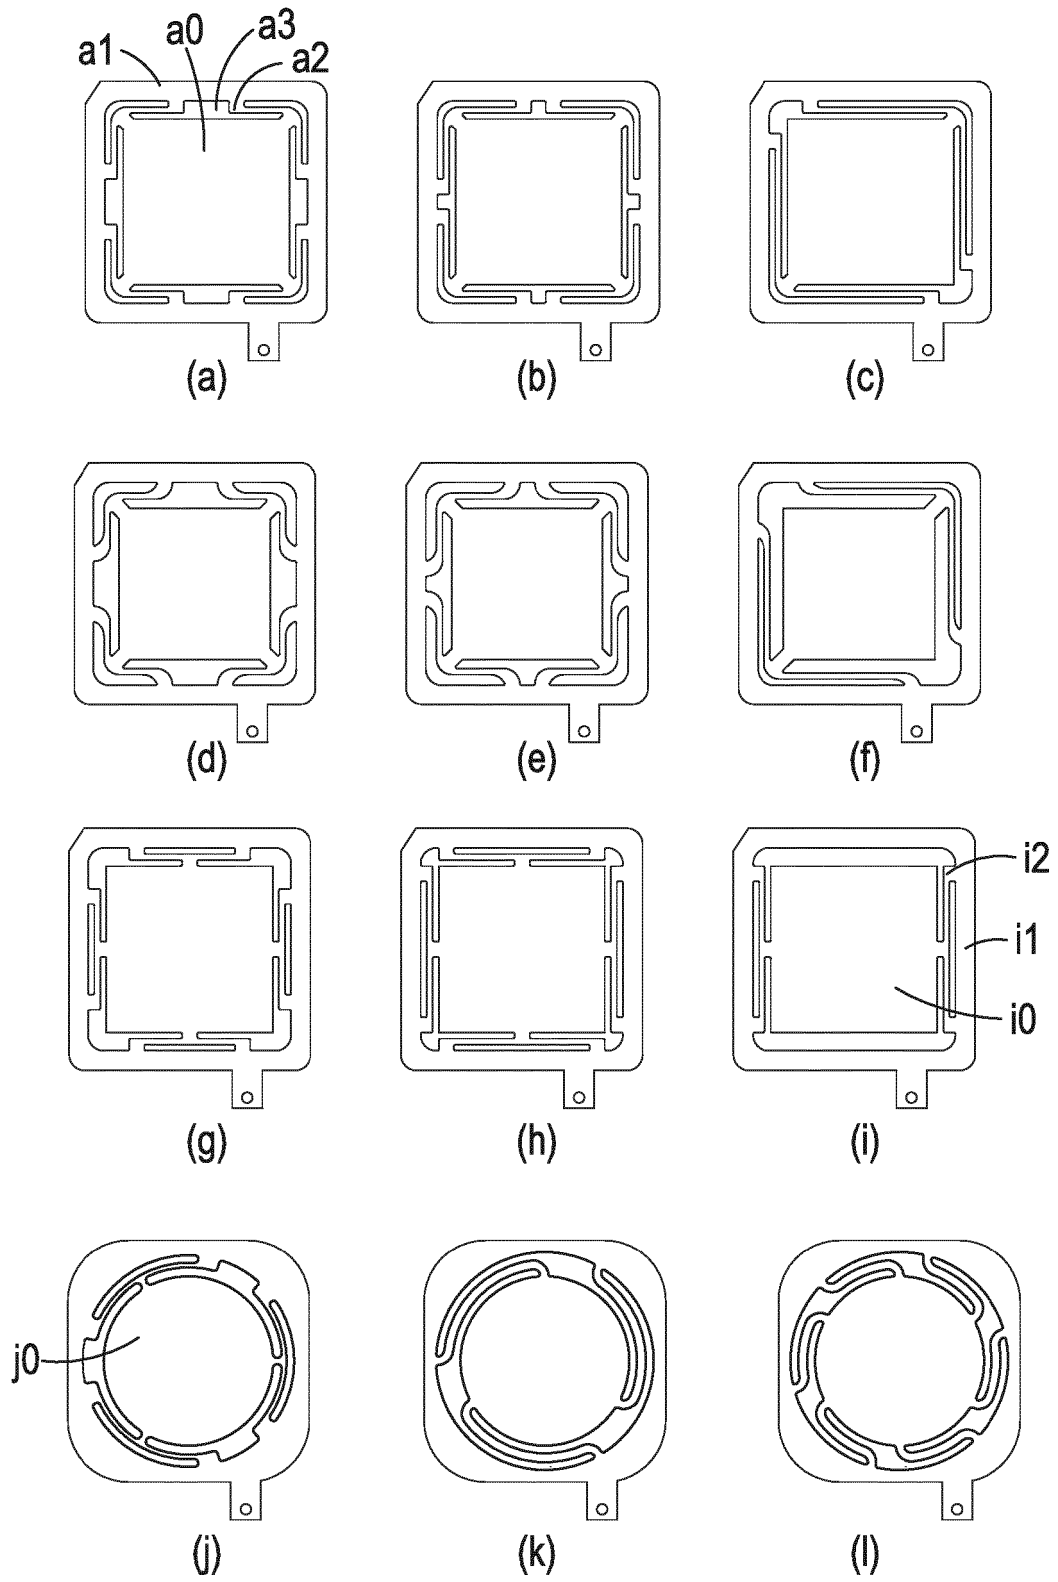


FIG.4A

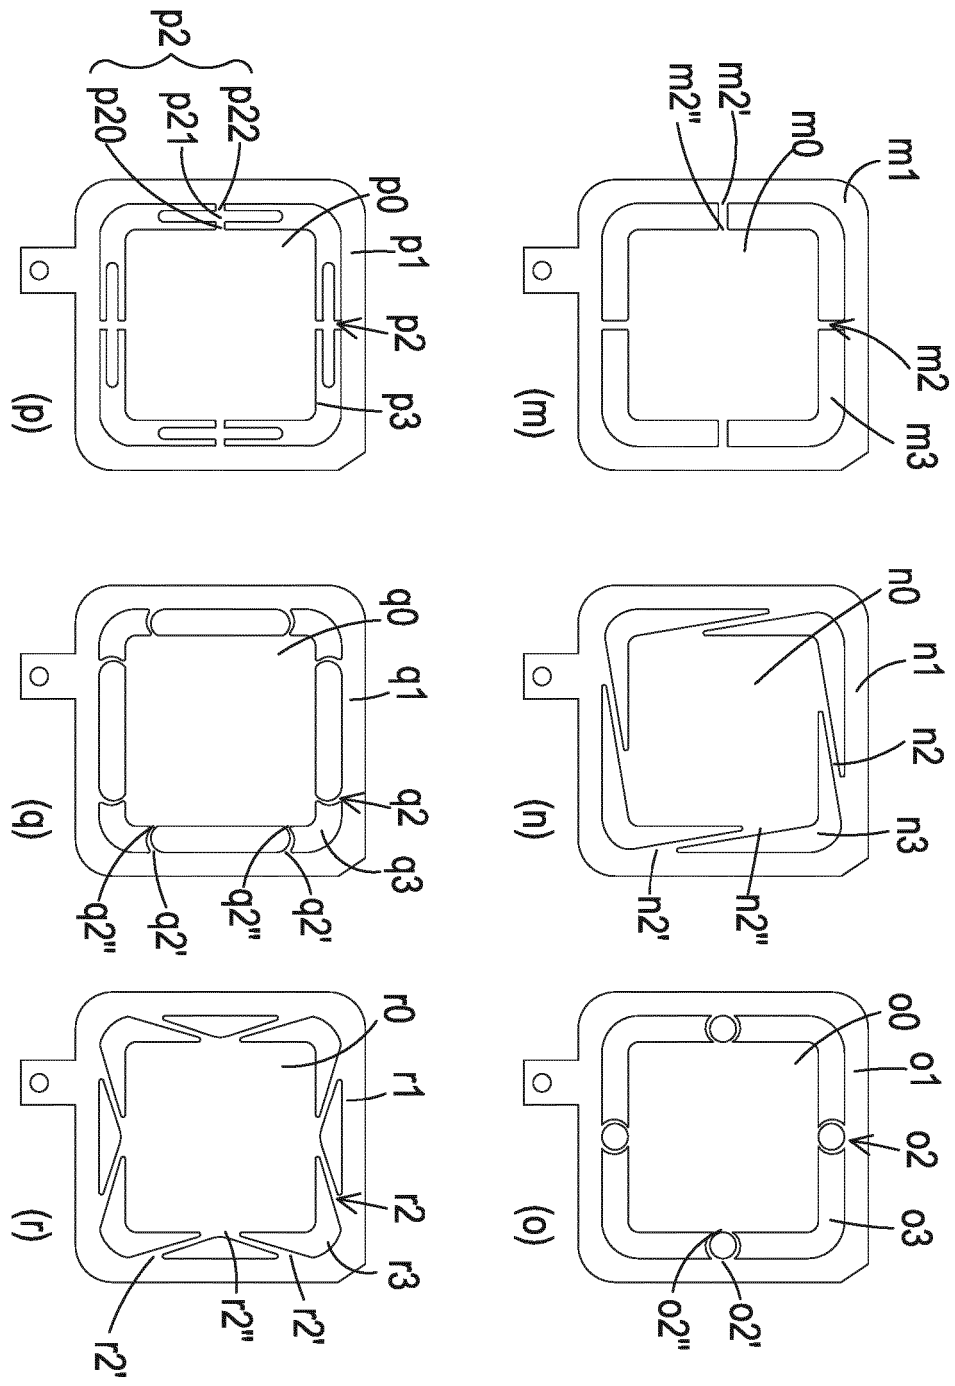


FIG. 4B

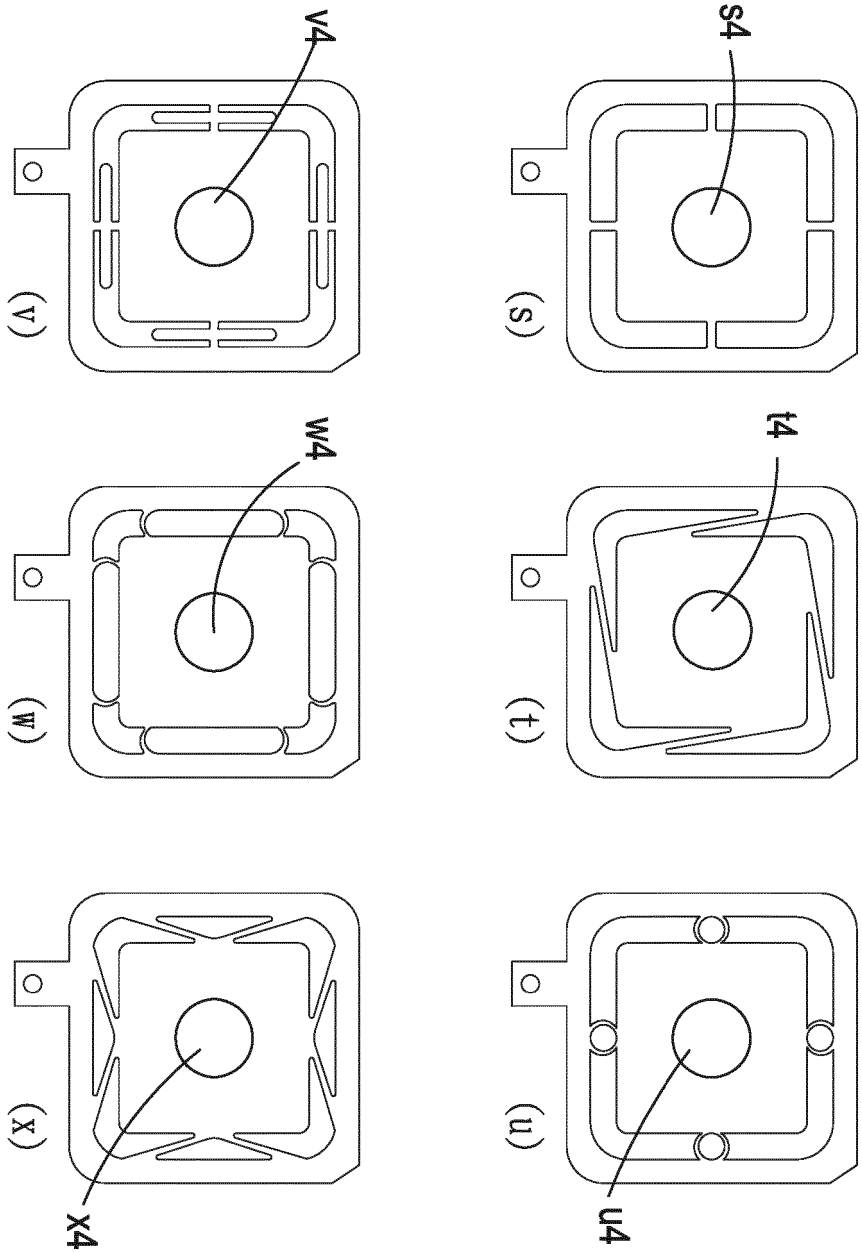


FIG. 4C

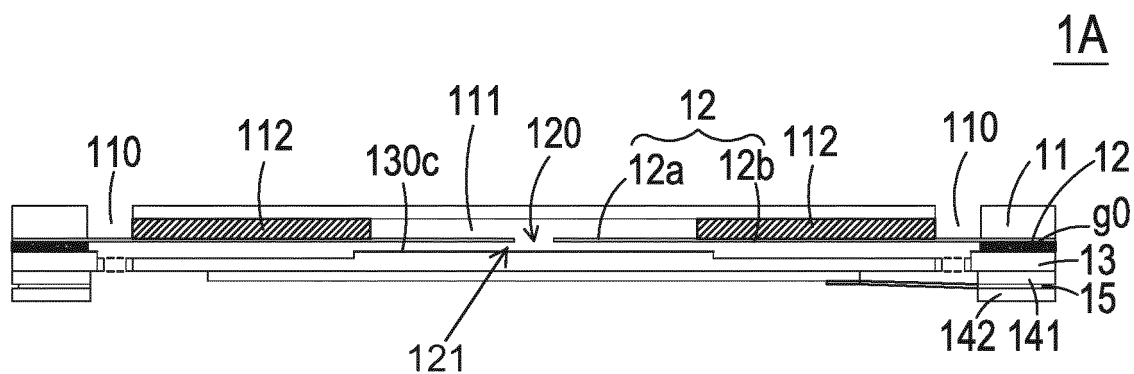


FIG. 5A

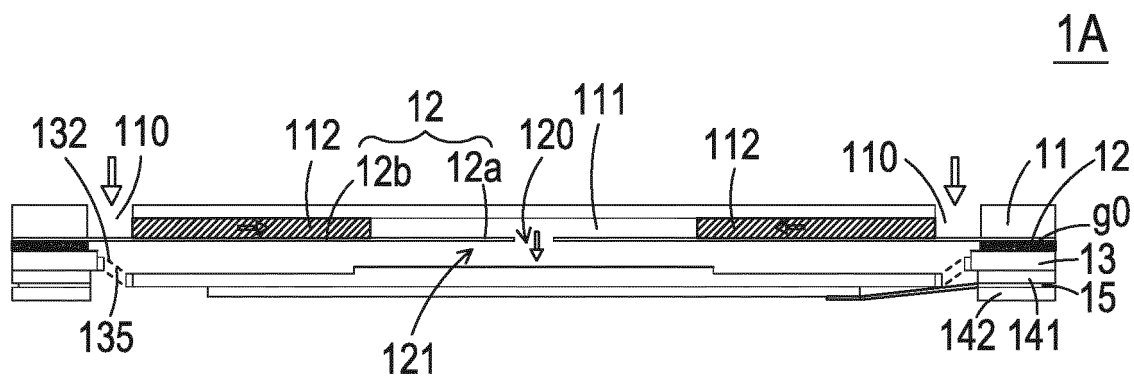


FIG. 5B









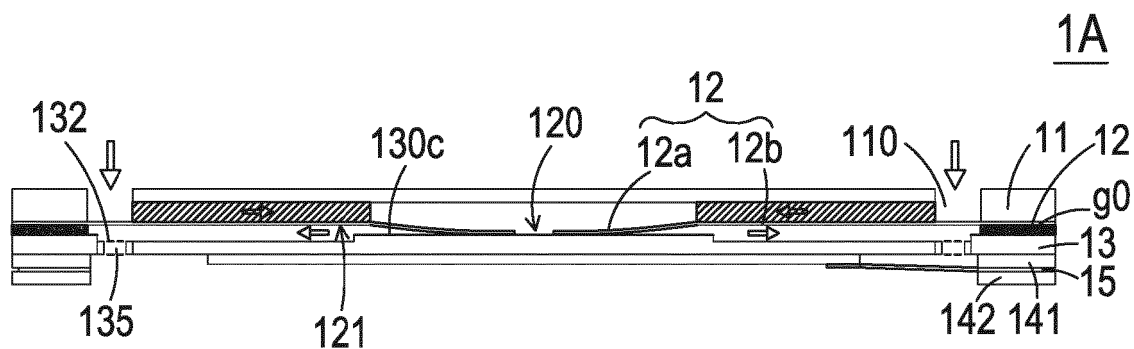


FIG. 5C

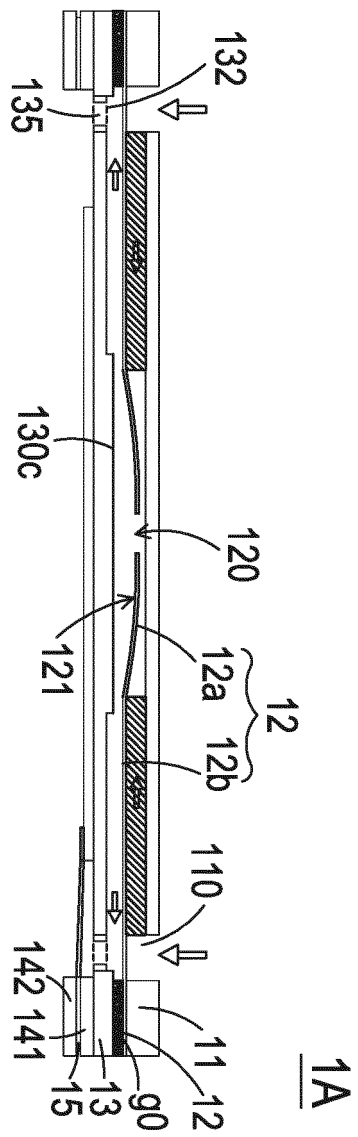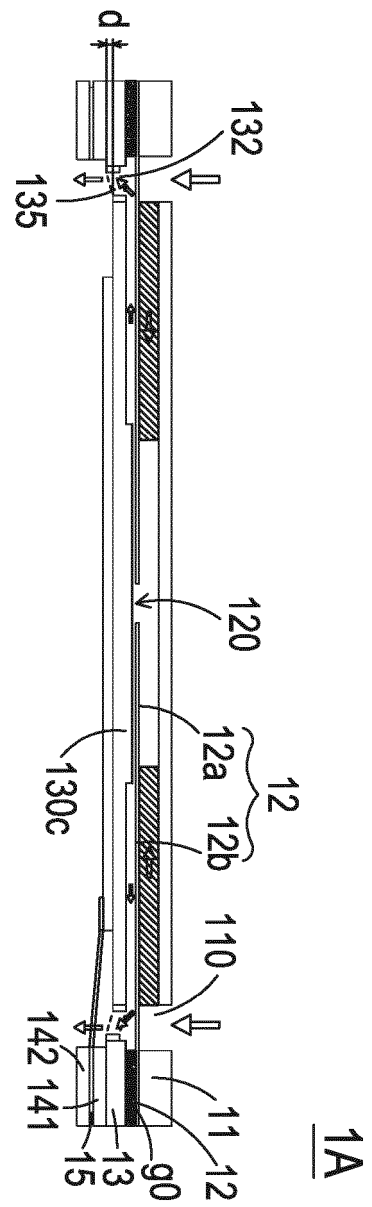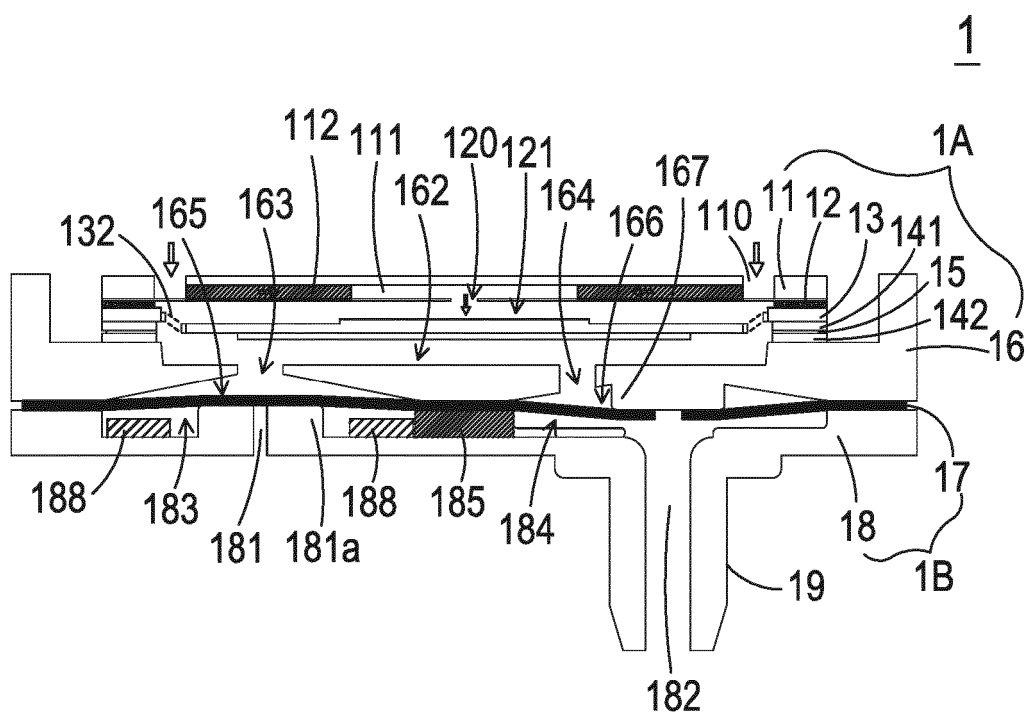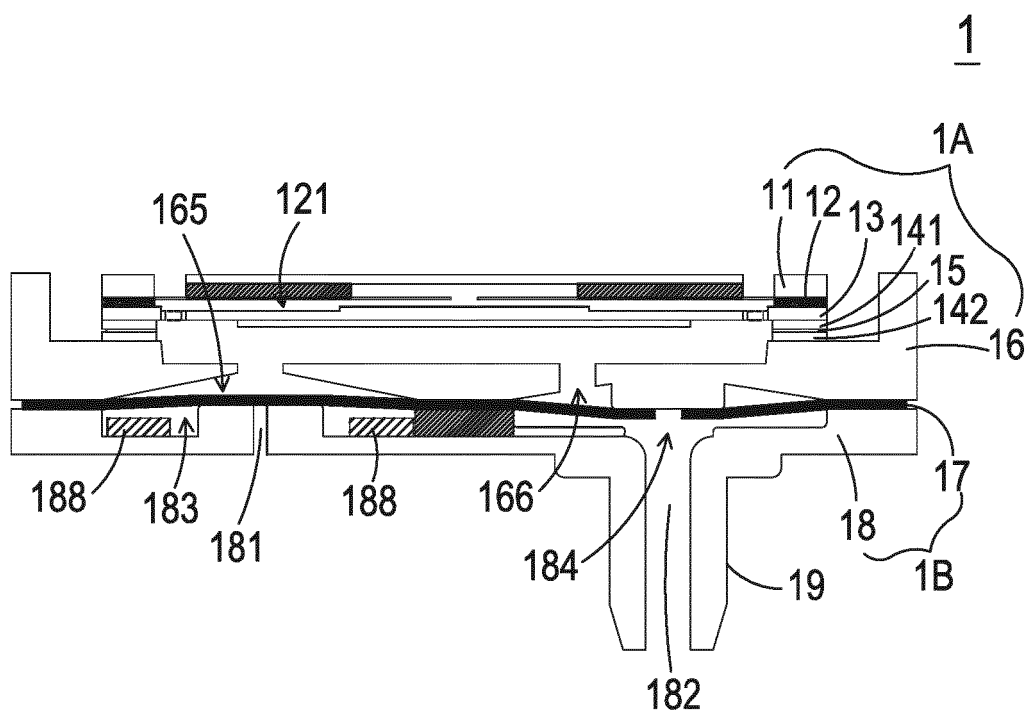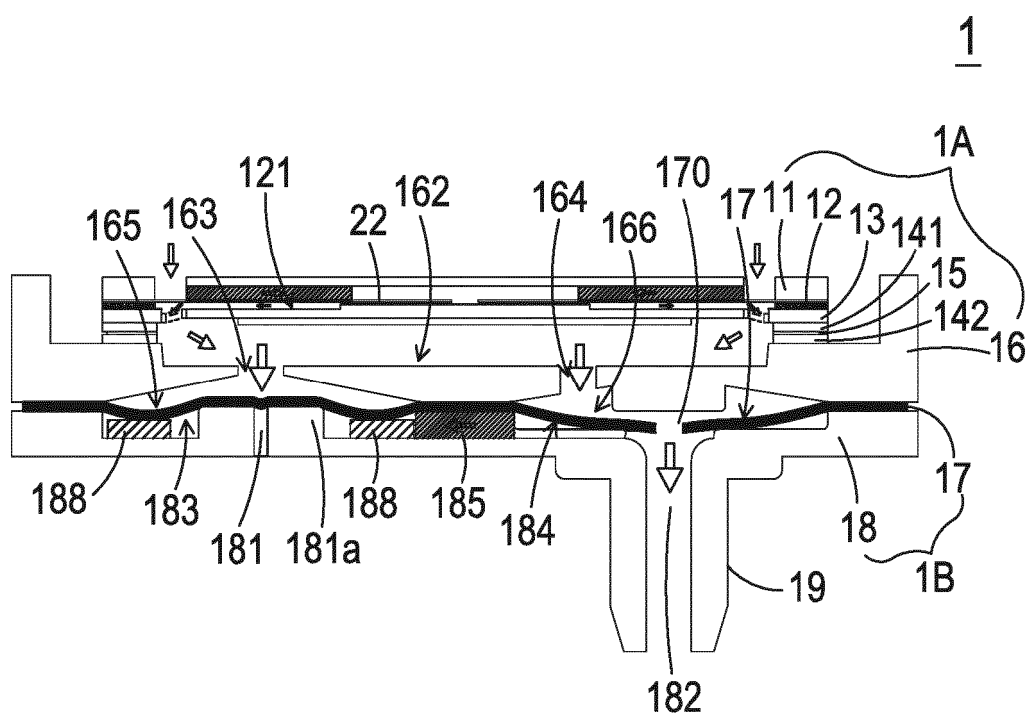

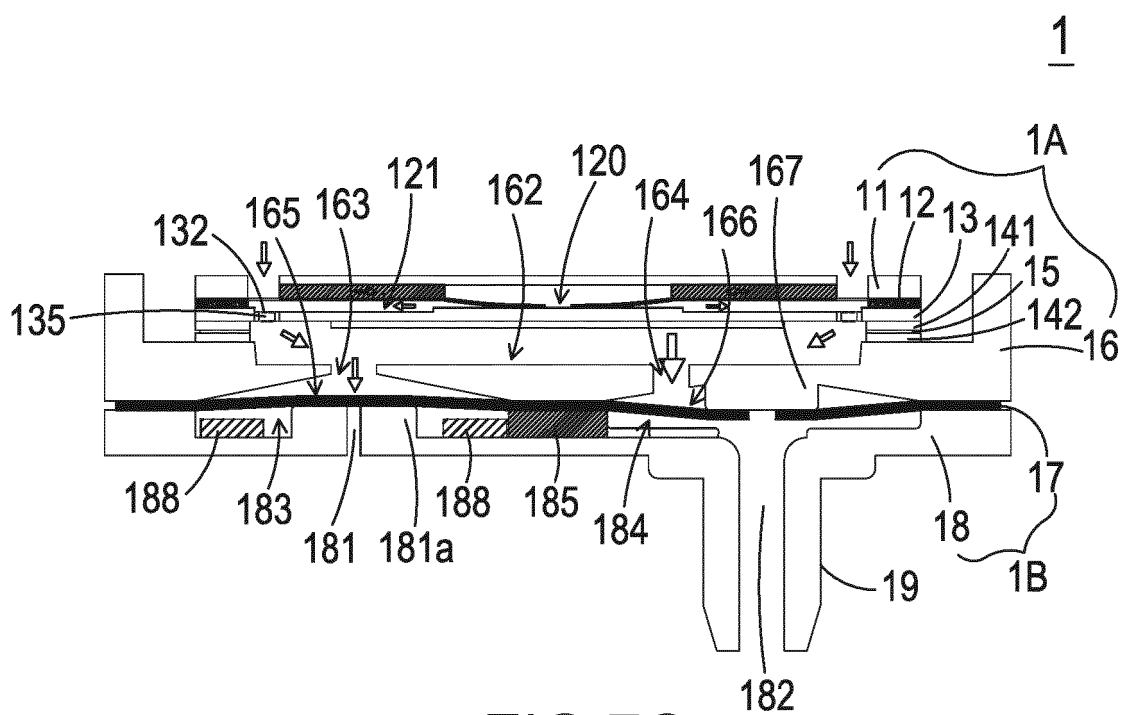

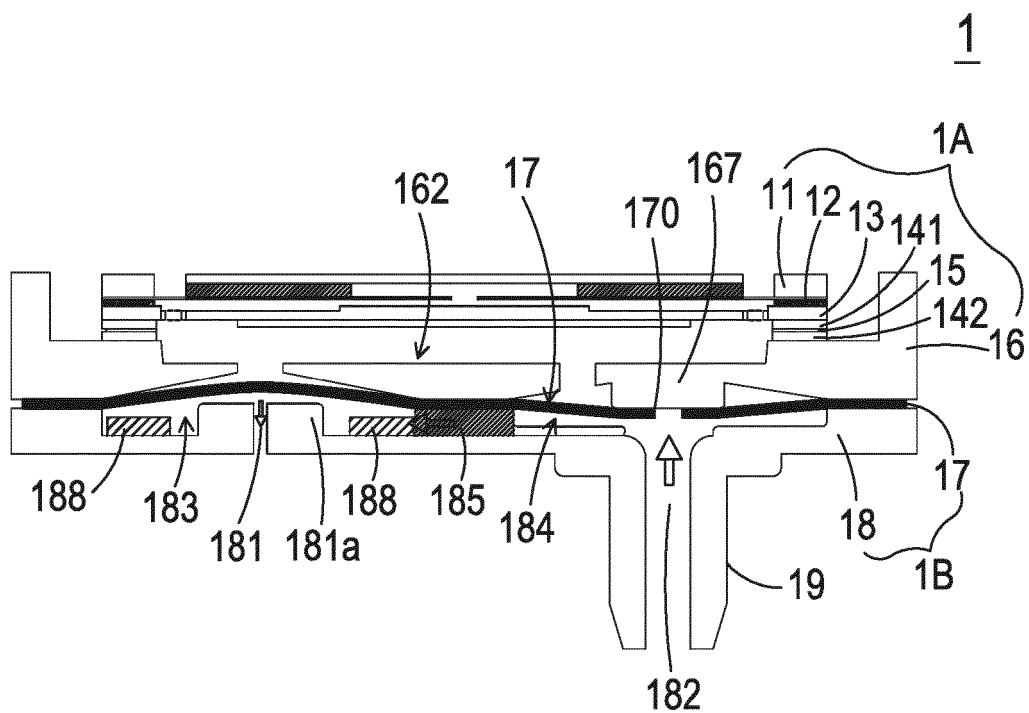

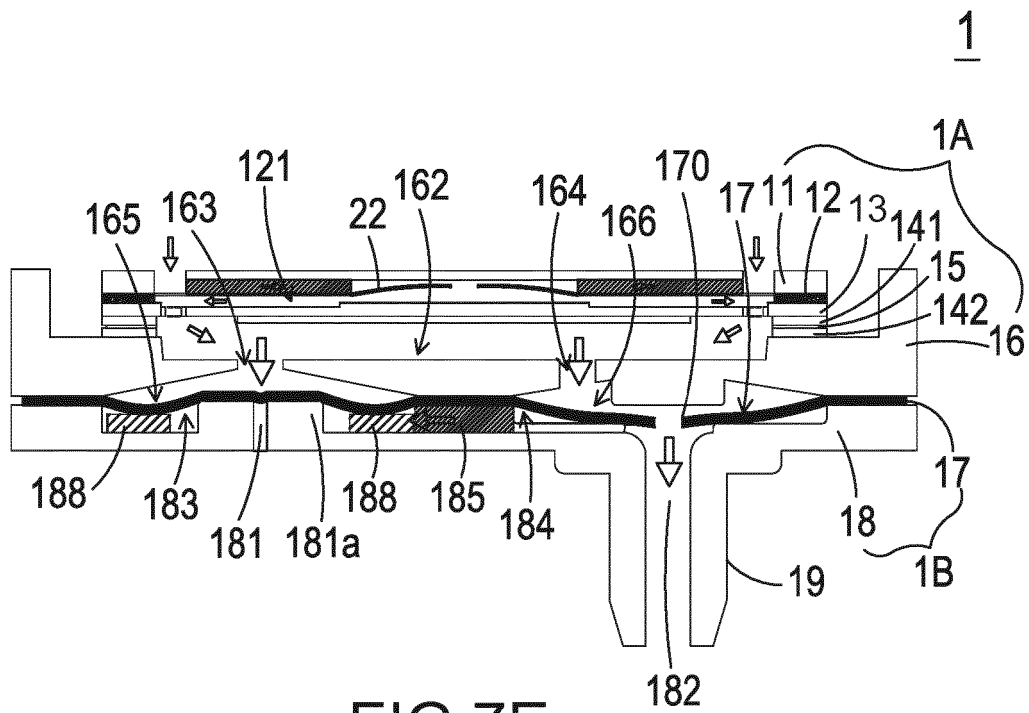

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 3203079 A1 [0005]
- CN 205383064 U1 [0006]