

(19)



(11)

EP 3 338 593 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

04.05.2022 Bulletin 2022/18

(51) International Patent Classification (IPC):

A45F 3/04 ^(2006.01) **A45F 3/12** ^(2006.01)

(52) Cooperative Patent Classification (CPC):

A45F 3/047; A45F 3/04; A45F 3/12

(21) Application number: **17208750.4**

(22) Date of filing: **20.12.2017**

(54) **BACKPACK**

RUCKSACK

SAC À DOS

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **21.12.2016 DE 102016225790**

(43) Date of publication of application:

27.06.2018 Bulletin 2018/26

(73) Proprietor: **adidas AG**

91074 Herzogenaurach (DE)

(72) Inventor: **SCHENK, Stefan**

91074 Herzogenaurach (DE)

(74) Representative: **Bardehle Pagenberg**

Partnerschaft mbB

Patentanwälte Rechtsanwälte

Prinzregentenplatz 7

81675 München (DE)

(56) References cited:

CA-A1- 2 552 491

CN-U- 204 336 151

FR-A1- 2 849 997

GB-A- 1 238 303

KR-B1- 101 030 985

US-A- 3 957 184

US-A- 5 431 317

US-A1- 2006 289 586

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

1. Technical field

[0001] The present invention relates to a backpack, in particular to a backpack for biking.

2. Description of the prior art

[0002] In recent years, backpacks for sports applications have become more and more popular. Backpacks are useful for many different sports, in particular for outdoor activities such as hiking and biking. In order to comfortably carry the backpack on a wearer's back, it is known to provide cushioning shoulder straps, e.g. straps comprising a cushioning material which extend over the shoulders of the wearer of the backpack.

[0003] For example, US 2011/0290843 A1 discloses a backpack having a convex back panel, wherein the convex back panel of the backpack may curve outward from the center of a wearer's back to minimize contact between the backpack and the wearer's back. The backpack may have a pair of shoulder straps operably connected to the convex back panel to secure the backpack to the back of the wearer.

[0004] Furthermore, US 6,164,509 A discloses an ergonomic backpack with a series of top straps, side straps, bottom straps and optional support members serving to move the backpack center of gravity higher in the backpack and closer to the wearer's body, significantly redistributing the load of books borne by the wearer's shoulders along a longer portion of the body and the back.

[0005] Further prior art is disclosed in US 2006/0 289 586 A1 and US 2006/0 289 589 A1.

[0006] CA 2552491 A1 relates to a backpack and a strap system for use with articles such as backpacks or other type of carrying devices having straps that extend over the shoulders.

[0007] US 5431317 A relates to the field of traveling bags. In particular, the invention relates to a multimode traveling bag that can be used as a hand carrying bag, back pack, or shoulder bag.

[0008] KR 101030985 B1 concerns a multi-purpose backpack is provided to facilitate carrying of the backpack by integrating sub-backpacks with a main backpack.

[0009] US 3957184 A relates to light weight back packs carried by hikers and climbers for hauling gear.

[0010] CN 204336151 U relates to the technical field of backpacks, in particular to a backpack shoulder strap height adjusting structure which comprises a backpack body.

[0011] GB 1238303 A relates to cases, bags or like portable containers, such as suitcases or holdalls, which may be carried in the hand in the manner of a conventional case, or upon the back in the manner of a rucksack.

[0012] FR 2 849 997 A1 relates to an adjustable set of straps for backpacks having elastic straps stitched to the body of the bag and free ends of shoulder straps and

serving as main straps and as subsidiary straps for a buckle at the waist of the wearer.

[0013] However, the backpacks known in the art do not allow an optimal and secure adjustment of their position on the wearer's back. An optimal and secure adjustment, however, is highly important for performance oriented applications such as downhill biking, where the backpack is subject to significant forces caused by gravity and sudden impacts.

[0014] Therefore, the underlying problem of the present invention is to further optimize backpacks and to at least partly overcome the above outline difficulties in a secure positioning of the backpack on the wearer's back.

3. Summary of the invention

[0015] The above-mentioned problem is at least partly solved by a backpack according to the independent claim. Advantageous embodiments are contained in the dependent claims.

[0016] The present invention relates to a backpack according to claim 1. In the context of the present invention, the at least one cushioning shoulder strap has a proximal part closer to the main body and a distal part more away from the main body. Therefore, the proximal part of the cushioning shoulder strap may also be referred to as an upper part of the cushioning shoulder strap that is adjacent to the wearer's shoulder and the distal part may be referred to as a lower part of the cushioning shoulder strap.

[0017] Any undesired change of the position of the backpack during sports applications such as downhill biking will impair the performance of the wearer. The inventors have realized that the provision of two stability straps for a cushioning shoulder strap is sufficient to firmly and comfortably maintain the backpack in its proper position on the wearer's back. Therefore, an unintended movement of such a backpack on the wearer's back, for example towards the wearer's head, can be reliably avoided.

[0018] The at least two stability straps may be connected to the main body at a first and a second stability anchorage, wherein the first stability anchorage may be arranged closer to a proximal part of the cushioning shoulder strap than the second stability anchorage. For example, when the backpack is used on a wearer's back, the first stability anchorage may be arranged closer to the shoulder of the wearer than the second stability anchorage. Such an arrangement of the stability anchorages of the stability straps can further optimize the secure positioning of the backpack.

[0019] In some embodiments, when the backpack is used on a wearer's back, the first stability anchorage may be arranged in a thorax area of the wearer. Moreover, the second stability anchorage may be arranged in a waist area of the wearer. Thus, the first stability anchorage may be located at a middle part of the backpack and

the second stability anchorage may be located at a lower part of the backpack. These embodiments further help to avoid undesired movements of the backpack along the wearer's back as the distance between the stability strap at the thorax area of a wearer and the wearer's armpit is much smaller than for the straps of conventional backpacks. Therefore, even in sports applications like downhill biking with high external forces, the described backpack can essentially remain at an adjusted position on the wearer's back.

[0020] In some embodiments, the distance between the first stability anchorage and the second stability anchorage may be smaller than the distance between the first stability anchorage and a proximal part of the at least one cushioning shoulder strap. For example, when the backpack is used on a wearer's back, the distance between the first stability anchorage and the second stability anchorage may be smaller than the distance between the first stability anchorage and an upper end of the main body which is adjacent to the wearer's shoulder. The inventors have noted that such a geometry further improves the secure adjustment of the desired position of the backpack.

[0021] In some embodiments, the at least two stability straps may be provided as a single strap extending from the main body to the distal part of the at least one cushioning shoulder strap and back to the main body. By providing the two stability straps as a single strap, a simple and cost-efficient construction can be provided. In addition, it allows to easily adjust the stability straps, for example to simultaneously tighten the two stability straps simply by shortening the overall single strap.

[0022] Whereas in the prior art mentioned above the cushioning shoulder strap is attached to the main body without the possibility for any adjustment, the embodiments of the invention provide a fundamentally new approach for adjusting the position of the backpack on a wearer's back and improving the wearer's comfort: Having two coupling straps allows to adjust the position of the proximal part of the cushioning shoulder strap not only so as to obtain a tighter fit but also in other directions, for example in a lateral direction, to adapt to different shoulder widths.

[0023] In some embodiments, the at least two coupling straps may be connected to the main body at a first and a second coupling anchorage. Preferably, at least one of the first and second coupling anchorages is arranged on an inner surface of the main body.

[0024] In some embodiments, the at least two coupling straps may be provided as a single strap extending from the main body to the proximal part of the at least one cushioning shoulder strap and back to the main body. Similar to the stability straps, such a construction reduces manufacturing costs and allows for an easier tightening.

[0025] The backpack comprises a first and a second pair of coupling straps, wherein the first pair is connected to a proximal part of a first cushioning shoulder strap and to the main body and the second pair is connected to a

proximal part of a second cushioning shoulder strap and to the main body. Moreover, a coupling strap of the first pair is connected to a coupling strap of the second pair. Similarly, such an arrangement facilitates the manufacture and the adjustment of the fit, as only a reduced number of couplings straps must be adjusted.

[0026] Moreover, the connection of the first pair and the second pair of coupling straps may be arranged on an inner surface of the main body. Such arrangement can avoid an unintentional disconnection of the secured connection between the first and second pairs of coupling straps during sports applications such as downhill biking or backcountry snowboarding, where a wearer of the backpack may be in dangerous situation as they may have a touch with trees and bushes.

[0027] In some embodiments, the main body may comprise a back panel. Such a back panel may provide support for the main body of the backpack and may minimize the contact between the backpack and the wearer's back. As a result, a durable and breathable backpack maybe provided for sports applications.

[0028] In some embodiments, at least one of the lengths of the at least two stability straps may be adjustable. Moreover, at least one of the lengths of the at least two coupling straps may be adjustable. Such embodiments provide a higher degree for varied adjustments of the backpack's position on the wearer's back so that the optimized wearer's comfort can be achieved.

[0029] In some embodiments, the backpack may have two cushioning shoulder straps and at least one supporting strap connecting the two cushioning shoulder straps. The supporting strap cooperates with the stability straps and/or the coupling straps to maintain the two cushioning shoulder straps at a comfortable and secured position on a wearer's back.

4. Short description of the figures

[0030] Aspects of the present invention will be explained in more detail with reference to the accompanying figures in the following. These figures present:

Fig. 1: a possible embodiment of a backpack according to the present invention worn by a wearer;

Figs. 2A - 2C: further possible embodiments of a backpack according to the present invention; and

Fig. 3: a still further possible embodiment of a backpack according to the present invention.

5. Detailed description of preferred embodiments

[0031] Possible embodiments and variations of the present invention are described in the following with ref-

erence to a backpack for sports applications, in particular for downhill biking. However, the concept of the present invention can identically or similarly be applied to any kind of sport application where a backpack is feasible and helpful, such as snowboarding or backcountry snowboarding, skiing or touring skiing, skateboarding or longboarding, hiking, running (e.g. as a hydration pack), etc. Moreover, the underlying principle of the present invention can also be applied to any backpack for carrying items or heavy loads in daily life or for travelling such as a knapsack, rucksack, single strap pack, training backpack, daypack, high-end backpack equipped with solar panels, movpack, commuting backpack, pack, external or internal frame pack, fanny pack or sackpack as well as for professional use such as a military backpack, tactical backpack for ammunition during military-style combat games such as paintball and airsoft, a specialist backpack designed for professional cooks and culinary students for carrying knives, cooking tools and other miscellaneous equipment such as notebooks, towels, and uniforms, or other specialist backpacks for fire services for wildfire fighting and for rescue services for Search and Rescue. Furthermore, the present invention is not limited to backpacks but can be applied to any type of container for the transport of items such as a messenger bag, bookbag, shopping bag (e.g. used by high-end retailers), kitbag, handbag, schoolbag or suitcase, satchels, sling bag, postbag, duffel bag, etc.

[0032] Moreover, for brevity only a limited number of embodiments are described in the following. However, the skilled person will recognize that the specific features described with reference to these embodiments can be modified and combined differently and that certain aspects of the specific embodiments may also be omitted, as long as this falls within the scope of the claims. Moreover, it is noted that the aspects described in the subsequent detailed description may be combined with aspects described in the above summary section, as long as this falls within the scope of the claims.

[0033] Fig. 1 presents a possible embodiment of a backpack 100 according to the present invention worn by a wearer 102 in front view, rear view and side view. According to the first aspect of the present invention, the backpack 100 comprises a main body 105, two cushioning shoulder straps 110 adapted for cushioning a load of the main body 105 and two pairs of stability straps 120 individually connecting a distal part of each cushioning shoulder strap 110 to the main body 105. In general, the cushioning shoulder strap 110 has an elongated shape with a proximal part closer to the main body 105 and a distal part more away from the main body 105. As shown in Fig. 1, the distal part may be referred to as a lower part of the cushioning shoulder strap 110 that is distant from the wearer's shoulder. Preferably, when the backpack 100 is worn by the wearer 102, each of the stability straps 120 is adapted to extend below an armpit of the wearer 102 and between an arm 103 and the body side of the wearer 102. As a result, the main body 105 is maintained

in a desired position, especially during sports applications such as downhill biking, which provides a secure positioning of the backpack 100 on the wearer's back.

[0034] In the context of this application, the term "main body" is understood as the part of the backpack which contains items packed in the backpack and which is usually worn on the wearer's back. The main body may comprise at least one compartment and / or pocket which may be closed for storing the items.

[0035] As can be seen from the side view of the preferred embodiment in Fig. 1, an upper stability strap 120 is connected to the main body 105 at a first stability anchorage 121a (indicated by a dashed circle in Fig. 1) which is arranged in a thorax area of the wearer 102. In addition, a lower stability strap 120 is connected to the main body 105 at a second stability anchorage 121b (also depicted by a dashed circle) which is arranged in a waist area of the wearer 102. The first stability anchorage 121a is arranged closer to a shoulder of the wearer 102 than the second stability anchorage 121b. The distance between the first stability anchorage 121a and the second stability anchorage 121b is smaller than the distance between the first stability anchorage 121a and an upper end of the main body 105. As shown in Fig. 1, when the backpack 100 is worn on the wearer's back, the upper end of the main body 105 may be the part of the main body that is adjacent to the wearer's shoulder. The stability anchorages will be described in more detail with reference to Figs. 2A - 2C. It is also conceivable to provide any other suitable arrangement of the stability anchorages on the backpack 100 in order to provide an improved secure positioning of the backpack 100 on the wearer's back for sports applications.

[0036] In the preferred embodiment of Fig. 1, the backpack 100 further comprises a supporting strap 150 connecting the two cushioning shoulder straps 110. It is also conceivable that a backpack according to the invention may comprise more than one supporting strap 150 as will be described below with reference to Fig. 3. The supporting strap 150 may cooperate with the four stability straps 120 to maintain the two cushioning shoulder straps 110 at a comfortable and secured position on the wearer's back.

[0037] In one embodiment, the cushioning shoulder straps 110 may comprise tubular knitwear. Tubular knitwear allows for easy padding or cushioning by placing a corresponding insert in the void formed by the tubular knitwear.

[0038] Figs. 2A - 2C present further possible embodiments of a backpack 200 according to the present invention. Fig. 2A presents the backpack 200 in rear view, front view and side view. Fig. 2B presents a detailed front view of the backpack 200 for explaining the second aspect of the present invention and Fig. 2C presents a particular embodiment of the backpack 200 in side view for explaining the first aspect of the present invention.

[0039] In the preferred embodiment of Fig. 2A, the backpack 200 comprises a main body 205, two cushion-

ing shoulder straps 210 adapted for cushioning a load of the main body 205 and two pairs of stability straps 220 individually connecting a distal part 211 of each cushioning shoulder strap 210 to the main body 205. The arrangement of the stability straps 220 may form a "V" shape when each of the stability straps 220 is stretched, where the distal part 211 of the cushioning shoulder strap 210 is at the tip of the "V" shape.

[0040] In the preferred embodiment of Fig. 2A, the stability straps 220 individually connecting the distal part 211 of each cushioning shoulder strap 210 to the main body 205 are provided as a single stability strap 220 extending from the main body 205 to the distal part 211 of the cushioning shoulder strap 210 and back to the main body 205. An upper part of the stability strap 220 is connected to the main body 205 at a first stability anchorage 221a and a lower part of the stability strap 220 is connected to the main body 205 at a second stability anchorage 221b. The first stability anchorage 221a and second stability anchorage 221b may be arranged similar to the above described embodiment shown in Fig. 1, e.g. at the thorax and the waist area of a wearer wearing the backpack 200.

[0041] As can be seen in Fig. 2A, the backpack 200 also comprises two pairs of coupling straps 230 individually connecting a proximal part 212 of each cushioning shoulder strap 210 with the main body 205. Similarly, the cushioning shoulder strap 210 has an elongated shape with a proximal part 212 closer to the main body 205 and a distal part 211 more away from the main body 205. As shown in Fig. 2A, the proximal part 212 of the cushioning shoulder strap 210 may be referred to as an upper part of the cushioning shoulder strap 210 that is adjacent to the wearer's shoulder. The coupling straps 230 are adapted to adjust the position of the proximal part 212 of each cushioning shoulder strap 210. Moreover, the coupling straps 230 may be adapted to adjust the position of the proximal part 212 of each shoulder strap in a lateral direction which is orthogonal to the longitudinal extension of each cushioning shoulder strap 210.

[0042] Furthermore, each of the coupling straps 230 may be connected to the main body at a first and a second coupling anchorage (not shown in Fig. 2A). Preferably, at least one of the coupling anchorages is arranged on an inner surface of the main body 205. The arrangement of the coupling straps 230 may also form a "V" shape when each of the coupling straps 230 is stretched, where the proximal part 212 of the cushioning shoulder strap 210 is at the tip of the "V" shape. The coupling straps 230 and their anchorages will be further described in more detail in Fig. 2B.

[0043] The main body 205 and at least one of the different straps may be at least partially manufactured by various techniques in order to achieve desired characteristics or functions including bendability, stretchability (expressed as Young's modulus, for example), permeability to air/breathability and water, thermoconductivity, thermal capacity, moisture absorption, static friction,

abrasion resistance, reinforcement, hardness and thickness, etc. Permeability to air and breathability can for example be achieved by knitting a more open mesh- or web-like structure. For example by using knitting techniques (e.g. weft-knitted fabrics, single-thread warp-knitted fabrics, warp-knitted fabrics, three-dimensional knitting, functional knitting, etc.), this may include the selection of fibers and yarns, coating the fibers, yarns or knitwear with polymer or other materials, the use of monofilaments, the combination of monofilaments and polymer coating, the application of fusible/melted yarns, and multi-layer textile material. In general, the yarns used for the manufacture of knitwear may be quipped, i.e. coated accordingly. Additionally or alternatively, the finished knitwear may be equipped accordingly. It is also conceivable to use any other suitable techniques as known by the person skilled in the art.

[0044] The main body 205 may comprise at least one area which is coated. The coating may for example provide water-repellency or abrasion-resistance. The area may be coated with a thermoplastic polyurethane, TPU, coating. TPU is rather easy to handle and to apply. Additionally or alternatively, the area may be coated with ultraviolet, UV, glue. UV glue may be applied in liquid form and cures under UV light by a photochemical process. In general, other coatings may be used as well.

[0045] Moreover, the main body 205 and at least one of the different straps may comprise a flexible material, preferably from a waterproof material and particularly preferred from a plastic fabric, e.g. Cordura®. Parts of the main body may also comprise a rigid or a bendable hard material. Additionally or alternatively, the main body 205 may comprise different regions having different materials, for example the regions 206, which may comprise suitable fabrics for reinforcement of the main body 205.

[0046] The stability anchorages 221a, 221b and / or the coupling anchorages may comprise at least one of the following: sewing, a buckle, a ring, or any type of connecting or fastening element that is feasible to connect and attach the different straps to the main body 205.

[0047] The backpack 200 further comprises a supporting strap 250 connecting the two cushioning shoulder straps 210. The supporting strap 250 may function in the same way as supporting strap 150 described above.

[0048] In one embodiment, the shoulder straps 210 may comprise a convex shape, which is adapted to go around a wearer's breast, e.g. if the wearer is a woman. The shoulder straps 210 with the convex shape can cooperate with the stability straps 220, the coupling straps 230 and the supporting straps to provide an optimized position of the shoulder straps around a wearer's body and thus a comfortable wearing experience of the backpack 200.

[0049] In a still further embodiment, the distal or lower part of the at least one cushioning shoulder strap 210 may be arranged on a front torso area of the wearer.

[0050] As can be seen in Fig. 2A, the backpack 200 may further comprise at least one handle, e.g. one handle

255. This allows the backpack 200 to be easily carried with a single hand. The handle 255 may be knitted in one piece with the main body 205 of the backpack 200. In this way, additional manufacturing steps of producing the handle 255 and attaching it to the backpack 200 are omitted. The additional efforts and costs for providing the handle 255 are reduced.

[0051] Furthermore, the backpack 200 may comprise a back panel 260. It is also conceivable that the backpack may further comprise at least one additional panel such as a front panel, one or more side panels which may form and / or reinforce the main body 205.

[0052] In one embodiment, at least one of the anchorages may be arranged on the back panel 260 of the backpack 200. Additionally or alternatively, the anchorages may be arranged at the edge between the back panel 260 and one side panel of the backpack. Moreover, the back panel 260 may comprise at least one protrusion or opening 270, which may provide a better breathability of the wearer's back. Additionally or alternatively, the back panel 260 may comprise at least some areas covered by a cushion material, which provide more comfortability for a wearer of the backpack 200.

[0053] As can be seen in Fig. 2A, the backpack 200 comprises three zippers 280 for closing parts or pockets of the main body 205. Instead of a zipper 280, other means of closing the main body 205 may be used, such as a snap button, a hook-and-loop fastener or a magnetic closure. The main body 205 could also comprise no closure mechanism.

[0054] Fig. 2B presents a detailed view of the coupling straps 230 of the backpack 200. Parts of the main body 205 are removed so that the main body 205 shown in this figure only comprises the back panel 260.

[0055] As can be seen in Fig. 2B, the backpack 200 comprises a first and a second pair of coupling straps 230, wherein the first pair is connected to a proximal part of a first cushioning shoulder strap 210 (e.g. the left one) and to the back panel 260 and the second pair is connected to a proximal part of a second cushioning shoulder strap 210 (e.g. the right one) and to the back panel 260.

[0056] As mentioned above, the coupling straps 230 individually connect a proximal part 212 of each cushioning shoulder strap 210 with the back panel 260, wherein the coupling straps 230 are adapted to adjust the position of the proximal part 212 of each cushioning shoulder strap 210. In particular, the coupling straps 230 are adapted to adjust the position of the proximal part 212 of each shoulder strap in a lateral direction (indicated by the two double arrows) which is essentially orthogonal to the longitudinal extension (indicated by the dashed arrow) of each cushioning shoulder strap 210. The coupling straps 230 can be adjusted, for example by adjusting at least one length of one of the coupling straps 203.

[0057] Moreover, with respect to each cushion shoulder strap 210, the at least two coupling straps 230 may be provided as a single strap extending from the main body 205 to the proximal part 212 of each cushioning

shoulder strap 210 and back to the main body 205. For example, the coupling straps 230 (e.g. the left ones) may be connected to the main body at a first coupling anchorage (not shown in Fig. 2B) and a second coupling anchorage 231. As shown in Fig. 2B, the main body 205 may further comprise at least one aperture, such that the coupling straps 230 extend through the aperture and connect to the main body at the second coupling anchorage 231, which is arranged on the back panel 260 and on an inner surface of the main body 205. As mentioned above, such a construction reduces manufacturing costs and allows for an easier adjustment of the coupling straps, e.g. tightening.

[0058] Moreover, a coupling strap 230 of the first pair is connected to a coupling strap 230 of the second pair, wherein the connection may be arranged on an inner surface of the main body 205, e.g. on an inner side of the back panel 260. As mentioned above, such an arrangement facilitates the manufacture and the adjustment of the fit, as only a reduced number of couplings straps 230 must be adjusted.

[0059] In the preferred embodiment of Fig. 2B, the second coupling anchorage 231 is provided as a buckle and by sewing, and the coupling strap 230 is connected to the proximal part of the cushioning shoulder strap 210 via a ring, so that the length of the coupling strap 230 is flexibly adjustable.

[0060] Fig. 2C presents a particular embodiment of the backpack 200 in side view according to the first aspect of the present invention.

[0061] As mentioned above, the stability straps 220 individually connecting the distal part 211 of each cushioning shoulder strap 210 to the main body 205 are provided as a single stability strap 220 extending from the main body 205 to the distal part 211 of the cushioning shoulder strap 210 and back to the main body 205.

[0062] The stability strap 220 is connected to the main body 205 at a first stability anchorage 221a and at a second stability anchorage 221b. Here the stability anchorages 221a and 221b comprise sewing of the stability strap 220 to the main body 205, and the stability strap 220 is connected to the distal part of the cushioning shoulder strap 210 via a ring. A buckle is positioned at the second stability anchorage 221b. By such an arrangement, the length of the stability strap 220 is adjustable through the buckle and the ring. For example, the stability strap 220 may slide through the ring, and the lower part of the stability strap 220 may be longer or shorter than the upper part of the stability strap.

[0063] The first stability anchorage 221a and second stability anchorage 221b may be arranged with respect to a longitudinal direction of the backpack 200. In the embodiment shown in Fig. 2A, the stability anchorages 221a, 221b are at a lower portion of the backpack 200 and are vertically spaced from each other. The first stability anchorage 221a is closer to an upper end of the backpack, which may be adjacent to a wearer's shoulder during use. The second stability anchorage 221b is more

distant from the upper end of the backpack.

[0064] The first stability anchorage 221a and second stability anchorage 221b may again be arranged in the thorax and the waist area of a wearer of the backpack 200, so that they extend below an armpit of a wearer and between an arm and the body side of the wearer of the backpack 200 to maintain the main body 205 in a desired position. As can be seen in Fig. 2C, the backpack 200 may further comprise a waist belt 290 for securely positioning the backpack 200 on a wearer's back and waist. The waist belt 290 may further comprise a means for closing similar to the supporting strap 250 as mentioned above.

[0065] Fig. 3 presents a further possible embodiment of a backpack 300 according to the present invention in front and side view. The backpack 300 may comprise similar features as the backpacks 100 and 200 as shown in Figs. 1 - 2C.

[0066] In the preferred embodiment of Fig. 3, the two cushioning shoulder straps 310 comprise a cushioning mesh material. Such an embodiment provides a better breathability for a wearer of the backpack 300 and is advantageous for sports applications, such as for use in higher temperatures. Additionally or alternatively, the back panel of the main body may also comprise a mesh.

[0067] Moreover, the backpack 300 comprises two supporting straps 350 to cooperate with the stability straps 320 to maintain the two cushioning shoulder straps 310 at a comfortable position on a wearer's back. For example, the distance between the cushioning shoulder straps 310 may be increased when a wearer adjusts the length of at least one of the stability straps 320, such that the cushioning shoulder straps 310 are no longer close to each other. In this case, the supporting straps 350 maybe adjusted to provide a proper distance of the two cushioning shoulder straps 310 and thus to maintain an optimized position of the backpack on a wearer's back.

Claims

1. A backpack (200) comprising:

- a. a main body (205);
- b. at least one cushioning shoulder strap (210);
- c. at least two coupling straps (230) individually connecting a proximal part (212) of the at least one cushioning shoulder strap (210) to the main body (205); wherein the proximal part (212) is closer to the main body (205) than a distal part (211) of the at least one cushioning shoulder strap (210);
- d. wherein the at least two coupling straps (230) are adapted to adjust the position of the proximal part (212) of the at least one cushioning shoulder strap (210) in a lateral direction which is orthogonal to the longitudinal extension of the at least one cushioning shoulder strap (210), and

e. a first and a second pair of coupling straps (230), wherein the first pair is connected to a proximal part (212) of a first cushioning shoulder strap (210) and to the main body (205) and the second pair is connected to a proximal part (212) of a second cushioning shoulder strap (210) and to the main body (205);

f. wherein a coupling strap of the first pair is connected to a coupling strap of the second pair.

2. Backpack (200) according to claim 1, wherein the at least two coupling straps (230) are connected to the main body (205) at a first and a second coupling anchorage (231).
3. Backpack (200) according to the preceding claim, wherein at least one of the coupling anchorages is arranged on an inner surface of the main body (205).
4. Backpack (200) according to one of the preceding claims, wherein the at least two coupling straps (230) are provided as a single strap extending from the main body (205) to the proximal part (212) of the at least one cushioning shoulder strap (210) and back to the main body (205).
5. Backpack (200) according to one of the preceding claims, wherein the connection between a coupling strap of the first pair of coupling straps and a coupling strap of the second pair of coupling straps is arranged on an inner surface of the main body (205).
6. Backpack (200) according to one of the preceding claims, wherein at least one of the lengths of the at least two coupling straps (230) is adjustable.
7. Backpack (100; 200) according to one of the preceding claims, wherein the main body (105; 205) comprises a back panel (260).
8. Backpack (100; 200; 300) according to one of the preceding claims, further comprising:
 - g. at least two stability straps (120; 220; 320) individually connecting the distal part (211) of the at least one cushioning shoulder strap (110; 210; 310) to the main body (105; 205).
9. Backpack according to the preceding claim, wherein the at least two stability straps (120; 220; 320) are connected to the main body (105; 205) at a first (121a; 221a; 321a) and a second stability anchorage (121b; 221b; 321b), the first stability anchorage (121a; 221a; 321a) being arranged closer to a proximal part (212) of the cushioning shoulder strap (110; 210; 310) than the second stability anchorage (121b; 221b; 321b).
10. Backpack (100; 200; 300) according to the preceding

claim, wherein the first stability anchorage (121a; 221a; 321a) is arranged in a thorax area of a wearer (102) using the backpack.

11. Backpack (100; 200; 300) according to one of the claims 9 or 10, wherein the second stability anchorage (121b; 221b; 321b) is arranged in a waist area of the wearer (102) using the backpack. 5
12. Backpack (100; 200; 300) according to one of the claims 8-11, wherein the at least two stability straps (120; 220; 320) are provided as a single strap extending from the main body (105; 205) to the distal part (211) of the at least one cushioning shoulder strap (110; 210; 310) and back to the main body (105; 205). 10
13. Backpack (100; 200; 300) according to one of the claims 8-12, wherein the distance between the first stability anchorage (121a; 221a; 321a) and the second stability anchorage (121b; 221b; 321b) is smaller than the distance between the first stability anchorage (121a; 221a; 321a) and the proximal part (212) of the at least one cushioning shoulder strap (110; 210; 310). 20
14. Backpack (100; 200; 300) according to one of the claims 8-13, wherein at least one of the lengths of the at least two stability straps (120; 220; 320) is adjustable. 25

Patentansprüche

1. Ein Rucksack (200) umfassend: 30
a. einen Hauptkörper (205);
b. mindestens einen gepolsterten Schultergurt (210);
c. mindestens zwei Kopplungsgurte (230), die einzeln einen proximalen Teil (212) des mindestens einen polsternden Schultergurts (210) mit dem Hauptkörper (205) verbinden; wobei der proximale Teil (212) näher an dem Hauptkörper (205) liegt als ein distaler Teil (211) des mindestens einen polsternden Schultergurts (210);
d. wobei die mindestens zwei Kopplungsgurte (230) dazu geeignet sind, die Position des proximalen Teils (212) des mindestens einen polsternden Schultergurts (210) in einer lateralen Richtung einzustellen, die orthogonal zu der Längserstreckung des mindestens einen polsternden Schultergurts (210) ist, und
e. ein erstes und ein zweites Paar von Kopplungsgurten (230), wobei das erste Paar mit einem proximalen Teil (212) eines ersten polsternden Schultergurts (210) und mit dem Hauptkörper (205) verbunden ist und das zweite Paar 40

mit einem proximalen Teil (212) eines zweiten polsternden Schultergurts (210) und mit dem Hauptkörper (205) verbunden ist;
f. wobei ein Kopplungsgurt des ersten Paares mit einem Kopplungsgurt des zweiten Paares verbunden ist.

2. Rucksack (200) nach Anspruch 1, wobei die mindestens zwei Kopplungsgurte (230) an einer ersten und einer zweiten Kopplungsverankerung (231) mit dem Hauptkörper (205) verbunden sind.
3. Rucksack (200) nach dem vorhergehenden Anspruch, wobei mindestens eine der Kopplungsverankerungen an einer Innenfläche des Hauptkörpers (205) angeordnet ist.
4. Rucksack (200) nach einem der vorhergehenden Ansprüche, wobei die mindestens zwei Kopplungsgurte (230) als ein einziger Gurt vorgesehen sind, der sich von dem Hauptkörper (205) zu dem proximalen Teil (212) des mindestens einen polsternden Schultergurts (210) und zurück zu dem Hauptkörper (205) erstreckt.
5. Rucksack (200) nach einem der vorhergehenden Ansprüche, wobei die Verbindung zwischen einem Kopplungsgurt des ersten Paares von Kopplungsgurten und einem Kopplungsgurt des zweiten Paares von Kopplungsgurten an einer Innenfläche des Hauptkörpers (205) angeordnet ist.
6. Rucksack (200) nach einem der vorhergehenden Ansprüche, wobei mindestens eine der Längen der mindestens zwei Kopplungsgurte (230) einstellbar ist.
7. Rucksack (100; 200) nach einem der vorangehenden Ansprüche, wobei der Hauptkörper (105; 205) eine Rückenplatte (260) aufweist.
8. Rucksack (100; 200; 300) nach einem der vorangehenden Ansprüche, ferner umfassend:
g. mindestens zwei Stabilitätsgurte (120; 220; 320), die den distalen Teil (211) des mindestens einen polsternden Schultergurts (110; 210; 310) individuell mit dem Hauptkörper (105; 205) verbinden.
9. Rucksack nach dem vorhergehenden Anspruch, wobei die mindestens zwei Stabilitätsgurte (120; 220; 320) mit dem Hauptkörper (105; 205) an einer ersten (121a; 221a; 321a) und einer zweiten Stabilitätsverankerung (121b; 221b; 321b) verbunden sind, wobei die erste Stabilitätsverankerung (121a; 221a; 321a) näher an einem proximalen Teil (212) des polsternden Schultergurts (110; 210; 310) angeordnet ist als die zweite Stabilitätsverankerung (121b; 221b; 321b). 50

10. Rucksack (100; 200; 300) nach dem vorhergehenden Anspruch, wobei die erste Stabilitätsverankerung (121a; 221a; 321a) in einem Thoraxbereich eines Trägers (102) angeordnet ist, der den Rucksack benutzt. 5
11. Rucksack (100; 200; 300) nach einem der Ansprüche 9 oder 10, wobei die zweite Stabilitätsverankerung (121b; 221b; 321b) in einem Taillenbereich des den Rucksack tragenden Trägers (102) angeordnet ist. 10
12. Rucksack (100; 200; 300) nach einem der Ansprüche 8-11, wobei die mindestens zwei Stabilitätsgurte (120; 220; 320) als ein einziger Gurt vorgesehen sind, der sich von dem Hauptkörper (105; 205) zu dem distalen Teil (211) des mindestens einen polsternen Schultergurts (110; 210; 310) und zurück zu dem Hauptkörper (105; 205) erstreckt. 15 20
13. Rucksack (100; 200; 300) nach einem der Ansprüche 8-12, wobei der Abstand zwischen der ersten Stabilitätsverankerung (121a; 221a; 321a) und der zweiten Stabilitätsverankerung (121b; 221b; 321b) kleiner ist als der Abstand zwischen der ersten Stabilitätsverankerung (121a; 221a; 321a) und dem proximalen Teil (212) des mindestens einen polsternen Schultergurts (110; 210; 310). 25
14. Rucksack (100; 200; 300) nach einem der Ansprüche 8-13, wobei mindestens eine der Längen der mindestens zwei Stabilitätsgurte (120; 220; 320) einstellbar ist. 30

Revendications

1. Un sac à dos (200) comprenant :

- a. un corps principal (205) ;
- b. au moins une bretelle rembourrée (210) ;
- c. au moins deux sangles de couplage (230) reliant individuellement une partie proximale (212) de l'au moins une bretelle rembourrée (210) au corps principal (205) ; dans lequel la partie proximale (212) est plus proche du corps principal (205) qu'une partie distale (211) de l'au moins une bretelle rembourrée (210) ;
- d. dans lequel les au moins deux sangles de couplage (230) sont aptes à ajuster la position de la partie proximale (212) de l'au moins une bretelle rembourrée (210) dans une direction latérale qui est perpendiculaire au prolongement longitudinal de l'au moins une bretelle rembourrée (210), et
- e. une première et une seconde paire de sangles de couplage (230), la première paire étant reliée à une partie proximale (212) d'une première bre-

telle rembourrée (210) et au corps principal (205), et la seconde paire étant reliée à une partie proximale (212) d'une seconde bretelle rembourrée (210) et au corps principal (205);
f. dans lequel une sangle de couplage de la première paire est reliée à une sangle de couplage de la seconde paire.

2. Sac à dos (200) selon la revendication 1, dans lequel les au moins deux sangles de couplage (230) sont reliées au corps principal (205) au niveau d'un premier et d'un second ancrage de couplage (231). 35
3. Sac à dos (200) selon la revendication précédente, dans lequel au moins l'un des ancrages de couplage est situé sur une surface interne du corps principal (205).
4. Sac à dos (200) selon l'une des revendications précédentes, dans lequel les au moins deux sangles de couplage (230) sont formées par une sangle unique s'étendant du corps principal (205) à la partie proximale (212) de l'au moins une bretelle rembourrée (210) et qui revient jusqu'au corps principal (205). 40
5. Sac à dos (200) selon l'une des revendications précédentes, dans lequel la liaison entre une sangle de couplage de la première paire de sangles de couplage et une sangle de couplage de la seconde paire de sangles de couplage est située sur une surface interne du corps principal (205). 45
6. Sac à dos (200) selon l'une des revendications précédentes, dans lequel au moins l'une des longueurs des au moins deux sangles de couplage (230) est ajustable. 50
7. Sac à dos (100 ; 200) selon l'une des revendications précédentes, dans lequel le corps principal (105 ; 205) comprend un renfort dorsal (260). 55
8. Sac à dos (100 ; 200 ; 300) selon l'une des revendications précédentes, comprenant en outre :
g. au moins deux sangles de stabilisation (120 ; 220 ; 320) reliant individuellement la partie distale (211) de l'au moins une bretelle rembourrée (110 ; 210 ; 310) au corps principal (105 ; 205).
9. Sac à dos selon la revendication précédente, dans lequel les au moins deux sangles de stabilisation (120 ; 220 ; 320) sont reliées au corps principal (105 ; 205) au niveau d'un premier (121a ; 221a ; 321a) et d'un second (121b ; 221b ; 321b) ancrage de stabilisation, le premier ancrage de stabilisation (121a ; 221a ; 321a) étant situé plus près d'une partie proximale (212) de la bretelle rembourrée (110 ; 210 ; 310) que ne l'est le second ancrage de stabilisation (121b ; 221b ; 321b).

10. Sac à dos (100 ; 200 ; 300) selon la revendication précédente, dans lequel le premier ancrage de stabilisation (121a ; 221a ; 321a) est situé dans une zone du thorax d'un porteur (102) utilisant le sac à dos. 5
11. Sac à dos (100 ; 200 ; 300) selon l'une des revendications 9 ou 10, dans lequel le second ancrage de stabilisation (121b ; 221b ; 321b) est situé dans une zone de la taille du porteur (102) utilisant le sac à dos. 10
12. Sac à dos (100 ; 200 ; 300) selon l'une des revendications 8 à 11, dans lequel les au moins deux sangles de stabilisation (120 ; 220 ; 320) sont formées par une sangle unique s'étendant du corps principal (105 ; 205) à la partie distale (211) de l'au moins une bretelle rembourrée (110 ; 210 ; 310) et qui revient jusqu'au corps principal (105 ; 205). 15
13. Sac à dos (100 ; 200 ; 300) selon l'une des revendications 8 à 12, dans lequel la distance entre le premier ancrage de stabilisation (121a ; 221a ; 321a) et le second ancrage de stabilisation (121b ; 221b ; 321b) est inférieure à la distance entre le premier ancrage de stabilisation (121a ; 221a ; 321a) et la partie proximale (212) de l'au moins une bretelle rembourrée (110 ; 210 ; 310). 20 25
14. Sac à dos (100 ; 200 ; 300) selon l'une des revendications 8 à 13, dans lequel au moins l'une des longueurs des au moins deux sangles de stabilisation (120 ; 220 ; 320) est ajustable. 30

35

40

45

50

55

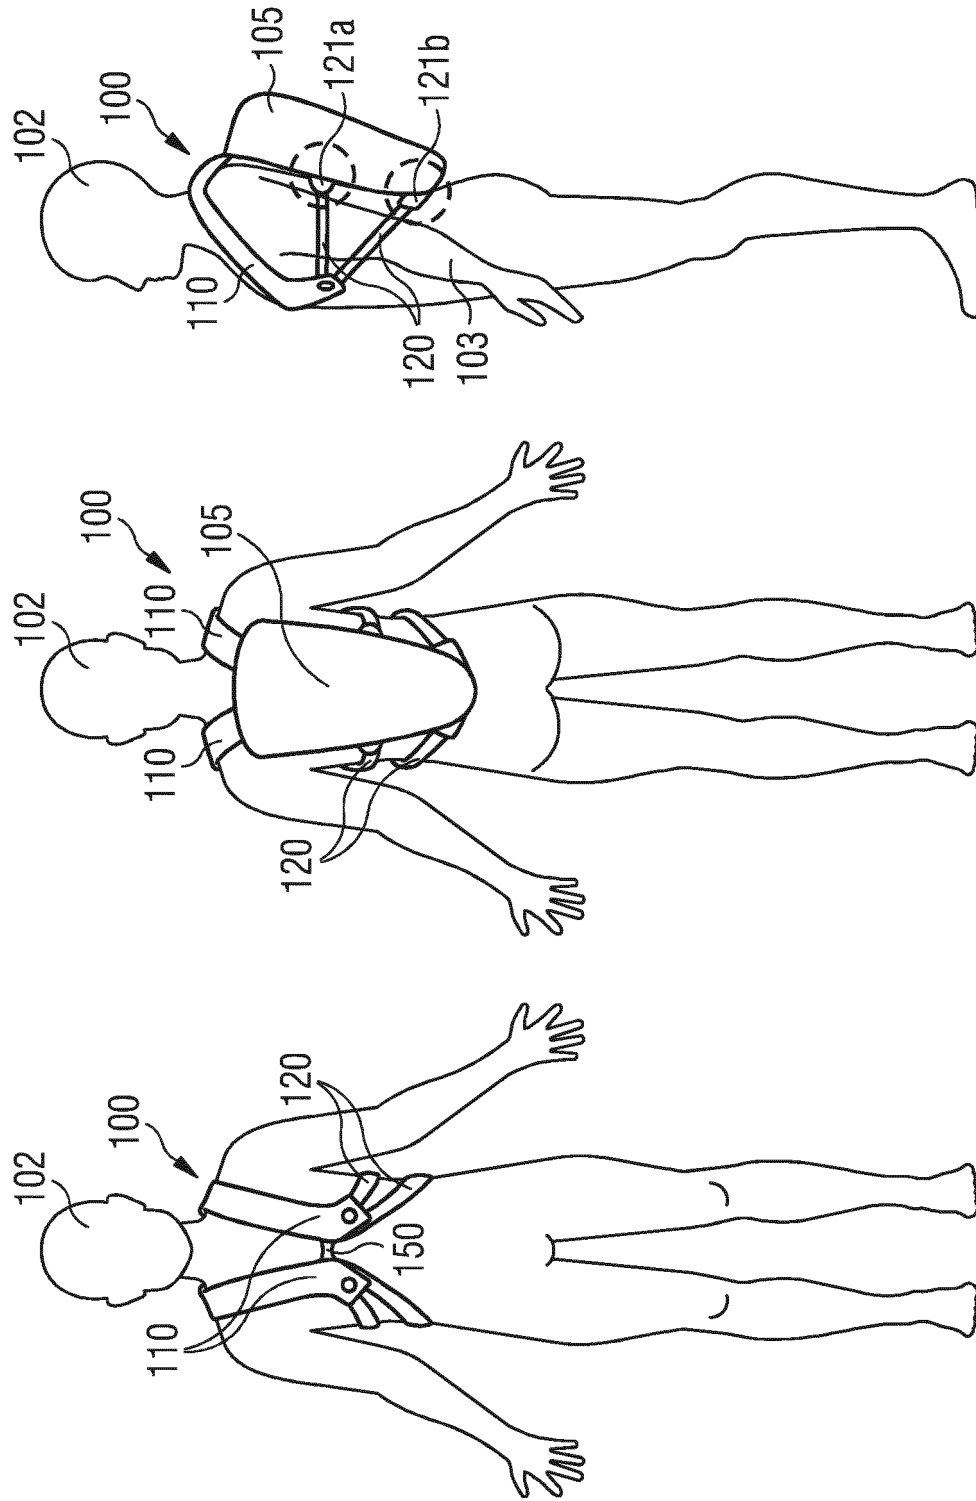


Fig. 1

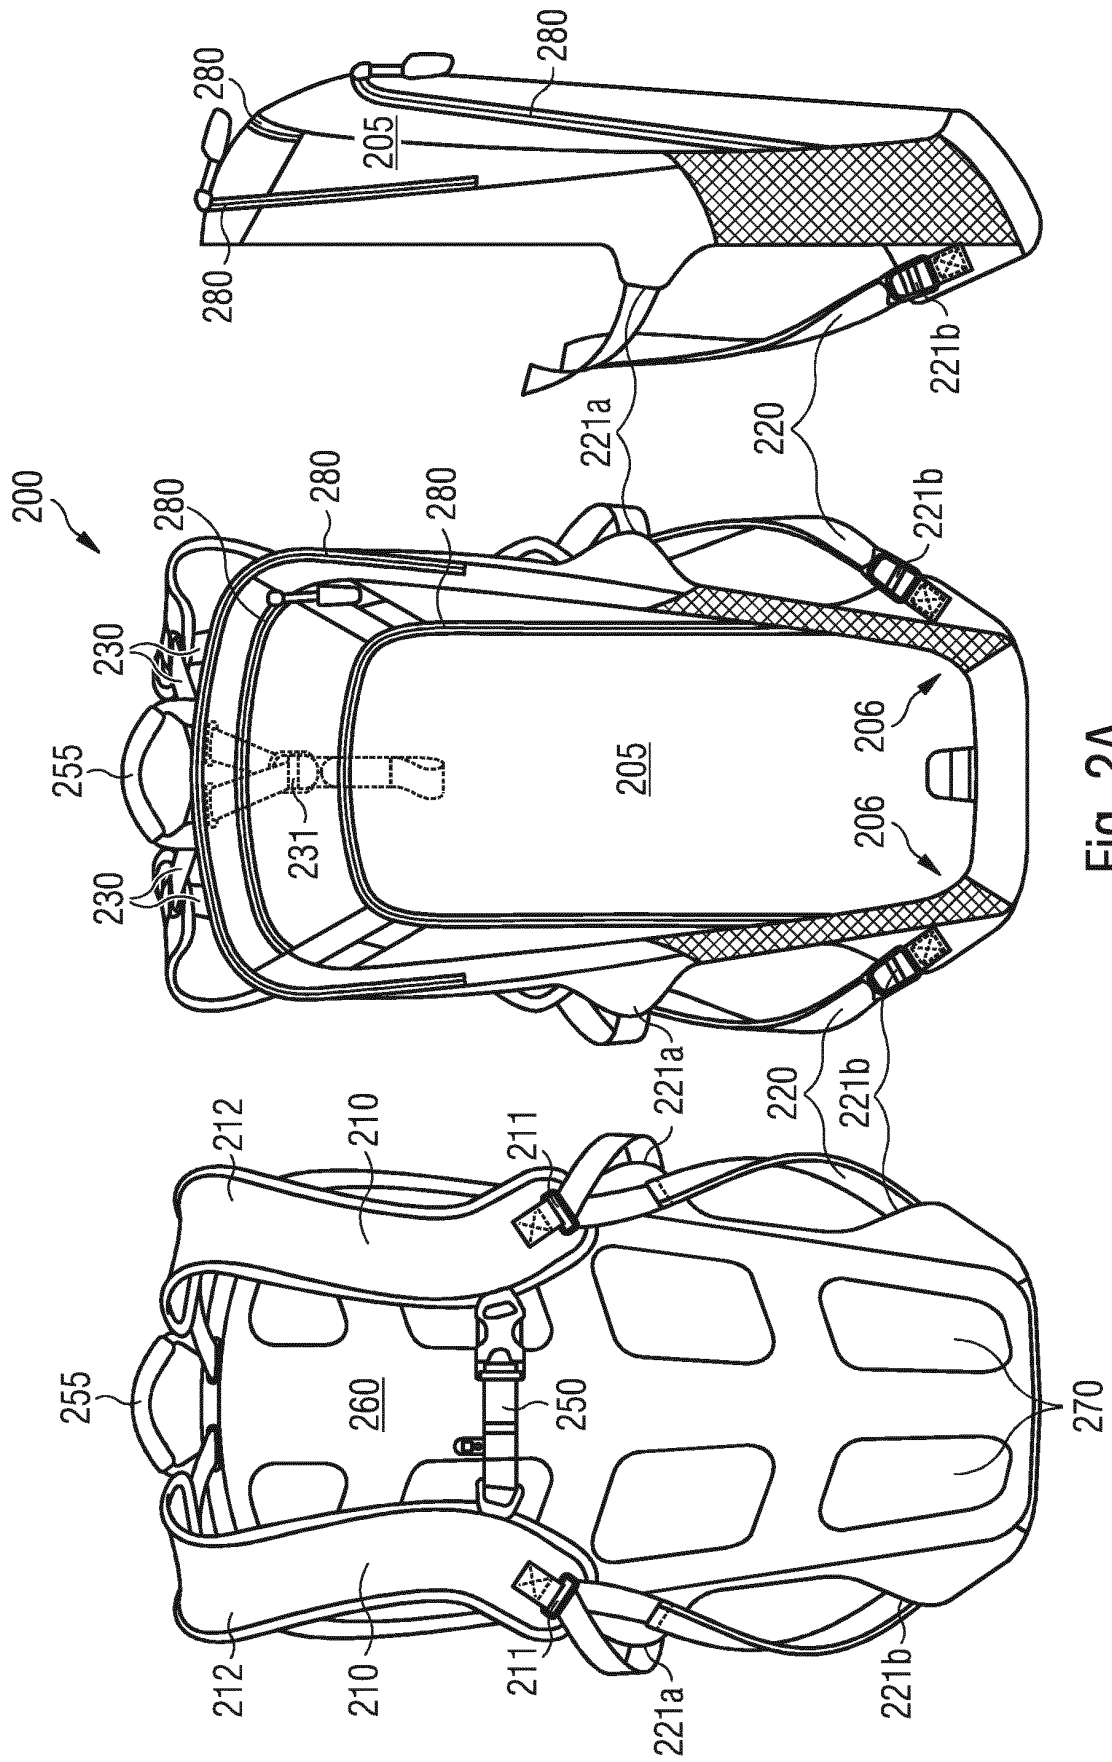


Fig. 2A

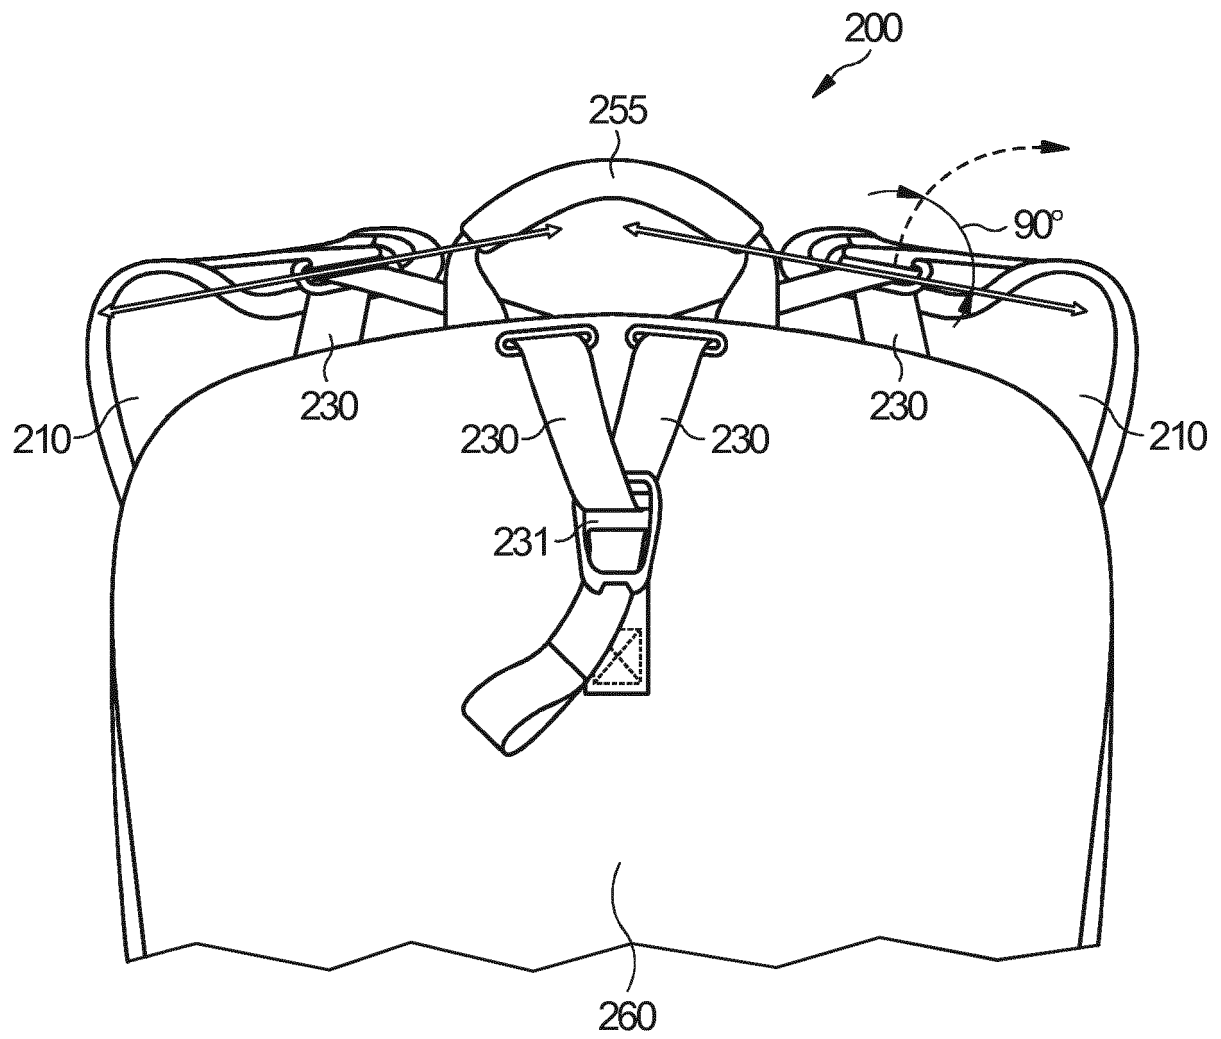


Fig. 2B

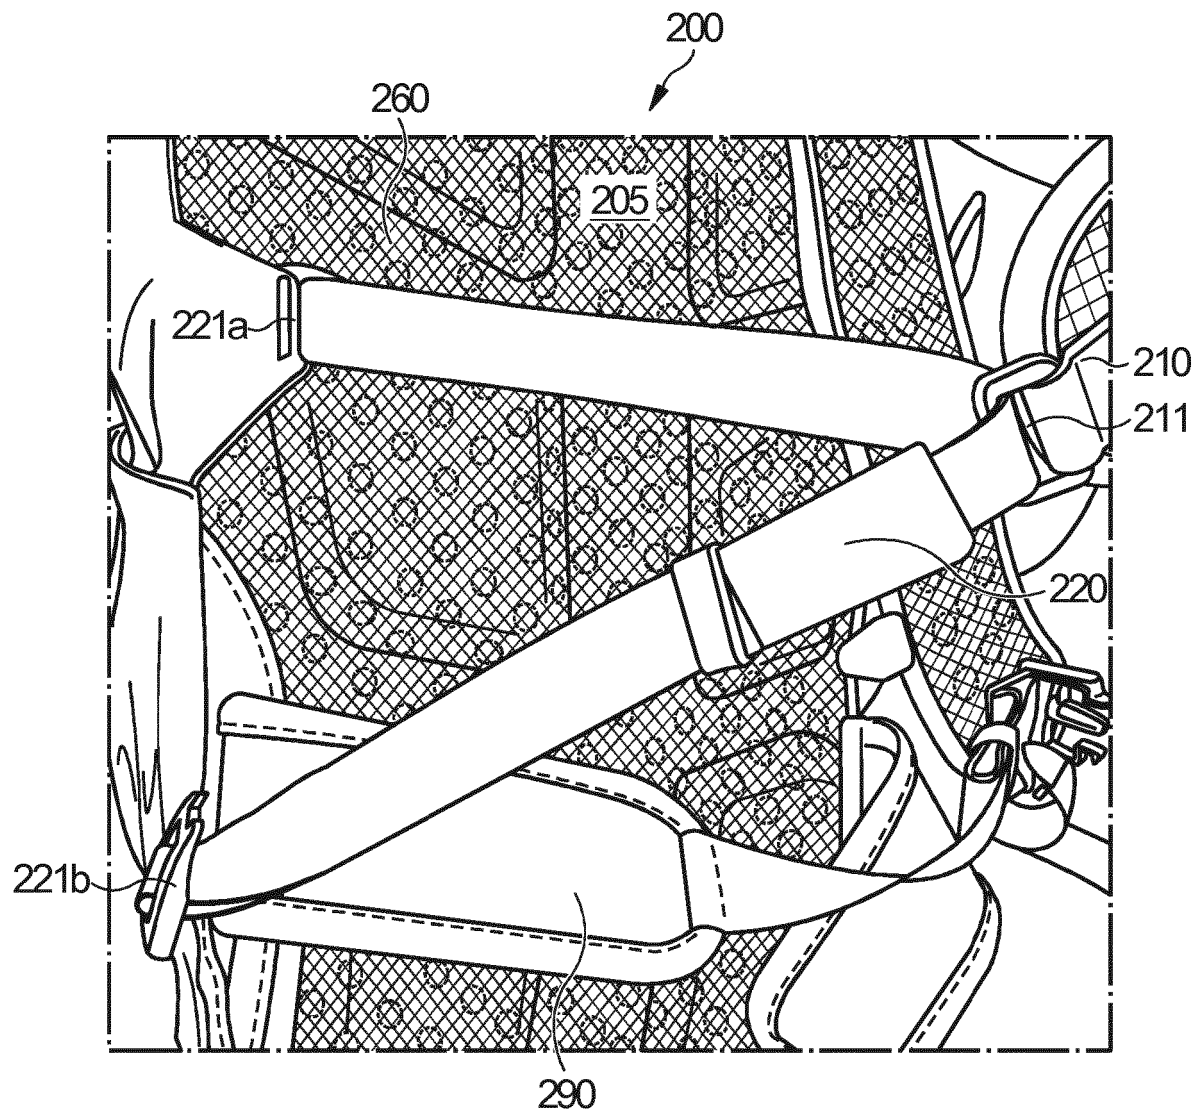


Fig. 2C

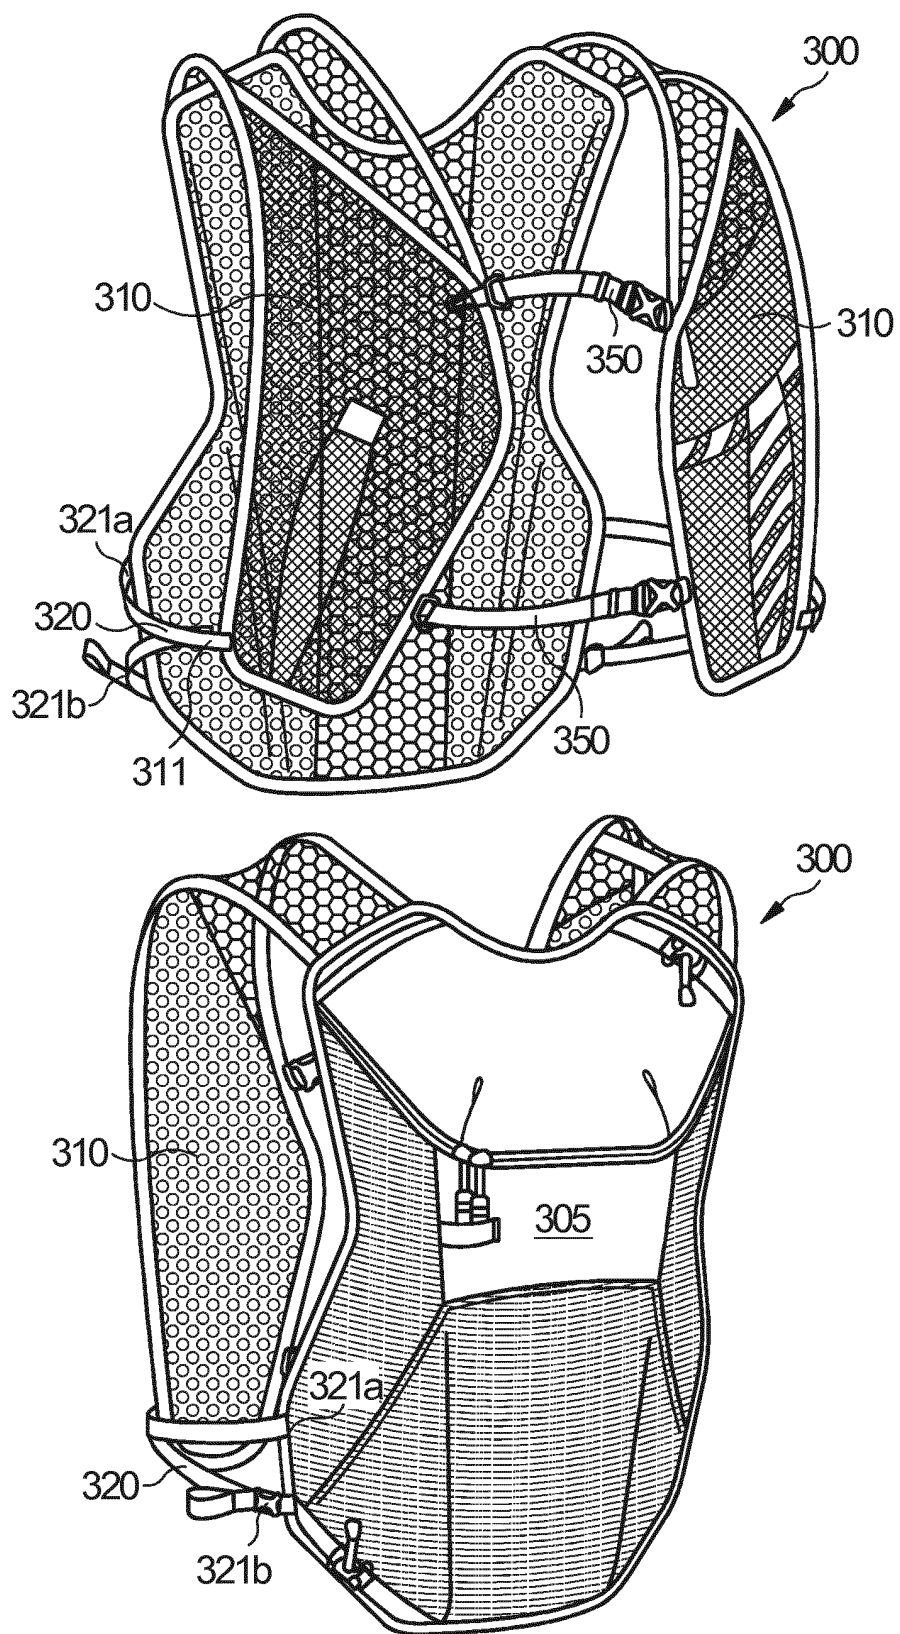


Fig. 3

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20110290843 A1 **[0003]**
- US 6164509 A **[0004]**
- US 20060289586 A1 **[0005]**
- US 20060289589 A1 **[0005]**
- CA 2552491 A1 **[0006]**
- US 5431317 A **[0007]**
- KR 101030985 B1 **[0008]**
- US 3957184 A **[0009]**
- CN 204336151 U **[0010]**
- GB 1238303 A **[0011]**
- FR 2849997 A1 **[0012]**