

(19)



(11)

EP 3 338 897 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
24.07.2019 Bulletin 2019/30

(51) Int Cl.:
B04B 9/12 (2006.01)

(21) Application number: **16205429.0**

(22) Date of filing: **20.12.2016**

(54) **CENTRIFUGAL SEPARATOR**

ZENTRIFUGALABSCHIEDER

SÉPARATEUR CENTRIFUGE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:
27.06.2018 Bulletin 2018/26

(73) Proprietor: **Alfa Laval Corporate AB
221 00 Lund (SE)**

(72) Inventor: **KARLSSON, Per
SE-129 40 HÄGERSTEN (SE)**

(74) Representative: **Alfa Laval Attorneys
Alfa Laval Corporate AB
Patent Department
P.O. Box 73
221 00 Lund (SE)**

(56) References cited:
**WO-A1-80/01248 WO-A1-99/42221
GB-A- 806 821**

EP 3 338 897 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

AREA OF INVENTION

[0001] The present invention refers to a centrifugal separator comprising, a centrifugal rotor, a rotatable spindle, rotatable around an axis, to which said centrifugal rotor is fixedly attached, a stationary frame member, at least one bearing journaling said spindle in said stationary frame member, a support device which comprises a bearing holder, directly supporting said bearing.

BACKGROUND OF INVENTION

[0002] Conventional spindle support devices for centrifugal separators are mainly of two different kinds, namely support devices, in which helical springs apply a force to oscillation-dampening friction buffers, and support devices, which are constructed by resilient rubber elements producing a dampening effect by inner friction.

[0003] Such known support devices comprise many components, which make them complicated and expensive. The dampening properties of the friction buffers as well as of the rubber elements are difficult to calculate. On the friction dampening surfaces coatings (coke) are formed, which change the dampening properties and result in a great risk for jamming. In the friction buffers, wearing particles are formed, which reduce the lifetime of the support device. The conduct of heat is insufficient in these known support devices, since rubber has a low heat conductivity and the friction surfaces of the friction buffers deteriorate the conduct of heat.

[0004] WO8001248 discloses an example of such support device for centrifugal separator.

[0005] WO89/10794 discloses an example of such a known support device for a centrifugal separator having a centrifuge rotor which is rotatable in a frame member by means of a bearing member. The support device comprises a number of support members extending radially outwardly from the bearing member and which each encloses a helical spring element. Consequently, these support members are arranged to permit relative radial movements between the centrifuge rotor and the frame member by being compressed in a respective space of the frame member. The helical spring elements thereby act on a piston movable in the space and abutting the outer wall of a bearing housing. By means of the spring constant of the helical spring elements, a certain stiffness of the known support device is obtained, which together with the resiliency of, for instance, the rotor spindle, determines the critical number of revolutions of the centrifuge rotor. In centrifugal separators, the helical springs of this type have to be dimensioned to the frequently very high stresses and fatigue risks to which they are subjected.

[0006] WO99/46052 discloses a known support device similar to the one described in WO89/10794. The helical spring elements are embedded in resilient rubber in sev-

eral different embodiments.

[0007] The dampening of the radial movements is obtained by means of the friction which arises between the piston and its contact surfaces, in particular the outer wall of the bearing housing. The friction which arises, results in addition to the dampening of the relative movements, also in the generation of heat. Such a heat generation is not desirable and forces the bearing to operate at a relatively high temperature, which reduces the lifetime of the bearing. Another problem is that the arrangement of moving pistons is rather space requiring. Such a space may be difficult to provide for the support device in a centrifugal separator, in particular outside the so-called neck bearing. In addition, these known support devices have a rather complicated construction, which of course makes the manufacture and the mounting labour demanding and expensive. In addition, it is difficult to conduct heat away from the bearing member.

DISCLOSURE OF INVENTION

[0008] The object of the present invention is to provide a centrifugal separator including a support device, which from a construction point of view is less complicated than the support devices known up to now and by which the problems mentioned above may be remedied. Further aspects of the invention are apparent from the dependent claims and the description.

[0009] This object is obtained by the centrifugal separator as defined in the appended claims.

[0010] In comparison with previously known, similar support devices, a support device designed in this manner is space saving. Furthermore the elastic characteristics is evenly distributed around the circumference of the spindle

[0011] Said elastic support member may have a ring-formed central part which ring-formed surface is free from contact with said bearing holder and said stationary frame member.

[0012] Said inner ring-formed part of said elastic support member may be fitted in a ring-formed radially inner space in said bearing holder, and said outer ring-formed part of said elastic support member is fitted in a ring-formed outer space in said stationary frame member.

[0013] The inner ring-formed part of said elastic support member is fitted with a ring-formed inner plate on an axially upper and a lower ring-formed surface respectively of said inner ring-formed part, and the outer ring-formed part of said elastic support member is fitted with a ring-formed plate on an axially upper and a lower ring-formed surface respectively of the outer part of said elastic support member.

[0014] Said ring-formed inner plates and said ring-formed outer plates may be made of a metallic material.

[0015] Said ring-formed inner plates and said ring-formed outer plates may be vulcanized onto said elastic support member.

[0016] Said ring-formed inner plates and said ring-

formed outer plates may be glued onto said elastic support member.

[0017] Said elastic support member may be made of rubber.

[0018] Said stationary frame member may comprise a ring-formed outer cover attached by screws to said frame member, said ring-formed outer cover together with said frame member defining said ring-formed outer space.

[0019] Said bearing holder may comprise a ring-formed inner cover attached by screws to said bearing holder, said ring-formed inner cover partly defining said ring-formed inner space.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] The present invention is now to be explained by means of different embodiments described as examples and with reference to the drawings attached, in which

Fig 1 discloses schematically a side view of parts of a centrifugal separator having a support device according to the invention.

Fig 2 discloses a radial section through the support device according to the invention.

DETAILED DESCRIPTION OF DIFFERENT EMBODIMENTS

[0021] Fig 1 discloses schematically parts of a centrifugal separator having a vertical spindle 1, which is journaled in a lower bearing 2 and an upper bearing 3. The lower bearing 2 is most often arranged to absorb essentially radial forces acting on the spindle 1 and the upper bearing 3 is most often arranged to absorb essentially radial and axial forces acting on the spindle 1. The spindle 1 carries at its upper end above the upper bearing 3 a centrifuge rotor 4. The spindle 1 and the centrifuge rotor 4 are rotatable about an axis x of rotation and driven in the example disclosed by a motor (not shown) via a screw gear 5, but may of course instead be belt driven or direct driven by a motor acting directly on the spindle.

[0022] In the example disclosed in fig. 2, the upper bearing 3 is supported by means of a support device 6 which comprises a bearing holder 9 directly supporting the outer bearing ring 3a and a substantially stationary frame member 7. The bearing holder 9 is connected to the stationary frame member 7 by a ring-formed elastic support member 8. The ring-formed elastic support member 8 has an inner ring-formed part 8a connected to said bearing holder 9 and an outer ring-formed part 8b connected to said stationary frame member 7 thereby forming an elastic connection between said bearing holder 9 and said frame member. The elastic support member 8 may be made of rubber or any elastic material with suitable characteristics.

[0023] The stationary frame member 7 comprises a ring-formed outer cover 7a which may be a separate com-

ponent attached by screws to the frame member 7, or may be a part of said frame member 7. Together they define a ring-formed radially outer space 7b open radially inwardly. The bearing holder 9 comprises a ring-formed inner cover 9a which may be a separate component attached by screws to the bearing holder 9, or may be a part of said bearing holder 9. Together they define a ring-formed radially inner space 9b open radially outwardly.

[0024] The inner ring-formed part 8a of the elastic support member 8 is fitted in said ring-formed inner space 9b in the bearing holder 9 and the outer ring-formed part 8b of said elastic support member 8 is fitted in said outer space 7b in the frame member 7.

[0025] A ring-formed center part 8c of said elastic support member 8 is positioned radially between said inner space 9b and said outer space 7b forming a zone of the elastic support member 8, which ring-formed surface is free from contact with said bearing holder 9 and said stationary frame member 7. The bearing holder 9 and the frame member 7 thus do not have any metallic contact with each other. The support device 6 is thereby arranged to permit a limited pivoting movement of the spindle 1, and details connected thereto, such as the centrifuge rotor 4, and the upper bearing 3 in relation to the frame member 7. To further enhance the functionality of the support device 6, the elastic support member 8 is, as is shown in fig. 2, fitted with a ring-formed inner plate 10 on an axially upper and a lower ring-formed surface respectively of said inner ring-formed part 8a of the elastic support member 8, and a ring-formed outer plate 11 on an axially upper and a lower ring-formed surface respectively of the outer ring-formed part 8b of said elastic support member 8. The inner and outer plates 10, 11 are preferably of metal and vulcanized or glued onto the elastic support member 8 to form a complete elastic buffer.

[0026] Without the inner and outer plates 10, 11, the elastic support member 8 would wear a lot because of a lot of relative movement between the elastic support member 8 and the frame member 7 when the centrifuge rotor 4 creates dynamic forces to the elastic support member 8.

Claims

1. A centrifugal separator comprising, a centrifugal rotor (4), a rotatable spindle (1), rotatable around an axis, to which said centrifugal rotor (4) is fixedly attached, a stationary frame member (7), at least one bearing (3) journaling said spindle (1) in said stationary frame member (7), a support device (6) which comprises a bearing holder (9), directly supporting said bearing (3), which bearing holder (9) is connected to the stationary frame member (7) by a ring-formed elastic support member (8) having an inner ring-formed part (8a) connected to said bearing holder (9) and an outer ring-formed part (8b) connected to said stationary frame member (7) thereby forming

an elastic connection between said bearing holder (9) and said frame member (7) **characterized in that** the inner ring-formed part (8a) of said elastic support member (8) is fitted with a ring-formed inner plate (10) on an axially upper and a lower ring-formed surface respectively of said inner ring-formed part (8a), and the outer ring-formed part (8b) of said elastic support member (8) is fitted with a ring-formed plate (11) on an axially upper and a lower ring-formed surface respectively of the outer part (8b) of said elastic support member (8).

2. A centrifugal separator according to claim 1, wherein said elastic support member (8) has a ring-formed central part (8c) which ring-formed surface is free from contact with said bearing holder (9) and said stationary frame member (7).
3. A centrifugal separator according to one of claims 1 or 2, wherein said inner ring-formed part (8a) of said elastic support member (8) is fitted in a ring-formed radially inner space (9b) in said bearing holder (9), and said outer ring-formed part (8b) of said elastic support member (8) is fitted in a ring-formed radially outer space (7b) in said stationary frame member (7).
4. A centrifugal separator according to claims 1-3, wherein said ring-formed inner plates (10) and said ring-formed outer plates (11) are made of a metallic material.
5. A centrifugal separator according to any one of the preceding claims, wherein said ring-formed inner plates (10) and said ring-formed outer plates (11) are vulcanized onto said elastic support member (8).
6. A centrifugal separator according to any one of claims 1-4, wherein said ring-formed inner plates (10) and said ring-formed outer plates (11) are glued onto said elastic support member (8).
7. A centrifugal separator according to any one of the preceding claims, wherein said elastic support member (8) is made of rubber.
8. A centrifugal separator according to any one of the preceding claims, wherein said stationary frame member (7) comprises a ring-formed outer cover (7a) attached by screws to said frame member (7), said ring-formed outer cover (7a) together with said frame member defining said ring-formed outer space (7b).
9. A centrifugal separator according to any one of claims 1-7, wherein said bearing holder (9) comprises a ring-formed inner cover (9a) attached by screws to said bearing holder (9), said ring-formed inner cover (9a) together with said bearing holder (9) defining

said ring-formed inner space (9b).

Patentansprüche

1. Zentrifugalabscheider, der Folgendes umfasst: einen Zentrifugalrotor (4), eine drehbare Welle (1), die um eine Achse drehbar ist, an welcher der Zentrifugalrotor (4) fest angebracht ist, ein unbewegliches Rahmenelement (7), wenigstens ein Lager (3), das die Welle (1) in dem unbeweglichen Rahmenelement (7) dreht, eine Stützeinrichtung (6), die eine Lagerhalterung (9) umfasst, die das Lager (3) unmittelbar trägt, wobei die Lagerhalterung (9) durch ein ringförmiges elastisches Stützelement (8), das einen inneren ringförmigen Teil (8a), der mit der Lagerhalterung (9) verbunden ist, und einen äußeren ringförmigen Teil (8b), der mit dem unbeweglichen Rahmenelement (7) verbunden ist, aufweist, mit dem unbeweglichen Rahmenelement (7) verbunden ist, wodurch eine elastische Verbindung zwischen der Lagerhalterung (9) und dem Rahmenelement (7) gebildet wird, **dadurch gekennzeichnet, dass** der innere ringförmige Teil (8a) des elastischen Stützelements (8) jeweils auf einer in Axialrichtung oberen beziehungsweise unteren ringförmigen Fläche des inneren ringförmigen Teils (8a) mit einer ringförmigen inneren Platte (10) ausgerüstet ist und der äußere ringförmige Teil (8b) des elastischen Stützelements (8) jeweils auf einer in Axialrichtung oberen beziehungsweise unteren ringförmigen Fläche des äußeren ringförmigen Teils (8b) des elastischen Stützelements (8) mit einer ringförmigen Platte (11) ausgerüstet ist.
2. Zentrifugalabscheider nach Anspruch 1, wobei das elastische Stützelement (8) einen ringförmigen mittleren Teil (8c) aufweist, wobei die ringförmige Fläche frei von einer Berührung mit der Lagerhalterung (9) und dem unbeweglichen Rahmenelement (7) ist.
3. Zentrifugalabscheider nach Anspruch 1 oder 2, wobei der innere ringförmige Teil (8a) des elastischen Stützelements (8) in einem ringförmigen in Radialrichtung inneren Raum (9b) in der Lagerhalterung (9) eingepasst ist und der äußere ringförmige Teil (8b) des elastischen Stützelements (8) in einem ringförmigen in Radialrichtung äußeren Raum (7b) in dem unbeweglichen Rahmenelement (7) eingepasst ist.
4. Zentrifugalabscheider nach einem der Ansprüche 1 bis 3, wobei die ringförmigen inneren Platten (10) und die ringförmigen äußeren Platten (11) aus einem metallischen Werkstoff hergestellt sind.
5. Zentrifugalabscheider nach einem der vorhergehenden Ansprüche, wobei die ringförmigen inneren Plat-

ten (10) und die ringförmigen äußeren Platten (11) auf das elastische Stützelement (8) vulkanisiert sind.


6. Zentrifugalabscheider nach einem der Ansprüche 1 bis 4, wobei die ringförmigen inneren Platten (10) und die ringförmigen äußeren Platten (11) auf das elastische Stützelement (8) geklebt sind.
7. Zentrifugalabscheider nach einem der vorhergehenden Ansprüche, wobei das elastische Stützelement (8) aus Gummi hergestellt ist.
8. Zentrifugalabscheider nach einem der vorhergehenden Ansprüche, wobei das unbewegliche Rahmenelement (7) eine ringförmige äußere Abdeckung (7a) umfasst, die durch Schrauben an dem Rahmenelement (7) befestigt ist, wobei die ringförmige äußere Abdeckung (7a) zusammen mit dem Rahmenelement den ringförmigen äußeren Raum (7b) definiert.
9. Zentrifugalabscheider nach einem der Ansprüche 1 bis 7, wobei die Lagerhalterung (9) eine ringförmige innere Abdeckung (9a) umfasst, die durch Schrauben an der Lagerhalterung (9) befestigt ist, wobei die ringförmige innere Abdeckung (9a) zusammen mit der Lagerhalterung (9) den ringförmigen inneren Raum (9b) definiert.


Revendications

1. Séparateur centrifuge, comprenant : un rotor centrifuge (4), une broche rotative (1) pouvant tourner autour d'un axe, sur laquelle ledit rotor centrifuge (4) est fermement fixé, un élément de cadre stationnaire (7), au moins un palier (3) faisant tourner ladite broche (1) dans ledit élément de cadre stationnaire (7), un dispositif de support (6) comprenant un porte-palier (9) supportant directement ledit palier (3), ledit porte-palier (9) étant connecté à l'élément de cadre stationnaire (7) par un élément de support élastique de forme annulaire (8) comportant une partie interne de forme annulaire (8a) connectée audit porte-palier (9) et une partie de forme annulaire externe (8b) connectée audit élément de cadre stationnaire (7), établissant ainsi une connexion élastique entre ledit porte-palier (9) et ledit élément de cadre (7), **caractérisé en ce que** la partie interne de forme annulaire (8a) dudit élément de support élastique (8) étant équipée d'une plaque interne de forme annulaire (10), respectivement sur une surface de forme annulaire axialement supérieure et inférieure de ladite partie interne de forme annulaire (8a), ladite partie externe de forme annulaire (8b) dudit élément de support élastique (8) étant équipée d'une plaque de forme annulaire (11), respectivement sur une surface de forme annulaire axialement supérieure et inférieure de la partie externe (8b) dudit élément de

support élastique (8).

2. Séparateur centrifuge selon la revendication 1, dans lequel ledit élément de support élastique (8) comporte une partie centrale de forme annulaire (8c), ladite surface de forme annulaire n'étant pas en contact avec ledit porte-palier (9) et ledit élément de cadre stationnaire (7).
3. Séparateur centrifuge selon l'une des revendications 1 ou 2, dans lequel ladite partie interne de forme annulaire (8a) dudit élément de support élastique (8) est ajustée dans un espace radialement interne de forme annulaire (9b) dans ledit porte-palier (9), ladite partie externe de forme annulaire (8b) dudit élément de support élastique (8) étant ajustée dans un espace radialement externe de forme annulaire (7b) dans ledit élément de cadre stationnaire (7).
4. Séparateur centrifuge selon les revendications 1 à 3, dans lequel lesdites plaques internes de forme annulaire (10) et lesdites plaques externes de forme annulaire (11) sont en un matériau métallique.
5. Séparateur centrifuge selon l'une quelconque des revendications précédentes, dans lequel lesdites plaques internes de forme annulaire (10) et lesdites plaques externes de forme annulaire (11) sont vulcanisées sur ledit élément de support élastique (8).
6. Séparateur centrifuge selon l'une quelconque des revendications 1 à 4, dans lequel lesdites plaques internes de forme annulaire (10) et lesdites plaques externes de forme annulaire (11) sont collées sur ledit élément de support élastique (8).
7. Séparateur centrifuge selon l'une quelconque des revendications précédentes, dans lequel ledit élément de support élastique (8) est en de caoutchouc.
8. Séparateur centrifuge selon l'une quelconque des revendications précédentes, dans lequel ledit élément de cadre stationnaire (7) comprend une couverture externe de forme annulaire (7a) fixée par des vis sur ledit élément de cadre (7), ladite couverture externe de forme annulaire (7a) et ledit élément de cadre définissant ensemble ledit espace externe de forme annulaire (7b).
9. Séparateur centrifuge selon l'une quelconque des revendications 1 à 7, dans lequel ledit porte-palier (9) comprend une couverture interne de forme annulaire (9a) fixée par des vis sur ledit porte-palier (9), ladite couverture interne de forme annulaire (9a) définissant ensemble avec ledit porte-palier (9) ledit espace interne de forme annulaire (9b).

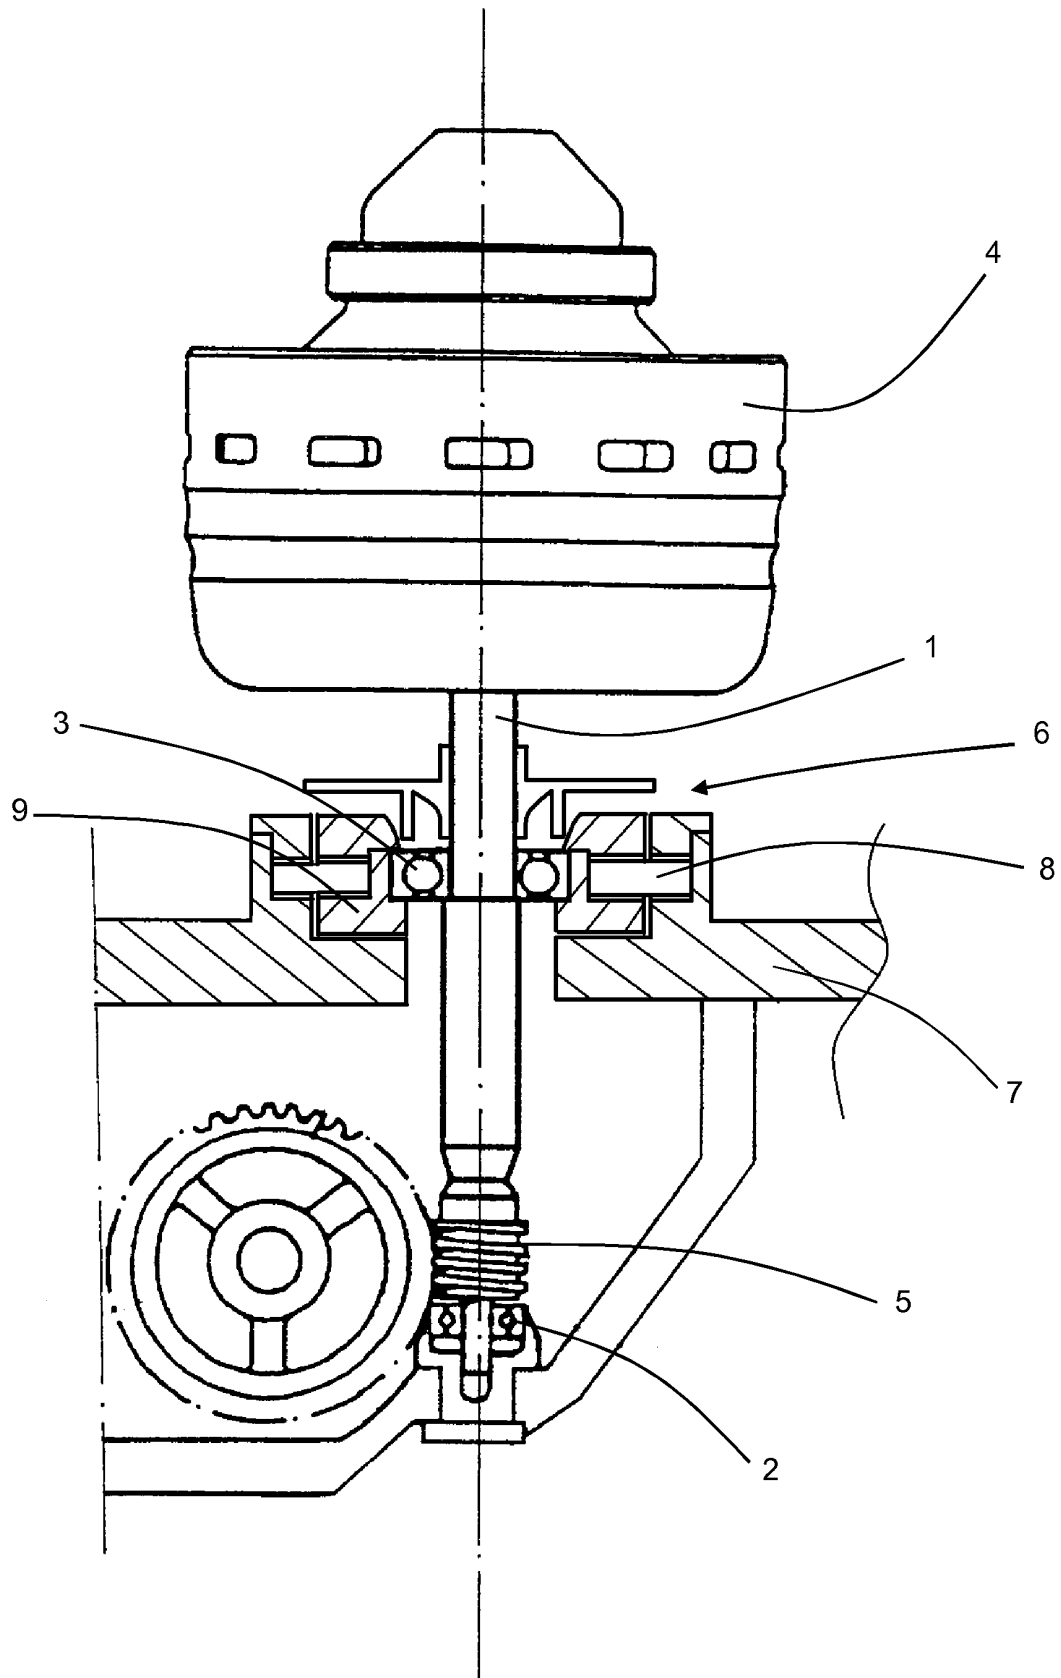

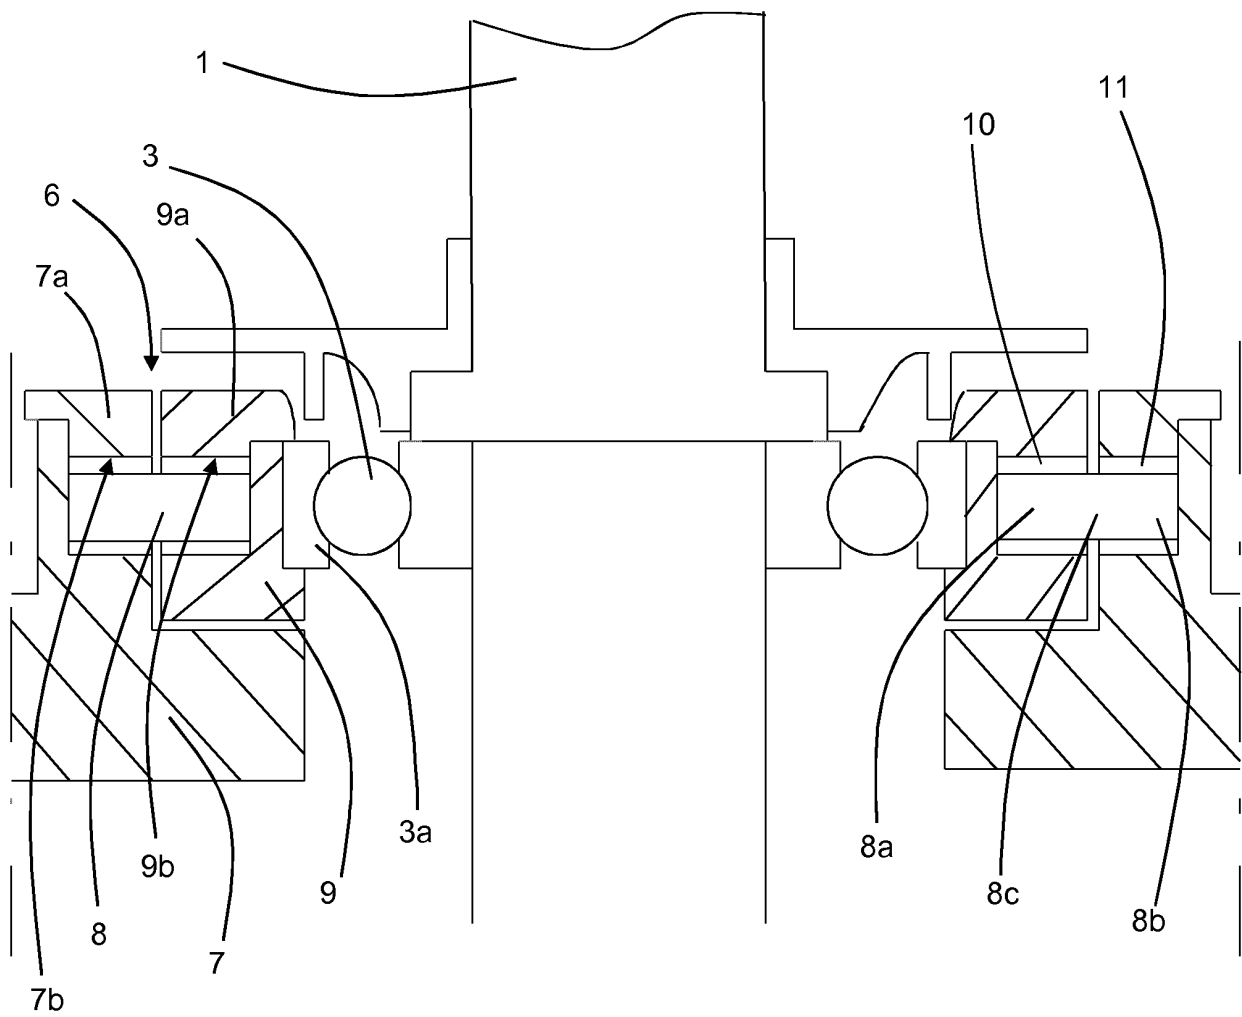

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 8001248 A [0004]
- WO 8910794 A [0005] [0006]
- WO 9946052 A [0006]