

(19)



(11)

EP 3 340 722 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

15.07.2020 Bulletin 2020/29

(51) Int Cl.:

H04W 76/11 ^(2018.01)

H04W 74/00 ^(2009.01)

(86) International application number:

PCT/CN2016/098021

(21) Application number: **16843615.2**

(22) Date of filing: **05.09.2016**

(87) International publication number:

WO 2017/041677 (16.03.2017 Gazette 2017/11)

(54) METHOD AND DEVICE FOR TRANSMITTING DATA

VERFAHREN UND VORRICHTUNG ZUR ÜBERTRAGUNG VON DATEN

PROCÉDÉ ET DISPOSITIF DE TRANSMISSION DE DONNÉES

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

• **WANG, Jian**

Shenzhen, Guangdong 518129 (CN)

• **QIAO, Yunfei**

Shenzhen, Guangdong 518129 (CN)

(30) Priority: **09.09.2015 CN 201510569921**

(43) Date of publication of application:

27.06.2018 Bulletin 2018/26

(74) Representative: **Pfenning, Meinig & Partner mbB**

Patent- und Rechtsanwälte

Theresienhöhe 11a

80339 München (DE)

(73) Proprietor: **Huawei Technologies Co., Ltd.**

Longgang District

Shenzhen, Guangdong 518129 (CN)

(56) References cited:

EP-A1- 2 015 485

EP-A1- 2 846 573

WO-A1-03/085874

WO-A1-2013/050037

WO-A1-2015/105846

CN-A- 101 141 788

CN-A- 101 689 949

CN-A- 102 487 548

(72) Inventors:

• **ZHANG, Chaolong**

Shenzhen, Guangdong 518129 (CN)

EP 3 340 722 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**TECHNICAL FIELD**

5 **[0001]** The present invention relates to the communications field, and more specifically, to a data transmission method and apparatus.

BACKGROUND

10 **[0002]** In an existing communications system (for example, a Long Term Evolution system), a terminal device sends uplink data based on a scheduling request mechanism shown in FIG. 1. When determining that there is to-be-sent uplink data, the terminal device may send an uplink scheduling request to a network device. The uplink scheduling request carries identification information (for example, a cell radio network temporary identity (cell Radio network temporary identity, C-RNTI)) of the terminal device. After receiving the uplink scheduling request, the network device may allocate
15 an uplink transmission resource to the terminal device according to current system resource usage, and send an uplink grant (UL grant) to the terminal device. The terminal device may send the uplink data to the network device on a transmission resource indicated by the uplink grant. Correspondingly, the network device may receive, on the corresponding transmission resource, the uplink data sent by the terminal device.

20 **[0003]** With the development of the Internet of Things, an increasing quantity of machine type communication (machine type communication, MTC) services emerge. Generally, a data packet transmitted in an MTC service is relatively small, and a transmission latency is also required to be small. When there is a large quantity of MTC services, the foregoing scheduling request mechanism not only brings a large quantity of signaling overheads, but also increases a transmission latency.

25 **[0004]** To resolve the foregoing problem, a technical solution of grant-free (Grant Free) transmission is proposed. Grant-free transmission means that a terminal device directly transmits uplink data to a network device without needing to request, in a scheduling request manner, a base station to allocate a resource. In this case, the terminal device does not send an uplink scheduling request to the network device before sending the uplink data, and the network device does not send a grant to or allocate a resource to the terminal device, but decodes the received uplink data in a blind detection manner. Therefore, the network device does not know which terminal device sends the detected uplink data.

30 **[0005]** Based on the foregoing problem, in grant-free transmission, the terminal device needs to add an identifier of the terminal device to an uplink data packet sent to the network device. However, in a scenario (for example, an Internet of Things (internet of things, IoT) scenario) of massive accesses to a single cell in the future, there may be a large quantity of terminal devices, and a terminal device identifier used to identify a terminal device may be quite long. For example, to support 300,000 terminal devices in a single cell, a terminal device identifier needs to be at least 19 bits
35 long. However, a data packet transmitted by a terminal device in this scenario may be relatively small. For example, a data packet in the IoT scenario is generally 100 bits to 1000 bits long. In this case, if a terminal device identifier is carried in the data packet, a proportion of resources occupied by the 19-bit terminal device identifier in the entire data packet is up to 16% approximately. If the terminal device divides the data packet into smaller data packets for multiple times of transmission, the proportion of resources occupied by the terminal device identifier becomes higher.

40 WO2013050037A1 relates to a method for communication between a meter device and a communication network in accordance with a radio protocol for communicating data between a meter device and a communication network, said meter device being provided with a meter device identification for identifying said meter device, wherein said radio protocol comprises: -a reduced part of said meter device identification and -a data field, wherein said method of communication comprises the steps of: -transmitting a data telegram according to said protocol from said meter device,
45 -receiving said data telegram by said communication network, and -identifying said meter device wherein said step of identifying said meter device is performed on the basis of a set of identification elements, said set of identification elements comprising at least: -said reduced part of said meter device identification, and -at least one information element obtained from a data source external to said meter device. The invention furthermore relates to an identification computer device and a meter device adapted for operating in accordance with the above mentioned radio protocol, and a radio
50 protocol for communication between a meter device and a communication network in accordance with the above mentioned radio protocol.

WO2015105846A1 discloses a method for operating a user equipment (UE) includes determining a first operating state in accordance with a first message traffic generated by a non-session based application executing in the UE, setting a state machine in the UE to the first operating state, and transmitting a first message in accordance with the state machine.

SUMMARY

55 **[0006]** Embodiments of the present invention provide a data transmission method and apparatus, so as to reduce

signaling overheads caused by adding a terminal device identifier to a data packet.

[0007] The object of the present invention is achieved by the features of the appended independent claims.

[0008] Compared with that the uplink data packet carries the complete terminal device identifier, the solutions can reduce system signaling overheads and improve system performance.

BRIEF DESCRIPTION OF DRAWINGS

[0009] To describe the technical solutions in the embodiments of the present invention more clearly, the following briefly describes the accompanying drawings required for describing the embodiments of the present invention or the prior art. Apparently, the accompanying drawings in the following description show merely some embodiments of the present invention, and a person of ordinary skill in the art may still derive other drawings from these accompanying drawings without creative efforts.

FIG. 1 is a schematic diagram of an example of a communications system to which an embodiment of the present invention is applied;

FIG. 2 is a schematic diagram of a contention access region and a contention transmission unit in the communications system shown in FIG. 1;

FIG. 3 is a schematic flowchart of a data transmission method according to an embodiment of the present invention;

FIG. 4 is another schematic flowchart of a data transmission method according to an embodiment of the present invention;

FIG. 5 is a schematic flowchart of another data transmission method according to an embodiment of the present invention;

FIG. 6 is a schematic flowchart of another data transmission method according to an embodiment of the present invention;

FIG. 7 is a schematic diagram of the data transmission method shown in FIG. 6;

FIG. 8 is a schematic diagram of dividing a terminal device identifier in the data transmission method shown in FIG. 6;

FIG. 9 is a schematic diagram of another data transmission method according to an embodiment of the present invention;

FIG. 10 is a schematic block diagram of a data transmission apparatus according to an embodiment of the present invention;

FIG. 11 is a schematic block diagram of another data transmission apparatus according to an embodiment of the present invention;

FIG. 12 is a schematic block diagram of another data transmission apparatus according to an embodiment of the present invention; and

FIG. 13 is a schematic block diagram of another data transmission apparatus according to an embodiment of the present invention.

DESCRIPTION OF EMBODIMENTS

[0010] The following clearly and completely describes the technical solutions in the embodiments of the present invention with reference to the accompanying drawings in the embodiments of the present invention. Apparently, the described embodiments are a part rather than all of the embodiments of the present invention. All other embodiments obtained by a person of ordinary skill in the art based on the embodiments of the present invention without creative efforts shall fall within the protection scope of the present invention.

[0011] An existing cellular communications system, such as a Global System for Mobile Communications (Global System for Mobile Communications, GSM), a Code Division Multiple Access (Code Division Multiple Access, CDMA) system, a Wideband Code Division Multiple Access (Wideband Code Division Multiple Access, WCDMA) system, and a Long Term Evolution (Long Term Evolution, LTE) system, mainly supports voice and data communication. Generally, a quantity of connections supported by a conventional base station is limited and easy to implement.

[0012] A next-generation mobile communications system not only supports conventional communication, but also supports machine to machine (machine to machine, M2M) communication, which is also referred to as machine type communication (machine type communication, MTC). As predicted, in 2020, there will be 50 billion to 100 billion MTC devices connected over a network. This greatly exceeds a current quantity of connections. M2M services are diverse in service types, and different types of M2M services have quite different network requirements. In general, there are several requirements as follows: (I) reliable latency-insensitive transmission; and (II) ultra-reliable and low latency transmission.

[0013] A service requiring reliable latency-insensitive transmission is relatively easy to deal with. However, a service requiring ultra-reliable and low latency transmission, such as a vehicle-to-vehicle (vehicle to vehicle, V2V) service, not

only requires a low transmission latency but also requires reliable transmission. If transmission is unreliable, retransmission is caused. As a result, a transmission latency is excessively high, and requirements cannot be met.

[0014] Due to the existence of a large quantity of connections, there is a significant difference between a future wireless communications system and an existing communications system. Because of the large quantity of connections, more resources need to be consumed for terminal device access, and more resources need to be consumed for data transmission of a terminal device and transmission of related scheduling signaling.

[0015] FIG. 1 is a schematic architecture diagram of a system 100 to which an embodiment of the present invention can be applied. The system 100 includes a network device 102 and multiple terminal devices 104 to 114 located within a coverage area of the network device 102. The network device 102 may be connected to the multiple terminal devices in a wireless manner, a wired manner, or another manner, and the network device 102 may support simultaneous transmission on multiple cellular carriers. FIG. 1 shows an example in which there is one network device and six terminal devices. Optionally, the system 100 may include multiple network devices, and another quantity of terminal devices may be included within a coverage area of each network device. This is not limited in this embodiment of the present invention.

[0016] A network in this embodiment of the present invention may be a public land mobile network (Public Land Mobile Network, PLMN), a device-to-device (device to device, D2D) network, an M2M network, or another network. FIG. 1 is merely an example of a simplified schematic diagram. The network may further include another network device that is not shown in FIG. 1.

[0017] In this embodiment of the present invention, the terminal device may be an access terminal, user equipment (user equipment, UE), a subscriber unit, a subscriber station, a mobile station, a remote station, a remote terminal, a mobile device, a user terminal, a terminal, a wireless communications device, a user agent, or a user apparatus. The access terminal may be a cellular phone, a cordless phone, a Session Initiation Protocol (Session Initiation Protocol, SIP) phone, a wireless local loop (Wireless Local Loop, WLL) station, a personal digital assistant (Personal Digital Assistant, PDA), a handheld device having a wireless communication function, a computing device, another processing device connected to a wireless modem, an in-vehicle device, a wearable device, a terminal device in a future 5G network, a terminal device in a future evolved public land mobile network (Public Land Mobile Network, PLMN), or the like.

[0018] In this embodiment of the present invention, the network device may be a device configured to communicate with a terminal device. The network device may be a base transceiver station (Base Transceiver Station, BTS) in a GSM system or a Code Division Multiple Access (Code Division Multiple Access, CDMA) system, a NodeB (NodeB, NB) in a WCDMA system, an evolved NodeB (Evolved Node B, eNB or eNodeB) in an LTE system, or an access controller in a cloud radio access network (Cloud Radio Access Network, CRAN). Alternatively, the network device may be a relay node, an access point, an in-vehicle device, a wearable device, a network-side device in a future 5G network, a network device in a future evolved PLMN network, or the like.

[0019] To deal with a large quantity of MTC services in a future network and to satisfy ultra-reliable and low latency service transmission, the network device 102 in the system 100 may use a grant-free (Grant Free) transmission solution. This solution may be applicable to uplink data transmission. In this grant-free transmission mechanism, a terminal device does not need to request, in a scheduling request manner, a network device to allocate a transmission resource, but directly contends for a resource and transmits uplink data, so as to reduce system signaling overheads and a transmission latency.

[0020] Grant-free transmission may be understood as one or more of the following meanings, or a combination of some technical features in multiple meanings.

1. Grant-free transmission may mean: A network device pre-allocates multiple transmission resources to a terminal device and notifies the terminal device of the multiple transmission resources; when the terminal device has an uplink data transmission requirement, the terminal device selects at least one transmission resource from the multiple transmission resources pre-allocated by the network device, and sends uplink data by using the selected transmission resource; and the network device detects, on at least one of the pre-allocated multiple transmission resources, the uplink data sent by the terminal device. The detection may be blind detection, detection performed according to a control field in the uplink data, or detection performed in another manner.

The blind detection may be understood as detection performed, when it is unknown in advance whether data arrives, on data that may arrive. The blind detection may also be understood as detection performed without an explicit signaling indication.

2. Grant-free transmission may mean: A network device pre-allocates multiple transmission resources to a terminal device and notifies the terminal device of the multiple transmission resources, so that when the terminal device has an uplink data transmission requirement, the terminal device selects at least one transmission resource from the multiple transmission resources pre-allocated by the network device, and sends uplink data by using the selected transmission resource.

3. Grant-free transmission may mean: A terminal device obtains information about multiple pre-allocated transmission resources; when the terminal device has an uplink data transmission requirement, selects at least one transmission

resource from the multiple transmission resources, and sends uplink data by using the selected transmission resource. The terminal device may obtain the information about the multiple transmission resources in multiple manners. For example, a mapping relationship between a terminal device and a transmission resource may be defined in a protocol, or indicated by a network device by using an instruction.

4. Grant-free transmission may mean a method for transmitting uplink data by a terminal device without dynamic scheduling performed by a network device. The dynamic scheduling may be a scheduling manner in which the network device needs to indicate, by using signaling, a transmission resource for each uplink data transmission of the terminal device. Optionally, the transmission resource may be a transmission resource in one or more transmission time units following a moment at which the terminal device receives the signaling. One transmission time unit may be a smallest time unit for one transmission, for example, a transmission time interval (transmission time interval, TTI), and its value may be 1 ms. Alternatively, one transmission time unit may be a preset transmission time unit. Optionally, implementing uplink data transmission performed by a terminal device may be understood as follows: At least two terminal devices are allowed to perform uplink data transmission on a same time-frequency resource.

5. Grant-free transmission may mean: A terminal device performs uplink data transmission without a grant from a network device. The grant may mean: The terminal device sends an uplink scheduling request to the network device; and after receiving the scheduling request, the network device sends an uplink grant (UL grant) to the terminal device. The uplink grant is used to indicate an uplink transmission resource allocated to the terminal device.

6. Grant-free transmission may mean a contention transmission mode, and may specifically mean: Multiple terminal devices perform uplink data transmission on a same pre-allocated time-frequency resource simultaneously without a grant from a network device.

[0021] Optionally, the data may be service data or signaling data.

[0022] In the grant-free transmission mechanism, the transmission resource may include but is not limited to one or a combination of the following resources: a time-domain resource, such as a radio frame, a subframe, or a symbol; a frequency-domain resource, such as a subcarrier or a resource block; a space-domain resource, such as a transmit antenna or a beam; a code-domain resource, such as a sparse code multiple access (sparse code multiple access, SCMA) codebook, a low density signature (low density signature, LDS), or a CDMA code; or an uplink pilot resource.

[0023] The foregoing transmission resources may be used for transmission performed according to a control mechanism including but not limited to the following: uplink power control such as uplink transmit power upper limit control; modulation and coding scheme setting such as transport block size setting, bit rate setting, and modulation order setting; and a retransmission mechanism such as a hybrid automatic repeat request (hybrid automatic repeat request, HARQ) mechanism.

[0024] In the grant-free transmission mechanism, at least one contention access region (contention Access Region, CAR) is defined in a time-frequency domain. The CAR may be a time-frequency region used for grant-free transmission, different CARs may be respectively corresponding to different time-frequency resources, and each CAR may further include at least one contention transmission unit (Contention Transmission Unit, CTU). The CAR may also be referred to as a CTU access region or a time-frequency resource corresponding to a CTU. A CTU may be a basic transmission resource unit for grant-free transmission. The CTU may be a combination of at least one of a time resource, a frequency resource, a code domain resource, or a pilot resource. For example, the CTU may be a transmission resource combining a time resource, a frequency resource, and a code domain resource; may be a transmission resource combining a time resource, a frequency resource, and a pilot resource; or may be a transmission resource combining a time resource, a frequency resource, a code domain resource, and a pilot resource. However, this is not limited in this embodiment of the present invention.

[0025] A technical solution for grant-free transmission is provided in a patent application numbered PCT/CN2014/073084 and entitled "System and Method for Uplink Grant-free Transmission Scheme". In this solution, a transmission resource may be divided into different CTUs. One code group may be allocated to each CTU. The allocated code group may be a group of CDMA codes, an SCMA codebook set, an LDS, a signature, or the like. Optionally, each code may be corresponding to a group of pilots.

[0026] After accessing the network device 102, the terminal devices 104 to 114 may report their own capability information to the network device 102. The capability information may include information used to indicate whether the terminal devices 104 to 114 are capable of grant-free transmission. In this way, the network device 102 may use, according to capability information reported by each terminal device, a grant-free transmission mechanism or a conventional request-grant mechanism to communicate with the terminal device. Optionally, the network device 102 may notify the terminal device of required information for performing grant-free transmission. For example, the network device 102 may instruct the terminal device to perform grant-free transmission, and send search space information, CAR information, CTU information, modulation and coding scheme information, and the like to the terminal device. Each terminal device is mapped to one or more CTUs, and a mapping rule may be predefined, or set by the network device. The terminal

device may select one code and one pilot in a pilot group corresponding to the code to perform uplink transmission. However, this is not limited in this embodiment of the present invention.

FIG. 2 shows an example of a CAR and a CTU in a grant-free transmission mechanism. An available bandwidth of a system is divided into multiple different time-frequency regions. Each CAR occupies different resource blocks. Optionally, a quantity of resource blocks occupied by each CAR may be predefined. For example, a CAR 202 occupies resource blocks (Resource Block, RB) 1 to 4 of a frequency band. As shown in FIG. 2, each CAR may be further divided into at least one CTU, and each CTU is a combination of a specific time, a frequency, a signature, and a pilot. In FIG. 2, all CARs are corresponding to a same CTU mapping relationship. For ease of description, a mapping relationship of four CARs is shown from different perspectives. However, this is not limited in this embodiment of the present invention. As shown in FIG. 2, each CAR supports six signatures (S1 to S6), and each signature may be corresponding to six pilots. Therefore, there are a total of 36 pilots (P1 to P36) that are corresponding to 36 CTUs. However, this is not limited in this embodiment of the present invention.

[0027] It should be understood that FIG. 2 shows an example in which there are four CARs and each CAR includes 36 CTUs, but another quantity of CARs may be included in this embodiment of the present invention, and each CAR may include another quantity of CTUs. This is not limited in this embodiment of the present invention.

[0028] FIG. 3 shows a data transmission method 300 according to an embodiment of the present invention. The method 300 may be executed by a terminal device.

[0029] S310. Determine a target CTU from multiple candidate CTUs according to a first partial identifier in a terminal device identifier, where the terminal device identifier includes the first partial identifier and a second partial identifier.

[0030] The terminal device identifier is used to identify the terminal device in a network, so that a network device can distinguish the terminal device from another terminal device. Optionally, the terminal device identifier may be specifically a cell radio network temporary identity (Cell Radio Network Temporary Identity, C-RNTI), a user identity, a device identifier, or the like. This is not limited in this embodiment of the present invention.

[0031] The terminal device may divide its terminal device identifier with a length of M into a first partial identifier with a length of N and a second partial identifier with a length of $(M-N)$, where $N \geq 1$ and $M \geq N$. The second partial identifier is a portion explicitly reported by the terminal device to the network device, and the first partial identifier is a portion implicitly indicated by the terminal device to the network device. A value of N may be predefined, indicated by the network device, or determined by the terminal device according to an actual condition. This is not limited in this embodiment of the present invention.

[0032] The terminal device may divide the terminal device identifier in multiple manners. For example, the terminal device may determine the first $(M-N)$ consecutive bits in the terminal device identifier as the explicit portion, and determine the last N consecutive bits as the implicit portion. Alternatively, the terminal device may determine the first N consecutive bits or the middle N consecutive bits in the terminal device identifier as the implicit portion, and determine the remaining portion as the explicit portion. Alternatively, the terminal device may determine N bits in odd-number (or even-number) positions in the terminal device identifier as the implicit portion and $(M-N)$ bits in even-number (or odd-number) positions as the explicit portion. Alternatively, the terminal device may divide the terminal device identifier in another manner. A manner in which the terminal device divides the terminal device identifier may be predefined, or indicated by the network device. This is not limited in this embodiment of the present invention.

[0033] S320. Send an uplink data packet to a network device by using the target CTU, where the uplink data packet carries the second partial identifier.

[0034] Specifically, the terminal device may send the uplink data packet to the network device in a grant-free transmission mode, and the terminal device may send the uplink data packet by using the target CTU determined according to the first partial identifier, so as to implicitly indicate the first partial identifier. In this way, the network device may extract the second partial identifier from the uplink data packet, determine the first partial identifier according to the target CTU, and determine, according to the first partial identifier and the second partial identifier, the complete terminal device identifier corresponding to the uplink data packet.

[0035] Therefore, according to the data transmission method provided in this embodiment of the present invention, the terminal device identifier is divided into the first partial identifier and the second partial identifier, the target CTU is determined from the multiple candidate CTUs according to the first partial identifier, and the uplink data packet carrying the second partial identifier is sent by using the target CTU, so that the first partial identifier in the terminal device identifier can be implicitly indicated. Compared with that the uplink data packet carries the complete terminal device identifier, this method can reduce system signaling overheads and improve system performance.

[0036] In S310, the multiple candidate CTUs may be specifically CTUs in one or more CARs, and the terminal device may determine one or more CTUs of the multiple candidate CTUs as the target CTU or CTUs according to a predefined rule or a rule indicated by the network device. For example, there is a correspondence between multiple CTU numbers corresponding to the multiple candidate CTUs and multiple binary sequences with a length of N ; and the terminal device determines, according to the correspondence, a target CTU number corresponding to the first partial identifier or corresponding to a binary sequence obtained from the first partial identifier, and determines a target CTU corresponding to

the target CTU number. In an optional embodiment, the terminal device may determine, according to a size of the uplink data packet, a quantity of candidate CTUs that may be used as the target CTU. However, this is not limited in this embodiment of the present invention.

[0037] Optionally, in this embodiment of the present invention, the multiple candidate CTUs may be classified into groups. Each CTU group may include one or more candidate CTUs, and quantities of candidate CTUs included in different CTU groups may be different or the same. A grouping status of the multiple candidate CTUs may be predefined, or preconfigured by the network device and notified to the terminal device. This is not limited in this embodiment of the present invention.

[0038] In an optional embodiment, before S310, the method 300 further includes:

receiving indication information sent by the network device, where the indication instruction is used to indicate group information of the multiple candidate CTUs; and
determining, according to the indication information, CTU groups to which the multiple candidate CTUs respectively belong to.

[0039] Specifically, the terminal device may determine a quantity of multiple candidate CTU groups into which the multiple candidate CTUs are grouped and numbers of the multiple candidate CTU groups, and determine one or more candidate CTUs included in each candidate CTU group. However, this is not limited in this embodiment of the present invention.

[0040] In an optional embodiment, as shown in FIG. 4, the determining a target CTU from multiple candidate CTUs according to a first partial identifier in a terminal device identifier in S310 includes the following steps:

[0041] S311. Determine a target CTU group from multiple candidate CTU groups according to the first partial identifier, where each of the multiple candidate CTU groups includes at least one of the multiple candidate CTUs.

[0042] S312. Determine the target CTU from at least one candidate CTU included in the target CTU group.

[0043] Specifically, the terminal device may determine at least one of the multiple candidate CTU groups as the target CTU group according to the first partial identifier, and determine some or all candidate CTUs in the target CTU group as the target CTU.

[0044] In an optional embodiment, a quantity of the multiple candidate CTU groups is 2^N , and there is a one-to-one correspondence between 2^N CTU group numbers of the 2^N candidate CTU groups and 2^N binary sequences with a length of N.

[0045] The correspondence may be predefined, or preconfigured by the network device and notified to the terminal device. For example, assuming that $N=2$, that the quantity of the multiple candidate CTU groups is four, and that numbers of the multiple candidate CTU groups are 1 to 4, four binary sequences 00, 01, 10, and 11 with a length of 2 may be corresponding to the CTU group numbers 1, 2, 3, and 4, respectively. However, this is not limited in this embodiment of the present invention.

[0046] In an optional embodiment, in S311, the terminal device may determine, from the multiple candidate CTU groups according to the correspondence, a target CTU group whose number is corresponding to the first partial identifier. However, this is not limited in this embodiment of the present invention.

[0047] In another optional embodiment, the terminal device may determine the target CTU group according to the first partial identifier and another parameter that can be learned by both the network device and the terminal device. In this embodiment of the present invention, a time-domain resource of the system may be divided into multiple contention access periods, and each contention access period is corresponding to a phase, such as a subframe or a radio frame. Optionally, there may be one or more CARs in each contention access period, and there may be one or more CTUs in each CAR. Correspondingly, there may be one or more CTUs in one contention access period. A value of a contention access period and distribution of CARs and/or CTUs in each contention access period may be predefined, or configured by the network device. This is not limited in this embodiment of the present invention.

[0048] Optionally, the multiple candidate CTU groups are in a same contention access period. The multiple candidate CTUs may be some or all CTUs in the contention access period. This is not limited in this embodiment of the present invention. In this case, the determining a target CTU group from multiple candidate CTU groups according to the first partial identifier in S311 includes:

determining the target CTU group from the multiple candidate CTU groups according to the first partial identifier and a number of the contention access period to which the multiple candidate CTU groups belong.

[0049] If the multiple candidate CTU groups are in the same contention access period, the terminal device may determine the target CTU group from the multiple candidate CTU groups according to the number of the contention access period and the first partial identifier. For example, the terminal device may determine a binary sequence with a length of N according to the number of the contention access period and the first partial identifier, and determine, according to a correspondence between the binary sequence and a CTU group number, the CTU group number corresponding to the binary sequence, so as to determine a target CTU group corresponding to the CTU group number.

However, this is not limited in this embodiment of the present invention.

[0050] In an optional embodiment, the determining the target CTU group from the multiple candidate CTU groups according to the first partial identifier and a number of the contention access period to which the multiple candidate CTU groups belong includes:

generating a binary pseudo-random sequence according to the number of the contention access period, where a length of the binary pseudo-random sequence is the same as a length of the first partial identifier;
performing a reversible operation on the binary pseudo-random sequence and the first partial identifier to obtain a first binary sequence; and
determining the target CTU group from the multiple candidate CTU groups according to the first binary sequence.

[0051] Specifically, the terminal device may generate the binary pseudo-random sequence by using the number of the contention access period as a seed, where the length of the binary pseudo-random sequence may be N . Then, the terminal device may perform the reversible operation on the binary pseudo-random sequence and the first partial identifier to obtain the first binary sequence. The reversible operation may be an exclusive OR (XOR) operation or another operation, so that the network device can obtain the first partial identifier when performing the same operation on the target CTU group and the binary pseudo-random sequence. Finally, the terminal device may determine the target CTU group according to the first binary sequence. For example, the terminal device determines, according to the correspondence between the binary sequence and the CTU group number, a target CTU group number corresponding to the first binary sequence, and further determines a target CTU group corresponding to the target CTU group number. However, this is not limited in this embodiment of the present invention. Optionally, the terminal device may determine, in another manner, the target CTU group from the multiple candidate CTU groups according to the binary pseudo-random sequence and the first partial identifier. This is not limited in this embodiment of the present invention.

[0052] In S312, the terminal device may determine the target CTU from the target CTU group in multiple manners. It is assumed that a quantity of candidate CTUs included in the target CTU group is L , and $L \geq 1$. Optionally, the terminal device may randomly select P candidate CTUs from the L candidate CTUs, and determine the P candidate CTUs as the target CTU, where $1 \leq P < L$. In this way, the target CTU group is first determined from the multiple candidate CTU groups, and then the target CTU is randomly selected from the target CTU group, so that a probability that different terminal devices select a same target CTU can be reduced, to improve data transmission performance and overall system performance.

[0053] Optionally, the foregoing CTU group number may be an initial number of a CTU group, that is, a predefined number or a number configured by the network device. In another optional embodiment, the terminal device may change initial numbers of some or all candidate CTU groups of the multiple candidate CTU groups to obtain new numbers of the multiple candidate CTU groups, and determine the target CTU group from the multiple candidate CTU groups according to the new numbers of the multiple candidate CTU groups. For example, the terminal device determines, according to the correspondence, a CTU group number corresponding to the N -bit binary sequence obtained from the first partial identifier, and determines, as the target CTU group, a CTU group whose new number is the target CTU group number. Specifically, the terminal device may randomly interchange the initial numbers of the some or all candidate CTU groups of the multiple candidate CTU groups, or may perform cyclic shift on the initial numbers of all candidate CTU groups of the multiple candidate CTU groups. For example, assuming that a quantity of the multiple candidate CTU groups is four and that initial numbers of the multiple candidate CTU groups are 1 to 4 in sequence, the terminal device may cyclically shift the initial numbers of the four candidate CTU groups as follows: A new number of a candidate CTU group with the initial number 1 is set to 3, a new number of a candidate CTU group with the initial number 2 is set to 4, a new number of a candidate CTU group with the initial number 3 is set to 1, and a new number of a candidate CTU group with the initial number 4 is set to 2. However, this is not limited in this embodiment of the present invention.

[0054] In another optional embodiment, the terminal device may change numbers of some or all candidate CTU groups of the multiple candidate CTU groups according to the number of the contention access period. Correspondingly, before S311, the method 300 further includes:

changing initial numbers of the multiple candidate CTU groups according to the number of the contention access period, to obtain new numbers of the multiple candidate CTU groups.

[0055] Correspondingly, the determining a target CTU group from multiple candidate CTU groups according to the first partial identifier in S311 includes:

determining, according to the first partial identifier, a target CTU group number from multiple CTU group numbers corresponding to the multiple candidate CTU groups; and
determining, from the multiple candidate CTU groups, a candidate CTU group whose new number is the target CTU group number as the target CTU group.

[0056] For example, the terminal device may generate a pseudo-random number by using the number of the contention access period as a seed, and perform, by using the pseudo-random number as a unit, cyclic shift on the multiple CTU group numbers corresponding to the multiple candidate CTU groups. However, this is not limited in this embodiment of the present invention.

[0057] After determining the new numbers of the multiple candidate CTU groups, the terminal device may determine the target CTU group according to the new numbers. For example, the terminal device may determine, according to the correspondence between the binary sequence and the CTU group number, the CTU group number corresponding to the binary sequence obtained from the first partial identifier, and determine a candidate CTU group whose new number is the corresponding CTU group number as the target CTU group. However, this is not limited in this embodiment of the present invention.

[0058] In this way, changing processing is performed on the initial numbers of the multiple candidate CTU groups to form new numbers, and the target CTU group is determined according to the new numbers. This can avoid that the terminal device transmits the uplink data by using a same target CTU group or target CTU in multiple contention access periods, thereby improving data transmission performance.

[0059] In this embodiment of the present invention, the terminal device may determine lengths of the first partial identifier and the second partial identifier according to a quantity of multiple available candidate CTU groups or available candidate CTUs, for example, a quantity of CTU groups or CTUs included in the contention access period. In an optional embodiment, before S310, the method 300 further includes:

when the quantity of the multiple candidate CTU groups is 2^N , determining that the length of the first partial identifier is N.

[0060] Optionally, the length of the first partial identifier may be less than N. This is not limited in this embodiment of the present invention.

[0061] In another optional embodiment, when determining the lengths of the first partial identifier and the second partial identifier, the terminal device may further divide the terminal device identifier according to the number of the contention access period. Correspondingly, before S310, the method 300 further includes:

dividing the terminal device identifier into the first partial identifier and the second partial identifier according to the number of the contention access period.

[0062] In this way, the terminal device may determine, according to the number of the contention access period and the quantity of the multiple candidate CTU groups, the first partial identifier and the second partial identifier in the terminal device identifier.

[0063] In an optional embodiment, the dividing the terminal device identifier into the first partial identifier and the second partial identifier according to the number of the contention access period includes:

generating a second binary sequence with a length of M according to the number of the contention access period, where the second binary sequence includes N reference bits with a value of 1, M is a length of the terminal device identifier, N is the length of the first partial identifier, and $1 \leq N < M$;

sequentially arranging N bits in the terminal device identifier whose positions are respectively corresponding to the N reference bits, to form the first partial identifier; and

sequentially arranging (M-N) bits in the terminal device identifier other than the N bits, to form the second partial identifier.

[0064] Specifically, the terminal device may generate the second binary sequence with a length of M by using the number of the contention access period as a seed. The second binary sequence includes the N reference bits, and a value of each reference bit is 1. Then, the terminal device may sequentially arrange bits, in the terminal device identifier with a length of M, that are located in positions corresponding to the N reference bits, to form the first partial identifier. The N bits may be arranged from left to right in a positive sequence, or in a reverse sequence, or in another sequence. The sequencing manner may be predefined, or preconfigured by the network device. This is not limited in this embodiment of the present invention.

[0065] In another optional embodiment, the terminal device may generate, according to the number of the contention access period, a third binary sequence with a length of M and including (M-N) 1s, sequentially arrange bits in the terminal device identifier that are located in positions corresponding to (M-N) 1s, to form the second partial identifier, and determine the remaining portion as the first partial identifier. However, this is not limited in this embodiment of the present invention.

[0066] Therefore, according to the data transmission method provided in this embodiment of the present invention, the terminal device identifier is divided into the first partial identifier and the second partial identifier, the target CTU is determined from the multiple candidate CTUs according to the first partial identifier, and the uplink data packet carrying the second partial identifier is sent by using the target CTU, so that the first partial identifier in the terminal device identifier can be implicitly indicated. Compared with that the uplink data packet carries the complete terminal device identifier, this method can reduce system signaling overheads and improve system performance.

[0067] The foregoing details, with reference to FIG. 3 and FIG. 4, the data transmission method according to this

embodiment of the present invention from a perspective of a terminal device. The following details, with reference to FIG. 5, a data transmission method according to an embodiment of the present invention from a perspective of a network device.

[0068] FIG. 5 shows another data transmission method 400 according to an embodiment of the present invention. The method 400 may be executed by a network device.

[0069] S410. Receive an uplink data packet transmitted by a terminal device by using a target CTU, where the uplink data packet carries a second partial identifier in a terminal device identifier of the terminal device.

[0070] S420. Determine a first partial identifier in the terminal device identifier according to the target CTU, where the terminal device identifier includes the first partial identifier and the second partial identifier.

[0071] S430. Determine the terminal device identifier of the terminal device according to the first partial identifier and the second partial identifier.

[0072] Optionally, the terminal device may transmit the uplink data packet in a grant-free transmission mode. Correspondingly, the network device may perform blind detection, so as to detect the uplink data packet carrying the second partial identifier and transmitted by using the target CTU. The network device may determine, according to a rule the same as that used by the terminal device, the first partial identifier corresponding to the target CTU, and determine, according to the first partial identifier and the second partial identifier, the complete terminal device identifier corresponding to the uplink data packet.

[0073] Therefore, according to the data transmission method provided in this embodiment of the present invention, the terminal device identifier is divided into the first partial identifier and the second partial identifier, the target CTU is determined from the multiple candidate CTUs according to the first partial identifier, and the uplink data packet carrying the second partial identifier is sent by using the target CTU, so that the first partial identifier in the terminal device identifier can be implicitly indicated. The network device may determine the first partial identifier according to the target CTU, and further determine the complete terminal device identifier of the terminal device. Compared with that the uplink data packet carries the complete terminal device identifier, this method can reduce system signaling overheads and improve system performance.

[0074] In this embodiment of the present invention, the network device may further preconfigure at least one of the following: a grouping manner of CTUs, a CTU group number, a length of the first partial identifier, a manner of dividing the terminal device identifier, and a manner of determining a target CTU according to the first partial identifier. In addition, the network device may notify the terminal device of the configuration. However, this is not limited in this embodiment of the present invention.

[0075] In an optional embodiment, before S410, the method 400 further includes:

grouping, according to a current network status, multiple CTUs in a contention access period to which the target CTU belongs into multiple CTU groups, where each CTU group includes at least one of the multiple CTUs; and sending CTU group information of the contention access period to the terminal device.

[0076] The network device may group the multiple CTUs according to a length requirement for the first partial identifier and a status of the multiple CTUs in the contention access period. A specific implementation of the grouping is not limited in this embodiment of the present invention.

[0077] Optionally, in another optional embodiment, the determining a first partial identifier in the terminal device identifier according to the target CTU in S420 includes:

determining, according to CTU group information, a target CTU group to which the target CTU belongs; and determining the first partial identifier according to the target CTU group.

[0078] The CTU group information may be predefined, or preconfigured and determined by the network device. This is not limited in this embodiment of the present invention.

[0079] There may be a predefined or preconfigured correspondence between a CTU group number and a binary sequence. Correspondingly, the network device may determine, according to the correspondence, a binary sequence corresponding to a number of the target CTU group, and determine the first partial identifier according to the binary sequence. For example, the network device may directly determine the binary sequence as the first partial identifier, or process the binary sequence to obtain the first partial identifier. This is not limited in this embodiment of the present invention.

[0080] In an optional embodiment, the determining the first partial identifier according to the target CTU group includes:

changing an initial number of the target CTU group to obtain a new number of the target CTU group; and determining the first partial identifier according to the new number of the target CTU group.

[0081] Specifically, the network device may determine, according to a correspondence between a CTU group number and a binary sequence, a binary sequence corresponding to the new number of the target CTU group, and determine the first partial identifier according to the corresponding binary sequence. However, this is not limited in this embodiment of the present invention.

[0082] In another optional embodiment, the determining the first partial identifier according to the target CTU group includes:

determining the first partial identifier according to the target CTU group and a number of a contention access period to which the target CTU belongs.

[0083] In another optional embodiment, the determining the first partial identifier according to the target CTU group and a number of a contention access period to which the target CTU belongs includes:

determining, according to a correspondence between a CTU group number and a binary sequence with a length of N, a first binary sequence corresponding to the target CTU group, where $N > 1$;

generating a binary pseudo-random sequence with a length of N according to the number of the contention access period; and

performing a reversible operation on the first binary sequence and the binary pseudo-random sequence to obtain the first partial identifier.

[0084] Optionally, the reversible operation may be specifically an exclusive OR operation. However, this is not limited in this embodiment of the present invention.

[0085] In another optional embodiment, the determining the terminal device identifier of the terminal device according to the first partial identifier and the second partial identifier in S430 includes:

sequentially combining the first partial identifier and the second partial identifier to obtain the terminal device identifier of the terminal device.

[0086] Specifically, assuming that the first partial identifier is A and the second partial identifier is B, the network device may combine A and B in a specific sequence to obtain the complete terminal device identifier AB or BA corresponding to the uplink data packet. The sequence in which the network device combines the first partial identifier and the second partial identifier may be defined in a protocol, or preconfigured by the network device and notified to the terminal device, or determined by the network device and the terminal device through negotiation. This is not limited in this embodiment of the present invention.

[0087] In another optional embodiment, in S430, the network device may further sequentially arrange, according to the number of the contention access period to which the target CTU belongs, multiple bits included in the first partial identifier and the second partial identifier, to obtain the terminal device identifier of the terminal device. For example, the network device may insert at least one bit in the first partial identifier into the second partial identifier according to the number of the contention access period, to obtain the complete terminal device identifier. In a specific example, a length of the terminal device identifier is M, and a length of the first partial identifier is N, where $1 \leq N < M$. Correspondingly, the determining the terminal device identifier of the terminal device according to the first partial identifier and the second partial identifier in S430 includes:

generating a binary random sequence with a length of M according to the number of the contention access period to which the target CTU belongs, where the binary random sequence includes N reference bits with a value of 1; and inserting the first partial identifier into the second partial identifier to obtain the terminal device identifier, so that positions of N bits in the first partial identifier in the terminal device identifier are in a one-to-one correspondence with positions of the N reference bits in the binary random sequence.

[0088] A rule used by the network device to determine the first partial identifier according to the target CTU may be the same as that used by the terminal device to determine the target CTU according to the first partial identifier, and a manner in which the network device determines the terminal device identifier according to the first partial identifier and the second partial identifier may be the same as a manner in which the terminal device divides the terminal device identifier. Therefore, for details, refer to corresponding content. For brevity, details are not further described herein.

[0089] Therefore, according to the data transmission method provided in this embodiment of the present invention, the terminal device identifier is divided into the first partial identifier and the second partial identifier, the target CTU is determined from the multiple candidate CTUs according to the first partial identifier, and the uplink data packet carrying the second partial identifier is sent by using the target CTU, so that the first partial identifier in the terminal device identifier can be implicitly indicated. The network device may determine the first partial identifier according to the target CTU, and further determine the complete terminal device identifier of the terminal device. Compared with that the uplink data packet carries the complete terminal device identifier, this method can reduce system signaling overheads and improve system performance.

[0090] The following provides more details about the data transmission method according to this embodiment of the present invention by using specific examples. FIG. 6 is a schematic flowchart of another data transmission method 500 according to an embodiment of the present invention.

[0091] S510. A network device groups multiple CTUs in a current contention access period into 2^N CTU groups, and/or determines a one-to-one correspondence between numbers of the 2^N CTU group and 2^N binary sequences with a length of N, where $N > 1$.

[0092] At least one of a grouping status of the multiple CTUs or a correspondence between a CTU group number and a binary sequence may be determined by the network device, or may be predefined in a protocol. This is not limited in this embodiment of the present invention.

[0093] Each of the 2^N CTU groups may include at least one CTU, and quantities of CTUs included in different CTU groups may be different or the same. Specifically, a quantity of CTUs included in each CTU group may be related to a degree of freedom requirement for a terminal device to select a target CTU, and may be predefined, or determined by the network device independently, or determined by the network device and the terminal device through negotiation. This is not limited in this embodiment of the present invention.

[0094] Optionally, the network device may group CTUs in some or all contention access periods. Quantities of CTU groups in different contention access periods may be the same or different, and quantities of CTUs included in different CTU groups may be the same or different. This is not limited in this embodiment of the present invention.

[0095] In this case, the terminal device may implicitly indicate M bits in a terminal device identifier of the terminal device in the current contention access period, where $1 \leq M \leq N$.

[0096] S520. The network device sends indication information to a terminal device, where the indication information is used to indicate CTU group information of the current contention access period and/or a correspondence between a CTU group number and a binary sequence.

[0097] Optionally, grouping of CTU groups in the current contention access period, a numbering rule, and the correspondence between a CTU group number and a binary sequence may be predefined. This is not limited in this embodiment of the present invention.

[0098] S530. The terminal device divides a terminal device identifier with a length of M into an implicit portion with a length of N and an explicit portion with a length of (M-N).

[0099] Optionally, the terminal device may determine the first (M-N) consecutive bits in the terminal device identifier as the explicit portion, and determine the last N consecutive bits as the implicit portion. Alternatively, the terminal device may determine the first N consecutive bits or the middle N consecutive bits in the terminal device identifier as the implicit portion, and determine the remaining portion as the explicit portion. Alternatively, the terminal device may divide the terminal device identifier in another manner. A manner in which the terminal device divides the terminal device identifier may be predefined, or indicated by the network device. This is not limited in this embodiment of the present invention.

[0100] S540. The terminal device determines a target CTU group from the 2^N CTU groups according to a number of the current contention access period and the implicit portion.

[0101] Specifically, as shown in FIG. 7, assuming that a contention access period is specifically a radio frame, the terminal device may generate an N-bit binary pseudo-random sequence X by using a frame number of a current frame as a seed, and perform an exclusive OR operation expressed by an equation (1) on the binary pseudo-random sequence and the implicit portion Y, to obtain a binary sequence Z. The binary sequence Z may also be referred to as a CTU group indication. Then, the terminal device may determine, according to the correspondence between a CTU group number and a binary sequence, a target CTU group number corresponding to the binary sequence Z, where the correspondence is predefined, or preconfigured by the network device.

$$Z = X \oplus Y \quad (1)$$

where an operator $\oplus$ represents an exclusive OR (XOR) operation.

[0102] S550. The terminal device determines a target CTU from at least one CTU included in the target CTU group.

[0103] Specifically, the terminal device may determine some or all CTUs in the target CTU group as the target CTUs. Optionally, the terminal device may randomly select the target CTU, or determine the target CTU according to some bits in the first partial identifier or in the second partial identifier. In this way, a probability that multiple terminal devices select a same target CTU can be reduced, and data transmission performance can be improved.

[0104] S560. The terminal device sends, to the network device by using the target CTU, an uplink data packet carrying the explicit portion.

[0105] S570. The network device receives the uplink data packet sent by the terminal device, and may determine, by using a reverse process of the foregoing processing process performed by the terminal device, the implicit portion corresponding to the uplink data packet.

[0106] Specifically, the network device may determine a target CTU group to which a target CTU corresponding to the uplink data packet belongs; determine, according to the correspondence between a CTU group number and a binary sequence, the binary sequence Z corresponding to the CTU group number; and generate an N-bit binary pseudo-random sequence X' by using the number of the current contention access period as a seed. In this case, because the seed used by the network device to generate a random number is the same as that used by the terminal device, X'=X. The network device performs an exclusive OR operation shown in an equation (2) on the binary sequence Z obtained according to the target CTU group number and the binary sequence X' generated according to the number of the current contention access period, to obtain the implicit portion Y.

$$Z \oplus X' = X \oplus Y \oplus X = Y \quad (2)$$

[0107] S580. The network device obtains, by using a rule the same as that used by the terminal device, according to the explicit portion carried in the uplink data packet and the implicit portion, the complete terminal device identifier corresponding to the uplink data packet.

[0108] FIG. 8 shows a specific implementation example of S530 in FIG. 6. The terminal device may generate a binary sequence R with a length of M by using a number of a current contention access period as a seed. A quantity of 1s in the binary sequence R is N. Then, the terminal device may collect, by using R as a bitmap sequence, numerical values on bits in the terminal device identifier that are corresponding to positions of 1 in R, to form a new binary sequence Y with a length of N, and use Y as the implicit portion. Correspondingly, the terminal device may further collect the remaining portion of the terminal device identifier to form a new binary sequence with a length of (M-N), that is, an explicit portion.

[0109] In an optional example, assuming that the terminal device identifier of the terminal device is ID=[10011101], M=8, and N=3. The terminal device may generate a random sequence R=[01010001] according to the number of the current contention access period. Positions of 1s in R are 2, 4, and 8 from left to right. The terminal device may collect bits in the 2nd, 4th, and 8th positions in the terminal device identifier ID to obtain the implicit portion Y=[011], and collect bits in the remaining positions to obtain an explicit portion [10110]. Y may be corresponding to a CTU group number 3, and the terminal device may select, from the multiple CTU groups, a target CTU group that is numbered 3. Then, the terminal device may transmit uplink data and the explicit portion [10110] of the terminal device identifier by using some CTUs or all CTUs in the target CTU group.

[0110] After receiving the uplink data and the explicit portion of the terminal device identifier that are transmitted by the terminal device, the network device may determine, according to the number 3 of the CTU group to which the uplink data belongs, the implicit portion Y of the terminal device identifier, and restore, according to the number of the current contention access period, the random sequence R in a manner the same as that used by the terminal device. Finally, the network device may sequentially insert all bits of the implicit portion Y=[011] into the explicit portion [10110], so that the bits of the implicit portion are located in the 2nd, 4th, and 8th positions of the terminal device identifier, respectively. In this way, the complete terminal device identifier ID=[1011101] is restored.

[0111] FIG. 9 is a schematic flowchart of another data transmission method according to an embodiment of the present invention. Specifically, the terminal device may first generate a pseudo-random number by using a number of a current contention access period (for example, a frame number of a radio frame) as a seed, and perform cyclic shift on initial numbers of multiple CTU groups in the current contention access period according to the random number, to obtain new numbers of the multiple CTU groups. In addition, the terminal device may divide a terminal device identifier into an explicit portion sequence and an implicit portion sequence, and determine, according to a correspondence between a sequence and a CTU group number, a target CTU group whose new number is corresponding to the implicit portion sequence.

[0112] It should be noted that the examples in FIG. 6 to FIG. 9 are merely intended to help a person skilled in the art better understand the embodiments of the present invention, but not to limit the scope of the embodiments of the present invention.

[0113] It should be understood that sequence numbers of the foregoing processes do not mean execution sequences. The execution sequences of the processes should be determined according to functions and internal logic of the processes, and should not be construed as any limitation on the implementation processes of the embodiments of the present invention.

[0114] The foregoing describes in detail the data transmission method according to the embodiments of the present invention with reference to FIG. 1 to FIG. 9. The following describes a data transmission apparatus according to an embodiment of the present invention with reference to FIG. 10 to FIG. 13.

[0115] FIG. 10 is a schematic block diagram of a data transmission apparatus 600 according to an embodiment of the present invention. The apparatus 600 may be a terminal device. However, this is not limited in this embodiment of the present invention. As shown in FIG. 10, the apparatus 600 includes:

a determining unit 610, configured to determine a target CTU from multiple candidate CTUs according to a first partial identifier in a terminal device identifier, where the terminal device identifier includes the first partial identifier and a second partial identifier; and

a sending unit 620, configured to send an uplink data packet to a network device by using the target CTU determined by the determining unit 610, where the uplink data packet carries the second partial identifier.

[0116] In an optional embodiment, the determining unit 610 includes:

a first determining subunit, configured to determine a target CTU group from multiple candidate CTU groups according to the first partial identifier, where each of the multiple candidate CTU groups includes at least one of the multiple candidate CTUs; and

a second determining subunit, configured to determine the target CTU from at least one candidate CTU included in the target CTU group determined by the first determining subunit.

[0117] In another optional embodiment, the apparatus 600 further includes:

a number changing unit, configured to: before the first determining subunit determines the target CTU group from the multiple candidate CTU groups, change initial numbers of the multiple candidate CTU groups according to a number of a contention access period to which the multiple candidate CTU groups belong, to obtain new numbers of the multiple candidate CTU groups.

[0118] Correspondingly, the first determining subunit is specifically configured to determine, according to the first partial identifier, a target CTU group number from multiple CTU group numbers corresponding to the multiple candidate CTU groups, and determine, from the multiple candidate CTU groups, a candidate CTU group whose new number is the target CTU group number as the target CTU group.

[0119] In another optional embodiment, a quantity of the multiple candidate CTU groups is 2^N , where $N \geq 1$; and there is a one-to-one correspondence between 2^N CTU group numbers of the multiple candidate CTU groups and 2^N binary sequences with a length of N.

[0120] In another optional embodiment, the first determining subunit is specifically configured to determine the target CTU group from the multiple candidate CTU groups according to the first partial identifier and the number of the contention access period to which the multiple candidate CTU groups belong.

[0121] In another optional embodiment, the first determining subunit is specifically configured to:

generate a binary pseudo-random sequence according to the number of the contention access period, where a length of the binary pseudo-random sequence is the same as a length of the first partial identifier;

perform a reversible operation on the binary pseudo-random sequence and the first partial identifier to obtain a first binary sequence; and

determine the target CTU group from the multiple candidate CTU groups according to the first binary sequence.

[0122] In another optional embodiment, the apparatus 600 further includes:

an identifier dividing unit, configured to: before the determining unit 610 determines the target CTU from the multiple candidate CTUs, divide the terminal device identifier into the first partial identifier and the second partial identifier according to a number of a contention access period to which the multiple candidate CTUs belong.

[0123] In another optional embodiment, the identifier dividing unit is specifically configured to:

generate a second binary sequence with a length of M according to the number of the contention access period, where the second binary sequence includes N reference bits with a value of 1, M is a length of the terminal device identifier, N is the length of the first partial identifier, and $1 \leq N < M$;

sequentially arrange N bits in the terminal device identifier whose positions are respectively corresponding to the N reference bits, to form the first partial identifier; and

sequentially arrange (M-N) bits in the terminal device identifier other than the N bits, to form the second partial identifier.

[0124] In another optional embodiment, the sending unit 620 is specifically configured to send, by using the target CTU determined by the determining unit 610, the uplink data packet to the network device in a grant-free transmission mode.

[0125] The data transmission apparatus 600 according to this embodiment of the present invention may be corresponding to the terminal device in the data transmission method according to the embodiments of the present invention, and the foregoing and other operations and/or functions of each module in the data transmission apparatus 600 are intended to implement corresponding processes of each method in FIG. 3 to FIG. 9. For brevity, details are not further

described herein.

[0126] Therefore, according to the data transmission apparatus provided in this embodiment of the present invention, the terminal device identifier is divided into the first partial identifier and the second partial identifier, the target CTU is determined from the multiple candidate CTUs according to the first partial identifier, and the uplink data packet carrying the second partial identifier is sent by using the target CTU, so that the first partial identifier in the terminal device identifier can be implicitly indicated. Compared with that the uplink data packet carries the complete terminal device identifier, this solution can reduce system signaling overheads and improve system performance.

[0127] FIG. 11 is a schematic block diagram of another data transmission apparatus 700 according to an embodiment of the present invention. The apparatus 700 may be a network device. However, this is not limited in this embodiment of the present invention. As shown in FIG. 11, the apparatus 700 includes:

a receiving unit 710, configured to receive an uplink data packet transmitted by a terminal device by using a target CTU, where the uplink data packet carries a second partial identifier in a terminal device identifier of the terminal device;

a first determining unit 720, configured to determine a first partial identifier in the terminal device identifier according to the target CTU, where the terminal device identifier includes the first partial identifier and the second partial identifier; and

a second determining unit 730, configured to determine the terminal device identifier of the terminal device according to the first partial identifier determined by the first determining unit 720 and the second partial identifier.

[0128] In an optional embodiment, the first determining unit 720 includes:

a first determining subunit, configured to determine, according to CTU group information, a target CTU group to which the target CTU belongs; and

a second determining subunit, configured to determine the first partial identifier according to the target CTU group determined by the first determining subunit.

[0129] In another optional embodiment, the second determining subunit is specifically configured to:

change an initial number of the target CTU group to obtain a new number of the target CTU group; and determine the first partial identifier according to the new number of the target CTU group.

[0130] In another optional embodiment, the second determining subunit is specifically configured to determine the first partial identifier according to the target CTU group and a number of a contention access period to which the target CTU belongs.

[0131] In another optional embodiment, the second determining subunit is specifically configured to:

determine, according to a correspondence between a CTU group number and a binary sequence with a length of N, a first binary sequence corresponding to the target CTU group, where $N > 1$;

generate a binary pseudo-random sequence with a length of N according to the number of the contention access period; and

perform a reversible operation on the first binary sequence and the binary pseudo-random sequence to obtain the first partial identifier.

[0132] In another optional embodiment, the second determining unit 730 is specifically configured to sequentially combine the first partial identifier and the second partial identifier, to obtain the terminal device identifier of the terminal device.

[0133] In another optional embodiment, a length of the terminal device identifier is M, and a length of the first partial identifier is N, where $1 \leq N < M$. Correspondingly, the second determining unit 730 is specifically configured to:

generate a binary random sequence with a length of M according to the number of the contention access period to which the target CTU belongs, where the binary random sequence includes N reference bits with a value of 1; and insert the first partial identifier into the second partial identifier to obtain the terminal device identifier, so that positions of N bits in the first partial identifier in the terminal device identifier are in a one-to-one correspondence with positions of the N reference bits in the binary random sequence.

[0134] In another optional embodiment, the receiving unit 710 is specifically configured to receive the uplink data packet transmitted by the terminal device in a grant-free transmission mode by using the target CTU.

[0135] The data transmission apparatus 700 according to this embodiment of the present invention may be corresponding to the network device in the data transmission method according to the embodiments of the present invention, and the foregoing and other operations and/or functions of each module in the data transmission apparatus 700 are intended to implement corresponding processes of each method in FIG. 5 to FIG. 9. For brevity, details are not further described herein.

[0136] Therefore, according to the data transmission apparatus provided in this embodiment of the present invention, the terminal device identifier is divided into the first partial identifier and the second partial identifier, the target CTU is determined from the multiple candidate CTUs according to the first partial identifier, and the uplink data packet carrying the second partial identifier is sent by using the target CTU, so that the first partial identifier in the terminal device identifier can be implicitly indicated. The network device may determine the first partial identifier according to the target CTU, and further determine the complete terminal device identifier of the terminal device. Compared with that the uplink data packet carries the complete terminal device identifier, this solution can reduce system signaling overheads and improve system performance.

[0137] FIG. 12 is a schematic block diagram of another data transmission apparatus 800 according to an embodiment of the present invention. The apparatus 800 may be a terminal device. However, this is not limited in this embodiment of the present invention. As shown in FIG. 12, the apparatus 800 includes:

a processor 810, configured to determine a target CTU from multiple candidate CTUs according to a first partial identifier in a terminal device identifier, where the terminal device identifier includes the first partial identifier and a second partial identifier; and

a transmitter 820, configured to send an uplink data packet to a network device by using the target CTU determined by the processor 810, where the uplink data packet carries the second partial identifier.

[0138] In this embodiment of the present invention, the processor may be a central processing unit (Central Processing Unit, CPU), or the processor may be another general purpose processor, a digital signal processor (DSP), an application-specific integrated circuit (ASIC), a field programmable gate array (FPGA) or another programmable logical device, a discrete gate or transistor logical device, a discrete hardware assembly, or the like. The general purpose processor may be a microprocessor, the processor may be any conventional processor, or the like.

[0139] Optionally, the apparatus 800 may further include a memory, and the memory may include a read-only memory and a random access memory and provide an instruction and data to the processor. A part of the memory may further include a non-volatile random access memory. For example, the memory may further store device type information.

[0140] In an implementation process, all steps of the foregoing methods may be completed by using an integrated logic circuit of hardware in the processor or by using an instruction in a software form. The steps of the methods disclosed with reference to the embodiments of the present invention may be directly implemented by a hardware processor, or may be implemented by a combination of hardware and a software module in a processor. The software module may be located in a storage medium mature in the art, such as a random access memory, a flash memory, a read-only memory, a programmable read-only memory, an electrically erasable programmable memory, or a register. The storage medium is located in the memory. The processor reads an instruction in the memory and completes the steps of the foregoing methods with reference to hardware in the processor. To avoid repetition, details are not further described herein.

[0141] In an optional embodiment, the processor 810 is specifically configured to:

determine a target CTU group from multiple candidate CTU groups according to the first partial identifier, where each of the multiple candidate CTU groups includes at least one of the multiple candidate CTUs; and
determine the target CTU from at least one candidate CTU included in the target CTU group.

[0142] In another optional embodiment, the processor 810 is further configured to:

before determining the target CTU group from the multiple candidate CTU groups, change initial numbers of the multiple candidate CTU groups according to a number of a contention access period to which the multiple candidate CTU groups belong, to obtain new numbers of the multiple candidate CTU groups; and
determine, according to the first partial identifier, a target CTU group number from multiple CTU group numbers corresponding to the multiple candidate CTU groups, and determine, from the multiple candidate CTU groups, a candidate CTU group whose new number is the target CTU group number as the target CTU group.

[0143] In another optional embodiment, a quantity of the multiple candidate CTU groups is 2^N , where $N \geq 1$; and there is a one-to-one correspondence between 2^N CTU group numbers of the multiple candidate CTU groups and 2^N binary sequences with a length of N .

[0144] In another optional embodiment, the processor 810 is specifically configured to determine the target CTU group from the multiple candidate CTU groups according to the first partial identifier and the number of the contention access period to which the multiple candidate CTU groups belong.

[0145] In another optional embodiment, the processor 810 is specifically configured to:

generate a binary pseudo-random sequence according to the number of the contention access period, where a length of the binary pseudo-random sequence is the same as a length of the first partial identifier;
perform a reversible operation on the binary pseudo-random sequence and the first partial identifier to obtain a first binary sequence; and
determine the target CTU group from the multiple candidate CTU groups according to the first binary sequence.

[0146] In another optional embodiment, the processor 810 is further configured to: before determining the target CTU from the multiple candidate CTUs, divide the terminal device identifier into the first partial identifier and the second partial identifier according to a number of a contention access period to which the multiple candidate CTUs belong.

[0147] In another optional embodiment, the processor 810 is specifically configured to:

generate a second binary sequence with a length of M according to the number of the contention access period, where the second binary sequence includes N reference bits with a value of 1, M is a length of the terminal device identifier, N is the length of the first partial identifier, and $1 \leq N < M$;
sequentially arrange N bits in the terminal device identifier whose positions are respectively corresponding to the N reference bits, to form the first partial identifier; and
sequentially arrange (M-N) bits in the terminal device identifier other than the N bits, to form the second partial identifier.

[0148] In another optional embodiment, the transmitter 820 is specifically configured to send, by using the target CTU determined by the processor 810, the uplink data packet to the network device in a grant-free transmission mode.

[0149] The data transmission apparatus 800 according to this embodiment of the present invention may be corresponding to the terminal device in the data transmission method according to the embodiments of the present invention, and the foregoing and other operations and/or functions of each module in the data transmission apparatus 800 are intended to implement corresponding processes of each method in FIG. 3 to FIG. 9. For brevity, details are not further described herein.

[0150] Therefore, according to the data transmission apparatus provided in this embodiment of the present invention, the terminal device identifier is divided into the first partial identifier and the second partial identifier, the target CTU is determined from the multiple candidate CTUs according to the first partial identifier, and the uplink data packet carrying the second partial identifier is sent by using the target CTU, so that the first partial identifier in the terminal device identifier can be implicitly indicated. Compared with that the uplink data packet carries the complete terminal device identifier, this solution can reduce system signaling overheads and improve system performance.

[0151] FIG. 13 is a schematic block diagram of another data transmission apparatus 900 according to an embodiment of the present invention. The apparatus 900 may be a network device. However, this is not limited in this embodiment of the present invention. As shown in FIG. 13, the apparatus 900 includes:

a receiver 910, configured to receive an uplink data packet transmitted by a terminal device by using a target CTU, where the uplink data packet carries a second partial identifier in a terminal device identifier of the terminal device; and
a processor 920, configured to: determine a first partial identifier in the terminal device identifier according to the target CTU, where the terminal device identifier includes the first partial identifier and the second partial identifier; and determine the terminal device identifier of the terminal device according to the first partial identifier and the second partial identifier.

[0152] In this embodiment of the present invention, the processor may be a CPU, or the processor may be another general purpose processor, a digital signal processor (DSP), an application-specific integrated circuit (ASIC), a field programmable gate array (FPGA) or another programmable logical device, a discrete gate or transistor logical device, a discrete hardware assembly, or the like. The general purpose processor may be a microprocessor, the processor may be any conventional processor, or the like.

[0153] Optionally, the apparatus 900 may further include a memory, and the memory may include a read-only memory and a random access memory and provide an instruction and data to the processor. A part of the memory may further include a non-volatile random access memory. For example, the memory may further store device type information.

[0154] In an implementation process, all steps of the foregoing methods may be completed by using an integrated logic circuit of hardware in the processor or by using an instruction in a software form. The steps of the methods disclosed

with reference to the embodiments of the present invention may be directly implemented by a hardware processor, or may be implemented by a combination of hardware in a processor and a software module. The software module may be located in a storage medium mature in the art, such as a random access memory, a flash memory, a read-only memory, a programmable read-only memory, an electrically erasable programmable memory, or a register. The storage medium is located in the memory. The processor reads an instruction in the memory and completes the steps of the foregoing methods with reference to hardware in the processor. To avoid repetition, details are not further described herein.

[0155] In an optional embodiment, the processor 920 is specifically configured to:

determine, according to CTU group information, a target CTU group to which the target CTU belongs; and determine the first partial identifier according to the target CTU group.

[0156] In another optional embodiment, the processor 920 is specifically configured to:

change an initial number of the target CTU group to obtain a new number of the target CTU group; and determine the first partial identifier according to the new number of the target CTU group.

[0157] In another optional embodiment, the processor 920 is specifically configured to determine the first partial identifier according to the target CTU group and a number of a contention access period to which the target CTU belongs.

[0158] In another optional embodiment, the processor 920 is specifically configured to:

determine, according to a correspondence between a CTU group number and a binary sequence with a length of N, a first binary sequence corresponding to the target CTU group, where $N > 1$;
generate a binary pseudo-random sequence with a length of N according to the number of the contention access period; and
perform a reversible operation on the first binary sequence and the binary pseudo-random sequence to obtain the first partial identifier.

[0159] In another optional embodiment, the processor 920 is specifically configured to sequentially combine the first partial identifier and the second partial identifier, to obtain the terminal device identifier of the terminal device.

[0160] In another optional embodiment, a length of the terminal device identifier is M, and a length of the first partial identifier is N, where $1 \leq N < M$. Correspondingly, the processor 920 is specifically configured to:

generate a binary random sequence with a length of M according to the number of the contention access period to which the target CTU belongs, where the binary random sequence includes N reference bits with a value of 1; and insert the first partial identifier into the second partial identifier to obtain the terminal device identifier, so that positions of N bits in the first partial identifier in the terminal device identifier are in a one-to-one correspondence with positions of the N reference bits in the binary random sequence.

[0161] In another optional embodiment, the receiver 910 is specifically configured to receive the uplink data packet transmitted by the terminal device in a grant-free transmission mode by using the target CTU.

[0162] The data transmission apparatus 900 according to this embodiment of the present invention may be corresponding to the network device in the data transmission method according to the embodiments of the present invention, and the foregoing and other operations and/or functions of each module in the data transmission apparatus 900 are intended to implement corresponding processes of each method in FIG. 5 to FIG. 9. For brevity, details are not further described herein.

[0163] Therefore, according to the data transmission apparatus provided in this embodiment of the present invention, the terminal device identifier is divided into the first partial identifier and the second partial identifier, the target CTU is determined from the multiple candidate CTUs according to the first partial identifier, and the uplink data packet carrying the second partial identifier is sent by using the target CTU, so that the first partial identifier in the terminal device identifier can be implicitly indicated. The network device may determine the first partial identifier according to the target CTU, and further determine the complete terminal device identifier of the terminal device. Compared with that the uplink data packet carries the complete terminal device identifier, this solution can reduce system signaling overheads and improve system performance.

[0164] It should be understood that, the term "and/or" in the embodiments of the present invention describes only an association relationship for describing associated objects and represents that three relationships may exist. For example, A and/or B may represent the following three cases: Only A exists, both A and B exist, and only B exists. In addition, the character "/" in this specification generally indicates an "or" relationship between the associated objects.

[0165] A person of ordinary skill in the art may be aware that, in combination with the examples described in the embodiments disclosed in this specification, method steps and units may be implemented by electronic hardware, computer software, or a combination thereof. To clearly describe the interchangeability between the hardware and the software, the foregoing has generally described steps and compositions of each embodiment according to functions. Whether the functions are performed by hardware or software depends on particular applications and design constraint conditions of the technical solutions. A person of ordinary skill in the art may use different methods to implement the described functions for each particular application, but it should not be considered that the implementation goes beyond the scope of the present invention.

[0166] It may be clearly understood by a person skilled in the art that, for the purpose of convenient and brief description, for a detailed working process of the foregoing system, apparatus, and unit, reference may be made to a corresponding process in the foregoing method embodiments, and details are not described herein again.

[0167] In the several embodiments provided in this application, it should be understood that the disclosed system, apparatus, and method may be implemented in other manners. For example, the described apparatus embodiment is merely an example. For example, the unit division is merely logical function division and may be other division in actual implementation. For example, a plurality of units or components may be combined or integrated into another system, or some features may be ignored or not performed. In addition, the displayed or discussed mutual couplings or direct couplings or communication connections may be indirect couplings or communication connections between some interfaces, apparatuses, and units, or may be implemented in electronic, mechanical, or other forms.

[0168] The units described as separate parts may or may not be physically separate, and parts displayed as units may or may not be physical units, may be located in one position, or may be distributed on a plurality of network units. A part or all of the units may be selected according to actual needs to achieve the objectives of the solutions of the embodiments of the present invention.

[0169] In addition, functional units in the embodiments of the present invention may be integrated into one processing unit, or each of the units may exist alone physically, or two or more units may be integrated into one unit. The integrated unit may be implemented in a form of hardware, or may be implemented in a form of a software functional unit.

[0170] When the integrated unit is implemented in the form of a software functional unit and sold or used as an independent product, the integrated unit may be stored in a computer-readable storage medium. Based on such an understanding, the technical solutions of the present invention essentially, or the part contributing to the prior art, or all or a part of the technical solutions may be implemented in the form of a software product. The computer software product is stored in a storage medium and includes several instructions for instructing a computer device (which may be a personal computer, a server, a network device, or the like) to perform all or a part of the steps of the methods described in the embodiments of the present invention. The foregoing storage medium includes: any medium that can store program code, such as a USB flash drive, a removable hard disk, a read-only memory (Read-Only Memory, ROM), a random access memory (Random Access Memory, RAM), a magnetic disk, or an optical disc.

[0171] The foregoing descriptions are merely specific embodiments of the present invention, but are not intended to limit the protection scope of the present invention. Any modification or replacement readily figured out by a person skilled in the art within the technical scope disclosed in the present invention shall fall within the protection scope of the present invention. Therefore, the protection scope of the present invention shall be subject to the protection scope of the claims.

Claims

1. A data transmission method, comprising:

determining (S310), by a terminal device, a target contention transmission unit, CTU, from multiple candidate CTUs according to a first partial identifier in a terminal device identifier, wherein the terminal device identifier comprises the first partial identifier and a second partial identifier, and a CTU is a basic transmission resource unit for grant-free transmission, and a time-domain resource of a system may be divided into multiple contention access periods, and there are one or more contention access regions, CARs, in each contention access period, and there are one or more CTUs in each CAR, and a number of a contention access period and distribution of CARs and CTUs in each contention access period may be predefined, or configured by a network device; and sending (S320), by the terminal device, an uplink data packet to a network device by using the target CTU, wherein the uplink data packet carries the second partial identifier; wherein the determining a target CTU from multiple candidate CTUs according to a first partial identifier in a terminal device identifier comprises:

determining (S311), by the terminal device, a target CTU group from multiple candidate CTU groups according to the first partial identifier, wherein each of the multiple candidate CTU groups comprises at least

one of the multiple candidate CTUs; and
determining (S312), by the terminal device, the target CTU from at least one candidate CTU comprised in the target CTU group;
wherein the determining (S311) a target CTU group from multiple candidate CTU groups according to the first partial identifier comprises:

determining the target CTU group from the multiple candidate CTU groups according to the first partial identifier and the number of the contention access period to which the multiple candidate CTU groups belong;

before the determining (S310) a target CTU the method further comprises:

receiving, by the terminal device, indication information sent by the network device, where the indication information is used to indicate group information of the multiple candidate CTUs; and
determining, according to the indication information, CTU groups to which the multiple candidate CTUs respectively belong to.

2. The method according to claim 1, wherein the determining (S311) the target CTU group from the multiple candidate CTU groups according to the first partial identifier and the number of the contention access period to which the multiple candidate CTU groups belong comprises:

generating, by the terminal device, a binary pseudo-random sequence according to the number of the contention access period, wherein a length of the binary pseudo-random sequence is the same as a length of the first partial identifier;

performing, by the terminal device, a reversible operation on the binary pseudo-random sequence and the first partial identifier to obtain a first binary sequence; and

determining, by the terminal device, the target CTU group from the multiple candidate CTU groups according to the first binary sequence.

3. The method according to any one of claims 1 to 2, wherein before the determining a target CTU from multiple candidate CTUs, the method further comprises:

dividing, by the terminal device, the terminal device identifier into the first partial identifier and the second partial identifier according to the number of a contention access period to which the multiple candidate CTUs belong.

4. The method according to claim 3, wherein the dividing the terminal device identifier into the first partial identifier and the second partial identifier according to the number of a contention access period to which the multiple candidate CTUs belong comprises:

generating, by the terminal device, a second binary sequence with a length of M according to the number of the contention access period, wherein the second binary sequence comprises N reference bits with a value of 1, M is a length of the terminal device identifier, N is the length of the first partial identifier, and $1 \leq N < M$;

sequentially arranging, by the terminal device, N bits in the terminal device identifier whose positions are respectively corresponding to the N reference bits, to form the first partial identifier; and

sequentially arranging, by the terminal device, M-N bits in the terminal device identifier other than the N bits, to form the second partial identifier.

5. A data transmission apparatus (600), wherein the data transmission apparatus (600) is a terminal device, comprising:

a determining unit (610), configured to determine a target contention transmission unit, CTU, from multiple candidate CTUs according to a first partial identifier in a terminal device identifier, wherein the terminal device identifier comprises the first partial identifier and a second partial identifier, and a CTU is a basic transmission resource unit for grant-free transmission, and a time-domain resource of a system may be divided into multiple contention access periods, and there are one or more contention access regions, CARs, in each contention access period, and there are one or more CTUs in each CAR, and a number of a contention access period and distribution of CARs and CTUs in each contention access period may be predefined, or configured by a network device; and

a sending unit (620), configured to send an uplink data packet to a network device by using the target CTU determined by the determining unit, wherein the uplink data packet carries the second partial identifier; wherein the determining unit (610) comprises:

a first determining subunit, configured to determine a target CTU group from multiple candidate CTU groups according to the first partial identifier, wherein each of the multiple candidate CTU groups comprises at least one of the multiple candidate CTUs; and

a second determining subunit, configured to determine the target CTU from at least one candidate CTU comprised in the target CTU group determined by the first determining subunit;

wherein the first determining subunit is specifically configured to determine the target CTU group from the multiple candidate CTU groups according to the first partial identifier and the number of the contention access period to which the multiple candidate CTU groups belong;

wherein the apparatus is further configured to

receive indication information sent by the network device, where the indication information is used to indicate group information of the multiple candidate CTUs; and determine, according to the indication information, CTU groups to which the multiple candidate CTUs respectively belong to.

6. The apparatus (600) according to claim 5, wherein the first determining subunit is specifically configured to:

generate a binary pseudo-random sequence according to the number of the contention access period, wherein a length of the binary pseudo-random sequence is the same as a length of the first partial identifier; perform a reversible operation on the binary pseudo-random sequence and the first partial identifier to obtain a first binary sequence; and

determine the target CTU group from the multiple candidate CTU groups according to the first binary sequence.

7. The apparatus (600) according to any one of claims 5 to 6, wherein the apparatus further comprises: an identifier dividing unit, configured to: before the determining unit determines the target CTU from the multiple candidate CTUs, divide the terminal device identifier into the first partial identifier and the second partial identifier according to the number of a contention access period to which the multiple candidate CTUs belong.

8. The apparatus (600) according to claim 7, wherein the identifier dividing unit is specifically configured to:

generate a second binary sequence with a length of M according to the number of the contention access period, wherein the second binary sequence comprises N reference bits with a value of 1, M is a length of the terminal device identifier, N is the length of the first partial identifier, and $1 \leq N < M$;

sequentially arrange N bits in the terminal device identifier whose positions are respectively corresponding to the N reference bits, to form the first partial identifier; and

sequentially arrange M-N bits in the terminal device identifier other than the N bits, to form the second partial identifier.

9. A data transmission apparatus (700), wherein the data transmission apparatus is a network device, comprising:

a receiving unit (710), configured to receive an uplink data packet transmitted by a terminal device by using a target contention transmission unit, CTU, wherein the uplink data packet carries a second partial identifier in a terminal device identifier of the terminal device, and a CTU is a basic transmission resource unit for grant-free transmission, and a time-domain resource of a system may be divided into multiple contention access periods, and there are one or more contention access regions, CARs, in each contention access period, and there are one or more CTUs in each CAR, and a number of a contention access period and distribution of CARs and CTUs in each contention access period may be predefined, or configured by a network device;

a first determining unit (720), configured to determine a first partial identifier in the terminal device identifier according to the target CTU, wherein the terminal device identifier comprises the first partial identifier and the second partial identifier; and

a second determining unit (730), configured to determine the terminal device identifier of the terminal device according to the first partial identifier determined by the first determining unit and the second partial identifier; wherein the first determining unit comprises:

a first determining subunit, configured to determine, according to CTU group information determined by the data transmission apparatus or predefined in a protocol, a target CTU group to which the target CTU belongs; and

a second determining subunit, configured to determine the first partial identifier according to the target CTU group determined by the first determining subunit;

wherein the second determining subunit is specifically configured to determine the first partial identifier

according to the target CTU group and the number of a contention access period to which the target CTU belongs;
 wherein the apparatus is further configured to
 send indication information to the terminal device, wherein the indication information is used to indicate group information of the multiple candidate CTUs.

Patentansprüche

1. Datenübertragungsverfahren, Folgendes umfassend:

Bestimmen (S310) einer Zielkonfliktübertragungs-einheit, CTU, von mehreren potentiellen CTUs durch eine Endgerätvorrichtung, entsprechend einer ersten Teilkennung in einer Endgerätvorrichtungskennung, wobei die Endgerätvorrichtungskennung die erste Teilkennung und eine zweite Teilkennung umfasst, und wobei eine CTU eine Basisübertragungsressourceneinheit für eine erteilungsfreie Übertragung ist, und eine Time-Domain-Ressource von einem System in mehrere Konfliktzugangsperioden aufgeteilt werden kann, und es in jeder Konfliktzugangsperiode einen oder mehrere Konfliktzugangsbereiche, CARs, gibt, und es in jedem CAR eine oder mehrere CTUs gibt, und eine Nummer von einer Konfliktzugangsperiode und eine Verteilung von CARs und CTUs in jeder Konfliktzugangsperiode vorbestimmt oder durch eine Netzwerkvorrichtung konfiguriert sein können; und

Senden (S320) eines Uplink-Datenpakets an eine Netzwerkvorrichtung durch die Endgerätvorrichtung, durch Verwenden der Ziel-CTU, wobei das Uplink-Datenpaket die zweite Teilkennung enthält;
 wobei das Bestimmen einer Ziel-CTU aus mehreren potentiellen CTUs entsprechend einer ersten Teilkennung in einer Endgerätvorrichtungskennung Folgendes umfasst:

Bestimmen (S311) einer Ziel-CTU-Gruppe von mehreren potentiellen CTU-Gruppen durch die Endgerätvorrichtung, entsprechend der ersten Teilkennung, wobei jede der mehreren potentiellen CTU-Gruppen mindestens eine der mehreren potentiellen CTUs umfasst; und

Bestimmen (S312) der Ziel-CTU von mindestens einer - von der Ziel-CTU-Gruppe umfassten - potentiellen CTU, durch die Endgerätvorrichtung;

wobei das Bestimmen (S311) einer Ziel-CTU-Gruppe von mehreren potentiellen CTU-Gruppen entsprechend der ersten Teilkennung Folgendes umfasst:

Bestimmen der Ziel-CTU-Gruppe von den mehreren potentiellen CTU-Gruppen entsprechend der ersten Teilkennung und der Nummer der Konfliktzugangsperiode, zu der die mehreren potentiellen CTU-Gruppen gehören;

vor dem Bestimmen (S310) einer Ziel-CTU umfasst das Verfahren ferner Folgendes:

Empfangen von Anzeigeinformationen, die von der Netzwerkvorrichtung geschickt werden, durch die Endgerätvorrichtung, wobei die Anzeigeinformationen verwendet werden, um Gruppeninformationen von den mehreren potentiellen CTUs anzuzeigen; und

Bestimmen von CTU-Gruppen, zu denen die mehreren potentiellen CTUs entsprechend der Anzeigeinformationen jeweils gehören.

2. Verfahren nach Anspruch 1, wobei das Bestimmen (S311) der Ziel-CTU-Gruppe von den mehreren potentiellen CTU-Gruppen entsprechend der ersten Teilkennung und der Nummer der Konfliktzugangsperiode, zu der die mehreren potentiellen CTU-Gruppen gehören, Folgendes umfasst:

Erzeugen einer binären Pseudozufallssequenz entsprechend der Nummer der Konfliktzugangsperiode durch die Endgerätvorrichtung, wobei eine Länge der binären Pseudozufallssequenz von derselben Länge ist, wie die erste Teilkennung;

Durchführen einer reversiblen Operation an der binären Pseudozufallssequenz und der ersten Teilkennung durch die Endgerätvorrichtung, um eine erste binäre Sequenz zu erhalten; und

Bestimmen der Ziel-CTU-Gruppe von den mehreren potentiellen CTU-Gruppen, entsprechend der ersten binären Sequenz, durch die Endgerätvorrichtung.

3. Verfahren nach einem der Ansprüche 1 bis 2, wobei das Verfahren vor dem Bestimmen einer Ziel-CTU von mehreren potentiellen CTUs ferner Folgendes umfasst:

Aufteilen der Endgerätvorrichtungskennung in die erste Teilkennung und die zweite Teilkennung durch die Endgerätvorrichtung, entsprechend der Nummer einer Konfliktzugangsperiode, zu der die mehreren potentiellen CTUs gehören.

4. Verfahren nach Anspruch 3, wobei das Aufteilen der Endgerätvorrichtungskennung in die erste Teilkennung und die zweite Teilkennung, entsprechend der Nummer einer Konfliktzugangsperiode, zu der die mehreren potentiellen CTUs gehören, Folgendes umfasst:

Erzeugen einer zweiten binären Sequenz mit einer Länge von M, entsprechend der Nummer der Konfliktzugangsperiode durch die Endgerätvorrichtung, wobei die zweite binäre Sequenz N Referenzbits mit einem Wert von 1 umfasst, wobei M eine Länge der Endgerätvorrichtungskennung ist, wobei N die Länge der ersten Teilkennung ist und $1 \leq N < M$;
sequenzielles Anordnen von N Bits in der Endgerätvorrichtungskennung durch die Endgerätvorrichtung, wobei die Positionen der N Bits jeweils den N Referenzbits entsprechen, um die erste Teilkennung zu bilden; und
sequenzielles Anordnen von M-N Bits, die andere sind als die N Bits, in der Endgerätvorrichtungskennung durch die Endgerätvorrichtung, um die zweite Teilkennung zu bilden.

5. Datenübertragungsgerät (600), wobei das Datenübertragungsgerät eine Endgerätvorrichtung ist, Folgendes umfassend:

eine Bestimmungseinheit (610), die dazu konfiguriert ist, eine Zielkonfliktübertragungseinheit, CTU, von mehreren potentiellen CTUs zu bestimmen, entsprechend einer ersten Teilkennung in einer Endgerätvorrichtungskennung, wobei die Endgerätvorrichtungskennung die erste Teilkennung und eine zweite Teilkennung umfasst, und eine CTU eine Basisübertragungsressourceneinheit für eine erteilungsfreie Übertragung ist, und eine Time-Domain-Ressource eines System in mehrere Konfliktzugangsperioden aufgeteilt werden kann, und es in jeder Konfliktzugangsperiode einen oder mehrere Konfliktzugangsbereiche, CARs, gibt, und es in jedem CAR eine oder mehrere CTUs gibt, und eine Nummer einer Konfliktzugangsperiode und eine Verteilung von CARs und CTUs in jeder Konfliktzugangsperiode vorbestimmt oder durch eine Netzwerkvorrichtung konfiguriert sein kann; und
eine Sendeeinheit (620), die dazu konfiguriert ist, ein Uplink-Datenpaket durch Verwenden der Ziel-CTU, die von der Bestimmungseinheit bestimmt ist, an eine Netzwerkvorrichtung zu senden, wobei das Uplink-Datenpaket die zweite Teilkennung enthält;
wobei die Bestimmungseinheit (610) Folgendes umfasst:

eine erste Bestimmungsuntereinheit, die dazu konfiguriert ist, eine Ziel-CTU-Gruppe von mehreren potentiellen CTU-Gruppen entsprechend der ersten Teilkennung zu bestimmen, wobei jede der mehreren potentiellen CTU-Gruppen mindestens eine der mehreren potentiellen CTUs umfasst; und
eine zweite Bestimmungsuntereinheit, die dazu konfiguriert ist, die Ziel-CTU von mindestens einer - von der Ziel-CTU-Gruppe, die durch die erste Bestimmungsuntereinheit bestimmt wurde, umfassten - potentiellen CTU zu bestimmen;
wobei die erste Bestimmungsuntereinheit speziell dazu konfiguriert ist, die Ziel-CTU-Gruppe von den mehreren potentiellen CTU-Gruppen zu bestimmen, entsprechend der ersten Teilkennung und der Nummer der Konfliktzugangsperiode, zu der die potentiellen CTU-Gruppen gehören;
wobei das Gerät ferner zu Folgendem konfiguriert ist Empfangen von Anzeigeinformationen, die durch die Netzwerkvorrichtung gesendet werden, wobei die Anzeigeinformationen verwendet werden, um Gruppeninformationen der mehreren potentiellen CTUs anzuzeigen; und
Bestimmen von CTU-Gruppen, zu denen die potentiellen CTUs jeweils gehören, entsprechend der Anzeigeinformationen.

6. Gerät (600) nach Anspruch 5, wobei die erste Bestimmungsuntereinheit speziell zu Folgendem konfiguriert ist:

Erzeugen einer binären Pseudozufallssequenz entsprechend der Nummer der Konfliktzugangsperiode, wobei die Länge der binären Pseudozufallssequenz dieselbe ist, wie eine Länge der ersten Teilkennung;
Durchführen einer reversiblen Operation an der binären Pseudozufallssequenz und der ersten Teilkennung, um eine erste binäre Sequenz zu erhalten; und
Bestimmen der Ziel-CTU-Gruppe von den mehreren potentiellen CTU-Gruppen, entsprechend der ersten binären Sequenz.

7. Gerät (600) nach einem der Ansprüche 5 bis 6, wobei das Gerät ferner Folgendes umfasst:
eine Kennungsteilungseinheit, die zu Folgendem konfiguriert ist: bevor die Bestimmungseinheit die Ziel-CTU von
den mehreren potentiellen CTUs bestimmt, Teilen der Endgerätvorrichtungskennung in die erste Teilkennung und
die zweite Teilkennung, entsprechend der Nummer einer Konfliktzugangsperiode, zu der die mehreren potentiellen
CTUs gehören.

8. Gerät (600) nach Anspruch 7, wobei die Kennungsteilungseinheit speziell zu Folgendem konfiguriert ist:

Erzeugen einer zweiten binären Sequenz mit einer Länge von M, entsprechend der Nummer der Konfliktzu-
gangsperiode, wobei die zweite binäre Sequenz N Referenzbits mit einem Wert 1 umfasst, M eine Länge der
Endgerätvorrichtungskennung ist, N die Länge der ersten Teilkennung ist, und $1 \leq N < M$;
Sequenzielles Anordnen von N Bits in der Endgerätvorrichtungskennung, deren Positionen jeweils den N Re-
ferenzbits entsprechen, um die erste Teilkennung zu bilden; und
Sequenzielles Anordnen von M-N Bits, die andere sind als die N Bits, in der Endgerätvorrichtungskennung, um
die zweite Teilkennung zu bilden.

9. Datenübertragungsgerät (700), wobei das Datenübertragungsgerät eine Netzwerkvorrichtung ist, Folgendes um-
fassend:

eine Empfangseinheit (710), die dazu konfiguriert ist, ein Uplink-Datenpaket zu empfangen, das durch Verwen-
den einer Zielkonfliktübertragungseinheit, CTU, durch eine Endgerätvorrichtung übertragen wird, wobei das
Uplink-Datenpaket eine zweite Teilkennung in einer Endgerätvorrichtungskennung der Endgerätvorrichtung
beinhaltet, und eine CTU eine Basisübertragungsressourceneinheit für eine erteilungsfreie Übertragung ist,
und eine Time-Domain-Ressource von einem System in mehrere Konfliktzugangsperioden aufgeteilt werden
kann, und es in jeder Konfliktzugangsperiode einen oder mehrere Konfliktzugangsbereiche, CARs, gibt, und
es in jedem CAR eine oder mehrere CTUs gibt, und eine Nummer einer Konfliktzugangsperiode und die Ver-
teilung von CARs und CTUs in jeder Konfliktzugangsperiode vorbestimmt oder durch eine Netzwerkvorrichtung
konfiguriert sein kann;

eine erste Bestimmungseinheit (720), die dazu konfiguriert ist, eine erste Teilkennung in der Endgerätvorrich-
tungskennung entsprechend der Ziel-CTU zu bestimmen, wobei die Endgerätvorrichtungskennung die erste
Teilkennung und die zweite Teilkennung umfasst; und

eine zweite Bestimmungseinheit (730), die dazu konfiguriert ist, die Endgerätvorrichtungskennung der Endge-
rätvorrichtung entsprechend der ersten Teilkennung, die durch die erste Bestimmungseinheit bestimmt wird,
und der zweiten Teilkennung, zu bestimmen;

wobei die erste Bestimmungseinheit Folgendes umfasst:

eine erste Bestimmungsuntereinheit, die dazu konfiguriert ist, entsprechend der CTU-Gruppeninformatio-
nen, die durch das Datenübertragungsgerät bestimmt oder in einem Protokoll vorbestimmt sind, eine Ziel-
CTU-Gruppe zu bestimmen, zu der die Ziel-CTU gehört; und

eine zweite Bestimmungsuntereinheit, die dazu konfiguriert ist, die erste Teilkennung entsprechend der
Ziel-CTU-Gruppe, die durch die erste Bestimmungsuntereinheit bestimmt wird, zu bestimmen;

wobei die zweite Bestimmungsuntereinheit speziell dazu konfiguriert ist, die erste Teilkennung entspre-
chend der Ziel-CTU-Gruppe und der Nummer einer Konfliktzugangsperiode, zu der die Ziel-CTU gehört,
zu bestimmen;

wobei das Gerät ferner dazu konfiguriert ist Anzeigeinformationen an die Endgerätvorrichtung zu senden,
wobei die Anzeigeinformationen verwendet werden, um Gruppeninformationen von den mehreren poten-
tiellen CTUs anzuzeigen.

Revendications

1. Procédé de transmission de données, comprenant :

la détermination (S310), par un dispositif terminal, d'une unité de transmission avec contention, CTU, cible,
parmi de multiples CTU candidates selon un premier identifiant partiel dans un identifiant de dispositif terminal,
dans lequel l'identifiant de dispositif terminal comprend le premier identifiant partiel et un second identifiant
partiel, et une CTU est une unité de ressource de transmission de base pour une transmission sans autorisation,
et une ressource de domaine temporel d'un système peut être divisée en de multiples périodes d'accès avec

contention, et il existe une ou plusieurs régions d'accès avec contention, CAR, dans chaque période d'accès avec contention, et il existe une ou plusieurs CTU dans chaque CAR, et un numéro d'une période d'accès avec contention et une distribution de CAR et de CTU dans chaque période d'accès avec contention peuvent être prédéfinis, ou configurés par un dispositif de réseau ; et

l'envoi (S320), par le dispositif terminal, d'un paquet de données en liaison montante à un dispositif de réseau en utilisant la CTU cible, dans lequel le paquet de données en liaison montante achemine le second identifiant partiel ;

dans lequel la détermination d'une CTU cible parmi de multiples CTU candidates selon un premier identifiant partiel dans un identifiant de dispositif terminal comprend :

la détermination (S311), par le dispositif terminal, d'un groupe de CTU cibles parmi de multiples groupes de CTU candidates selon le premier identifiant partiel, dans lequel chacun des multiples groupes de CTU candidates comprend au moins l'une des multiples CTU candidates ; et

la détermination (S312), par le dispositif terminal, de la CTU cible parmi au moins une CTU candidate comprise dans le groupe de CTU cibles ;

dans lequel la détermination (S311) d'un groupe de CTU cibles parmi de multiples groupes de CTU candidates selon le premier identifiant partiel comprend :

la détermination du groupe de CTU cibles parmi les multiples groupes de CTU candidates selon le premier identifiant partiel et le numéro de la période d'accès avec contention à laquelle les multiples groupes de CTU candidates appartiennent ;

avant la détermination (S310) d'une CTU cible le procédé comprend en outre :

la réception, par le dispositif terminal, d'informations d'indication envoyées par le dispositif de réseau, où les informations d'indication sont utilisées pour indiquer des informations de groupe des multiples CTU candidates ; et

la détermination, selon les informations d'indication, de groupes de CTU auxquels les multiples CTU candidates appartiennent respectivement.

2. Procédé selon la revendication 1, dans lequel la détermination (S311) du groupe de CTU cibles parmi les multiples groupes de CTU candidates selon le premier identifiant partiel et le numéro de la période d'accès avec contention à laquelle les multiples groupes de CTU candidates appartiennent comprend :

la génération, par le dispositif terminal, d'une séquence binaire pseudo-aléatoire selon le numéro de la période d'accès avec contention, dans lequel une longueur de la séquence binaire pseudo-aléatoire est la même qu'une longueur du premier identifiant partiel ;

la réalisation, par le dispositif terminal, d'une opération réversible sur la séquence binaire pseudo-aléatoire et le premier identifiant partiel pour obtenir une première séquence binaire ; et

la détermination, par le dispositif terminal, du groupe de CTU cibles parmi les multiples groupes de CTU candidates selon la première séquence binaire.

3. Procédé selon l'une quelconque des revendications 1 et 2, dans lequel avant la détermination d'une CTU cible parmi de multiples CTU candidates, le procédé comprend en outre :

la division, par le dispositif terminal, de l'identifiant de dispositif terminal en le premier identifiant partiel et le second identifiant partiel selon le numéro d'une période d'accès avec contention à laquelle les multiples CTU candidates appartiennent.

4. Procédé selon la revendication 3, dans lequel la division de l'identifiant de dispositif terminal en le premier identifiant partiel et le second identifiant partiel selon le numéro d'une période d'accès avec contention à laquelle les multiples CTU candidates appartiennent comprend :

la génération, par le dispositif terminal, d'une seconde séquence binaire avec une longueur de M selon le numéro de la période d'accès avec contention, dans lequel la seconde séquence binaire comprend N bits de référence avec une valeur de 1, M est une longueur de l'identifiant de dispositif terminal, N est la longueur du premier identifiant partiel, et $1 \leq N < M$;

l'agencement séquentiel, par le dispositif terminal, de N bits dans l'identifiant de dispositif terminal dont les positions correspondent respectivement aux N bits de référence, pour former le premier identifiant partiel ; et l'agencement séquentiel, par le dispositif terminal, de M-N bits dans l'identifiant de dispositif terminal autres

que les N bits, pour former le second identifiant partiel.

5. Appareil de transmission de données (600), dans lequel l'appareil de transmission de données (600) est un dispositif terminal, comprenant :

une unité de détermination (610), conçue pour déterminer une unité de transmission avec contention, CTU, cible, parmi de multiples CTU candidates selon un premier identifiant partiel dans un identifiant de dispositif terminal, dans lequel l'identifiant de dispositif terminal comprend le premier identifiant partiel et un second identifiant partiel, et une CTU est une unité de ressource de transmission de base pour une transmission sans autorisation, et une ressource de domaine temporel d'un système peut être divisée en de multiples périodes d'accès avec contention, et il existe une ou plusieurs régions d'accès avec contention, CAR, dans chaque période d'accès avec contention, et il existe une ou plusieurs CTU dans chaque CAR, et un numéro d'une période d'accès avec contention et une distribution de CAR et de CTU dans chaque période d'accès avec contention peuvent être prédéfinis, ou configurés par un dispositif de réseau ; et

une unité d'envoi (620), conçue pour envoyer un paquet de données en liaison montante à un dispositif de réseau en utilisant la CTU cible déterminée par l'unité de détermination, dans lequel le paquet de données en liaison montante achemine le second identifiant partiel ;
dans lequel l'unité de détermination (610) comprend :

une première sous-unité de détermination, conçue pour déterminer un groupe de CTU cibles parmi de multiples groupes de CTU candidates selon le premier identifiant partiel, dans lequel chacun des multiples groupes de CTU candidates comprend au moins l'une des multiples CTU candidates ; et

une seconde sous-unité de détermination, conçue pour déterminer la CTU cible parmi au moins une CTU candidate comprise dans le groupe de CTU cibles déterminé par la première sous-unité de détermination ;
dans lequel la première sous-unité de détermination est spécifiquement conçue pour déterminer le groupe de CTU cibles parmi les multiples groupes de CTU candidates selon le premier identifiant partiel et le numéro de la période d'accès avec contention à laquelle les multiples groupes de CTU candidates appartiennent ;

dans lequel l'appareil est en outre conçu pour
recevoir des informations d'indication envoyées par le dispositif de réseau, où les informations d'indication sont utilisées pour indiquer des informations de groupe des multiples CTU candidates ; et
déterminer, selon les informations d'indication, des groupes de CTU auxquels les multiples CTU candidates appartiennent respectivement.

6. Appareil (600) selon la revendication 5, dans lequel la première sous-unité de détermination est spécifiquement conçue pour :

générer une séquence binaire pseudo-aléatoire selon le numéro de la période d'accès avec contention, dans lequel une longueur de la séquence binaire pseudo-aléatoire est la même qu'une longueur du premier identifiant partiel ;

réaliser une opération réversible sur la séquence binaire pseudo-aléatoire et le premier identifiant partiel pour obtenir une première séquence binaire ; et

déterminer le groupe de CTU cibles parmi les multiples groupes de CTU candidates selon la première séquence binaire.

7. Appareil (600) selon l'une quelconque des revendications 5 et 6, dans lequel l'appareil comprend en outre :

une unité de division d'identifiant, conçue pour : avant que l'unité de détermination détermine la CTU cible parmi les multiples CTU candidates, diviser l'identifiant de dispositif terminal en le premier identifiant partiel et le second identifiant partiel selon le numéro d'une période d'accès avec contention à laquelle les multiples CTU candidates appartiennent.

8. Appareil (600) selon la revendication 7, dans lequel l'unité de division d'identifiant est spécifiquement conçue pour :

générer une seconde séquence binaire avec une longueur de M selon le numéro de la période d'accès avec contention, dans lequel la seconde séquence binaire comprend N bits de référence avec une valeur de 1, M est une longueur de l'identifiant de dispositif terminal, N est la longueur du premier identifiant partiel, et $1 \leq N < M$;
agencer séquentiellement N bits dans l'identifiant de dispositif terminal dont les positions correspondent respectivement aux N bits de référence, pour former le premier identifiant partiel ; et

agencer séquentiellement M-N bits dans l'identifiant de dispositif terminal autres que les N bits, pour former le second identifiant partiel.

- 5 9. Appareil de transmission de données (700), dans lequel l'appareil de transmission de données est un dispositif de réseau, comprenant :

10 une unité de réception (710), conçue pour recevoir un paquet de données en liaison montante transmis par un dispositif terminal en utilisant une unité de transmission avec contention, CTU, cible, dans lequel le paquet de données en liaison montante achemine un second identifiant partiel dans un identifiant de dispositif terminal du dispositif terminal, et une CTU est une unité de ressource de transmission de base pour une transmission sans autorisation, et une ressource de domaine temporel d'un système peut être divisée en de multiples périodes d'accès avec contention, et il existe une ou plusieurs régions d'accès avec contention, CAR, dans chaque période d'accès avec contention, et il existe une ou plusieurs CTU dans chaque CAR, et un numéro d'une période d'accès avec contention et une distribution de CAR et de CTU dans chaque période d'accès avec contention peuvent être prédéfinis, ou configurés par un dispositif de réseau ;

15 une première unité de détermination (720), conçue pour déterminer un premier identifiant partiel dans l'identifiant de dispositif terminal selon la CTU cible, dans lequel l'identifiant de dispositif terminal comprend le premier identifiant partiel et le second identifiant partiel ; et

20 une seconde unité de détermination (730), conçue pour déterminer l'identifiant de dispositif terminal du dispositif terminal selon le premier identifiant partiel déterminé par la première unité de détermination et le second identifiant partiel ;

dans lequel la première unité de détermination comprend :

25 une première sous-unité de détermination, conçue pour déterminer, selon des informations de groupe de CTU déterminées par l'appareil de transmission de données ou prédéfinies dans un protocole, un groupe de CTU cibles auquel la CTU cible appartient ; et

une seconde sous-unité de détermination, conçue pour déterminer le premier identifiant partiel selon le groupe de CTU cibles déterminé par la première sous-unité de détermination ;

30 dans lequel la seconde sous-unité de détermination est spécifiquement conçue pour déterminer le premier identifiant partiel selon le groupe de CTU cibles et le numéro d'une période d'accès avec contention à laquelle la CTU cible appartient ;

35 dans lequel l'appareil est en outre conçu pour envoyer des informations d'indication au dispositif terminal, dans lequel les informations d'indication sont utilisées pour indiquer des informations de groupe des multiples CTU candidates.

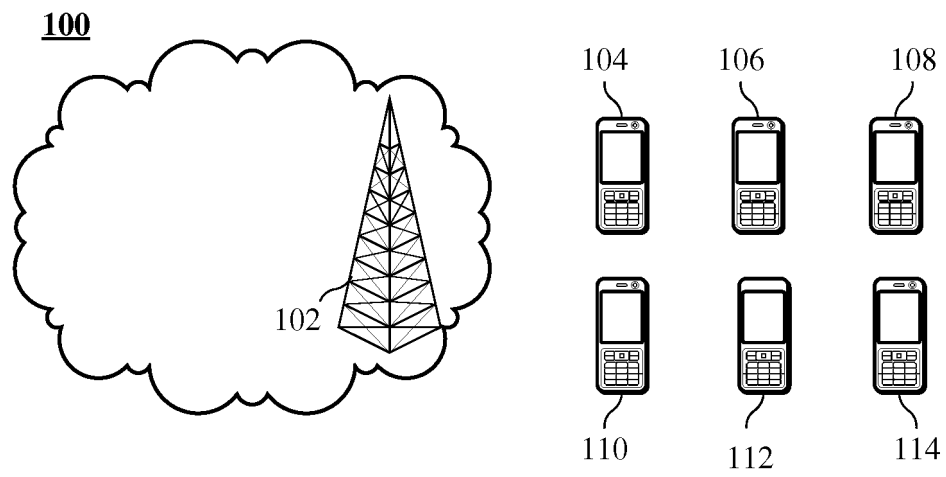


FIG. 1

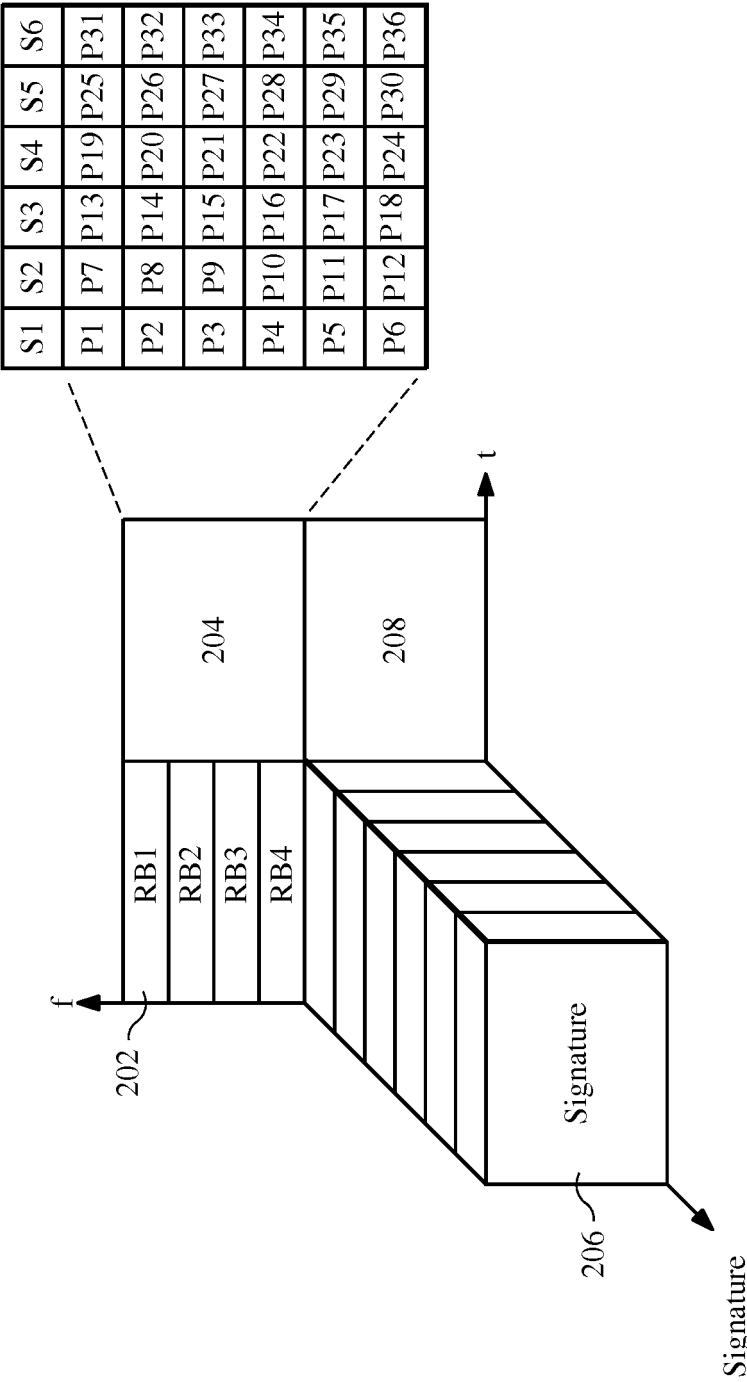


FIG. 2

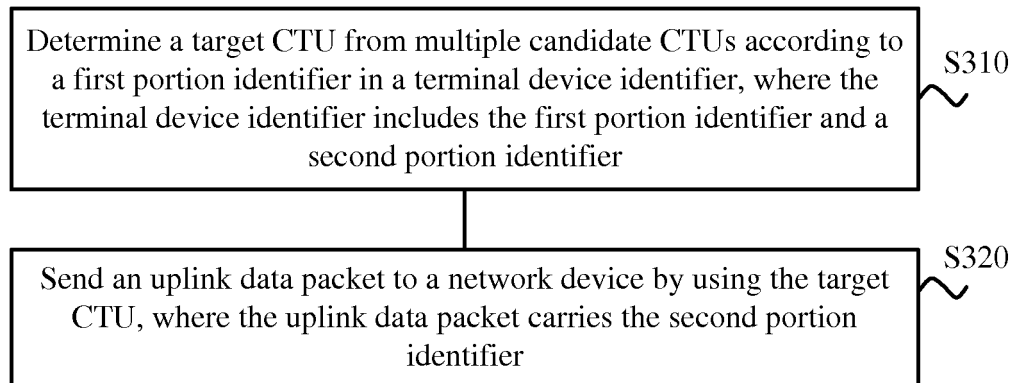


FIG. 3

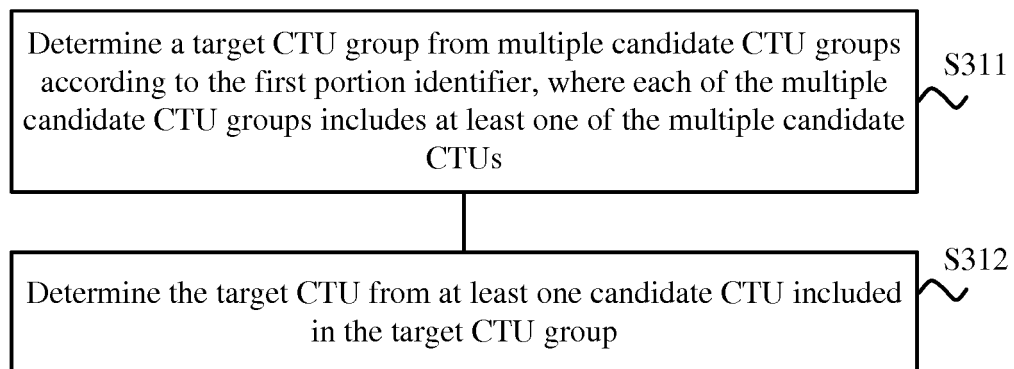


FIG. 4

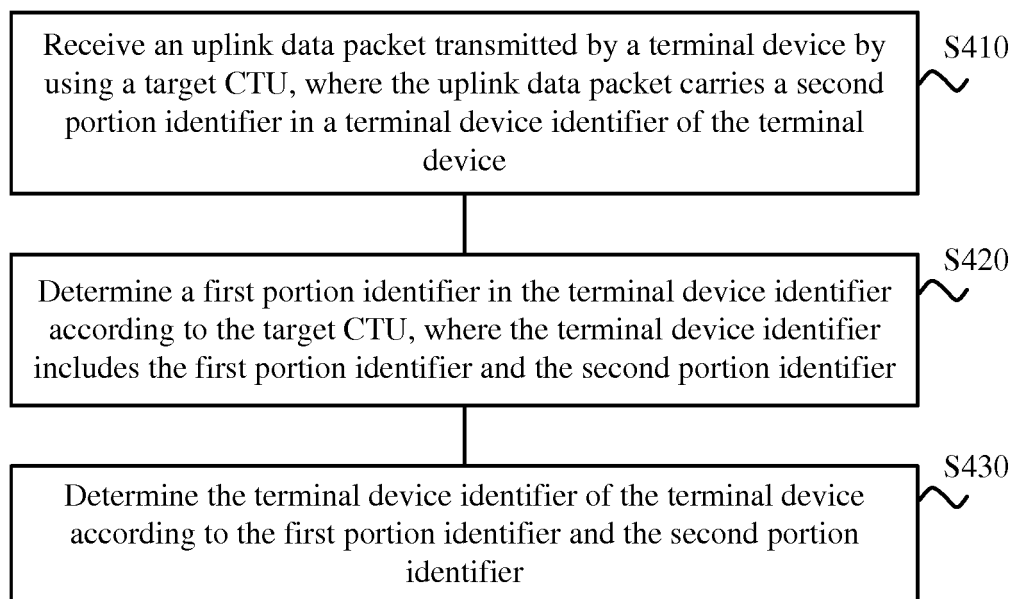


FIG. 5

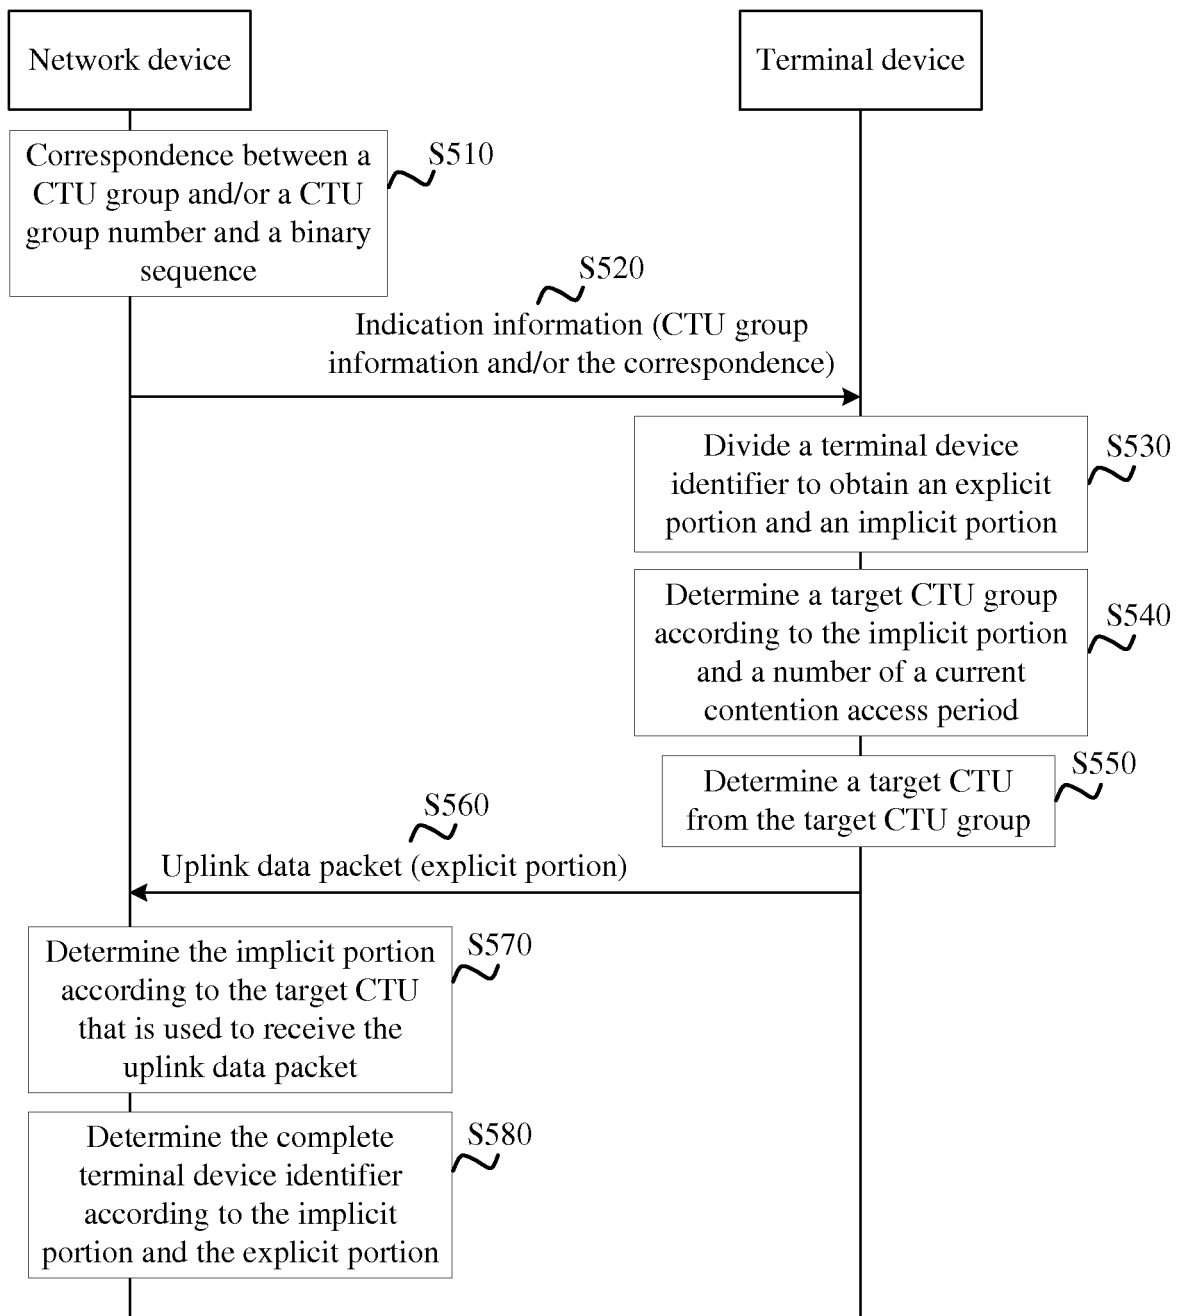


FIG. 6

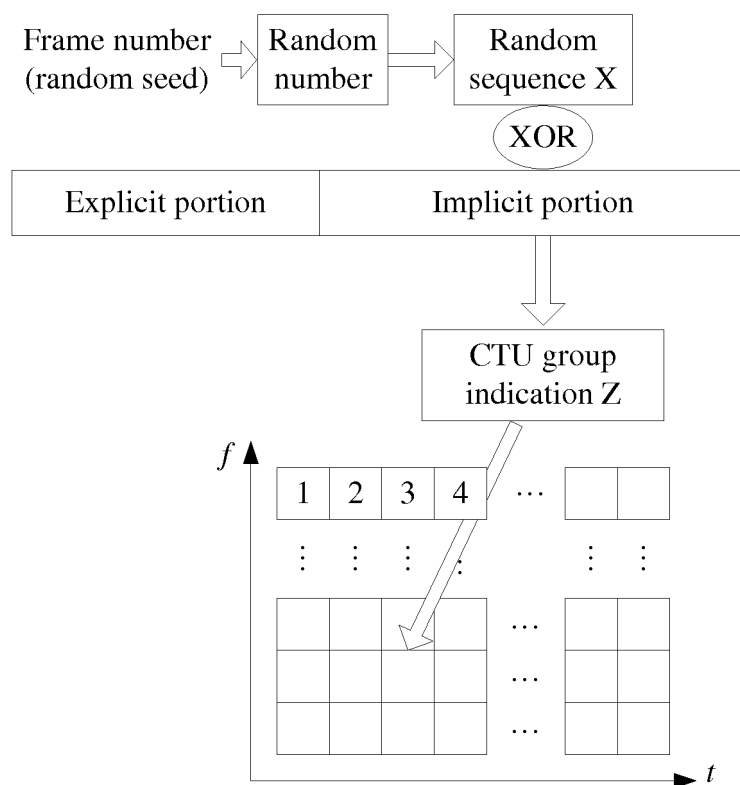


FIG. 7

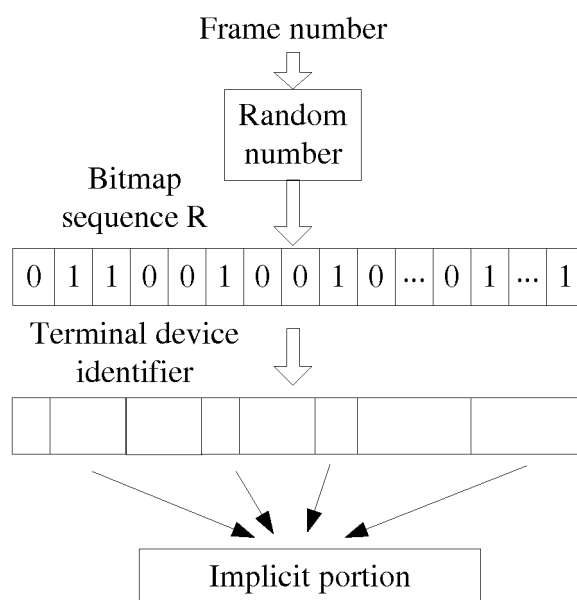


FIG. 8

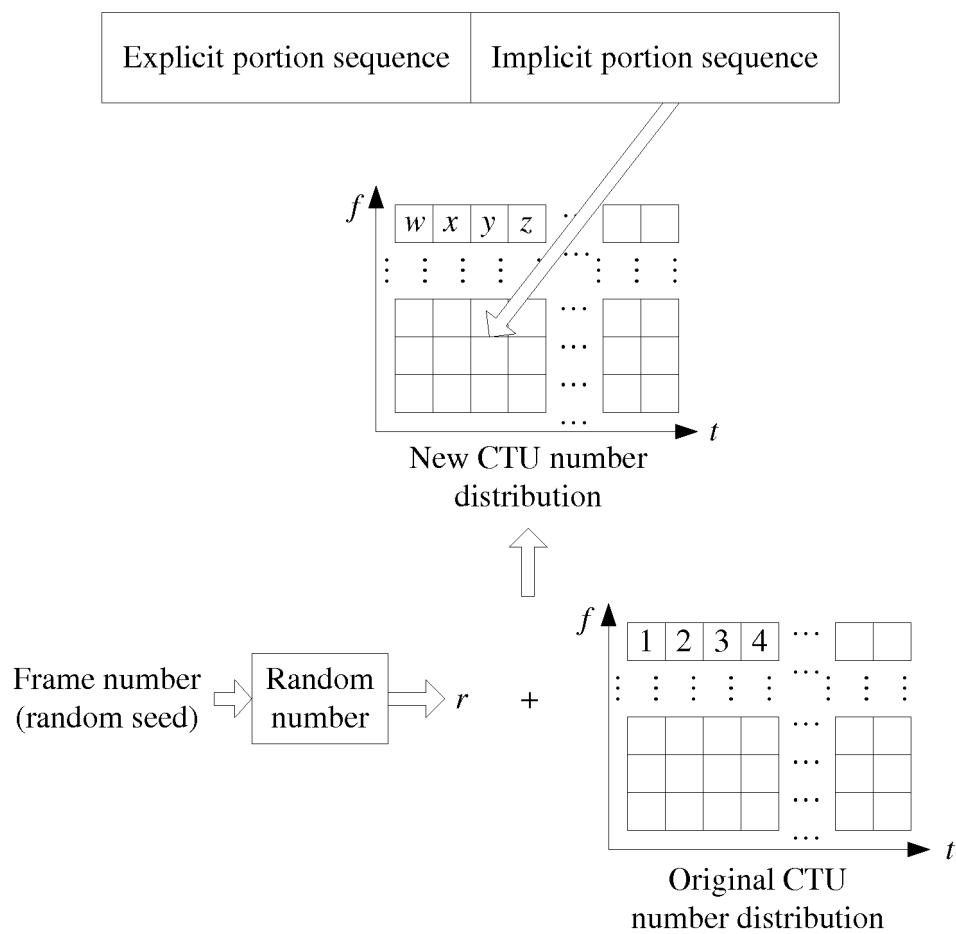


FIG. 9

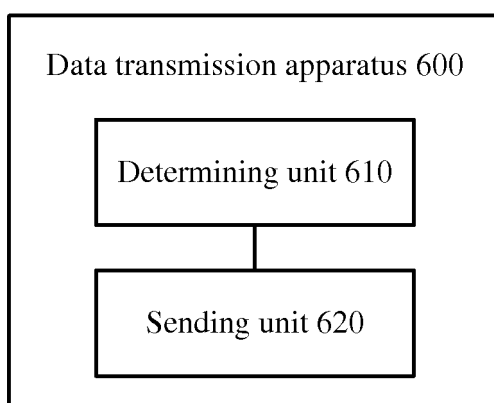


FIG. 10

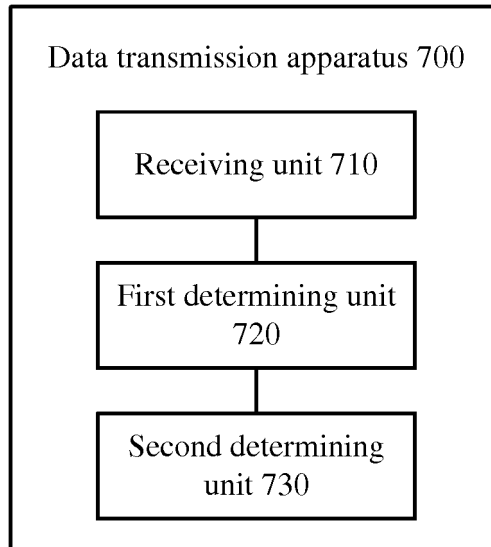


FIG. 11

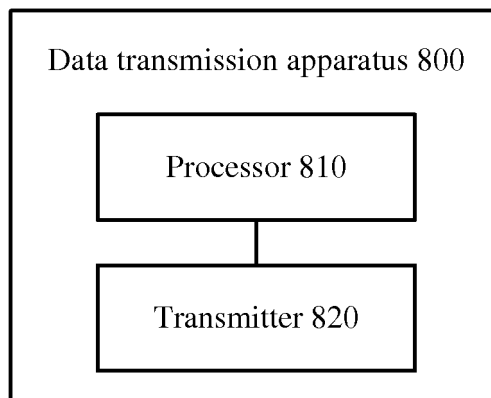


FIG. 12

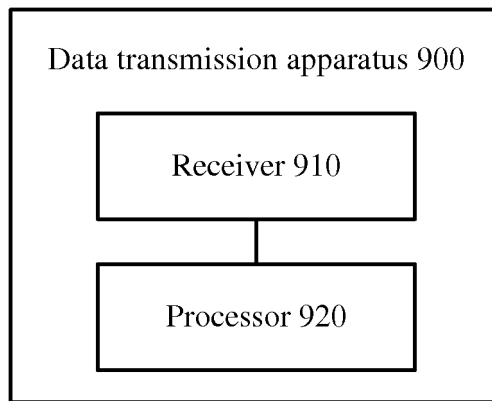


FIG. 13

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2013050037 A1 [0005]
- WO 2015105846 A1 [0005]
- CN 2014073084 W [0025]