



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
15.08.2018 Bulletin 2018/33

(21) Application number: **16848198.4**

(22) Date of filing: **06.10.2016**

(51) Int Cl.:
G05D 1/10 ^(2006.01) **B64D 39/00** ^(2006.01)
G01S 17/88 ^(2006.01) **G06T 7/20** ^(2017.01)

(86) International application number:
PCT/ES2016/070713

(87) International publication number:
WO 2017/051057 (30.03.2017 Gazette 2017/13)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(30) Priority: **09.10.2015 ES 201531460**

(71) Applicant: **Defensya Ingenieria Internacional, S.L.**
28023 Madrid (ES)

(72) Inventor: **ADARVE LOZANO, Alberto**
28023 Madrid (ES)

(74) Representative: **Monzón de la Flor, Luis Miguel**
Poeta Joan Maragall, 9
esc. Izq 3º Izq.
28020 Madrid (ES)

(54) **SYSTEM FOR LOCATING THE POSITION OF THE END OF THE BOOM, THE MOUTH OF THE REFUELLING VESSEL AND THE TANKER**

(57) The invention relates to a position-finding system comprising Means for Locating the position of the Receiver, and Means for Locating the position of the end of the Boom, which allow the positions and inclines thereof in relation to a common coordinates system to be determined exactly and therefore allow the possibility of approach by automatic means if the laws that govern both, that is the Boom and the receiver aircraft, are appropriately designed and based on said information supplied by the invention for the final approach thereof and contact. The means for locating the position of the receiver

can consist of a series of LEDs, lasers or light emitters arranged on the receiver aircraft, combined with the cameras arranged on the tanker aircraft, or a ToF camera, or a laser illuminator with a DOE lens. The invention also relates to a position-finding device comprising light emitters, at least two cameras, a light sensor and an electronic one, such that when the first elements (emitters) are placed on the tanker and the others on the receiver, they allow, in addition to the position-finding, the approaching of the receiver towards the tanker.

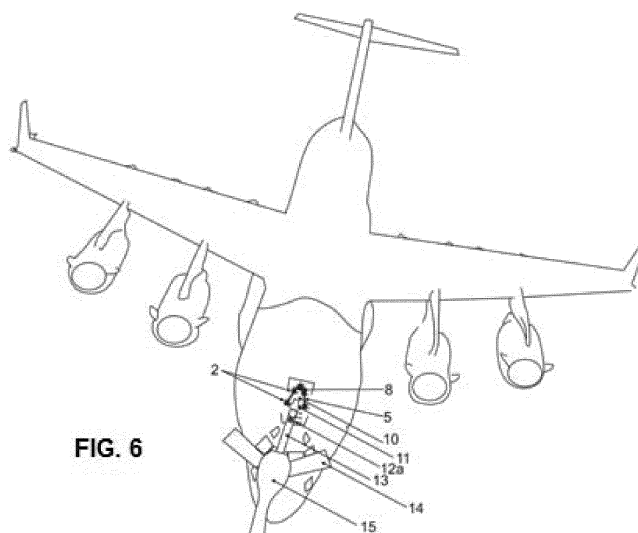


FIG. 6

Description

OBJECT OF THE INVENTION

[0001] The object of this invention, as the title of the invention establishes, is a System for locating the position of the end of the boom, the mouth of the refuelling vessel and the tanker itself, with the boom being understood as the in-flight refuelling pole or boom formed by a rigid telescopic tube with mobile flight control surfaces which a tanker aircraft operator can extend and insert into the receiving aircraft's vessel.

[0002] Refuelling operations involve three important points: the initial approach of the receiver to the tanker; the placement of the receiver in a position which is optimal for the refuelling; and the contact between the boom's nozzle and the receptor vessel to start supplying fuel. The System or set of elements described herein allow these operations of approach, positioning and contact to be performed prior to refuelling which are currently manual, in a semi-automatic and even automatic manner with great safety, precision and robustness and even help the receiver maintain its position more easily when it is being supplied with fuel. Thanks to these devices, the part of the System in the receiver is able to obtain the position of the tanker for its approach and the part of the System inside the tanker is able to precisely determine the location and the inclination of the vessel in which the boom must be entered, as well as the position and inclination of the end of the latter, to which the operation is limited, in order to develop adequate control laws to allow such contact.

[0003] Therefore, this invention is noteworthy due to the fact that it allows a mother plane to refuel a receiving plane in a semi-automatic and even automatic manner.

[0004] Thanks to the joint collaboration of the means available for the System, the tanker boomer or refuelling operator can accurately determine the location and inclination of the vessel in which the Boom must be entered as well as the position and inclination from the end of the latter in order to aid the operation. An automated system based on the information obtained by this invention is also completely viable.

[0005] The invention consists of means for locating the position of the tanker from the receiver, means for locating the receiver from the tanker, in other words, where the receiver is exactly placed in the space, and on the other hand means for locating the end of the boom, which allow their positions and relative inclinations to be precisely determined. All this in relation to a common coordinate system and therefore the possibility of enabling an approach through automatic means, if the laws that control both, i.e. the Boom and receiving plane, are designed appropriately, and based on this information provided by this invention for its final approach and contact.

[0006] The system presented herein has several clearly distinguished versions depending on the way in which the position of the receiver's vessel is obtained, each one

with different advantages according to the implementation chosen. Both of them obtain the position of the end of the boom, in particular the nozzle, from the location of certain points of light placed on the end of the boom, in the images obtained from a set of two cameras strategically placed in the tank. They obtain the position of the mouth of the receiving aircraft's vessel using means for locating the position of the receiver, using either a series of LEDs, lasers, or light emitters arranged on the receiver plane along with the cameras placed on the tanker aircraft, or a ToF (Time-of-flight) camera or a laser emitter with a DOE pattern, also in conjunction with the cameras placed under (on the tanker's fuselage or external surface, but below it, such as on the lower area of the tail cone or belly-fairing on the plane's underside) the tanker.

[0007] As has also been indicated, the object of the present invention is a System for approaching and locating the tanker from the receiver, based on the previous system which, conveniently complemented, allows the semi-automatic or automatic approach of the receiver to the tanker, which results in an automation of the entire refuelling process in mid-flight.

[0008] It can therefore be considered that this invention is confined within the scope of the in-flight refuelling systems, and particularly among those relating to the boom positioning systems in the vessel of the aircraft to be refuelled.

BACKGROUND OF THE INVENTION

[0009] In-flight refuelling is currently carried out in two different ways. With hoses and baskets, or with a Boom. In the case that it is carried out with a Boom, the end or nozzle (fuel outlet nozzle) of the Boom must be placed in a vessel found on the surface of the plane that is going to receive the fuel. This entire operation is currently carried out manually and relies on the expertise of the operator or boomer.

[0010] Patent US6966525B1 is known in the state of the art, which describes an in-flight refuelling system, and where the alignment system and the method are provided to substantially automate the positioning and commitment of an in-flight refuelling system performed by a first aircraft with respect to a refuelling vessel supported by a second aircraft in order to facilitate the refuelling operation between the first and the second aircraft. More specifically, this patent provides means for aligning the refuelling pole mid-flight with the refuelling vessel in such a way that an extendible nozzle can be extended from the refuelling extendible arm mid-flight and hook up to the refuelling vessel to initiate an in-flight refuelling operation.

[0011] Another patent of the state of the art related to the invention is patent US6752357, which describes an Aircraft distance measurement system that analyses the images of at least one camera using the known length of refuelling extendible arm, the location of the nozzle in order to identify a distance between the boom nozzle and

the refuelling vessel of the receiving aircraft. In other words, the aim is to calculate the distance between the boom's nozzle and the receiving vessel to refuel the aeroplane.

[0012] Certain other systems give details of means for locating the position of the receiver, but no system uses means to locate the tip of the BOOM, and similarly no system gives details of both means for locating the vessel and the tip of the boom.

[0013] All previous systems rely on the expertise of the operator or boomer in order to be operated, as they are ultimately manual operations.

[0014] Therefore, the object of this invention is also to develop a system that enables semi-automatic or automatic refuelling that does not depend on the expertise of the operator to correctly position the end of the boom in the vessel on the surface of the plane, developing a System such as the one described below and is essentially included in the first claim, enabling semi-automatic and even automatic refuelling

DESCRIPTION OF THE INVENTION

[0015] The main part of the Location System invention comprises Means for Locating the Position of the Receiver, in order to determine exactly where and how the receiver is positioned in the space, and on the other hand Means for Locating the position of the end of the boom, which allow the positions and inclines thereof in relation to a common coordinates system to be determined exactly and therefore allow the possibility of approach by automatic means if the laws that govern both, that is the boom and the receiver aircraft, are appropriately designed and based on said information supplied by the invention for the final approach thereof and contact.

[0016] This basic system for locating the end of the boom and that of the refuelling vessel in a mid-flight refuelling operation from a tanker equipped with a boom (15) to a receiving plane comprises:

- Means for Locating the Position of the Receiver in the receiving plane that comprise at least one Vision Subsystem arranged on the tanker.
- Means for Locating the Position of the Boom tip comprising light emitters, placed on the boom tip, along with the Vision Subsystem arranged on the tanker.
- Processing Means in which, through the images obtained from the localisation means allow their positions and inclinations to be exactly determined with respect to a common coordinate system.

[0017] The Means for Locating the Position of the Receiver may include:

In an initial embodiment, which we will call the Vessel Device, the means consist of a series of LEDs or lasers, or light emitters arranged on the receiver plane along with the cameras placed on the tanker

aircraft.

In a second embodiment, they can consist of a ToF camera, which when placed on the tanker plane allows the position of the receiver to be known without needing to place any means on the receiving plane. This ToF camera, also known as flight time, consists of lighting elements and a matrix sensor that measures the time it takes the light to return once sent. This information will provide us with the distances from this new camera to the receiver and will be incorporated into the Vision Subsystem to replace the Vessel Device. We can use the distances to the receiver that the flight time camera provides us with to obtain a set of points on the surface of the receiving aircraft that, together with an algorithm which recognises or compares the surface of the same receiver plane previously digitised and stored, will provide the location of the vessel's mouth in an alternative manner to that provided by the Vessel Device, thereby allowing this device to be replaced by the use of the designated ToF camera.

In a third embodiment, the Means for Locating the Receiver position consist of a laser emitter or illuminator, placed in the tanker, to which a DOE or diffraction lens generating a structured illumination that creates a known light pattern has been added on the surface of the receiver and which, along with a processing subsystem and any of the two Vision Subsystem cameras, allows the distances to them from any of the two cameras to be obtained through basic telemetry. This matrix information on distances, either through means of recognition by comparison between the points of the matrix and the same points on a 3D image model of the receiver itself, enable information to be obtained on the position equivalent to that obtained by the Vessel Device and thus provides the same functionality as the device, potentially replacing it by rendering it unnecessary.

[0018] The Means for Locating the tip of the Boom comprise light emitters, which may preferably, but not essentially, be LEDs, laser emitters or the ends of optical fibres that conduct the light of any of the above and have lenses or diffuser elements attached to their ends, placed on the tip of the boom, along with the cameras arranged on the tanker (of the Vision Subsystem).

The Processing Means comprise control electronics that switch the light emitters of the Boom Device on and off. They also have video signal processing electronics to calculate information on the distance to the light emitters of other devices. They also have enough computing power to analyse point clouds, recognise certain patterns in them, and compare them with other point clouds.

[0019] The Location System aims to produce fundamental information that forms the basis of the invention. This information consists of:

- The spatial location of the end of the boom that is

represented by the "nozzle" that dispenses the fuel, as well as the inclination thereof, which will be materialised by a point (x, y, z) in the space along with a vector (Vx, Vy, Vz) parallel to the direction of the removable part of the boom where said nozzle is located.

- The spatial location of the fuel inlet mouth that is inside the vessel, which as mentioned, is located on the upper surface of the receiving plane, along with the inclination of the tube that flows into it. Both equally represented by a point of three coordinates and a vector of three components parallel to the mentioned tube
- A third point of information for the case of the approach and location system is the location of the tanker relative to the receiver, as well as the relative inclination between both. This would serve as an approximation tool in the initial phase of contact.

The references relating to the location of the boom end and the fuel inlet port are represented, as already mentioned, by a set of six coordinates, each of which refer to a coordinate axis attached to the tanker and for the purpose of convenience, the origin of said axes will be placed in one of the two chambers that are used in this invention for obtaining the indicated locations. The origin O, therefore, will be in the centre of the sensor of said chamber and its z-axis will be perpendicular to the surface of the sensor, the OX and OY axes being parallel to the plane of said sensor, the positive Y and horizontal axes above and the growing Xs axis to the right.

[0020] Said information is obtained based on the data obtained by the Vision Subsystem that forms part of the invention, both in the complete and short versions and which consists mainly of two cameras and other electronic elements that will be detailed below. This camera subsystem captures the light emitted by two devices that, as already mentioned, are placed on the tip of the Boom and on the vessel of the receiver plane, respectively. In addition, and as will be detailed below, the information corresponding to each device will be stored in order to facilitate future and subsequent contact between both. For future references to the elements that make up the short version of this invention, in this document, we will talk about the "Vessel Device", "Boom Point Device" and "Vision Subsystem", when referring to the three simplified Location Devices that constitute this invention, leaving only the initial approach of the receiver to the tanker to be dealt with in the full version of the invention, as already commented.

[0021] The simplified invention, relating to the location of the end of the boom and the mouth of the vessel, is comprised of three elements: a Vessel Device, a Boom Device and a Vision Subsystem, which is formed by a set of at least two cameras, where the cameras and the boom device are electrically connected to each other and

placed in the tanker, while the communication with the vessel device, which is on the surface of the receiver, is based on communication via emitted light and a receiving sensor. This communication is two-way, in other words, it works in both directions: The receiving plane emits light through an active element and receives through the tanker aircraft's cameras. While the tanker also emits through an active light element placed in the boom and receives through means of an image sensor which is not necessarily a matrix in the plane's fuel receiver. This last communication occurs almost exclusively at the time of contact between the two planes when the theoretical transfer of fuel takes place and the situation and relative distance between both is optimal.

[0022] These fundamental elements or parts are described in more detail below:

Vessel Device which is found on the receiver plane, in a preferred embodiment, consists of a semi-hollow steel band of high shock resistance that includes at least four transparent zones of material also of high strength such as graphene, aluminum oxide or similar, within which at least three elements that provide light are embedded and a fourth element consisting of a sensor that receives and detects light from another device. Optionally, this device may have two reduced-size cameras embedded in it. This will allow the light emitted by another device similar to the one described now to be "seen", with the device being placed on the tanker, and thus for the relative situation of the same with respect to this receiver to be determined. The device will be fixed to the receiving aircraft via gluing, screwing, riveting or a similar procedure.

[0023] This device is placed on the vessel of the receiving plane. Its box consists of a shock-resistant frame that may be made of steel, titanium, Teflon, Kevlar or another high-strength material with a wide range of operating temperatures. In this frame, the light emitters and the sensor that have been discussed above are embedded. These emitters must be able to emit light with sufficient intensity so that the tanker's cameras can "see" them in daylight and will emit the position information that the cameras need to locate them properly with their light. Each camera will "see" each emitter in a position (x, y) within its range of positions that the pixel matrix of its image sensor will provide. This pair (x, y) corresponds to a line placed in the space and which refers to certain coordinate axes defined by the camera itself. The use and change mode of two cameras allows us, through the use of geometry, to determine the point of intersection of both lines and therefore the situation of the light seen by both cameras with respect to a coordinate axis fixed to the cameras. These lights will consist of an LED or LASER emitter that, when turned on, will send control information and other information such as an appropriately compressed and digitised voice signal by means of a binary and redundant code, as detailed below. This sending of information is processed simply through a set of consecutive pulses with a certain cadence pattern when information on the location of the vessel or the dig-

itised information itself is being sent, provided this is not control information.

[0024] By way of example, when the information does not involve a location, it may be sent with the following format: Header+L+Data+CRC16. Where the header is a 16-bit string to indicate the beginning of a message, L is the length in bits of the data with up to 8 bits for L, leading to a maximum of 255 bits of data. CRC is a 16-bit cyclic redundancy code. The data may include a synchronisation clock between the subsystem and the device. If the information to be transmitted is voice information, it will be digitised, compressed and sent with simple error correction codes and longer frames.

[0025] The subsystem will be powered via a connection to the receiver's power supply which will also include a control wire that will act as permission for the emission of the stored code from inside the receiving plane.

[0026] In order to ensure that the light emitters can be properly seen, even in conditions with a high level of solar brightness, and to avoid confusion with other sources of light from the ground or from other aircraft, the method employed in this invention consists of using aids simultaneously which provide very positive practical results: Firstly, the light emitted is confined within a spectrum band with a very narrow wavelength range and a high temporal coherence. The rest of the wavelengths are eliminated through an equally narrow bandpass optical filter, placed in front of the camera lenses. This gives us a greatly improved relative value of emitted light compared with the ambient light. At the same time, as a second aid, we make the emitted light flicker with a defined pattern. In this way, for a pixel received as a consequence of the reflection of the light emitted with that pattern in a point of our image, we obtain values that must follow that same pattern. Thus, if we use a frequency the same as that used in the camera (number of frames per second), we can take the values of the pixels in consecutive frames and make a correlation with the pattern of light emitted. The pixels whose correlation value exceeds a certain threshold will indicate to us that they have been illuminated by our emitters. The combination of both methods allows us to "see" with sufficient clarity those light emitters from our image with our Vision Subsystem with the precision that the resolution of these cameras allow and taking into account that working distances are relatively low, a subcentimetre resolution can be reached, with total guarantee and without too much difficulty. The Vessel Device also has a sensor whose input signal is filtered and optically amplified, and also accompanied with a certain pattern for "zero" and another pattern with a "one". The light signals coming from the other device or the Boom Device will arrive without complications to this sensor when contact has been made between the nozzle and the vessel or when there is near-contact, meaning that they are very close to each other. This procedure will allow communications of 48K Baud, which means that a spoken conversation could easily be transmitted through this link and method. Finally, the device includes

electronics with the function of extracting the voice signal or data, where appropriate, or generating pulses from its light emitters at the appropriate times. A more advanced version of this device will include two additional cameras as well as processing electronics similar to those of the Vision Subsystem.

Boom Device:

[0027] This second device consists of a protection and support box that protects certain light emitters on the tip of the boom.

[0028] The Boom Device consists of a box that houses the electronics and light emitters necessary for the required functionality. This box must have a means to grip the boom. It may be a ring or a similar element that meets the above conditions. In a preferred implementation, the box has two half-rings that grip it to the front area of the boom's nozzle. The box contains the drivers of the LEDs used in this implementation, which provide them with the necessary current to be turned on and off according to the established guidelines. These electronics must also include the necessary protections for the rest of the electronics as well as a voltage adapter to convert the voltage supplied by the aircraft to that required by the drivers and other electronics in order to function. On the outer surface of the box, in a plane orthogonal to the axis of the boom, the LEDs are arranged so that one of them is as close as possible to the centre of the Vision Subsystem cameras and the other two are symmetrically placed with respect to this minimum distance to the inside of the cameras. This is a minimum configuration and additional LEDs can be placed to obtain additional redundancy at the expense of a more intense calculation. The duration of the LED lighting will be the same as the time frame of the cameras when said lighting occurs and will be synchronised with them, for both turning them on and off. The proposed box will be aluminium and its shape and size will be compatible with the geometry of the boom to avoid geometric interference that leads to friction or collisions with other parts of the aircraft or the boom itself. In a more complete version, this device can include cameras that would see the receiver from a privileged situation at the time of contact.

Both previous devices will emit diffused light that will be captured by the Vision Subsystem, which when processing it will obtain the relative position between both elements and from there through a Control System, the ability to establish contact with little or no human intervention.

Vision Subsystem:

[0029] This is comprised mainly of a set of cameras, at least two, whose function is to observe the scenario of the operation in which the other indicated devices exercise their fundamental role of signalling the position of their respective locations, from which the information that will be derived will be deducted. This in turn will allow us

to establish guaranteed contact between the nozzle and vessel. In a preferred implementation, these cameras are prepared to see the light emitted by the emitters placed in the other devices of this invention at working distances. This will involve requirements such as a good resolution, 1080 in our case, notwithstanding other resolutions. An acquisition frequency of at least thirty frames per second and a working spectrum that includes infrared. An electrical connection will synchronise the turning on of the LEDs as preferred emitters of the Boom Point Device, with the image frame being acquired by the cameras' image sensors.

[0030] The essence of the proposed system lies in the simplicity with which active light emitters in a narrow range of the spectrum and with a wide angle of diffusion can easily be seen from a large area, at distances of tens of metres, necessary for these types of operations and in all kinds of ambient light conditions, with the use of cameras with their corresponding filters and employing pulse coding techniques. In the complete system which is also object of this invention, the additional functionality of initial approach between receiver and tanker is covered by the same techniques and the same type of devices: adding a Vision Subsystem in the receiving aircraft and light emitters next to the tanker's Vision Subsystem.

[0031] In the broadest case of an approach and location system, the system comprises three locating devices for refuelling, one arranged on the receiving vessel, another on the tanker and another on the tip of the boom.

[0032] Each of the Refuelling Devices comprises:

- At least three LED- or Laser-type light emitters, or a combination of both, each with a wide-angle diffuser to diffuse the light they emit. Each light emitter will be powered by its respective driver, and all commanded by a control electronics unit.
- At least two high-speed vision cameras (>30fps), with their respective lenses and narrow bandpass optical filters, tuned to the light emitted by another collaborating device. The cameras will have high-speed fpga-type or similar electronics to determine the coordinates of the points of light emitted by another Locating Device collaborator in real time.
- A light sensor with its respective lens capable of detecting light from another collaborating Locating Device when it is nearby.
- Electronic equipment that processes the coordinates provided by both cameras to obtain the relative coordinates of each emitter with respect to one of the cameras. Furthermore, in order to provide this information to the rest of the aircraft for use in assisting refuelling, there will be a communication bus for all of the electronic equipment, both for controlling and recognising/processing, with the exterior of the device. The positional contact information will also be stored in a memory in order to make it available in future occasions.

[0033] The electronic equipment will perform at least the following functions:

- Calculation of x, and of each light emitter displayed by each camera.
- Calculation of X, Y, Z of each point of light displayed simultaneously by both cameras.
- Calculation of the X_p , Y_p , Z_p as well as V_{px} , V_{py} , V_{pz} of the relevant point rigidly linked to the previous ones as well as a vector perpendicular to the relevant surface attached to it.
- Storage of the previous information.
- Sending of the previous information to the exterior.
- On and off switch for the light emitters.
- Recognition by correlation of the consecutive frame pixels of the sequences corresponding to the light emitters of another collaborating Locating Device.
- Extraction of the data of the high-speed light signal.

[0034] The cameras of all of the vision subsystems can have controllable and variable focus, and they can also have controllable and variable Iris and/or zoom.

[0035] In a possible embodiment, the Boom location means can be integrated into the boom itself.

[0036] Also, in a possible embodiment, the vessel may be configured so that the vessel locating means are integrated into the vessel itself.

[0037] In the operations shown above some of the elements or parts that constitute it can be replaced by similar elements currently existing in the plane and to which they have been provided with the new specific functionality contained in this invention when adding either new elements or new functionalities with the purpose of obtaining the functionalities described for this entire invention, thus bypassing as far as possible the installation of new devices in the aircraft.

[0038] Unless otherwise indicated, all technical and scientific elements used herein have the meaning commonly understood by standard experts in the art to which this invention pertains. Methods and materials similar or equivalent to those described in the specification can be employed when using this invention.

[0039] Throughout the description and the claims the words "comprises", "consists" and its variants are not intended to exclude other technical characteristics, additives, components or steps. For experts in the art, other objects, advantages and characteristics of the invention will emerge partly from the description and partly from the practice of the invention.

EXPLANATION OF THE FIGURES

[0040] To supplement the description being given and with the aim of promoting a better understanding of the characteristics of the invention, in accordance with a preferred example of a practical embodiment of the same, a set of drawings are provided as an integral part of the description in which, for merely illustrative purposes, the

following has been represented:

In Figure 1, we can observe a simplified representation in a first embodiment of the System for Approaching and Locating the end of the Boom and the mouth of the Vessel.

In Figure 2, we can observe a simplified representation of the System for Approaching and Locating the end of the Boom and the mouth of the Vessel.

In Figure 3 an alternative embodiment of the Location System to that found in Figure 1 is proposed.

Figures 4A, 4B and 4C represent the three different devices or subsystems that comprise this invention.

Figure 5A depicts the first of the devices of this invention shown in Figure 4A in more detail.

Figure 5B shows a cross section of the Vessel Device.

Figure 5C represents a cross section of that part of the receiver.

Figure 5D is a Cartesian representation of the elements of Figure 5C.

Figure 6 represents a receiving plane at the moment in which the boom (15) is about to make contact.

Figure 7 represents the image obtained from the boom when the Vision Subsystem is placed in the Belly Fairing located on the underside of the tanker.

Figure 8 shows a view of the tanker aircraft as well as its deployed boom.

Figure 9 is a Cartesian and schematic representation of the locations of the most important elements that form part of the Boom Device.

Figure 10 is a Cartesian representation of the Vision Subsystem.

In Figure 11 the architecture of the Vision Subsystem is represented.

Figure 12 represents a box in which the elements that form part of the Boom Device are included.

In Figure 13 the composition of the Vessel Device is described.

In Figure 14 a representation of the Locating Device for refuelling is shown.

PREFERRED EMBODIMENT OF THE INVENTION

[0041] In view of the Figures, a preferred embodiment of the proposed invention is described below.

[0042] Figure 1 shows a mother plane or tanker (40) provided with a boom (15) that has an extendible part (13), at the end of which the first light emitters (12) can be found, while the second light emitters (2) are arranged on the receiving plane, which additionally and in a complementary manner can have a reception sensor (22); in addition, cameras (26) are also arranged on the tanker.

[0043] Figure 2 shows an embodiment corresponding to the System for approaching and locating the end of the boom and the mouth of the vessel, which comprises locating devices (41) arranged on the tip of the boom (15), another on the vessel and another on the tanker (40), where each locator device (41) comprises the following:

- At least three LED- or Laser-type light emitters
- At least two high-speed vision cameras
- Electronic equipment that processes the coordinates
- A light sensor with its respective lens

[0044] Figure 3 shows an alternative embodiment to that proposed in Figure 1, where the means for locating the vessel used consisting of light emitters (21), have been replaced by the use of any of the following means, which also serve to locate the vessel (a ToF camera (42), a laser emitter (43), and a DOE pattern (44))

[0045] Figures 4A, 4B and 4C represent the three different elements or Subsystems that make up the Location System of the end of the boom and the mouth of the vessel.

[0046] In Figure 4A we can see an element (5) that grabs the receiving plane just above the fuel vessel. Known as a Vessel Device, it has an inverted "U" or "V" shape and a structure (5) in which there are at least three lights (2) that are found on its surface. This element has a connection cable (7) which ends in a connector to join with the control part of the aircraft.

[0047] Figure 4B shows the so-called boom device, located at the end of the boom (20), consisting essentially of a ring (19) for fixing and protecting it, and light emitters (12) for locating it.

[0048] In Figure 4C we can see a set of two cameras (26) which when placed in a suitable position on the tank will allow the other devices of this invention to be seen and located, and which constitutes the so-called Vision Subsystem. The two chambers are joined and fixed by means of a support (28), each chamber being provided with its respective lenses (25) and filter element (24).

[0049] Figure 5A shows the Vessel Device in more detail in which a reception sensor (22) placed on the structure (5) can be seen and which allows information to be received in the form of light coming from the Boom Tip Device when the tip of the boom and the vessel have come together. In addition, the Vessel Device has a se-

ries of light emitters (21), with both elements (21) and (22) embedded in a transparent or translucent material (23). Underneath the vessel device the mouth (8) of the vessel (9) is shown, in which the nozzle of the boom (9) must be fitted.

[0050] Figure 5B shows a cross section of the vessel device, where the structure (5) is visible, along with a transparent or translucent material (3) that protects the light emitter (2) placed on a printed circuit (4) where the rest of the electronics used with it can be found.

[0051] Figure 5C represents a cross-sectional view of the same part of the receiver, showing the structure (5) of the vessel device provided with an inclination similar to that which would be found in a cut section of the receiving plane in the area of the vessel, along with the light reflector emitters (21) and the end (6) of the vessel mouth, where the segment (b) represents the distance from the centre of the closure of this to the mid-point of the segment joining the two light emitters which are found in the mid-zone of the device, while (a) the distance from the same central point of the mouth of the vessel to the upper light (21) of the device on an axis orthogonal to the axis of the same vessel is shown. Finally is the angle between both segments described above, (a) and (b).

[0052] Figure 5D is a Cartesian representation of the elements described above. The axes refer to a local origin O'' and should later refer to the origin O located in the centre of the image sensor of the left chamber, as shown in Figure 7. P' is the midpoint between the lights P_2 and P_3 and u_o , v_o and w_o are versors (unit vectors) in the directions of the different axes. The O'' - P' axis is the same axis as the vessel tube axis.

[0053] Figure 6 represents a receiving plane at the moment when the boom (15) is about to make contact with the mouth of the vessel (8). The view represents the image when the Vision Subsystem is located in the preferred position in this invention placed in the tail cone. It shows: Boom flap (14), extendible part (13) of the boom, device lights (12a) of the end of the boom of this invention placed on top of the extendible pole for this preferred implementation. The nozzle (11) and ramp (10) of the vessel on which the nozzle is usually slid before contact can also be observed.

[0054] Figure 7 represents the image obtained from the boom when the Vision System is placed in the Belly Fairing located on the underside of the tanker. The figure shows the nozzle (11), the extensible part (13) of the boom, the end of the boom (14) and the fixed part (15) of the boom from the bottom of the tanker. It also shows the location (12b) of the illumination ring of this invention when the Vision System is positioned as described above. Both points of view generate images of the contact, each with its own drawbacks and advantages. The Boom device could contain six or more light emitters and, in this way, allow the Vision Subsystem to be placed in the two indicated locations (Tail Cone and Belly Fairing), with which complementary images would be obtained that may generate an interesting redundancy, which is

very useful for these types of Systems.

[0055] Figure 8 shows a view of the tanker aircraft as well as its deployed boom, to indicate the two positions in which the Vision Subsystem can be located. The first situation corresponds to its (preferred) placement in the tail cone (18a), while the second situation corresponds to its location under the Belly Fairing (18b), the underside of the tanker. Said locations correspond, as already mentioned, to various implementations of the boom's illumination ring, which can be arranged either in the rear part (12a) or in the front part (12b), corresponding to the locations (18a) and (18b) of the cameras. Each of the cameras, depending on its positioning in the tail cone (18a) or on the underside of the aircraft (18b), define the fields of vision (16) and (17) respectively according to the specific location.

[0056] Figure 9 is a Cartesian and schematic representation of the locations of the most important elements that form part of the boom device consisting basically of a metal ring or a similar support element, in which at least three light emitters P_1 , P_2 and P_3 are embedded, placed forming a triangle. Point P' is the midpoint between the outermost light emitters P_2 and P_3 . O' is the chosen local origin of the coordinates. Once again, there must be a movement in order to be able to refer any point to the global origin placed in the centre of the image sensor of one of the cameras; u_o , v_o and w_o are versors (unit vectors) in the directions of the different axes, d_2 is the distance from the centre of the fuel outlet nozzle of the boom to the local O' origin that can be determined by knowing the distance $P'O'$ which measured in the device will have a value, d_1 . v_o is a versor in the direction of the Boom axis.

[0057] Figure 10 is a Cartesian representation of the Vision Subsystem. In this drawing, both cameras can be seen as well as what they would show when aimed at a point P of the space. Each camera will see the point with different local coordinates (X_1 , Y_1) and (X_2 , Y_2) in which the point will appear as point P_1 and P_2 respectively. The Z coordinate in each of the local representations can be calculated from the angle $/2$ corresponding to half of the FoV (Field of View) of each camera which will depend on the optics and resolution of the camera as well as the size of its sensor. Once Z_1 and Z_2 are found, local to the point for each chamber, Z , X and Y of the point will be obtained with respect to a predetermined reference origin. In our case, the centre or origin O that we have placed, without the loss of generality, is in the centre of the sensor of the left chamber, as shown in the figure. This will give us the coordinates of any point observed by both cameras with respect to the same coordinate axes and therefore the real relative coordinates between them.

[0058] Figure 11 shows the architecture of the Vision Subsystem, which includes the main components that make up its architecture. A preferably metallic outer aluminium enclosure includes two chambers separated by a distance of about half a metre (the greater the distance, the better the spatial resolution on the z -axis). Each cam-

era (26) has sensor and electronics for adapting and reading, to which a lens (25) and filter (24) must be placed beforehand to eliminate the wavelengths which differ from those emitted by the Boom and Vessel devices. It includes special electronics (32) based on FPGA in order to obtain results in real time and which performs a processing and image recognition and extraction of local coordinates x_i , y_i of the points of light of the indicated devices.

[0059] The coordinate information of both cameras is transferred to a Processing System (33) where finally the X, Y, Z coordinates of each light emitter is obtained with respect to a coordinate axis whose origin has been taken at the centre of the sensor of the left camera for greater ease, notwithstanding the use of any other.

[0060] Figure 12 represents a box in which the elements that form part of the Boom Device are included. Essentially, it is comprised of light emitters (38), which are LEDs in this preferred implementation, at least three, powered by their respective drivers (37) which are in turn handled by a microcontroller (36) which in turn connects with the Vision Subsystem through a control bus with its respective communications electronics (34). The control bus will be synchronised with the Vision Subsystem in order to obtain the position of the Vision Subsystem light emitters.

[0061] In Figure 13 the composition of the Vessel Device is described. In it, in this preferred implementation, a set of LEDs (LED1, LED 2, LED3,... LEDn) (38) at least 3, are powered by their respective drivers (37) and these are activated and deactivated by a microcontroller (36) which will be controlled remotely. This device can be turned on or off from the console of the receiving plane. Additionally, a sensor (35) will receive light through its corresponding filter (29) in order for the signal adapter element (39) to provide the microcontroller (36) with information on the pulses received therein and coming from the boom device. The device may store the received information in a non-volatile memory. The microcontroller, which has a processing algorithm, not only controls the lighting of the LEDs but, in addition to the information received from the light sensor (35), it can extract both information about the position of the device with respect to the boom device and about audio information, which could be inserted in the sequence of pulses emitted by the latter. Finally, a communication bus allows this device to be controlled from the receiving plane, as already mentioned.

[0062] Figure 14 shows the structure of a Location Device (41). The device is enclosed in a box (0) and consists of a set of at least three light emitters (2) with their respective diffusers (23) fed by their corresponding drivers (37). Two cameras (26) with their corresponding lenses (25) and narrow bandpass optical filters (24). Both cameras (26) and light emitters are controlled by a control electronics unit and the information from the first (26), as well as that coming from the light sensor (35) provided with its optical band pass filter (29), is processed by a

real-time processing unit based on FPGA or similar electronics (33, 36, 39). The cameras have their own electronics for calculating the coordinates of the points of light coming from another Location Device in real time. The device communicates with the exterior through a communications bus (34) and is powered by a power source from the plane, which is not shown in the drawing.

Detailed functioning of the System:

[0063] In the case that the vessel (fig.6.10) placed on the surface of the fuel receiver is in a position that can be seen by the subsystem of the two cameras (fig.4C) placed in a favourable position on the tanker (such as the tail cone (fig.8-18a) or the belly fairing (fig.8-18b)), cameras placed on the Vessel Device and pointed in the opposite direction could show the tanker and more specifically the tanker's vision system. Next to it, the light emitters of the tanker have been placed, which will emit their corresponding pattern from this position that will be captured by the cameras next to the Vessel Device. In this way, the receiver can locate the tanker and approach it in order to get into the refuelling position. (This is one of the features pursued by this invention).

Even before reaching that placement in the refuelling position, the lights placed on the device (fig.4A.5) that are on the upper side of the vessel, or distributed in another alternative implementation, on the surface of the receiving aircraft, begin to blink with a cadence corresponding to a certain code. This flashing has two modes of operation or two particular functionalities, the first is a blinking at a fixed frequency that matches the frame rate of the cameras and the second is a different frequency with about 48KHz as the preferred value and that allows coded voice information to be sent to the Boom Device which, with a suitable optical filter in front of its sensor (fig. 14-29) is able to eliminate the information light not related to the device from the signal received. It is obvious that the narrower the bandpass filter and the more coherent the light emitted (fig.13-38), the easier it will be to eliminate the unwanted light. The pattern sent by the light emitters allows an additional aid to distinguish which pixels of the images obtained by the cameras of the Vision Subsystem placed in the tanker correspond to the illumination generated by the light sources of the vessel device. The image processor (fig.11-32) placed behind the cameras, within the Vision Subsystem, will subtract the images from successive frames of the video to obtain the differences between one image and the next and thus be able to show with greater clarity the points that vary from one frame to the next. These differences will be correlated with the code used for the blinking of the lights to thereby further facilitate the task of detecting each of the lights placed on the device, as well as to identify each of them in both cameras.

[0064] Once the light from the emitters of the vessel device are received as coordinates in the Vision Subsystem cameras, the coordinates of these emitters will be

calculated using simple mathematics which allows it to be included in the electronics and recalculated in the image time frame (fig. 11-33).

Thereby, using the coordinates of the lights, the location of the vessel mouth (fig.5B-5) will be obtained along with the vector orthogonal to the mouth with respect to the coordinate axes referring to the tanker and more specifically with respect to one of its cameras. (This is the second important functionality pursued by this invention).

[0065] At the same time, the lights placed on the boom, near the nozzle (fig.4B-12) or (fig.6-12a) or (fig.8-12b) will be flashed in a similar manner, although not identically, to those of the vessel device, and their positions with respect to the same system of tanker coordinates can be determined through a completely analogous procedure. From this position we can precisely determine the coordinates of the end of the nozzle through which the fuel leaves as well as the vector orthogonal to the nozzle's output section. (This is the third important functionality pursued by this invention).

[0066] Initially, we had the position of the tanker from the receiver and now we have the relative position of the vessel mouth and of the boom outlet tip, with both referring to the same tanker reference axes. Through control laws that either govern or aid the movement of both the boom and the receiver plane itself, a semi-automatic or even automatic guidance can be implemented to improve the operation. When the connection is made, both sets of coordinates must match and it will be time to make the adjustments considered appropriate, as in other implementations of this invention, the calculation of the vessel mouth position may not be as obvious as that corresponding to the preferred implementation of this, since the light emitters could be distributed along the surface of the receiver. This could have other advantages. During this moment of actual contact, the information on the position of the lights is exactly that desired for the contact and the fact that it can be stored is very interesting; something that this invention accomplishes thanks to the communication established between the receiving plane's vessel device and the tanker's Vision Subsystem. The receiver uses the light from its emitters as a carrier to send encrypted digital information to the Vision Subsystem. At the same time, the Boom device can send information, not only to the Vision Subsystem, but also to the vessel device where the light sensor placed in it will close the communication loop between both aircraft. The receiving aircraft may store the situation information from the contact and other relevant auxiliary information that may be of interest to the tanker in relation to it.

Once the position is stored, and during a future connection between tanker and the same receiver, the latter will be able to tell the tanker what position the vessel should be in for the exact connection to take place. In addition to that exchange of location information, this channel can be used for spoken communications, thus avoiding any radio signal that could be detected more easily than an optical signal.

Another important functionality of the invention is the possibility of performing a duplex voice communication between receiver and tanker. That is, between the Vessel Device and the Boom Device. Both have two ways to turn on their respective light emitters. One to send the position and another to send and receive a signal of tens of kHz, enough to carry a voice signal. And this can occur in both directions, provided both devices are equipped with the respective light sensors.

[0067] Therefore, the stages that take place for the correct functioning of the System include:

- Visualization from the Vessel Device cameras of the lights placed in the tank that flash, generating patterns following the frame frequency of these cameras.
- Determination of the position of the tank with respect to the Vessel Device cameras, in order to facilitate the approach of the receiving aircraft.
- Positioning of the receiving plane with respect to the tank to allow refuelling. In this position the receiver can be seen by the tanker cameras.
- Blinking of the lights arranged on the Receiving Device with a certain cadence that has two modes of operation; the first being a blinking with a fixed frequency, which coincides with the frame frequency of the cameras with which it performs a pattern emission; and the second being a different frequency of about 48KHz as the preferred value and which allows encoded voice information to be sent to the Boom Device.
- Determination of the position of the vessel mouth with respect to the tanker:
 - Elimination in the cameras of the frame image of the light not related to the device by means of the optical filters that the cameras have.
 - Subtraction of the images from the successive frames of the video by an image processor to obtain the differences between one image and the next one and thus be able to show with greater clarity the points that vary from one frame to the next.
 - Correlation of the differences with the pattern code used for the blinking of the lights to determine the lights that are relevant.
 - Calculation of the coordinates of these emitters through simple mathematics that allow it to be included in the electronics and recalculated in real time.
- While the previous operations take place, the lights placed on the boom close to the nozzle will be made to flash in a similar way and with a similar management to the previous one for the Vessel Device. In doing this, they will also be able to emit information not only on the position but also voice information.
- Determination of the position of the boom lights with

respect to the same tanker coordinates system.

- Determine exactly the coordinates of the end of the nozzle with respect to the tanker.
- Determination of the relative positions between both significant points: Boom tip and vessel mouth as well as the vectors orthogonal to their surfaces.

Calibration: Determination of the relative position of contact and storage thereof

[0068] During the moment of contact between the boom nozzle and the vessel, the set of cameras (which will be placed preferably on the bottom of the tail cone of the tanker, although they could also be placed on the bottom of its main body, the Belly Fairing, or distributed along this and on more parts of the plane), the set of lights of the device that is the object of this invention will be able to be seen from the shortest possible distance (which is the moment of contact), mainly the vessel device placed on the surface of the plane receiver. Said device may have the form presented here as the preferred implementation but could also be distributed in several pieces arranged on the surface of the receiver. This device could even be replaced by a system that obtains the position of the vessel by alternative methods. The first task of this invention is to obtain the position of the point that is in the mouth of the vessel together with a vector perpendicular thereto. In such a way that, from the information gathered by the Vision Subsystem on the position of light emitters or alternative methods and elements, these six parameters must be obtained. Therefore, the moment of contact is a safe time in which we will truly know the relative position between the information obtained from the Vessel Device, in any of its implementations, and the vessel mouth and its orthogonal vector. At that moment the cameras will be able to determine with the maximum accuracy where the nozzle should be placed with respect to the set of lights or other elements, and from this determine with the same precision the location of the vessel with respect to them. This information is fundamental and will allow the calibration of the entire System. This is why, during this moment of contact, the information on the location in which the vessel is found is completely accurate and must pass from the tanker to the receiving aircraft which will store it in order to provide it to other tankers.

Receiving location information

[0069] At the time of contact, as already mentioned, the distance between the tip of the boom and the vessel of the receiving plane is particularly favourable.

[0070] In the device object of this invention that is placed next to said vessel there is at least one light receiving sensor that will receive the information that will be sent from the nozzle of the boom in the form of light in a preferred implementation. In this way, the receiver can receive the information obtained in the tanker at the

time of contact and store it, in order for it to be sent by its active element or elements during a future point of contact, when another tanker so requests. In addition, the same tanker can store this information for future points of contact, since it can be kept in a small database for all those recipients with whom contact has been made. Not only can the contact data be stored, but the vessel can also transmit other fuel data, etc. to the tanker, which will be stored in the database.

[0071] Having sufficiently described the nature of the present invention, as well as the manner of putting it into practice, it is noted that it may be implemented in other embodiments that differ in detail from that indicated by way of example, and to which it will also reach the protection sought, provided that it does not alter, change or modify its fundamental principle.

Claims

1. System for locating the end of the boom and that of the refuelling vessel in a mid-flight refuelling operation from a tanker equipped with a boom (15) and a receiving plane **characterised by** comprising:

- Means for Locating the position of the inlet mouth of the fuel that is inside the vessel of the receiving plane that comprise at least one Vision Subsystem arranged on the tanker.
- Means for Locating the position of the boom tip comprising light emitters, placed on the boom tip, along with the Vision Subsystem arranged on the tanker.
- Processing Means in which, through the images obtained from the Localisation Means allow their positions and inclinations to be exactly determined with respect to a common coordinate system.

2. System for Locating the end of the Boom and the refuelling Vessel, according to claim 1, **characterised by** the fact that the Means for Locating the position of the fuel inlet mouth consist of a series of LEDs, lasers or light emitters arranged on the receiver plane of the Vessel Device along with some cameras placed on the tanker,

3. System for Locating the end of the Boom and the refuelling Vessel, according to claim 2, **characterised by** the fact that the Vessel Device consists of a steel or titanium or teflon or kevlar, semi-hollow band that includes at least four transparent zones of material such as a graphene, aluminum oxide or similar, inside which elements that provide light are embedded.

4. System for Locating the end of the Boom and the Refuelling Vessel, according to claim 3, **character-**

ised by the fact that a sensor that receives and detects light from another device is contained in one of the transparent areas.

5. System for Locating the end of the Boom and the refuelling Vessel, according to claim 1, **characterised by** the fact that the Means for Locating the position of the Receiver consist of a ToF camera located in the tanker, which consists of lighting means and a sensor that measures the time it takes the light to return once emitted, together with a processing system to either recognise the position of the vessel or to make a comparison with a 3D model of the receiver and thus determine the position of the vessel inlet.
6. System for Locating the end of the Boom and the refuelling Vessel, according to claim 1, **characterised by** the fact that the Means for Locating the position of the Receiver consist of a laser emitter placed on the tanker with a DOE lens or diffraction lens that generates a known pattern of light structured on the surface of the receiver and that along with a Processing System will allow the determination of the correspondence between the points of the matrix and the same points in the image obtained by the cameras by means of basic telemetry to also obtain the distances, and with these perform an image recognition or a comparison with a 3D model of the receiver itself to obtain information equivalent to that obtained through the Receptacle Device
7. System for Locating the end of the Boom and the refuelling Vessel, according to claim 1, **characterised by** the fact that the Means for Locating the position of the boom consist of a Boom Device comprising a box that, by means of a clamp or similar, attaches to the boom or the boom's extendible bar. Said box contains light emitters with a narrow range of wavelengths, at least three, which are small in size like LEDs, each one including a diffuser where said light emitters are powered by their respective drivers that are connected to a power source through a control electronics unit and the entire System is controlled remotely and to generate light patterns.
8. System for Locating the end of the Boom and the refuelling Vessel, according to claim 3 and 7, **characterised by** the fact that the Vision Subsystem comprises at least two cameras sensitive to the wavelength emitted by the Boom and Vessel Devices, placed in a rigid support which keeps them at a fixed distance and have an optical band pass filter and its respective focus lens behind the filter and electronics for processing and extracting both the image and the information relative to the coordinates (x, y) of each point of light emitted by each device of the previous ones.

9. System for Locating, as described in the previous claims, **characterised by** the fact that the light emitters are the terminal ends of an optical fibre that transports light from LEDs, lasers or emitters in general, separated from the light emitting end of the optical fibre.
10. System for Locating the end of the Boom and the refuelling Vessel, according to any of the preceding claims, **characterised by** the fact that at least the Vision Subsystem has controllable and variable focusing cameras.
11. System for Locating the end of the Boom and the refuelling Vessel, according to any of the preceding claims 1-9, **characterised by** the fact that at least the Vision Subsystem comprises controllable and variable Iris cameras.
12. System for Locating the end of the Boom and the refuelling Vessel, according to any of the preceding claims 1-9, **characterised by** the fact that at least the Vision Subsystem comprises controllable and variable zoom cameras.
13. A Boom or refuelling device for the location system according to any of claims 1-12, **characterised by** the fact that the Boom Location Device has been integrated into the boom itself.
14. A Vessel for a receiving aircraft for the location system according to any of the preceding claims 1-12, **characterised by** the fact that the boom location Device or refuelling device has been integrated into the vessel itself.
15. System for Approaching and Locating the end of the Boom and the refuelling Vessel in a refuelling operation in mid-flight from a receiving vessel to a tanker with a boom (15) **characterised by** the fact that it comprises three locating Devices: one arranged on the receiving vessel, another under the tanker and another on the tip of the boom, where each location device comprises:
 - At least three LED- or Laser-type light emitters, or a combination of both, each with a diffuser. Each light emitter will be powered by its respective driver, and all commanded by a control electronics unit.
 - At least two high-speed vision cameras (>30fps), with their respective lenses and narrow bandpass optical filters, tuned to the light emitted by another collaborating device. The cameras will have high-speed FPGA-type or similar electronics to determine the coordinates of the points of light emitted by another Locating Device collaborator in real time.



- A light sensor with its respective lens capable of detecting light from another collaborating Locating Device when it is nearby.
- Electronic equipment that processes and saves the coordinates provided by both cameras to obtain the relative coordinates of each emitter with respect to one of the cameras. Furthermore, in order to provide this information to the rest of the aircraft for use in assisting refuelling, there will be a communication bus for all of the electronic equipment, for recognising/processing/storing the device.

16. Procedure of Approaching and Locating the end of the Boom and the mouth of the refuelling Vessel in a refuelling operation in mid-flight from a tanker provided with a boom (15) to a receiving vessel according to the system of claim 15 **characterised by** the fact that it includes the following stages:

- Visualization from the Vessel Device cameras of the lights placed in the tank that flash, generating patterns following the frame frequency of these cameras.
- Determination of the position of the tank with respect to the Vessel Device cameras, in order to facilitate the approach of the receiving aircraft.
- Positioning of the receiving plane with respect to the tank to allow refuelling. In this position the receiver can be seen by the tanker cameras.
- Blinking of the lights arranged on the Receiving Device with a certain cadence that has two modes of operation; the first being a blinking with a fixed frequency, which coincides with the frame frequency of the cameras with which it performs a pattern emission; and the second being a different frequency of about 48KHz as the preferred value and which allows encoded voice information to be sent to the Boom Device.
- Determination of the position of the Vessel mouth with respect to the tanker:
 - Elimination in the cameras of the frame image of the light not related to the device by means of the optical filters that the cameras have.
 - Subtraction of the images from the successive frames of the video by an image processor to obtain the differences between one image and the next one and thus be able to show with greater clarity the points that vary from one frame to the next
 - Correlation of the differences with the pattern code used for the blinking of the lights to determine the lights that are relevant.
 - Calculation of the coordinates of these emitters through simple mathematics that allow it to be included in the electronics and

recalculated in real time.

- While the previous operations take place, the lights placed on the boom close to the nozzle will be made to flash in a similar way and with a similar management to the previous one for the Vessel Device. In doing this, they will also be able to emit information not only on the position but also voice information.
- Determination of the position of the boom lights with respect to the same tanker coordinates System.
- Determine exactly the coordinates of the end of the nozzle with respect to the tanker.
- Determination of the relative positions between both significant points: Boom Tip and Vessel Mouth as well as the vectors orthogonal to their surfaces.

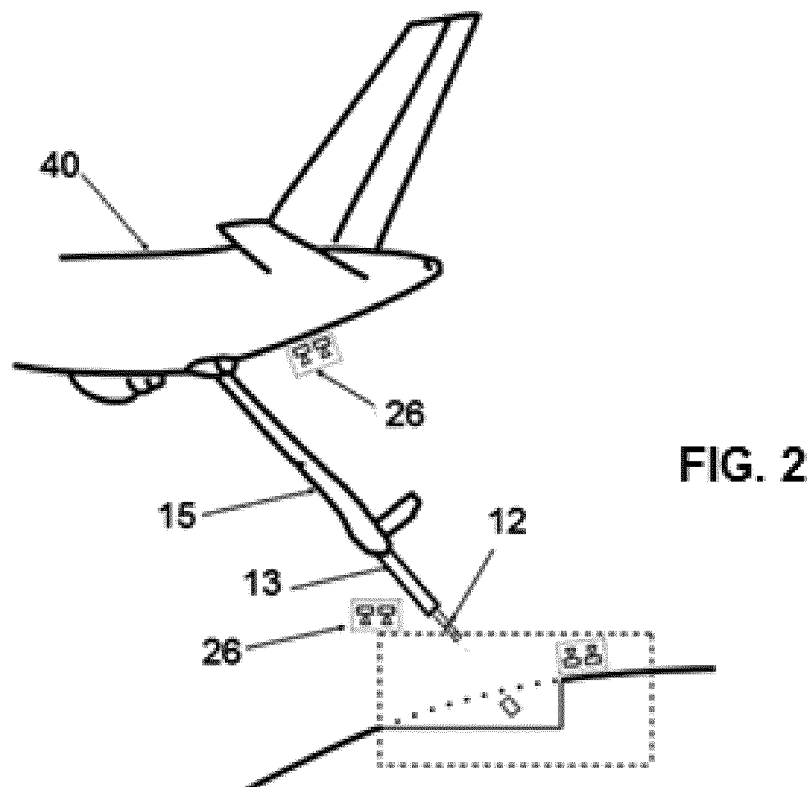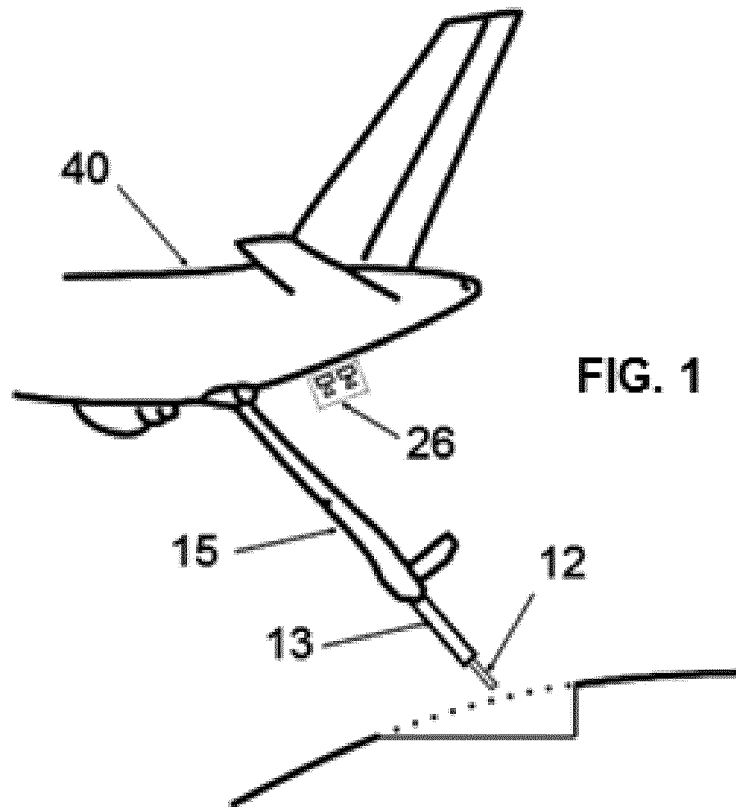

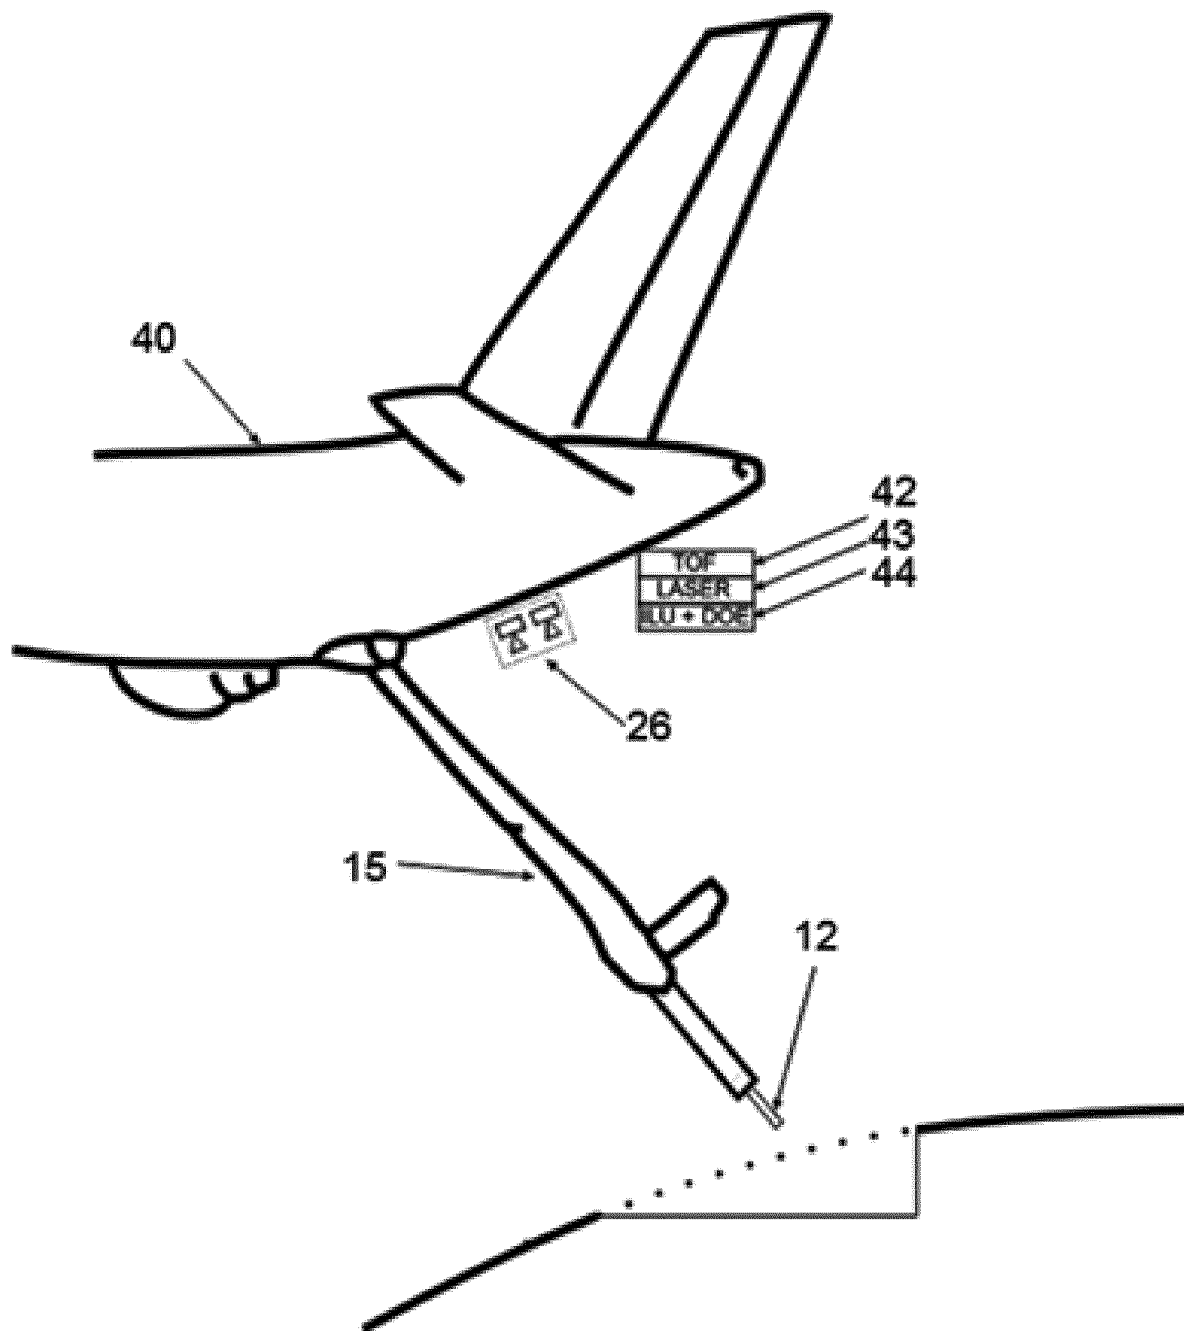


FIG. 3

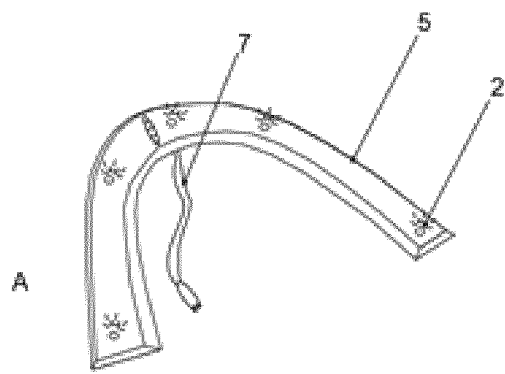


FIG. 4A

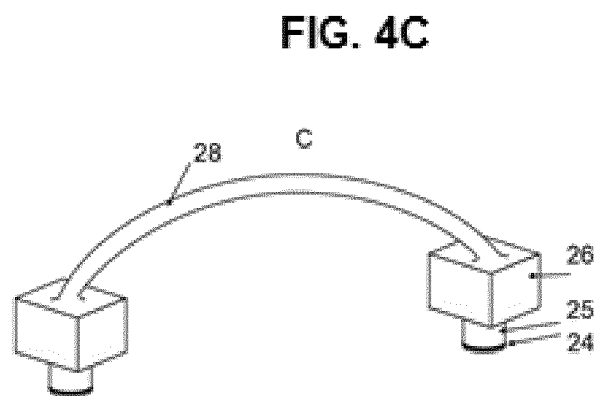


FIG. 4C




FIG. 4B

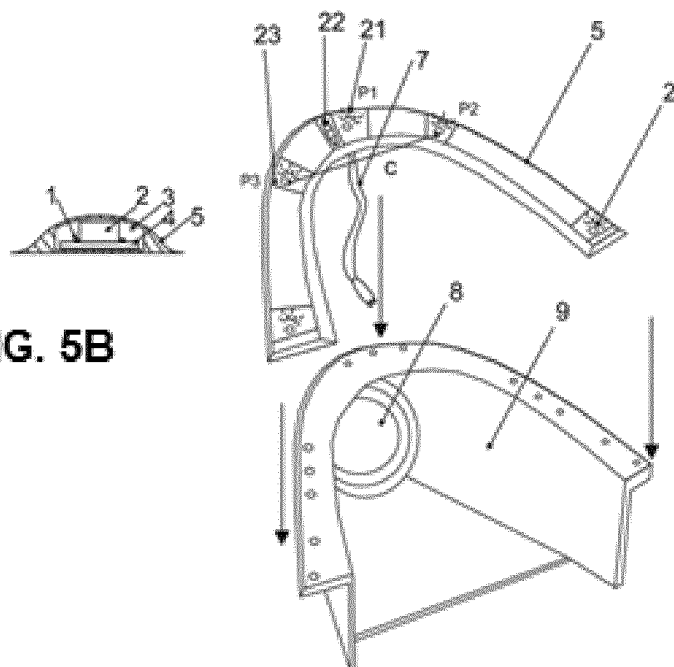


FIG. 5A

FIG. 5B

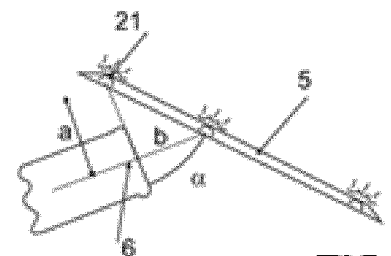


FIG. 5C




FIG. 5D

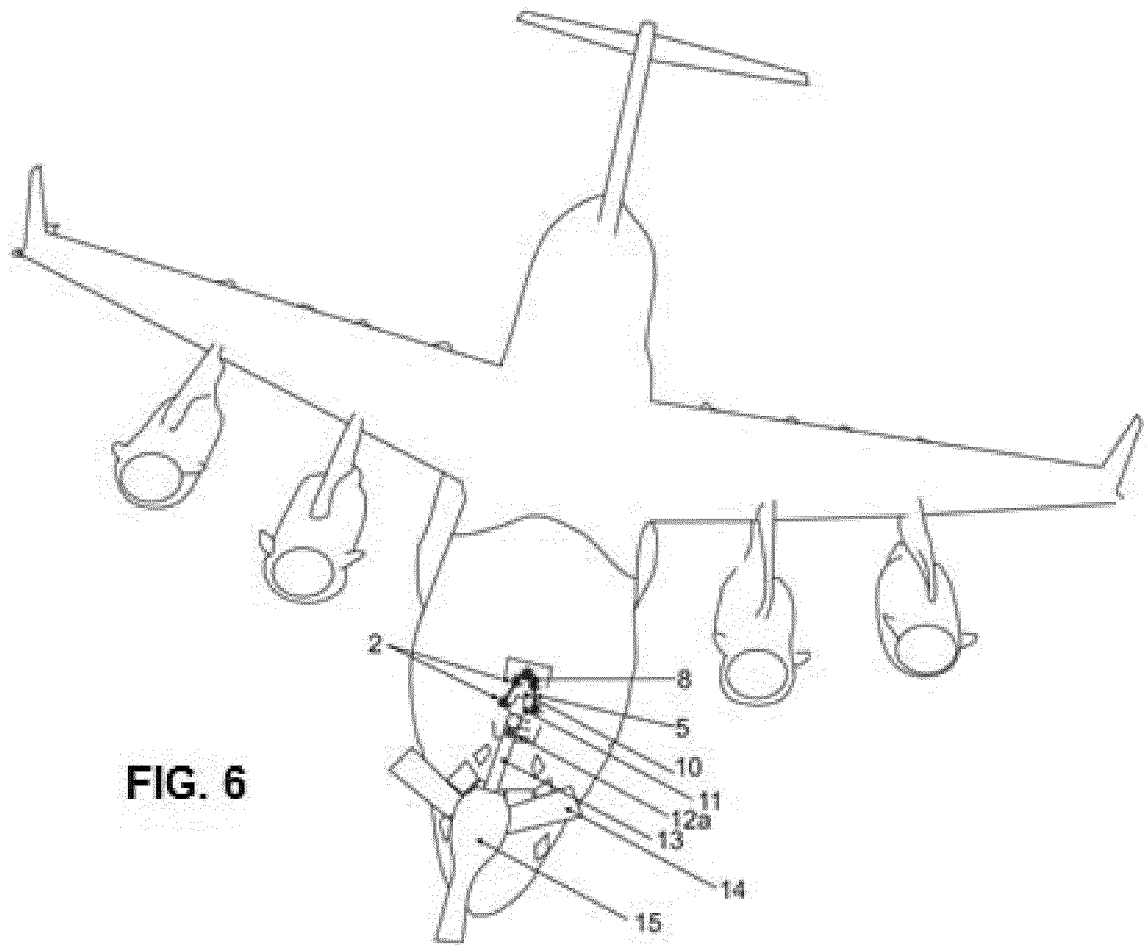


FIG. 6

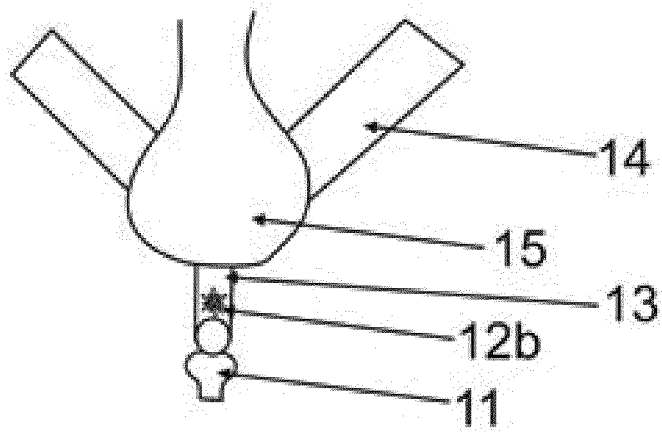


FIG. 7

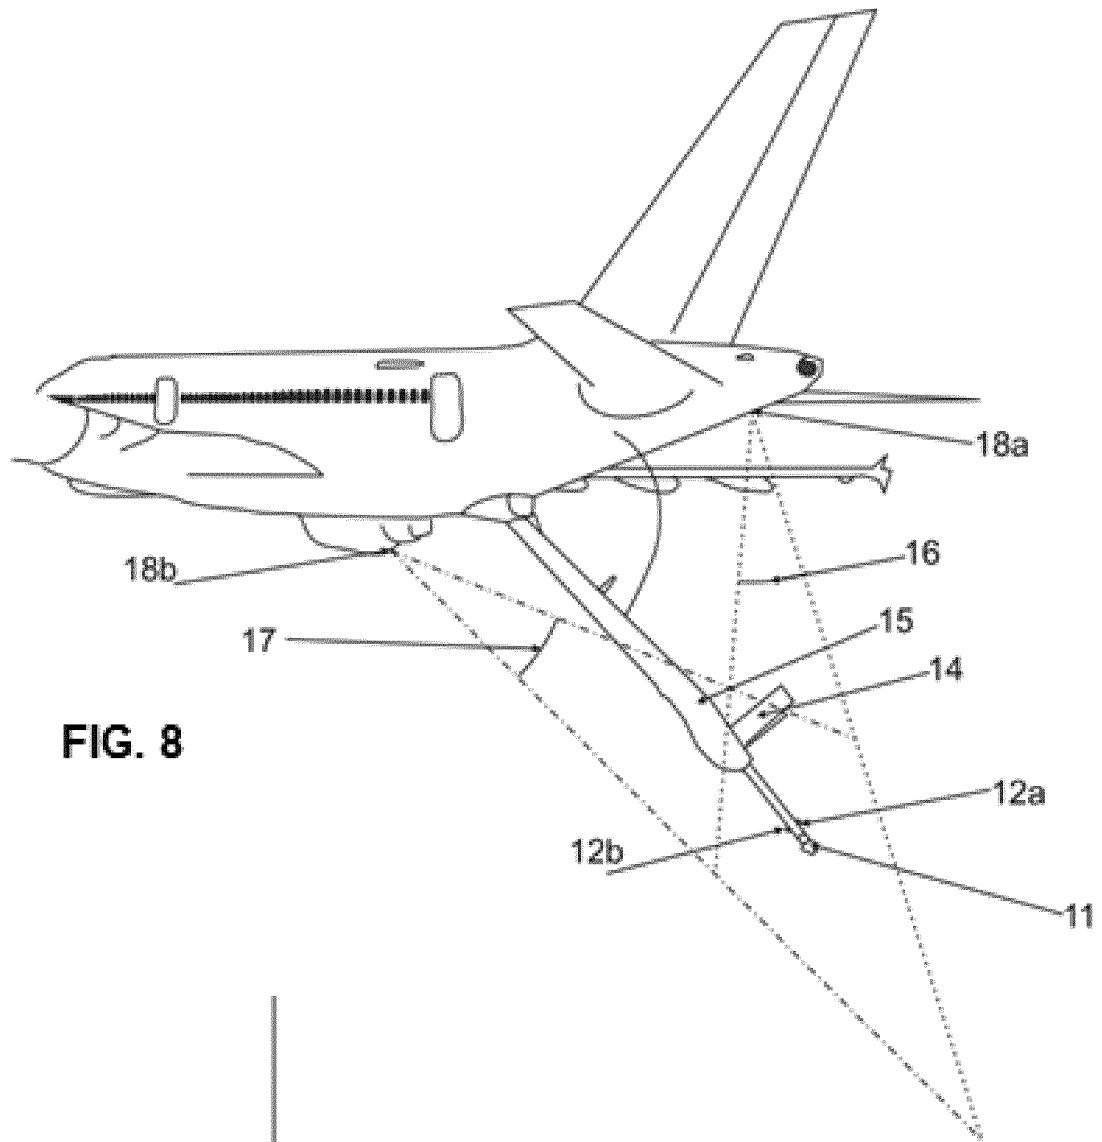


FIG. 8

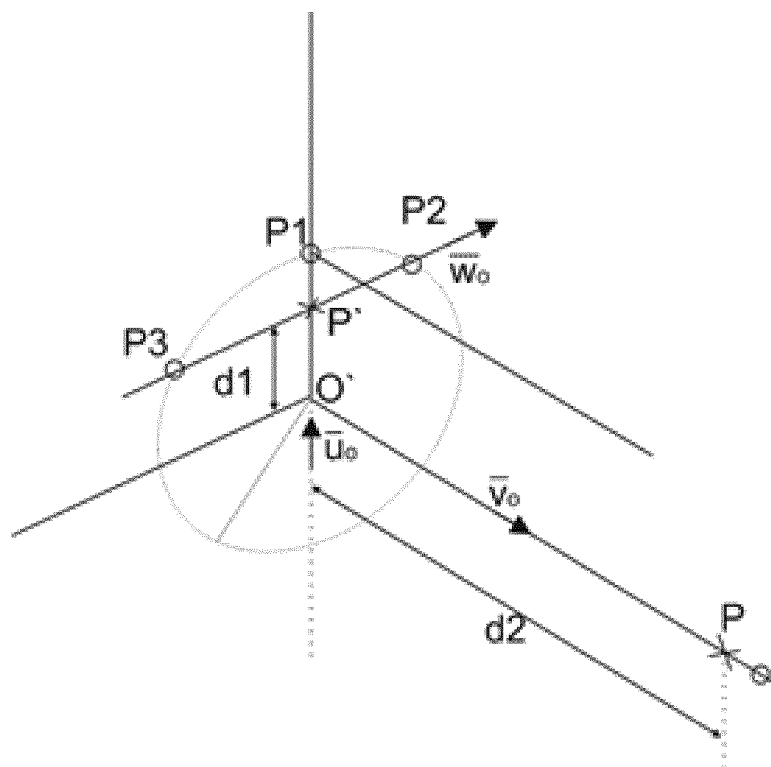


FIG. 9

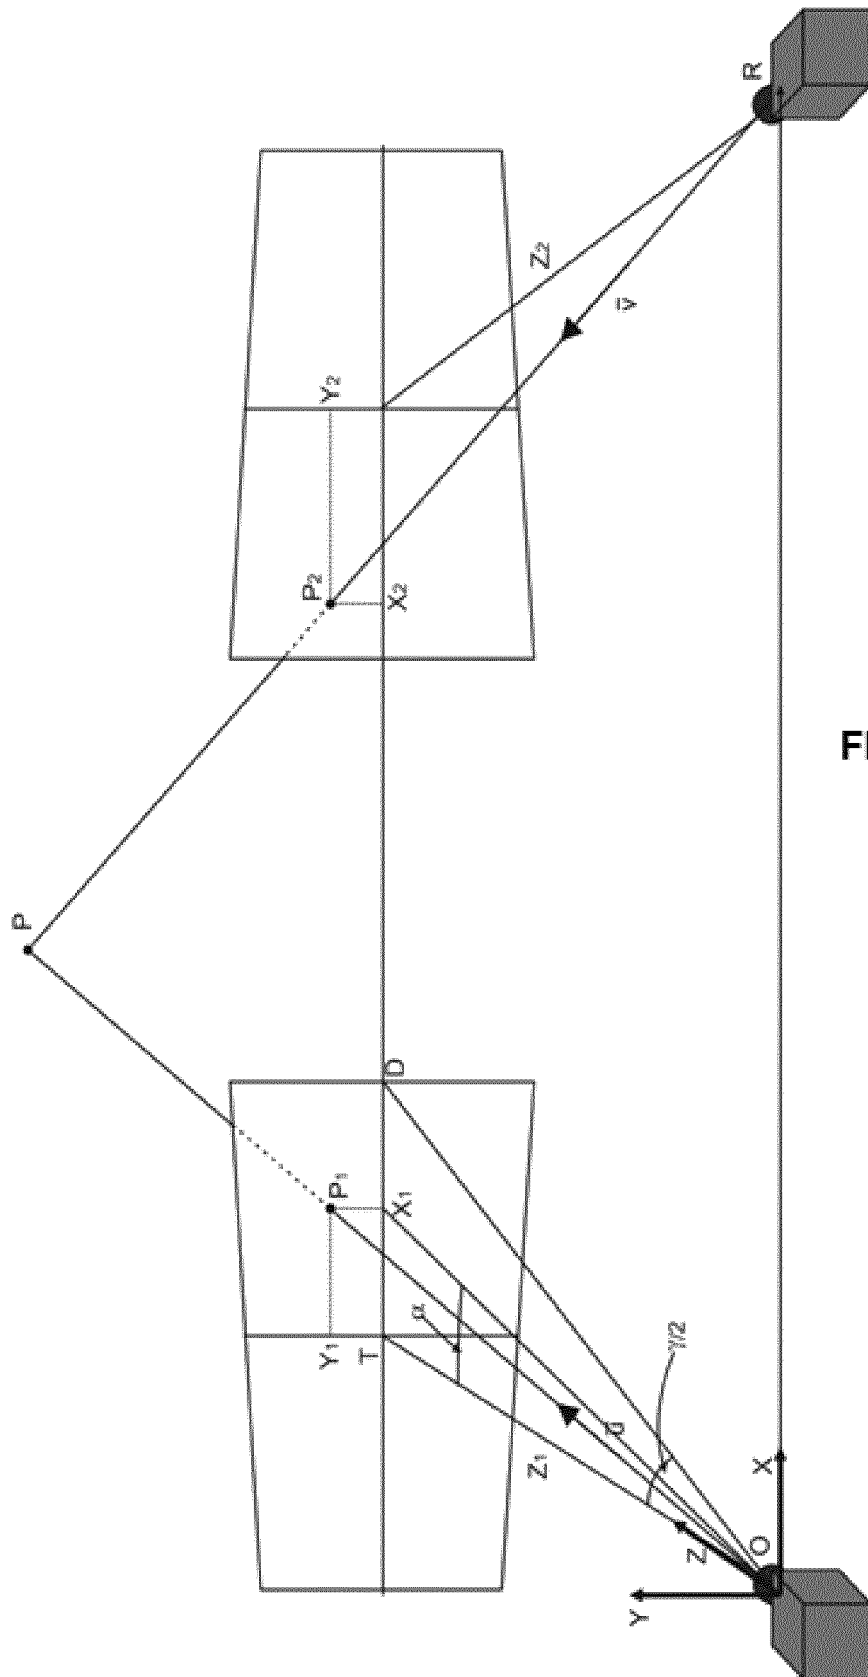


FIG. 10

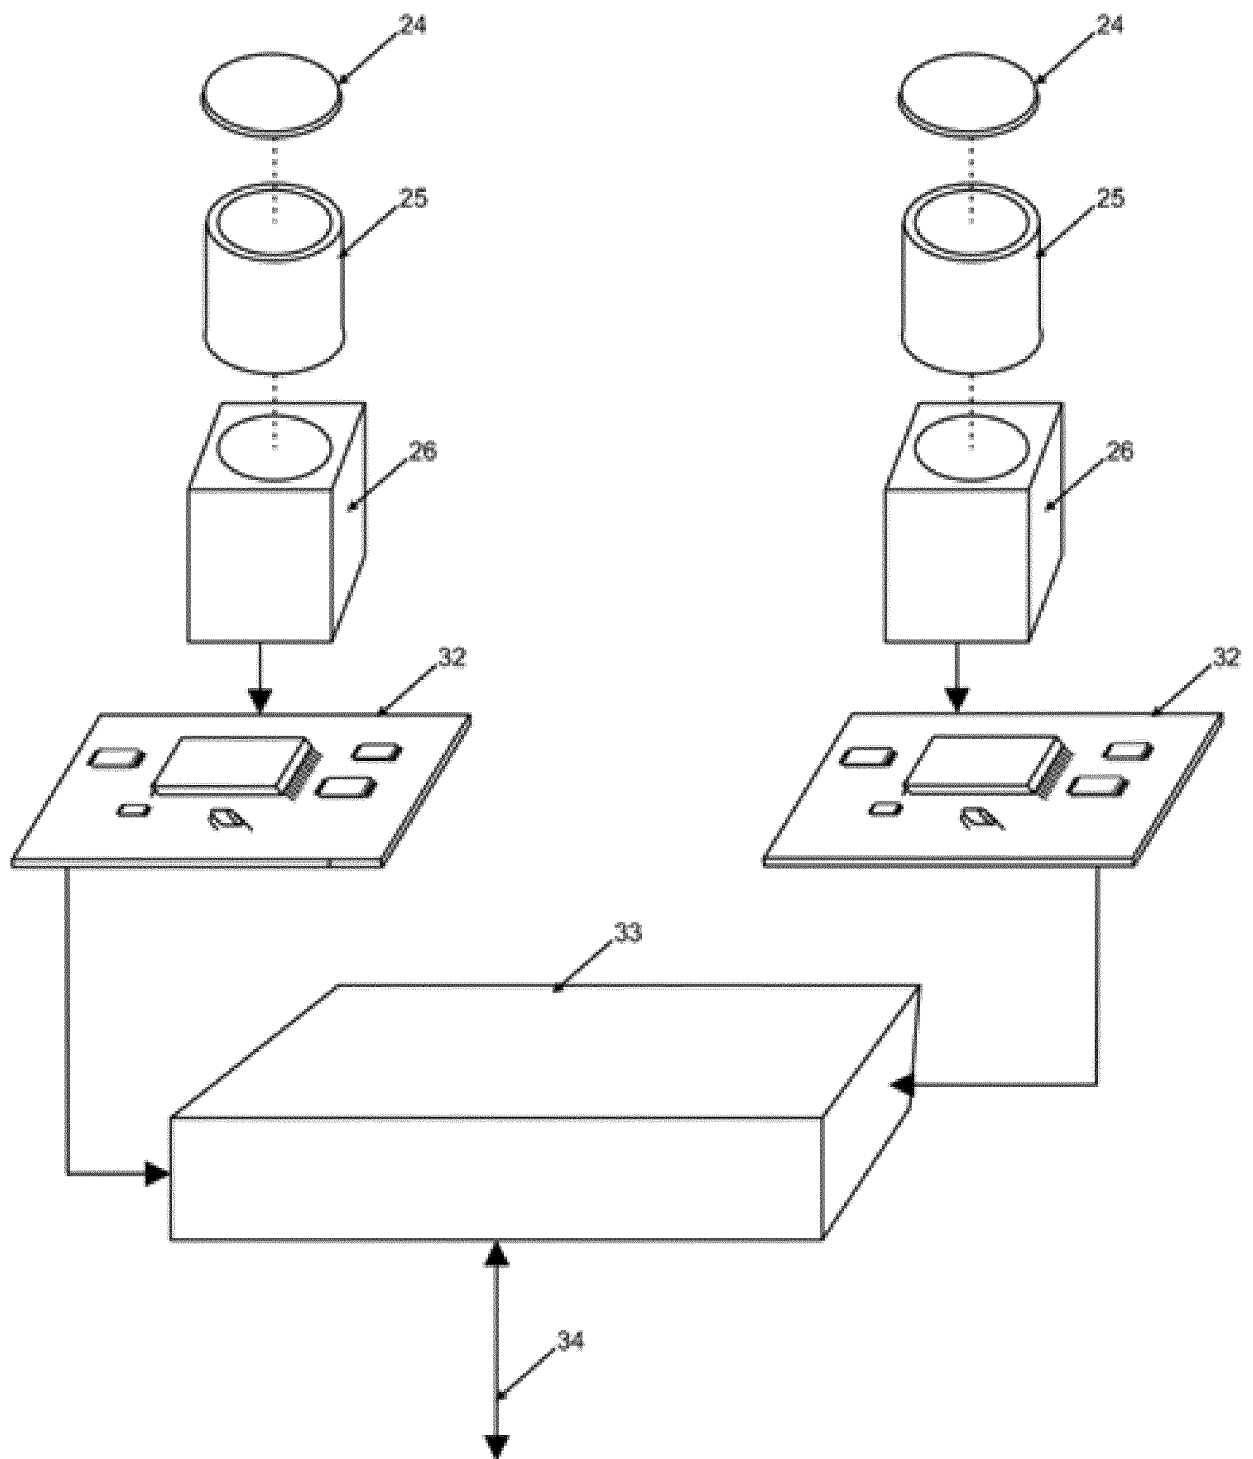


FIG. 11

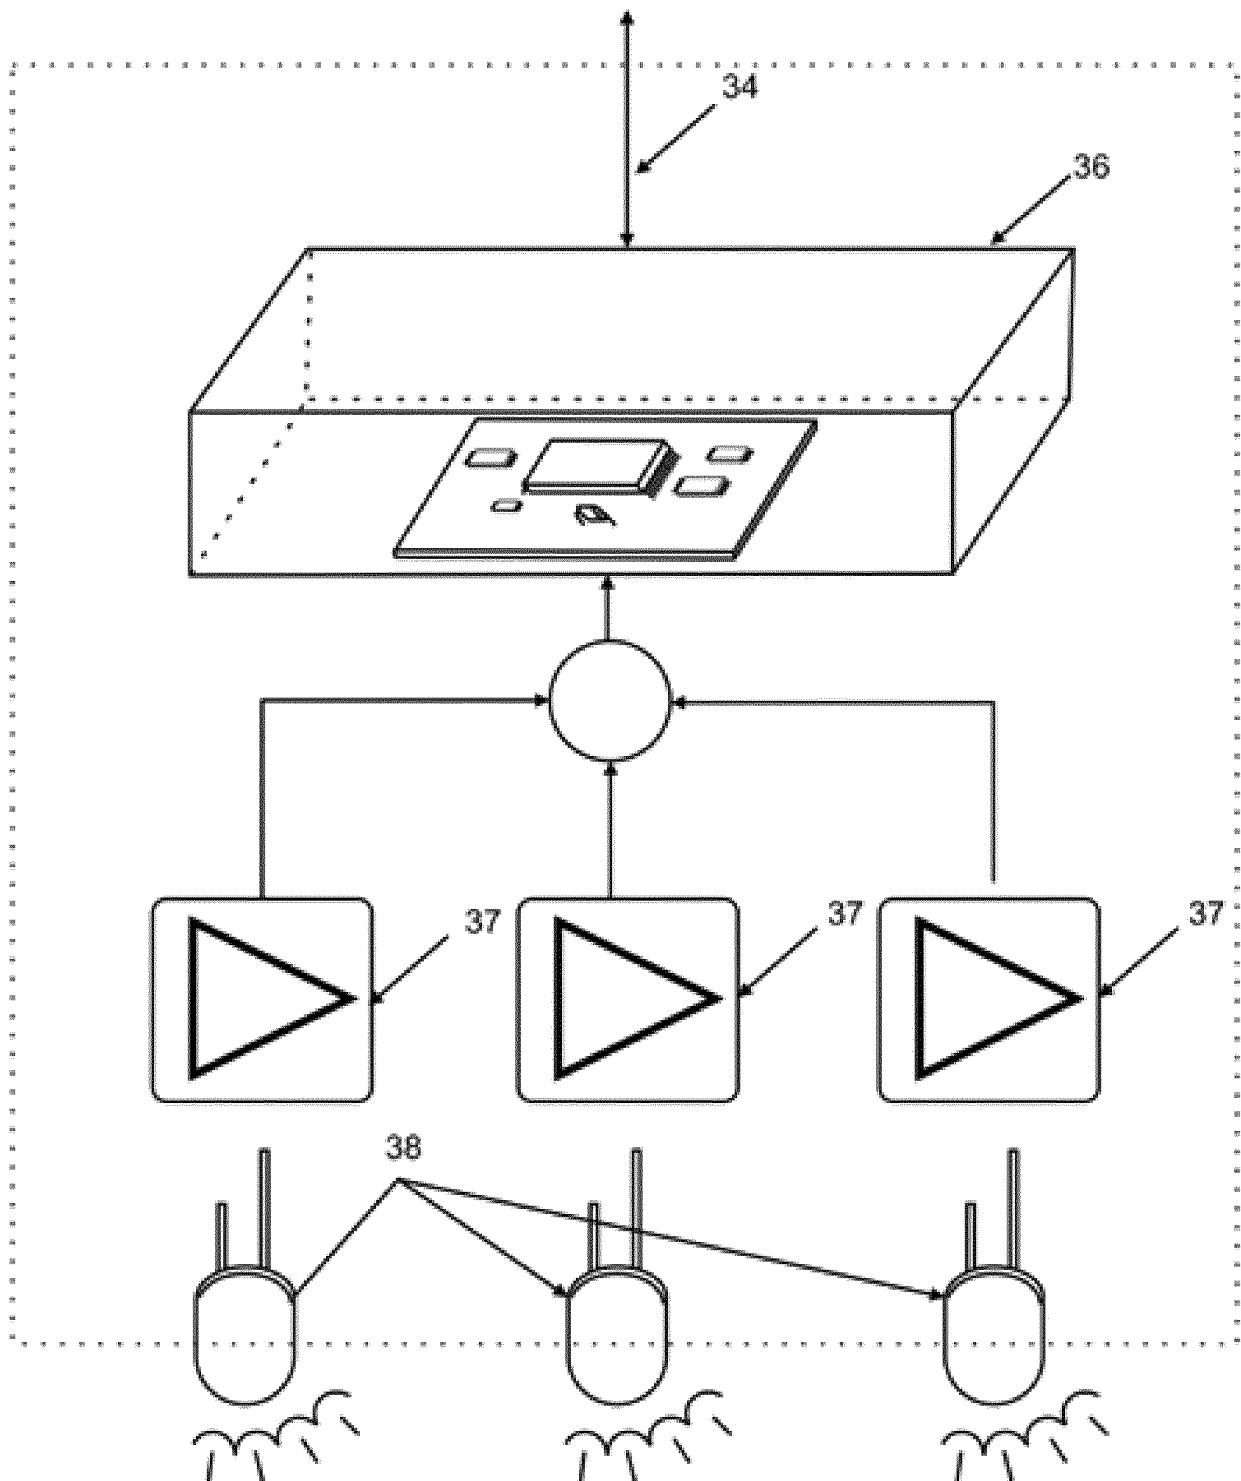


FIG. 12

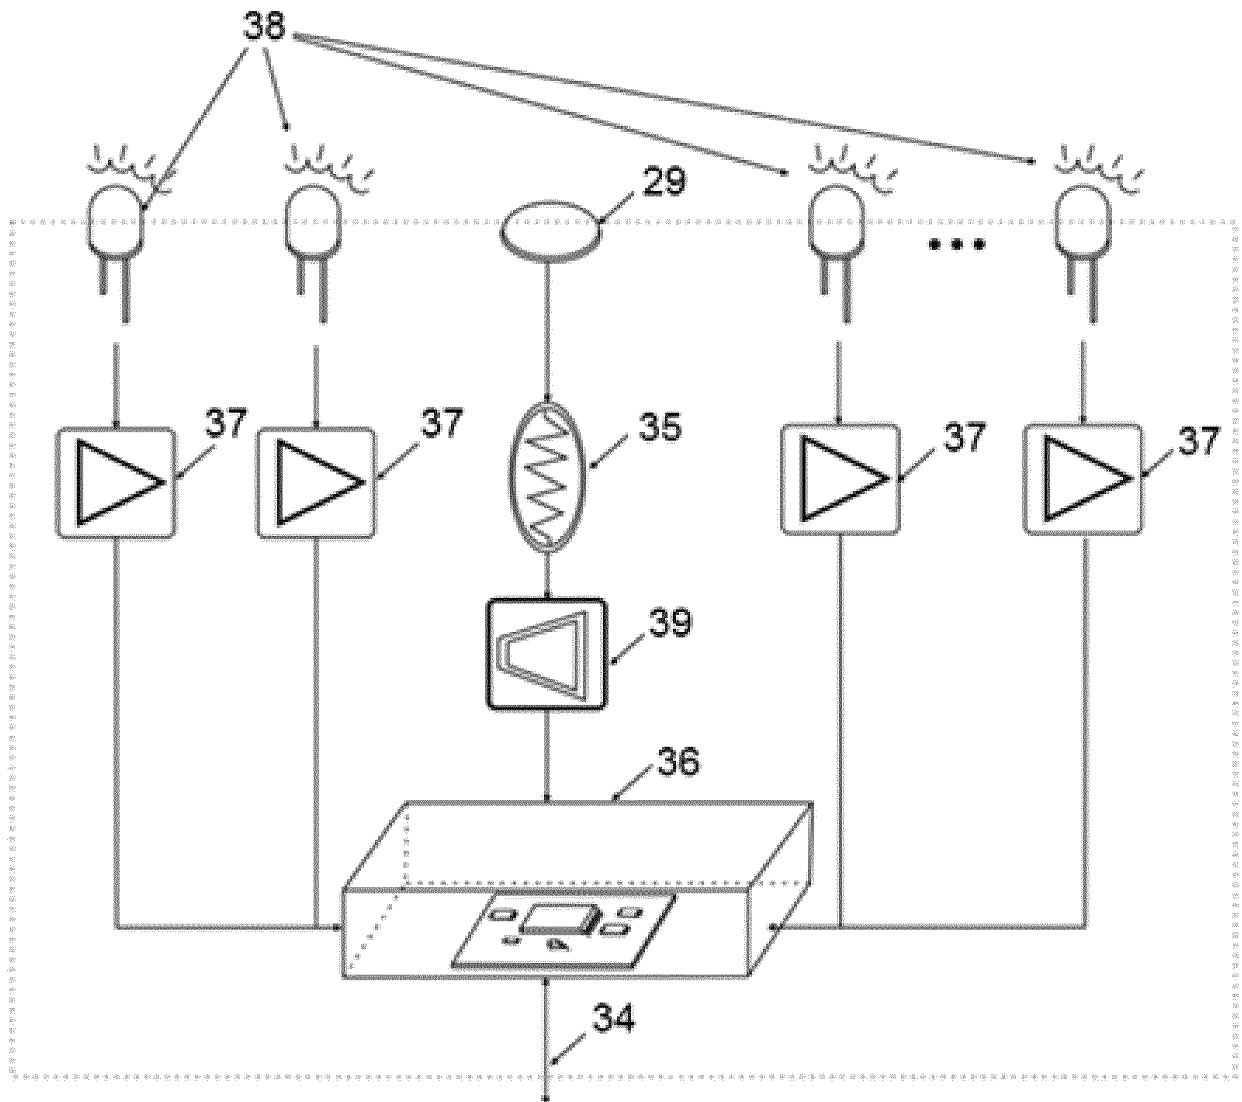


FIG. 13

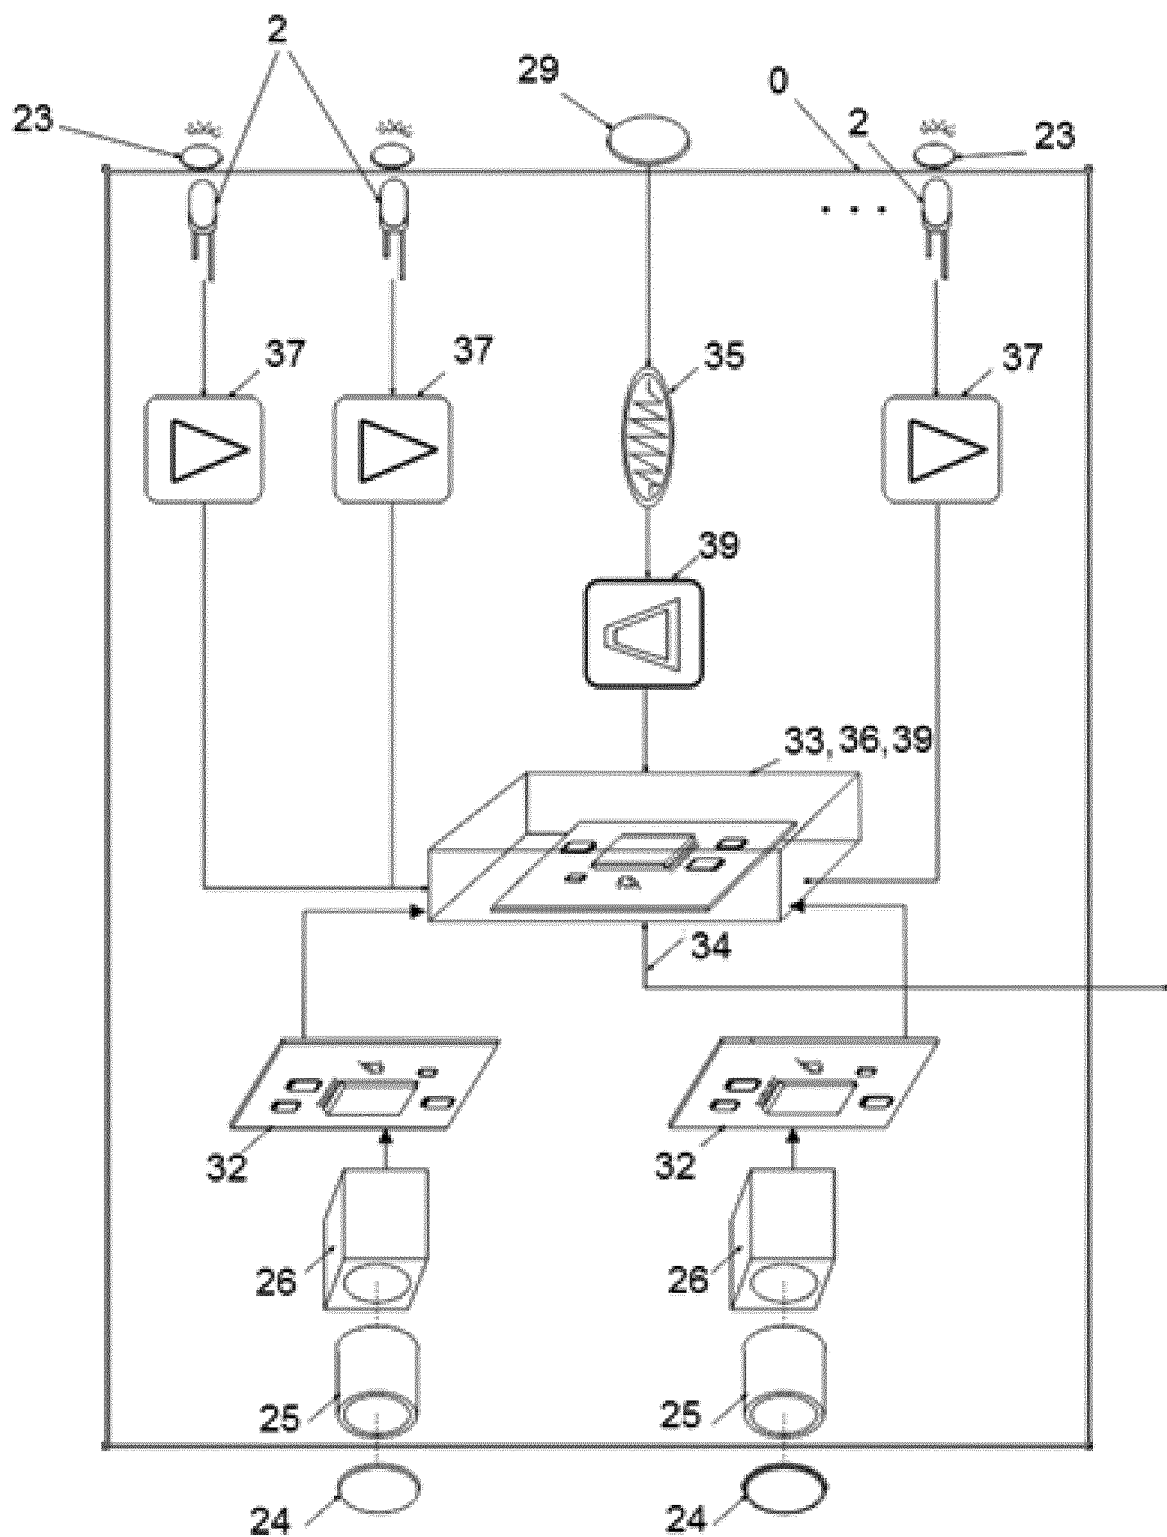


FIG. 14

INTERNATIONAL SEARCH REPORT

International application No.

PCT/ES2016/070713

A. CLASSIFICATION OF SUBJECT MATTER

See extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G05D, B64D, G01S, G06T

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPODOC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5530650 A (BIFERNO et al.) 25/06/1996; column 5, line 1 - column 7, line 7; column 9, line 51 - column 10, line 59; figures 1 - 5, 14.	1, 13
A		5, 15-16
Y	US 2003/0205643 A1 (VON THAL et al.) 06/11/2003; paragraphs [0020] - [0040]; figures 1 - 6.	1, 13
A		7
A	US 6966525 B1 (SCHROEDER) 22/11/2005; the whole document.	1-2, 5-6, 8-9, 14-16
A	US 2003/0209633 A1 (VON THAL et al.) 13/11/2003; paragraphs [0022] - [0032]; figures 1 - 5.	1, 5, 15-16

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance.

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure use, exhibition, or other means.

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

16/11/2016

Date of mailing of the international search report

(17/11/2016)

Name and mailing address of the ISA/

OFICINA ESPAÑOLA DE PATENTES Y MARCAS

Paseo de la Castellana, 75 - 28071 Madrid (Spain)

Facsimile No.: 91 349 53 04

Authorized officer

L. Dueñas Campo

Telephone No. 91 3495342

Form PCT/ISA/210 (second sheet) (January 2015)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/ES2016/070713

C (continuation).	DOCUMENTS CONSIDERED TO BE RELEVANT	
Category *	Citation of documents, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2012/0261516 A1 (GILLILAND et al.) 18/10/2012; paragraphs [0019] - [0021], [0041]; figures 1 - 3, 7.	1, 6, 15-16
A	US 4025193 A (POND et al.) 24/05/1977.	
A	WO 01/02875 A2 (LOCKHEED) 11/01/2001.	
A	EP 2879312 A1 (EADS CONSTRUCCIONES AERONÁUTICAS) 03/06/2015.	

Form PCT/ISA/210 (continuation of second sheet) (January 2015)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/ES2016/070713

Information on patent family members

Patent document cited in the search report	Publication date	Patent family member(s)	Publication date
US 5530650 A	25.06.1996	NONE	
US 2003/0205643 A1	06.11.2003	US2004069904 A1 US6837462 B2 US6651933 B1	15.04.2004 04.01.2005 25.11.2003
US 6966525 B1	22.11.2005	AT504496T T WO2006091217 A1 EP1761432 A1 EP1761432 B1	15.04.2011 31.08.2006 14.03.2007 06.04.2011
US 2003/0209633 A1	13.11.2003	US6752357 B2	22.06.2004
US 2012/0261516 A1	18.10.2012	US2015346344 A1 US8976340 B2	03.12.2015 10.03.2015
US 4025193 A	24.05.1977	US3917196 A	04.11.1975
WO 01/02875 A2	11.01.2001	AU1186301 A	22.01.2001
EP 2879312 A1	03.06.2015	US2015249498 A1 EP2879314 A1	03.09.2015 03.06.2015

Form PCT/ISA/210 (patent family annex) (January 2015)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/ES2016/070713

5

CLASSIFICATION OF SUBJECT MATTER

G05D1/10 (2006.01)

B64D39/00 (2006.01)

10

G01S17/88 (2006.01)

G06T7/20 (2006.01)

15

20

25

30

35

40

45

50

55

Form PCT/ISA/210 (extra sheet) (January 2015)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6966525 B1 [0010]
- US 6752357 B [0011]