

(19)



(11)

**EP 3 364 037 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**18.03.2020 Bulletin 2020/12**

(51) Int Cl.:  
**F04D 17/16** <sup>(2006.01)</sup> **F04D 25/06** <sup>(2006.01)</sup>  
**F04D 29/30** <sup>(2006.01)</sup> **F04D 29/42** <sup>(2006.01)</sup>  
**F04D 29/70** <sup>(2006.01)</sup>

(21) Application number: **18157533.3**

(22) Date of filing: **20.02.2018**

**(54) RADIAL BLOWER FOR SUCTION HOODS**

RADIALGEBLÄSE FÜR ABSAUGHAUBE

SOUFFLANTE RADIALE POUR HOTTE D'ASPIRATION

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB  
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO  
PL PT RO RS SE SI SK SM TR**

(30) Priority: **20.02.2017 IT 201700018600**

(43) Date of publication of application:  
**22.08.2018 Bulletin 2018/34**

(73) Proprietor: **ELICA S.p.A.**  
**60044 Fabriano (AN) (IT)**

(72) Inventors:  
• **TANTALO, Fabio**  
**60044 Fabriano (AN) (IT)**

• **ANTONINI, Paolo**  
**60044 Fabriano (AN) (IT)**  
• **CATALINI, Gianluca**  
**60044 Fabriano (AN) (IT)**

(74) Representative: **Leihkauf, Steffen Falk**  
**Jacobacci & Partners S.p.A.**  
**Via Senato, 8**  
**20121 Milano (IT)**

(56) References cited:  
**EP-A2- 0 985 829 EP-A2- 1 967 740**  
**DE-A1-102015 213 471 JP-A- S5 372 205**  
**JP-U- H 046 600 US-A1- 2010 183 433**

**EP 3 364 037 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

**[0001]** The present invention relates to a radial blower, in particular for suction hoods, of the type comprising a housing with two axial and opposite air suction openings and a radial air outlet opening, as well as a conveying unit with an electric motor and an impeller located inside the housing.

**[0002]** Radial blowers of the aforesaid type are known, for example, from EP2365224, EP0985829, JPH046600 and US2010/183433.

**[0003]** The blowers of the prior art have some disadvantages. They exhibit a high consumption of electrical energy and a limited maximum flow rate (the drawn electrical energy being the same), and therefore a still unsatisfactory energy efficiency.

**[0004]** The known blowers exhibit a high back-pressure gradient, unsteady vortexes and unplanned flow separations at the outlet opening.

**[0005]** At the suction openings, the known blowers exhibit resistance and losses of kinetic energy of the conveyed gas due to the sudden change of the air flow direction, with undesired flow separations and local vortexes.

DE102015213471 describes a fan module having a housing with a flow channel, wherein a sound-insulating element is arranged in the flow channel.

JPS5372205 describes a muffler for reducing noise generated during operation of a centrifugal blower.

**[0006]** It is thus the object of the present invention to provide a radial blower of the aforesaid type having features such as to solve at least some of the drawbacks mentioned with reference to the prior art.

**[0007]** It is a particular object of the invention to suggest a radial blower which is improved from the fluid-dynamic point of view, so as to reduce the energy consumption, the flow rate being equal, and to increase the maximum flow rate, the size and drawn electrical power being equal.

**[0008]** It is a further object of the invention to suggest a radial blower which exhibits low noise and vibration levels, by virtue of an improved fluid-dynamic geometry.

**[0009]** These and other objects are achieved by a radial blower according to appended claim 1.

**[0010]** Preferably, guide spokes are formed in at least one of the suction openings, such guide spokes extending from a radially outer zone of the suction opening towards a radially more inner zone and having a shape such as to divert the air flow entering the suction opening towards the rotation direction of the impeller.

**[0011]** The guide spokes form "static blades", capable of directing the flow, optimizing its trajectory, and conferring a motion in the same direction of movement as the impeller. This reduces the necessary torque and improves the energy efficiency of the blower.

**[0012]** According to the invention, a tangential outlet portion of the housing forms an outlet channel delimited by a (radially) outer wall portion and a (radially) inner wall portion opposite to the outer wall portion.

**[0013]** Preferably, a guide core is formed by a peripheral wall of the housing and by the inner wall has a cusp-shaped cross section (on a section plane orthogonal to the rotation axis), converging towards a free edge and wherein said free edge is substantially rectilinear and parallel to the rotation axis.

**[0014]** According to the invention, the outlet channel and the outlet opening define a flow section delimited by:

- a flat base parallel to the rotation axis, and
- an arc-shaped delimitation, the ends of which are connected to the ends of the flat base

**[0015]** The tunnel-shaped configuration of the outlet channel with flat base and upper arc-shaped delimitation contributes to reducing the back-pressure gradient, which acts against the flow direction, reduces unplanned flow separations and increases both the energy efficiency and the mass flow rate, the exterior dimensions and motor type being equal.

**[0016]** In order to better understand the invention and appreciate the advantages thereof, some non-limiting exemplary embodiments will be described below with reference to the drawings, in which:

figure 1 is an exploded, perspective view of a radial blower according to the invention;

figure 2 is a front view of the radial blower in figure 1;

figures 3 and 4 are two opposite side views of the radial blower in figure 1;

figure 5 is a perspective view of a half-shell of the housing of the radial blower in figure 1;

figures 6 and 7 are inlet opening views of the housing of the blower in figure 1;

figures 8 and 9 are views of details of the inlet openings shown in figures 6 and 7 with indication of some characteristic geometric parameters;

figure 10 is a cross-section view (taken along a section plane X-X tangential to a circumference of the rotation axis of the motor) of a guide spoke of an air inlet opening, on the side opposite to the motor side, in a radially inner region;

figure 11 is a cross-section view (taken along a section plane XI-XI tangential to a circumference of the rotation axis of the motor) of a guide spoke of the air inlet opening, on the side opposite to the motor side, in a radially outer region;

figure 12 is a cross-section view (taken along a section plane XII-XII tangential to a circumference at the rotation axis of the motor) of a guide spoke of an air inlet opening on motor side;

figures 13 and 14 are section views, taken according to a plane perpendicular to the rotation axis, of a sequence of blades of the impeller of the blower, with the indication of some characteristic geometric parameters, according to embodiments;

figure 15 is a radial section view of a half-shell of the housing of the blower according to an embodiment;

figure 16 is an enlarged view of a detail in figure 15; figures 17 and 18 are side views of an inner side of a half-shell of the housing of the blower, with the indication of some characteristic geometric parameters, according to an embodiment; figure 19 is a view of an outlet zone of the blower according to an embodiment, figure 20 shows an impeller for the blower according to an embodiment.

**[0017]** A radial blower, in particular for household suction hoods, is indicated as a whole by reference numeral 1 in the figures. The blower 1 defines a rotation axis R of the impeller and the definitions of "axial", "radial", "circumferential" and "peripheral" position or orientation refer to the rotation axis R or to geometric shapes developed around the rotation axis R. Furthermore, in the present description, the expression "radially inward" means "in approximation towards the rotation axis R" and the expression "radially outward" means "moving away from the axis of rotation R".

**[0018]** The blower 1 comprises a housing 2 with a first axial suction opening 3 and a second axial suction opening 4, opposite to the first suction opening 3, and a radial or tangential air outlet opening 5, as well as a conveying unit arranged inside the housing 2 and having an electric motor 6 and an impeller 7 connected to the rotor and/or to a drive shaft 8 of the electric motor 6.

**[0019]** The electric motor 6 is fixed to the housing 2 on two opposite sides or cantilevered on one side only and integral in rotation, e.g. by means of a plurality of portions or support spokes protruding from an edge 10 of the first suction opening 3 and, in the case of motor support on both sides, by means of an additional plurality of portions or support spokes protruding from an edge 10' of the second suction opening 4.

#### Detailed description of the housing 2

**[0020]** The housing 2 has a substantially toroidal shape with two side walls 11, 12 which delimit the suction openings 3, 4, and with a peripheral wall 13 and a substantially tangential portion 14, which forms the air outlet opening 5.

**[0021]** The housing 2 is formed by two half-shells 15, 16, which are mutually connected along a junction line 17 in the peripheral wall 13 by complementary junction edges 18, which may be step- or groove-shaped so as to create a labyrinth connection interface, and possibly one or more alignment pins 19 protruding from the junction edge 18 of one of the half-shells 15, 16 respectively and accommodated in corresponding alignment holes 20 formed in the junction edge 18 of the other half-shell. The junction edges 18 may also comprise flanges or junction reliefs 22 protruding radially outwards from the housing 2 and having an undercut to accommodate one or more clips or junction profiles 21, in particular "Ω"- or "C"-shaped clips, or alternatively holes to receive connecting screws, which lock the two half-shells 15, 16 against each

other.

**[0022]** This results in a simple, sturdy and particularly accurate assembly of the housing.

**[0023]** The suction openings 3, 4 are preferably substantially circular and coaxial with the impeller 7, which is also circular.

**[0024]** The housing 2 internally delimits a circumferential conveying space 27, which gradually widens in radial direction from a zone with a minimum initial section 28 to a zone with a maximum final section 29 (Figure 18). The radial extension with respect to the rotation axis R of the minimum initial section 28 is preferably in the range from 75 mm to 85 mm and the radial extension with respect to the rotation axis R of the maximum final section 29 is preferably in the range from 115 mm to 130 mm.

#### Description of the suction openings 3, 4

**[0025]** The suction openings 3, 4 comprise protection grids 24, 25, which can also form the structure for supporting the motor unit 6 - impeller 7.

**[0026]** The protection grid 24, 25 may also be formed in one piece with the respective side walls 11, 12 or with the respective half-shells 15, 16 or manufactured separately and then applied thereon.

**[0027]** According to an embodiment (Figure 1), the first suction opening 3 (motor side), the first protection grid 24 for the first suction opening 3 and a structure for supporting the motor 6 are formed by a support plate 23 that has been made separately and then connected to the first half-shell 15, e.g. by means of screws or rivets, by snap-fitting, or by other fixing means.

**[0028]** Advantageously, the support plate 23 and the motor 6 may be connected to each other to form a pre-assembled grid-motor unit, which can be mounted on the first half-shell 15.

**[0029]** According to an alternative embodiment, the support plate 23 is formed in one piece with the first half-shell 15, thereby obtaining a direct support of the motor 6 on the half-shell.

**[0030]** The second suction opening 4 (side opposite to motor side), the second protection grid 25 for the second suction opening 4 and, if provided, an additional portion for supporting the motor 6, can be formed in one piece with and by the second half-shell 16 (Figure 3) or alternatively by a second plate, made separately and then connected to the second half-shell 16, e.g. by means of screws or rivets, by snap-fitting or by means of other fixing means (not shown).

**[0031]** One or both the protection grids 24, 29 and/or the motor supporting structure form a plurality of guide spokes 9, 9' extending from a radially outer zone of the suction opening 3, 4 towards a radially more inner zone and having a shape such as to divert the airflow which enters into the suction opening 3, 4 towards the rotation direction of the impeller 7. In this manner, the guide spokes 9, 9' form "static blades", capable of directing the flow, optimizing its trajectory, and conferring a motion in

the same direction of movement as the impeller 7. This reduces the necessary torque and improves the energy efficiency of the blower 1.

**[0032]** According to an embodiment, the guide spokes 9, 9' form a substantially rectilinear outer edge 64 (with respect to the housing 2) to improve the uniformity of the outer shape, which is important for the protection function, and to reduce flow resistance. The guide spokes 9, 9' are preferably inclined "ahead", i.e. with the radially outer end arranged more forward than the radially inner end, observed in the rotation direction of the impeller (Figure 3, 4). Like rotating blades, this configuration of the "static blading" consisting of the guide spokes 9, 9' conciliates the need to minimize energy losses and flow resistance with the need to divert flow in the rotation direction of the impeller 7.

**[0033]** The guide spokes 9, 9' are plate-shaped with a cross section (taken along a section plane tangential to the rotation axis R) inclined with respect to the axial direction and possibly curved in the shape of an arc (Figure 10, 11, 12).

**[0034]** According to an advantageous embodiment (Figure 12), the guide spokes 9 of the first suction opening 3 have a concave front surface 62, facing the rotation direction of the impeller 7, a convex rear surface 63, opposite to the front surface 62, the axially outer edge 64 (preferably flat) and a surface 65 of the axially inner, preferably rounded edge. On a section plane tangential with respect to the rotation axis R,

- the front surface 62 has a concave arc shape, e.g. the arc of a circle,
- the rear surface 63 has a convex arc shape, e.g. the arc of a circle,
- possibly, the thickness of guide spoke 9 gradually tapers from the axially outer edge 64 to the axially inner edge 65.

**[0035]** The exit angle  $\alpha_{ua}$  of the front surface 62 of the guide spoke 9 (motor side), seen in section taken along the plane tangential to the rotation axis R (the orientation angle of the front surface 62 at the axially inner end 65 in the rotation direction with respect to the axial direction) is in the range between 7° and 11°, preferably about 9°.

**[0036]** The exit angle  $\alpha_{up}$  of the rear surface 63 of the guide spoke 9 (motor side), seen in section taken along the plane tangential to the rotation axis R (the orientation angle of the rear surface 63 at the axially inner end 65 in the rotation direction with respect to the axial direction) is in the range between 3° and 6°, preferably about 4.8°.

**[0037]** The entry angle  $\alpha_{ia}$  of the front surface 62 of the guide spoke 9 (motor side), seen in section taken along the plane tangential to the rotation axis R (the orientation angle of the front surface 62 at the axially outer end 64 in the rotation direction with respect to the axial direction) is in the range between 60° and 74°, preferably

about 67,8°.

**[0038]** The entry angle  $\alpha_{ip}$  of the rear surface 63 of the guide spoke 9 (motor side), seen in section taken along the plane tangential to the rotation axis R (the orientation angle of the rear surface 63 at the axially outer end 64 in the rotation direction with respect to the axial direction) is in the range between 42° and 60°, preferably about 51,4° (Figure 12).

**[0039]** More generally, considering a mean line of the section profile of the guide spoke 9, the entry angle of the guide spoke 9 is greater than the exit angle of the guide spoke 9.

**[0040]** Advantageously, the guide spokes 9 of the first suction opening 3 (motor side) have a substantially constant section shape along their longitudinal extension, except for the radially outer and inner ends.

**[0041]** The axially inner end 65 of the guide spoke 9 is positioned ahead in the rotation direction with respect to the axially outer end 64 of the same guide spoke 9. The chord 66 of the spokes 9 (indicated in Figure 12) has a chord orientation angle 67 in the rotation direction with respect to the axial direction comprised between 33° and 43°, advantageously about 38°.

**[0042]** According to an advantageous embodiment (Figure 10, 11), the guide spokes 9' of the second suction opening 4 (side opposite to the motor side) can have a warp or twist along a longitudinal axis thereof. Advantageously, the width of the profile of the guide spokes 9' increases from a minimum width (Figure 10) near the radially inner end to a maximum width (Figure 11) near the radially outer end.

**[0043]** The guide spokes 9' have a concave front surface 62', facing the rotation direction of the impeller 7, a convex rear surface 63', opposite to the front surface 62', the axially outer edge 64' (preferably flat) and a surface 65' of the (preferably rounded) axially inner edge. On a section plane tangential to the rotation axis R,

- the front surface 62' is concave in the shape of an arc,
- the rear surface 63' is convex in the shape of an arc,
- possibly, the thickness of the guide spoke 9 gradually tapers from the axially outer edge 64 to the axially inner edge 65.

**[0044]** The exit angle  $\alpha_{ua}'$  of the front surface 62' of the guide spoke 9', seen in section taken along the plane tangential to the rotation axis R (the orientation angle of the front surface 62' at the axially inner end 65' in the rotation direction with respect to the axial direction) is comprised between 11° and 15°, preferably about 13.2° in the radially outer region and preferably about 13.3° in the radially inner region.

**[0045]** The exit angle  $\alpha_{up}'$  of the rear surface 63' of guide spoke 9', seen in section taken along the plane tangential to the rotation axis R (the orientation angle of the rear surface 63' at the axially inner end 65' in the rotation direction with respect to the axial direction) is in the range between 7° and 13°, preferably about 9.8° in

the radially outer region and preferably about 9.9° in the radially inner region.

**[0046]** At the radially outer end (**Figure 11**), the entry angle  $\alpha_{ia}$ ' of the front surface 62' of the guide spoke 9', seen in section taken along the plane tangential to the rotation axis R (the orientation angle of the front surface 62' at the axially outer end 64' in the rotation direction with respect to the axial direction) is in the range between 39° and 49°, preferably about 44.4°.

**[0047]** At the same radially outer end (**Figure 11**), the entry angle  $\alpha_{ip}$ ' of the rear surface 63' of the guide spoke 9', seen in section taken along the plane tangential to the rotation axis R (the orientation angle of the rear surface 63' at the axially outer end 64' in the rotation direction with respect to the axial direction) is in the range between 38° and 48°, preferably about 43.7°.

**[0048]** More generally, considering a mean line of the section profile of the guide spoke 9', the entry angle of the guide spoke 9' is greater than the exit angle of the guide spoke 9'.

**[0049]** The axially inner end 65' of the guide spoke 9' is positioned ahead in the rotation direction with respect to the axially outer end 64' of the same guide spoke 9'. The chord 66' of the spokes 9' (**Figures 10 and 11**) has a chord orientation angle 67' in the rotation direction with respect to the axial direction:

- greater at the radially outer end than at the radially inner end, more particularly
- comprised between 24° and 34°, advantageously about 29° at the radially outer end (**Figure 11**),
- comprised between 15° and 25°, advantageously about 20° at the radially inner end (**Figure 10**).

**[0050]** The guide spokes 9, 9' are arranged at a constant pitch, e.g. 21 guide spokes 9 on the motor side and 19 guide spokes 9' on the side opposite to the motor side.

**[0051]** Furthermore, the guide spokes 9, 9', of each suction opening 3, 4 may be connected to one another by means of one or of a plurality of reinforcement rings 68, possibly concentric to the rotation axis R. On the motor side may be provided a single reinforcement ring 68, while on the opposite side may be provided three or two reinforcement rings 68' which also act as protection to prevent access to the impeller.

**[0052]** According to an embodiment (**Figure 8**) at the first suction opening 3 (motor side), the ratio between radial extension 69 of the guide spoke 9 and the outer radius 70 of the first suction opening 3 is in the range from 0.28 to 0.4, preferably about 0.34.

**[0053]** The guide spokes 9 can extend from an inner radius 71 of the first suction opening 3 of value from 39 mm to 48 mm, preferably about 43.3 mm, to the outer radius 70 of value from 60 mm to 72 mm, preferably about 66 mm.

**[0054]** The guide spokes 9 are preferably tilted "ahead", i.e. with the radially outer end arranged more ahead than the radially inner end, seen in the rotation

direction of the impeller, with an inclination angle 72 with respect to the radial direction passing through the radially inner end of the guide spoke 9, from 5.8° to 7.3°, preferably about 6.7° (**Figure 8**).

**[0055]** According to an embodiment (**Figure 9**) at the second suction opening 4 (side opposite to the motor side), the ratio between the radial extension 69' of the guide spoke 9' and the outer radius 70' of the second suction opening 4 is comprised in the range from 0.5 to 0.7, preferably about 0.58.

**[0056]** The guide spokes 9 can extend from an inner radius 71' of the second suction opening 4 of value from 22 mm to 32 mm, preferably of about 27.4 mm, to an outer radius 70 mm of value from 60 mm to 72 mm, preferably about 66 mm.

**[0057]** The guide spokes 9' are preferably tilted "ahead", i.e. with the radially outer end arranged more ahead than the radially inner end, seen in the rotation direction of the impeller, with an inclination angle 72' with respect to the radial direction passing through the radially inner end of the guide spoke 9', from 10° to 16°, preferably about 13.6° (**Figure 9**).

**[0058]** According to an embodiment, the guide spokes 9, 9' also protrude axially towards the outside of housing 2, conferring an outward bulging shape, e.g. frustoconical, to the protection grid 24, 25. In this manner, a greater axial space can be exploited for diverting the flow, the actual flow section of the suction opening 3, 4 being equal.

**[0059]** The guide spokes 9, 9' contribute to a reduction in flow resistance, an increase in flow rate, electrical power drawn by the motor being the same, in particular at high flow rates and speeds. The guide spokes 9, 9' further contribute to a more gradual distribution of the air flow deviation, a reduction of the angle of attack between the flow entering the impeller 7 and the blades 26, 43 of the impeller 7.

#### **Detailed description of the tangential outlet portion 14**

**[0060]** The tangential outlet portion 14 of the housing 2 forms an exit channel delimited by a (radially) outer wall portion 30 which connects in approximately tangential manner to the peripheral wall 13 near the final section 29 of the conveying space 27 and a (radially) inner wall portion 31, opposite to the portion of the outer wall 30 and connected to the peripheral wall 13 at the initial section 28 of protrudes approximately towards the outer wall portion 30 and/or towards the peripheral wall 13 in the transition zone with the tangential portion 14 and which determines the transition from the peripheral wall 13 to the inner wall portion 31.

**[0061]** The air outlet opening 5 is delimited by a tubular end 35 of the tangential portion 14, which comprises an outer connection flange 38 and which defines an opening plane 36 and an outlet direction 37 possibly perpendicular to the opening plane 36.

**[0062]** According to an embodiment, the guide core 32 has a cross-section (on a section plane taken along the rotation axis R), possibly in the form of a cusp, converging towards a free edge 42 substantially rectilinear and parallel to the rotation axis R and, preferably, extended from the first side wall 11 to the second side wall 12.

**[0063]** The portion of the inner wall 31 extends from the free edge 42 of the guide core 32 to the tubular end 35, up to the free end of the tangential portion 14 (**Figure 5, 18**), and has a section shape (on section plane parallel to the opening plane 36) substantially parallel to the rotation axis R, so that the outlet channel and the outlet opening 5 define (starting from the free edge 42 of the core 32) a flow section delimited by:

- a flattened, possibly flat, base 33, parallel to the rotation axis R, and
- an arc-shaped delimitation 34, the ends of which are connected to the ends of the flattened base 33.

**[0064]** The inner wall portion 31 which forms the flattened base 33 extends from the free edge 42 of the core 32 in a gradually converging manner towards a direction parallel to the direction of the apex of the opposite outer wall portion 30, seen in a section plane perpendicular to the rotation axis R (**Figure 17, 18**). Preferably, the inner wall portion 31 and the direction of the apex of the opposite outer wall portion 30 include an opening angle 77 of less than 45°, preferably in the range from 5° to 30°, more preferably in the range from 5° to 15°, seen on a section plane perpendicular to the rotation axis R.

**[0065]** The inner wall portion 31 has a circle arc shape in longitudinal cross-section, in a section plane orthogonal to the rotation axis R, having a radius greater than the outer radius of the impeller 7, preferably from 4/3 to 6/3, advantageously about 5/3, of the outer radius of the impeller 7.

**[0066]** The height 73 of the flow section of the outlet channel (measured perpendicular to the base 33) increases gradually from the free edge 42 of the core 32 to the tubular end 35, but said height 73 remains less than 70%, preferably less than 65% of the outer diameter 74 of the tubular end 35 (**Figure 17**).

**[0067]** According to a preferred embodiment, the height 73 of the flow section is about 1/2 of the outer diameter 74 of the tubular end 35 at the free edge 42 of the core 32 is about 3/5 of the outer diameter 74 of the tubular end 35 at the latter, with a tolerance of +/- 5%.

**[0068]** The configuration of the outlet channel as a "tunnel with flat base and upper arc delimitation" contributes to reducing the back-pressure gradient, which acts against the flow direction, reduces unplanned flow separations and increases both the energy efficiency and the mass flow rate, the exterior dimensions and motor type being the same.

**[0069]** In the preferred embodiment, the tubular end 35 has a cylindrical shape with a circular cross-section and the delimitation 34 forms a stretch of the circular

cross-section.

**[0070]** The same tubular end 35 and the portion of the inner wall 31, possibly together with other walls of housing 2, delimit an outer auxiliary compartment 75, which is separate with respect to both the outlet opening 5 and the conveying space 27. With particular advantage, this auxiliary compartment may accommodate an electric control board 76 for the motor 6. In this manner, the space in the gap between the peripheral wall 13 and the tangential section 14 is exploited, as well as a part of the same tangential portion 14 which is not used for conveying the air.

**[0071]** In an embodiment (**Figure 19**), the outlet opening 5 is provided with a non-return shutter flap 78, which is orientable and preferably elastically biased towards a closing position (in the direction opposite to the outlet direction of the air), and can be moved (towards the outside of the housing) to an opening position by means of the air flow thrust out of outlet opening 5. The shape and the position of the shutter flap 78 may be such as to increase, in the open position, the surface extension of the flattened base 33, extending it towards the outside of the housing. This avoids the return of fumes to the fan and further reduces the formation of vortexes and flow separations.

**[0072]** The housing 2 is advantageously made of plastic material by injection molding, in particular in polypropylene, e.g. filled with glass fibers, glass balls, talcum, etc.

#### Detailed description of the impeller 7

**[0073]** The impeller 7 comprises a first plurality of blades 26 extending between a front ring 39 (motor side) and a central wall 41, as well as a second plurality of blades 43 extending between a rear ring 44 opposite to the front ring 39 and the central wall 41, in which the second plurality of blades 43 is advantageously angularly offset with respect to the first plurality of blades 26.

**[0074]** The blades 26, 43 are arranged at constant angular pitch, e.g. 56 blades at an angular pitch of  $\beta = 6.43^\circ$ . A single "irregular" blade can be provided arranged at different distances from the adjacent blades, for example  $\beta_1 = 6.93^\circ$  and  $\beta_2 = 5.93^\circ$ .

**[0075]** This arrangement of the blades 26, 43 prevents the impeller from reaching a resonance oscillation and thus reduces the noise and vibrations of the radial blower.

**[0076]** The central wall 41 is a substantially closed wall (**Figure 1**), or is provided with cooling openings 79 (for a more effective cooling of the motor 6) alternating with radial spoke shaped closed zones 80 (**Figure 20**), with a dome- or cup-shaped central portion 45 adapted to accommodate a front portion, more precisely the rotor, of the electric motor 6, and a connection seat 46 for the fixation of the impeller 7 to the drive shaft 8 or to the rotor. The connection seat 46 may comprise a co-molded metal hub with the central portion 45 made of plastic material. The impeller 7 is advantageously injection-molded and

made of polypropylene or ABS.

**[0077]** According to an advantageous embodiment (**Figures 13, 14**), the blade 26, 43 has a concave front surface 47, facing towards the rotation direction of the impeller 7, a convex rear surface 48 opposite to the front surface 47 and a surface 49 of the radially inner edge of the blade 26, 43, in which, on a section plane perpendicular to the rotation axis R,

- the front surface 47 has a concave arc shape with a first radius of curvature 50, which increases from a minimum value in a radially inner or intermediate zone to a maximum value in a radially outer zone;
- the rear surface 48 has a convex arc shape with a second radius of curvature 51, which increases from a minimum value in a radially inner or intermediate zone to a maximum value in a radially outer zone;
- the radially inner surface 49 may have a convex arc shape, e.g. an arc of a circle having a third radius of curvature 52 lesser than the first radius 50 and lesser than the second radius 51.

**[0078]** The exit angle  $\alpha_u$  of the blade 26, 43 (the orientation angle of the radially outer end of the blade 26, 43 in the rotation direction with respect to a plane radial to the rotation axis R and passing through said radially outer end) is in the range between  $49^\circ$  and  $60^\circ$ , and is advantageously about  $54.3^\circ$ , while the entry angle  $\alpha_i$  of the blade 26, 43 (the orientation angle of the radially inner end of the blade 26, 43 against the rotation direction with respect to a plane radial to the rotation axis R and passing through said radially inner end) is in the range between  $43^\circ$  and  $54^\circ$  and is advantageously of about  $48.7^\circ$  (**Figure 13**).

**[0079]** Both the radially inner and radially outer ends of the blades 26, 43 are oriented in the rotation direction of the impeller 7 and the ratio  $\alpha_i / \alpha_u$  between the entry angle  $\alpha_i$  and the exit angle  $\alpha_u$  (as shown in **Figure 13**) is comprised in the range from 0.8 to 1.0, preferably 0.9.

**[0080]** This particular shape of the blades contributes to reducing the flow resistance and to a separation of the flow from the blades 26, 43 in a single and very concentrated zone at their radially outer end.

**[0081]** Advantageously, the ratio between the radial extension 54 of the blade 26, 43 and the outer radius 55 of the impeller 7 is in the range from 0.185 to 0.245, preferably about 0.22.

**[0082]** The blades 26, 43 may extend from an inner radius 56 in the range from 55 mm to 65 mm, preferably about 59.2 mm, to the aforesaid outer radius 55 in the range from 68 mm to 80 mm, preferably about 75.2 mm.

**[0083]** Advantageously, the blades 26, 43 have a constant cross-section shape along their axial extension with the exception of rounded end portions and a slight tapering from the central wall 41 axially outwards to facilitate the removal from the mold.

**[0084]** The radially outer end of the blade 26, 43 is positioned ahead in the rotation direction with respect to

the radially inner end of the same blade 26, 43. The chord 57 of the blades 26, 43 (indicated in **Figure 14**) has an inner chord orientation angle 58 in the rotation direction with respect to a plane radial to the rotation axis R and passing through the radially inner edge of the blade) comprised between  $17^\circ$  and  $23^\circ$ , advantageously about  $19.9^\circ$ , as well as an outer orientation chord angle 59 in rotation direction with respect to a plane radial to the rotation axis R and passing through the radially outer end of the blade) comprised between  $12.5^\circ$  and  $18.5^\circ$ , advantageously about  $15.6^\circ$ .

**[0085]** The maximum thickness 50 of the blades 26, 43 is advantageously chosen in the range from 2 mm to 3.3 mm, preferably about 2.8 mm.

**[0086]** The maximum distance 51 between the chord 57 and the rear surface 48 of the blades 26, 43 is advantageously chosen in the range from 5.7 mm to 6.5 mm, preferably about 6.1 mm.

**[0087]** The maximum thickness 50 and also the maximum chord distance 51 of the blade are in a central stretch having a third of the total radial extension of the blade.

**[0088]** The shape and arrangement of the components of the impeller 7, in particular of the blades 26, 43, also contribute to an improvement towards an optimization of the performance of the blower 1. The air flow follows the entire profile of the blades 26, 43 without recirculation and without the formation of unplanned flow separation zones, which would increase the noise levels and imply higher electrical energy consumption.

**[0089]** As a whole, the invention allows to create a very compact, silent and energy-efficient blower, the conveying performance (flow rate, speed, pressure) being the same.

## Claims

1. Radial blower (1), in particular for suction hoods, having an impeller rotation axis (R) and comprising:

- a housing (2) with a first axial suction opening (3) and a second axial suction opening (4) opposite the first suction opening (3) and an outlet opening (5) in tangential direction, the outlet opening (5) defining an opening plane (36),
- a conveying unit (6, 7) arranged in a conveying space (27) inside the housing (2) and having an electric motor (6) and an impeller (7) connected to a rotor of the electric motor (6),

wherein a tangential outlet portion (14) of the housing (2) forms an outlet channel delimited by an outer wall portion (30) and an inner wall portion (31) opposite the outer wall portion (30), wherein, in a section plane parallel to the opening plane (36), the outlet channel and the outlet opening (5) define a flow section in which the inner wall por-

tion (31) forms a flattened base (33) substantially parallel to the rotation axis (R) and the outer wall portion (30) forms a delimitation (34) in the shape of an arc, the ends of which are connected to the ends of the flattened base (33),

**characterized in that** the inner wall portion (31) has a circle arc shape in a longitudinal cross-section, in a section plane orthogonal to the rotation axis (R), having a radius greater than the outer radius of the impeller (7), or in the range from 4/3 to 6/3 of the outer radius of the impeller (7).

2. Blower (1) according to claim 1, wherein a guide core (32) formed between a peripheral wall (13) of the housing (2) and the inner wall portion (31) has a cusp-shaped cross section, converging in a free edge (42), seen in a section plane orthogonal to the rotation axis (R), wherein said free edge (42) is substantially rectilinear and parallel to the rotation axis (R).
3. Blower (1) according to claim 2, wherein the flattened base (33) of the outlet channel extends from the free edge (42) of the core (32) in a gradually converging manner towards a direction parallel to the direction of the apex of the outer wall portion (30), seen in a section plane perpendicular to the rotation axis (R).
4. Blower (1) according to one of the preceding claims, wherein the inner wall portion (31) and the direction of the apex of the outer wall portion (30) include an opening angle (77) of less than 45°, or in the range from 5° to 30°, seen in a section plane perpendicular to the rotation axis (R).
5. Blower (1) according to one of the preceding claims, wherein a height (73) of the flow section of the outlet channel is less than 65% of the outer diameter (74) of a tubular end (35).
6. Blower (1) according to one of the preceding claims, wherein a tubular end (35) and the inner wall portion (31) delimit at least one part of an auxiliary compartment (75) outside the outlet channel and the conveying space (27), wherein the auxiliary compartment receives an electrical control board (76) for controlling the motor (6).
7. Blower (1) according to one of the preceding claims, wherein guide spokes (9, 9') are formed in at least one of the suction openings (3, 4), such spokes extending from a radially outer area of the suction opening (3, 4) towards a radially more internal zone and having a shape and inclination such as to divert the airflow entering the suction opening (3, 4) towards the direction of rotation of the impeller (7).
8. Blower (1) according to claim 7, wherein the guide

spokes (9,9') form an axially outer edge (64) substantially rectilinear and are inclined "forward", with the radially outer end arranged further forward than the radially inner end, seen in the direction of rotation of the impeller.

9. Blower (1) according to claim 7 or 8, wherein the guide spokes (9, 9') are plate-shaped with a cross section, according to a section plane tangent to the rotation axis (R), that is curved in the shape of an arc and inclined with respect to the axial direction.
10. Blower (1) according to claim 9, wherein the guide spokes (9, 9') have a concave front surface (62, 62'), facing in the rotation direction of the impeller (7), and a convex rear surface (63, 63') opposite the front surface (62, 62'), an axially outer edge (64) and a rounded axially inner edge (65), wherein in a section plane tangent to the rotation axis (R),
  - the front surface (62, 62') has a concave arc shape,
  - the rear surface (63, 63') has a convex arc shape,
  - the thickness of the guide spoke (9, 9') gradually tapers from the axially outer edge (64, 64') towards the axially inner edge (65, 65').
11. Blower (1) according to claim 10, wherein in cross section according to a section plane tangent to the rotation axis (R), the entry angle of the guide spoke (9, 9') with respect to the axial direction is greater than the exit angle of the guide spoke (9, 9') with respect to the axial direction.
12. Blower (1) according to one of the claims from 7 to 11, wherein an axially inner edge (65, 65') of the guide spoke (9, 9') is positioned forward in the rotation direction of the impeller (7) with respect to the axially outer edge (64) of the same guide spoke (9).
13. Blower (1) according to one of the claims from 7 to 11, wherein the guide spokes (9') of the second suction opening (4) on a side opposite the motor (6) side have a torsion along their longitudinal extension and the profile width of the guide spokes (9') increases from a minimum width in the vicinity of the radially inner end to a maximum width in the vicinity of the radially outer end, and/or wherein the guide spokes (9, 9') axially project towards the outside of the housing (2), forming a protection grid (24, 25) bulging outwardly.
14. Blower (1) according to one of the preceding claims, wherein a non-return closure flap (78) is connected to the outlet opening (5), such flap being orientable and elastically urged towards a closed position and displaceable into an open position by the thrust of



the airflow exiting the outlet opening (5), wherein the closure flap (78) has a flat shape and a position such as to increase, in the open position, the surface extension of the flattened base (33), by lengthening it towards the outside of the housing.

## Patentansprüche

1. Radialgebläse (1), insbesondere für eine Saughau-  
be, welches eine Impeller-Rotationsachse (R) auf-  
weist und umfassend:

- ein Gehäuse (2) mit einer ersten axialen Saug-  
öffnung (3) und einer zweiten axialen Saugöff-  
nung (4), welche der ersten Saugöffnung (3) ent-  
gegengesetzt ist, und einer Auslassöffnung (5)  
in tangentialer Richtung, wobei die Auslassöff-  
nung (5) eine Öffnungsebene (36) definiert,
- eine Fördereinheit (6, 7), welche in einem För-  
derraum (27) innerhalb des Gehäuses (2) an-  
geordnet ist und einen elektrischen Motor (6)  
und einen Impeller (7) aufweist, welcher mit ei-  
nem Rotor des elektrischen Motors (6) verbun-  
den ist,

wobei ein tangentialer Auslassabschnitt (14) des  
Gehäuses (2) einen Auslasskanal bildet, welcher  
durch einen äußeren Wandabschnitt (30) und einen  
inneren Wandabschnitt (31) begrenzt ist, welcher  
dem äußeren Wandabschnitt (30) entgegengesetzt  
ist,

wobei in einer Schnittebene parallel zu der Öffnungs-  
ebene (36) der Auslasskanal und die Auslassöff-  
nung (5) einen Strömungsabschnitt definieren, in  
welchem der innere Wandabschnitt (31) eine abge-  
flachte Basis (33) bildet, welche im Wesentlichen pa-  
rallel zu der Rotationsachse (R) ist, und der äußere  
Wandabschnitt (30) eine Begrenzung (34) in der  
Form eines Bogens bildet, wobei die Enden davon  
mit den Enden der abgeflachten Basis (33) verbun-  
den sind, **dadurch gekennzeichnet, dass** der in-  
nere Wandabschnitt (31) eine Kreisbogenform in ei-  
nem longitudinalen Querschnitt aufweist, in einer  
Schnittebene orthogonal zu der Rotationsachse (R),  
welcher einen Radius größer als den äußeren Ra-  
dius des Impellers (7) oder in dem Bereich von 4/3  
bis 6/3 des äußeren Radius des Impellers (7) auf-  
weist.

2. Gebläse (1) nach Anspruch 1, wobei ein Führungs-  
kern (32), welcher zwischen einer Umfangswand  
(13) des Gehäuses (2) und dem inneren  
Wandabschnitt (31) gebildet ist, einen Spitzen-för-  
migen Querschnitt aufweist, welcher in einem freien  
Rand (42) zusammenläuft, wenn in einer Schnitte-  
ebene orthogonal zu der Rotationsachse (R) gese-  
hen, wobei der freie Rand (42) im Wesentlichen ge-

radlinig und parallel zu der Rotationsachse (R) ist.

3. Gebläse (1) nach Anspruch 2, wobei sich die abge-  
flachte Basis (33) des Auslasskanals von dem freien  
Rand (42) des Kerns (32) in einer allmählich zusam-  
menlaufenden Weise in Richtung einer Richtung pa-  
rallel zu der Richtung des Scheitelpunkts des äuße-  
ren Wandabschnitts (30) erstreckt, wenn in einer  
Schnittebene rechtwinklig zu der Rotationsachse (R)  
gesehen.

4. Gebläse (1) nach einem der vorhergehenden An-  
sprüche, wobei der innere Wandabschnitt (31) und  
die Richtung des Scheitelpunkts des äußeren  
Wandabschnitts (30) einen Öffnungswinkel (77) von  
weniger als 45° oder in dem Bereich von 5° bis 30°  
umfassen, wenn in einer Schnittebene rechtwinklig  
zu der Rotationsachse (R) gesehen.

5. Gebläse (1) nach einem der vorhergehenden An-  
sprüche, wobei eine Höhe (73) des Strömungsab-  
schnitts des Auslasskanals geringer ist als 65% des  
äußeren Durchmessers (74) eines röhrenförmigen  
Endes (35).

6. Gebläse (1) nach einem der vorhergehenden An-  
sprüche, wobei ein röhrenförmiges Ende (35) und  
der innere Wandabschnitt (31) wenigstens einen Teil  
eines Hilfsabteils (75) außerhalb des Auslasskanals  
und des Fördererraums (27) begrenzen, wobei das  
Hilfsabteil eine elektrische Steuerplatine (76) zum  
Steuern des Motors (6) aufnimmt.

7. Gebläse (1) nach einem der vorhergehenden An-  
sprüche, wobei Führungsspeichen (9, 9') in wenig-  
stens einer aus den Saugöffnungen (3, 4) gebildet  
sind, wobei sich derartige Speichen von einem radial  
äußeren Bereich der Saugöffnung (3, 4) in Richtung  
einer radial weiter inneren Zone erstrecken und eine  
Form und Neigung aufweisen, um den Luftstrom ab-  
zulenken, welcher in die Saugöffnung (3, 4) in Rich-  
tung der Richtung einer Rotation des Impellers (7)  
eintritt.

8. Gebläse (1) nach Anspruch 7, wobei die Führungs-  
speichen (9, 9') einen axial äußeren Rand (64) bil-  
den, welcher im Wesentlichen geradlinig ist, und  
nach "vorne" geneigt sind, wobei das radial äußere  
Ende weiter vorne angeordnet ist als das radial in-  
nere Ende, wenn in der Richtung einer Rotation des  
Impellers gesehen.

9. Gebläse (1) nach Anspruch 7 oder 8, wobei die Füh-  
rungsspeichen (9, 9') plattenförmig mit einem Quer-  
schnitt sind, welcher gemäß einer Schnittebene tan-  
gential zu der Rotationsachse (R) in der Form eines  
Bogens gekrümmt ist und in Bezug auf die axiale  
Richtung geneigt ist.

10. Gebläse (1) nach Anspruch 9, wobei die Führungsspeichen (9, 9') eine konkave vordere Fläche (62, 62'), welche in die Rotationsrichtung des Impellers (7) weist, und eine konvexe hintere Fläche (63, 63'), welche der vorderen Fläche (62, 62') entgegengesetzt ist, einen axial äußeren Rand (64) und einen abgerundeten axial inneren Rand (65) aufweisen, wobei in einer Schnittebene tangential zu der Rotationsachse (R),

- die vordere Fläche (62, 62') eine konkave Bogenform aufweist,
- die hintere Fläche (63, 63') eine konvexe Bogenform aufweist,
- sich die Dicke der Führungsspeiche (9, 9') von dem axial äußeren Rand (64, 64') in Richtung des axial inneren Rands (65, 65') allmählich verringert.

11. Gebläse (1) nach Anspruch 10, wobei in einem Querschnitt gemäß einer Schnittebene tangential zu der Rotationsachse (R) der Eintrittswinkel der Führungsspeiche (9, 9') in Bezug auf die axiale Richtung größer ist als der Austrittswinkel der Führungsspeiche (9, 9') in Bezug auf die axiale Richtung.

12. Gebläse (1) nach einem der Ansprüche 7 bis 11, wobei ein axial innerer Rand (65, 65') der Führungsspeiche (9, 9') in der Rotationsrichtung des Impellers (7) in Bezug auf den axial äußeren Rand (64) der gleichen Führungsspeiche (9) nach vorne positioniert ist.

13. Gebläse (1) nach einem der Ansprüche 7 bis 11, wobei die Führungsspeichen (9') der zweiten Saugöffnung (4) an einer Seite der Seite des Motors (6) entgegengesetzt eine Torsion entlang ihrer longitudinalen Erstreckung aufweisen und die Profilbreite der Führungsspeichen (9') von einer minimalen Breite in der Nähe des radial inneren Endes zu einer maximalen Breite in der Nähe des radial äußeren Endes ansteigt, und/oder wobei die Führungsspeichen (9, 9') axial in Richtung der Außenseite des Gehäuses (2) vorstehen, wobei ein Vorsprungsgitter (24, 25) gebildet ist, welches sich nach außen wölbt.

14. Gebläse (1) nach einem der vorhergehenden Ansprüche, wobei eine nicht-zurückkehrende Verschlussklappe (78) an der Auslassöffnung (5) verbunden ist, wobei eine solche Klappe in Richtung einer geschlossenen Position orientierbar und elastisch vorbelastet ist und in eine offene Position durch den Schub des Luftstroms verlagerbar ist, welcher die Auslassöffnung (5) verlässt, wobei die Verschlussklappe (78) eine ebene Form und eine Position aufweist, um in der offenen Position die Flächenerstreckung der abgeflachten Basis (33) durch Vergrößern in Richtung der Außenseite des Gehäuses

zu steigern.

## Revendications

1. Soufflante à flux radial (1), en particulier pour hottes aspirantes, ayant un axe de rotation de roue mobile (R) et comprenant :

- un boîtier (2) avec une première ouverture d'aspiration axiale (3) et une seconde ouverture d'aspiration axiale (4) opposée à la première ouverture d'aspiration (3) et une ouverture de sortie (5) dans une direction tangentielle, l'ouverture de sortie (5) définissant un plan d'ouverture (36),
- une unité d'entraînement (6, 7) agencée dans un espace d'entraînement (27) à l'intérieur du boîtier (2) et ayant un moteur électrique (6) et une roue mobile (7) reliée à un rotor du moteur électrique (6),

dans laquelle une partie de sortie tangentielle (14) du boîtier (2) forme un canal de sortie délimité par une partie de paroi externe (30) et une partie de paroi interne (31) opposée à la partie de paroi externe (30), dans laquelle, dans un plan de section parallèle au plan d'ouverture (36), le canal de sortie et l'ouverture de sortie (5) définissent une section d'écoulement dans laquelle la partie de paroi interne (31) forme une base aplatie (33) sensiblement parallèle à l'axe de rotation (R) et la partie de paroi externe (30) forme une délimitation (34) de la forme d'un arc, les extrémités de laquelle sont reliées aux extrémités de la base aplatie (33),

**caractérisée en ce que** la partie de paroi interne (31) a une forme d'arc de cercle sur une section transversale longitudinale, dans un plan de section orthogonal à l'axe de rotation (R), ayant un rayon supérieur au rayon externe de la roue mobile (7), ou dans la plage allant de 4/3 à 6/3 du rayon externe de la roue mobile (7).

2. Soufflante (1) selon la revendication 1, dans laquelle un noyau de guidage (32) formé entre une paroi périphérique (13) du boîtier (2) et la partie de paroi interne (31) a une section transversale en forme de bec, qui converge en un bord libre (42), vu dans un plan de section orthogonal à l'axe de rotation (R), dans laquelle ledit bord libre (42) est sensiblement rectiligne et parallèle à l'axe de rotation (R).


3. Soufflante (1) selon la revendication 2, dans laquelle la base aplatie (33) du canal de sortie s'étend du bord libre (42) du noyau (32) d'une manière progressivement convergente vers une direction parallèle à la direction du sommet de la partie de paroi externe (30), vue dans un plan de section perpendiculaire à

l'axe de rotation (R).

4. Soufflante (1) selon l'une des revendications précédentes, dans laquelle la partie de paroi interne (31) et la direction du sommet de la partie de paroi externe (30) comprennent un angle d'ouverture (77) de moins de 45°, ou dans la plage de 5° à 30°, vu dans un plan de section perpendiculaire à l'axe de rotation (R). 5
5. Soufflante (1) selon l'une des revendications précédentes, dans laquelle une hauteur (73) de la section d'écoulement du canal de sortie est de moins de 65 % du diamètre externe (74) d'une extrémité tubulaire (35). 10
6. Soufflante (1) selon l'une des revendications précédentes, dans laquelle une extrémité tubulaire (35) et la partie de paroi interne (31) délimitent au moins une partie d'un compartiment auxiliaire (75) à l'extérieur du canal de sortie et de l'espace d'entraînement (27), dans laquelle le compartiment auxiliaire reçoit un panneau de commande électrique (76) pour commander le moteur (6). 15
7. Soufflante (1) selon l'une des revendications précédentes, dans laquelle des rayons de guidage (9, 9') sont formés dans au moins une des ouvertures d'aspiration (3, 4), de tels rayons s'étendant d'une région radialement externe de l'ouverture d'aspiration (3, 4) vers une zone radialement plus interne et ayant une forme et une inclinaison propres à faire dévier le flux d'air pénétrant dans l'ouverture d'aspiration (3, 4) vers la direction de rotation de la roue mobile (7). 20
8. Soufflante (1) selon la revendication 7, dans laquelle les rayons de guidage (9, 9') forment un bord axialement externe (64) sensiblement rectiligne et sont inclinés «vers l'avant», avec l'extrémité radialement externe agencée plus vers l'avant que l'extrémité radialement interne, vues dans la direction de rotation de la roue mobile. 25
9. Soufflante (1) selon la revendication 7 ou 8, dans laquelle les rayons de guidage (9, 9') sont en forme de plaque avec une section transversale, suivant un plan de section tangent à l'axe de rotation (R), qui est incurvée sous la forme d'un arc et inclinée par rapport à la direction axiale. 30
10. Soufflante (1) selon la revendication 9, dans laquelle les rayons de guidage (9, 9') ont une surface avant concave (62, 62') orientée dans la direction de rotation de la roue mobile (7), et une surface arrière convexe (63, 63') opposée à la surface avant (62, 62'), un bord axialement externe (64) et un bord axialement interne arrondi (65), dans laquelle dans un plan 35

de section tangent à l'axe de rotation (R),

- la surface avant (62, 62') a une forme d'arc concave,
  - la surface arrière (63, 63') a une forme d'arc convexe,
  - l'épaisseur du rayon de guidage (9, 9') se réduit progressivement du bord axialement externe (64, 64') vers le bord axialement interne (65, 65').
11. Soufflante (1) selon la revendication 10, dans laquelle en section transversale suivant un plan de section tangent à l'axe de rotation (R), l'angle d'entrée du rayon de guidage (9, 9') par rapport à la direction axiale est plus grand que l'angle de fuite du rayon de guidage (9, 9') par rapport à la direction axiale. 40
  12. Soufflante (1) selon l'une des revendications de 7 à 11, dans laquelle un bord axialement interne (65, 65') du rayon de guidage (9, 9') est positionné vers l'avant dans la direction de rotation de la roue mobile (7) par rapport au bord axialement externe (64) du même rayon de guidage (9). 45
  13. Soufflante (1) selon l'une des revendications de 7 à 11, dans laquelle les rayons de guidage (9') de la seconde ouverture d'aspiration (4) sur un côté opposé au côté du moteur (6) ont une torsion le long de leur extension longitudinale et la largeur de profil des rayons de guidage (9') augmente d'une largeur minimale à proximité de l'extrémité radialement interne à une largeur maximale à proximité de l'extrémité radialement externe, et/ou dans laquelle les rayons de guidage (9, 9') font axialement saillie vers l'extérieur du boîtier (2), formant une grille de protection (24, 25) bombée vers l'extérieur. 50
  14. Soufflante (1) selon l'une des revendications précédentes, dans laquelle un clapet de fermeture anti-retour (78) est relié à l'ouverture de sortie (5), un tel clapet étant orientable et élastiquement sollicité vers une position fermée et déplaçable dans une position ouverte par la poussée du flux d'air sortant de l'ouverture de sortie (5), dans lequel le clapet de fermeture (78) a une forme plane et une position propres à augmenter, dans la position ouverte, l'extension de surface de la base aplatie (33), en la prolongeant vers l'extérieur du boîtier. 55

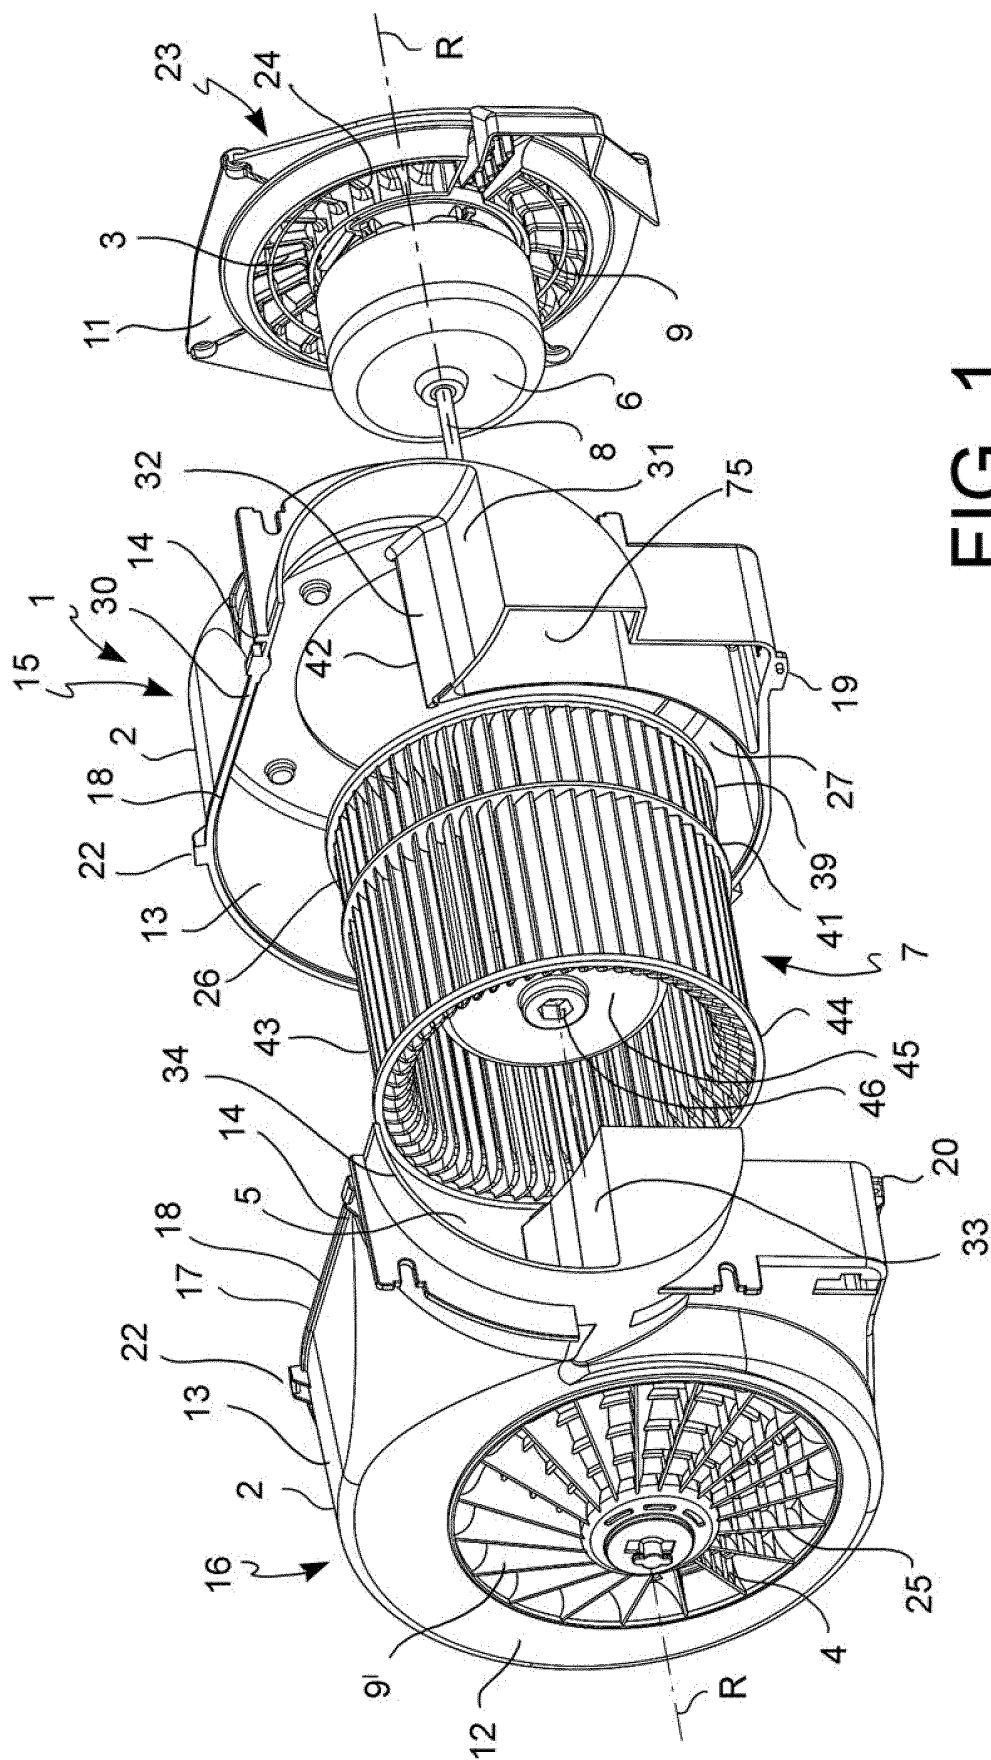

**FIG. 1**

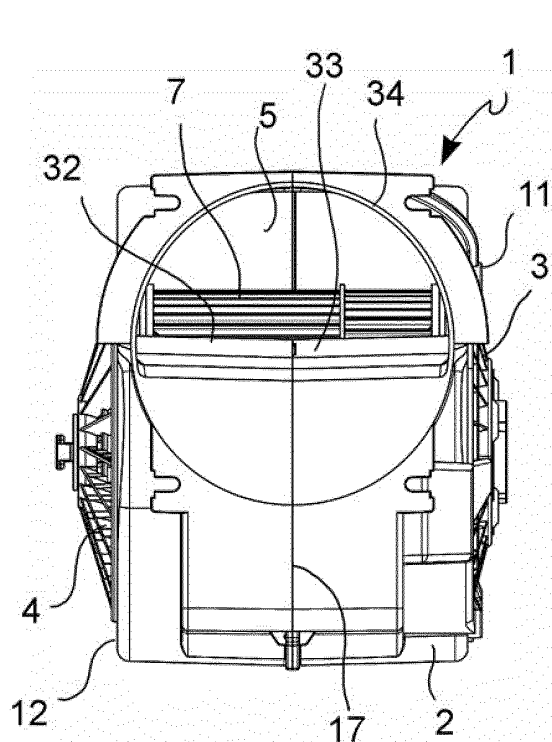


FIG. 2

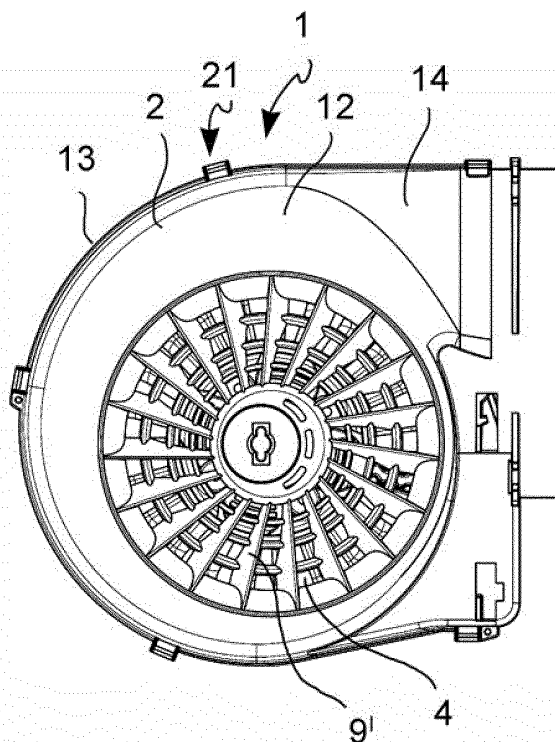


FIG. 3

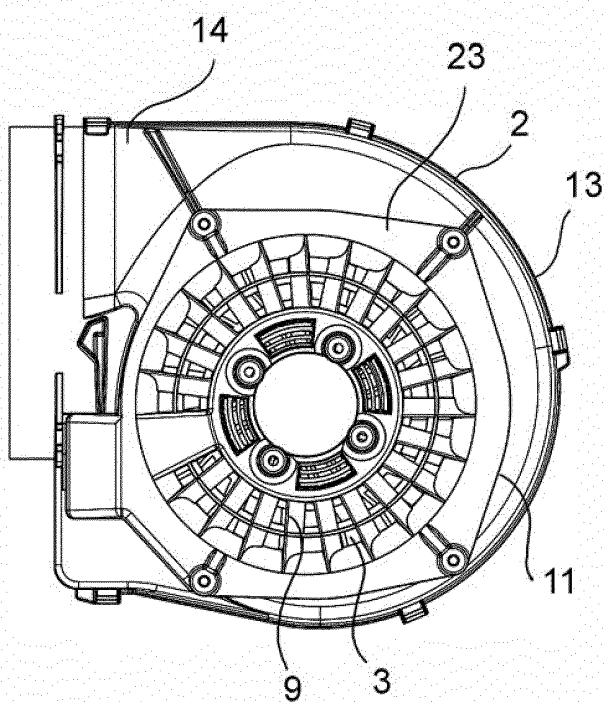


FIG. 4

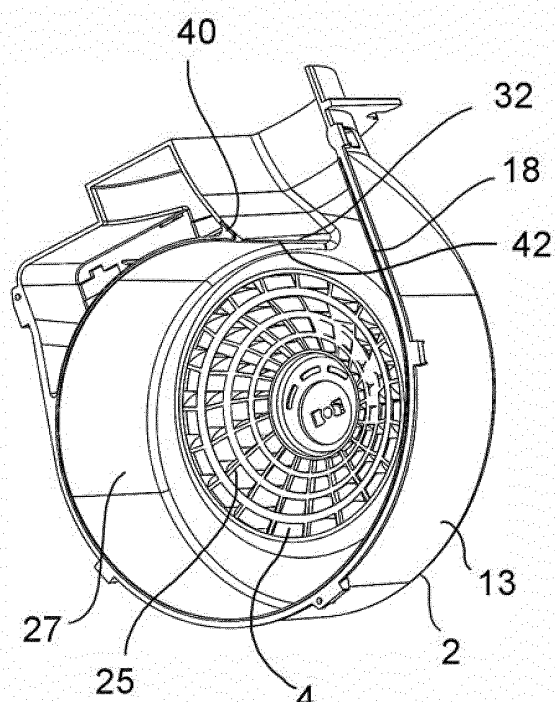


FIG. 5

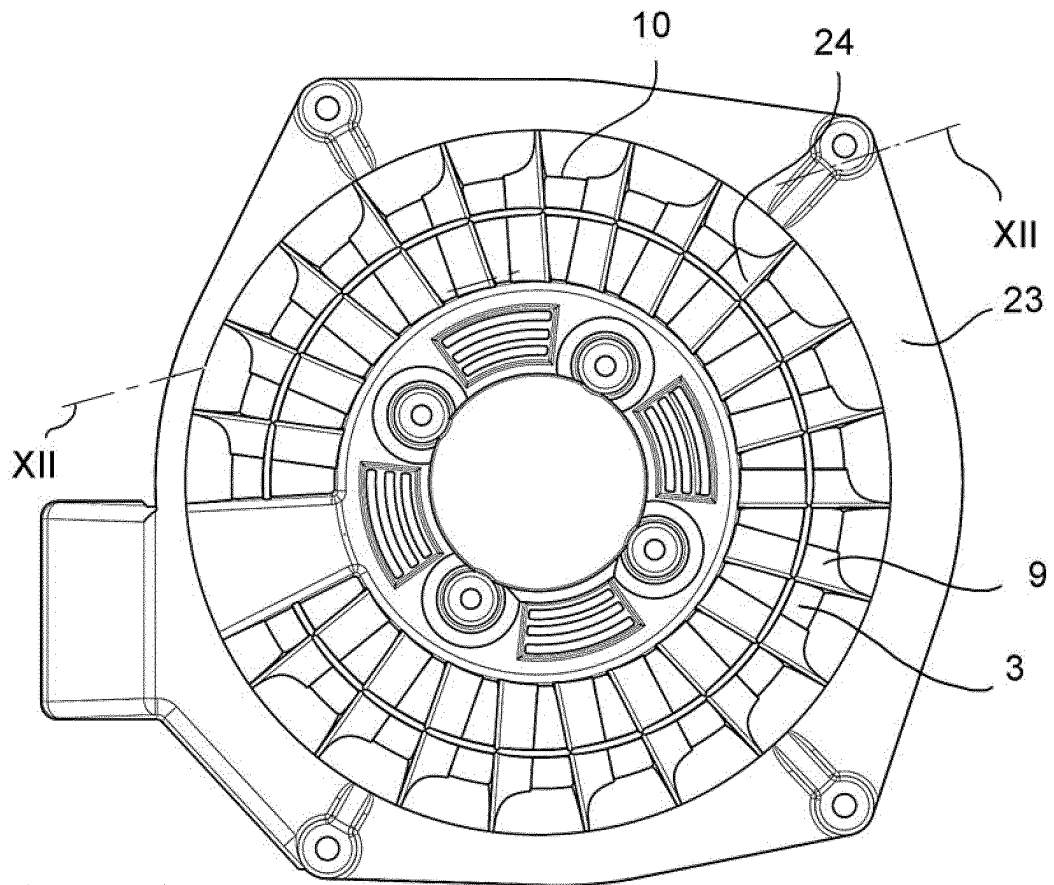


FIG. 6

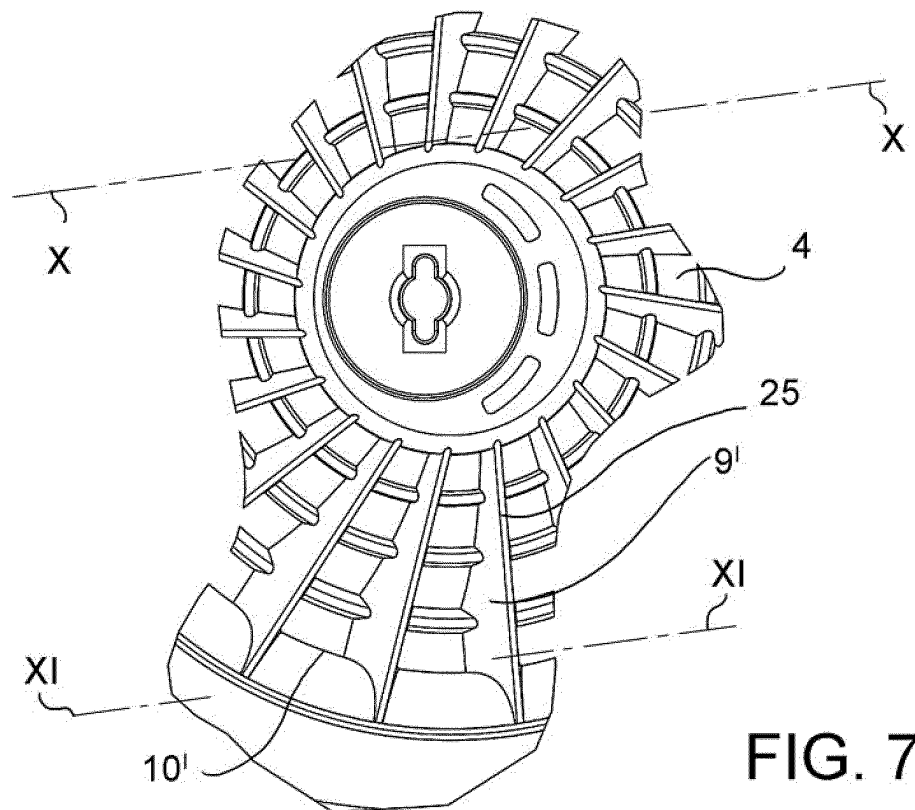
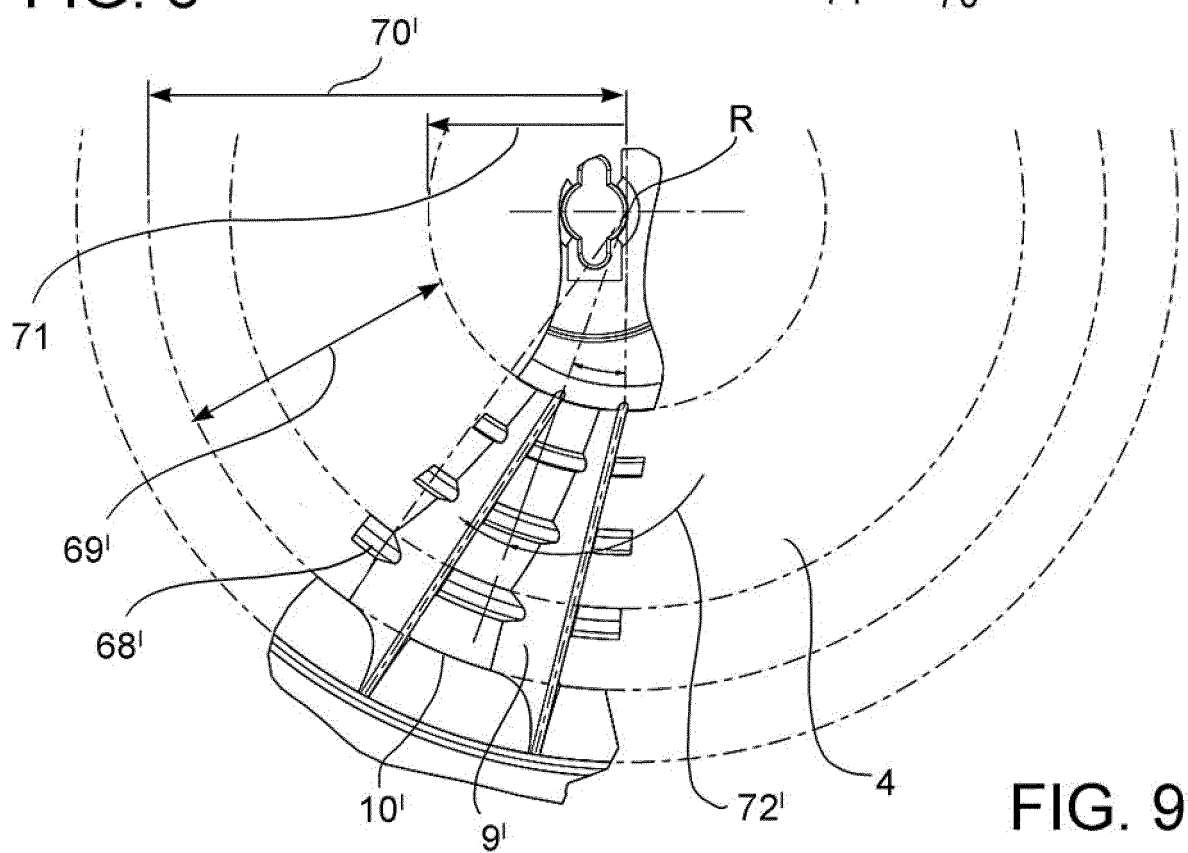
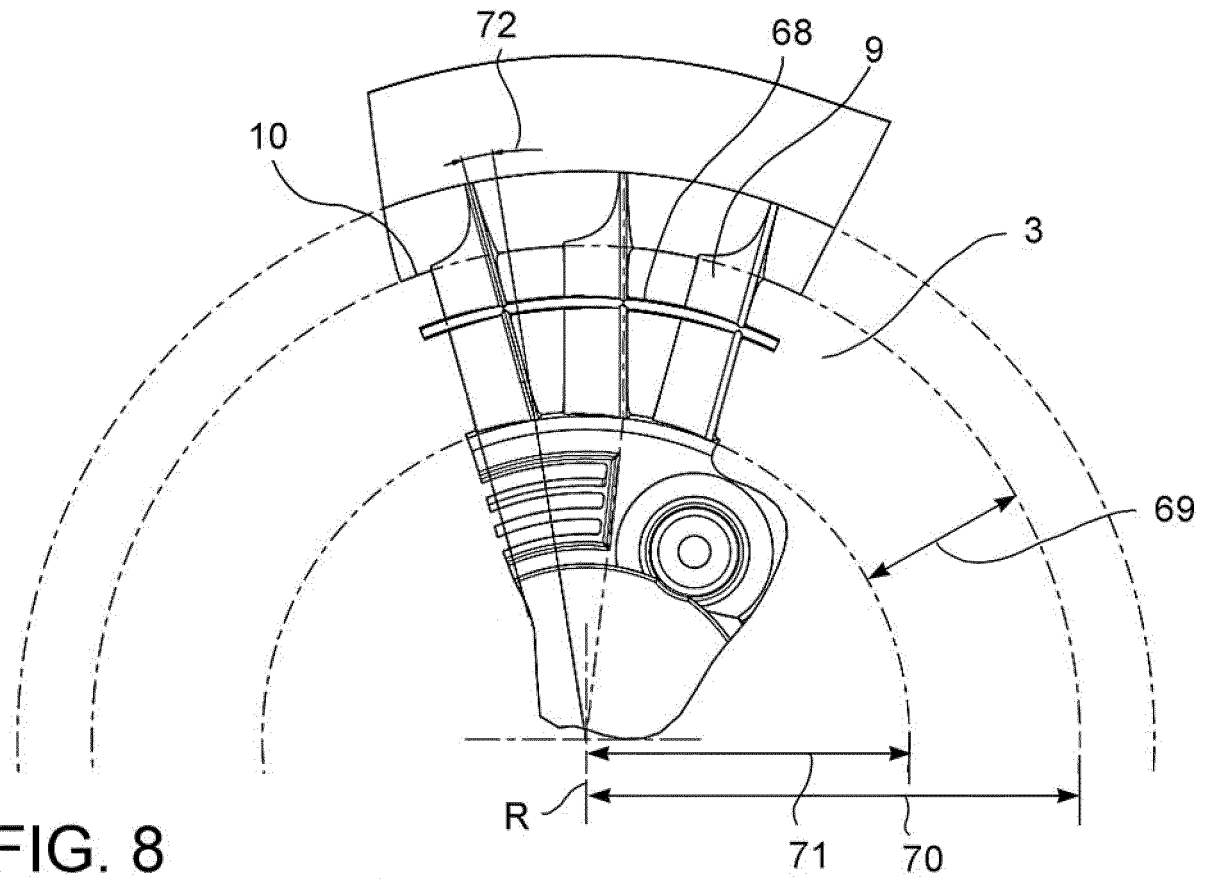


FIG. 7



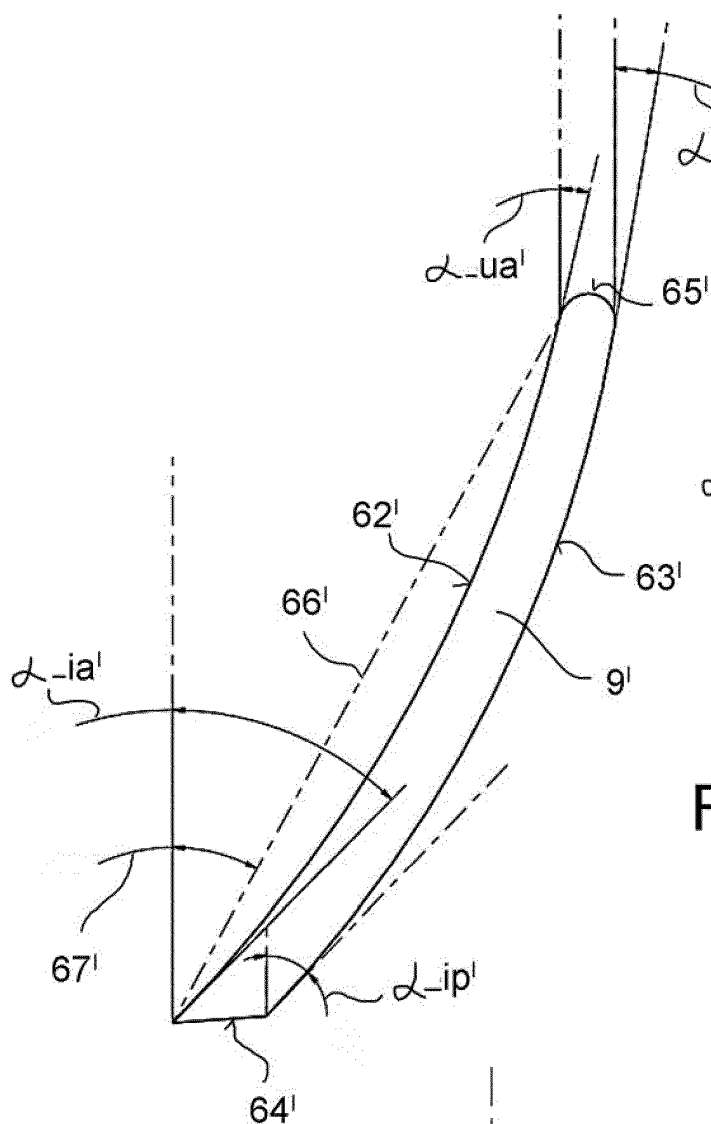


FIG. 11

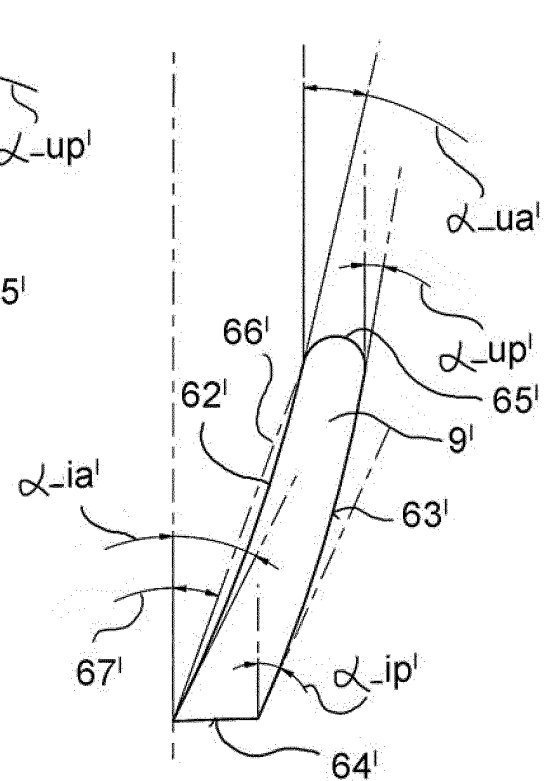


FIG. 10

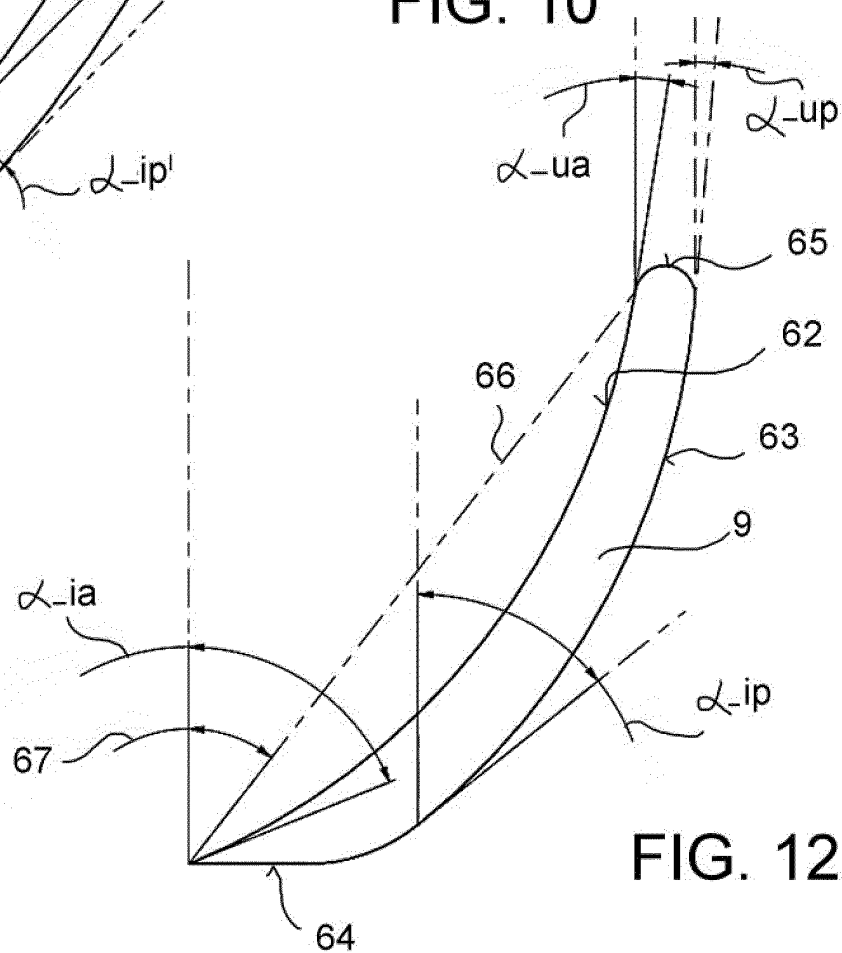
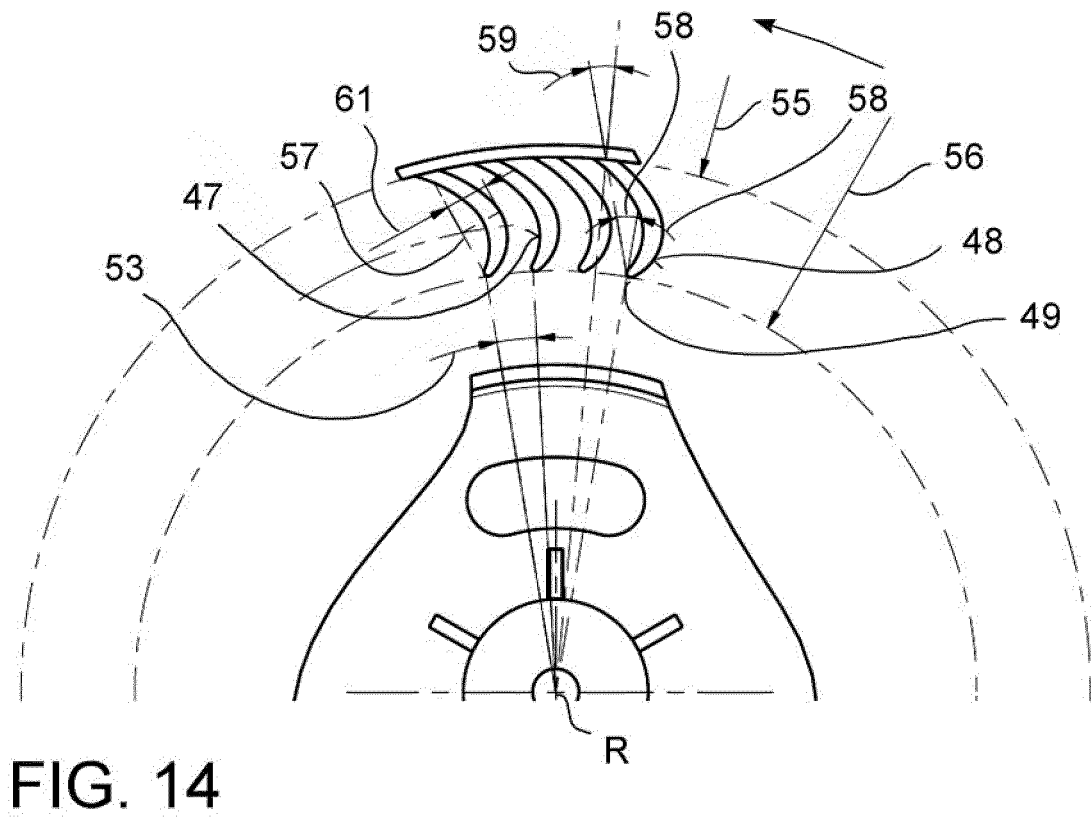
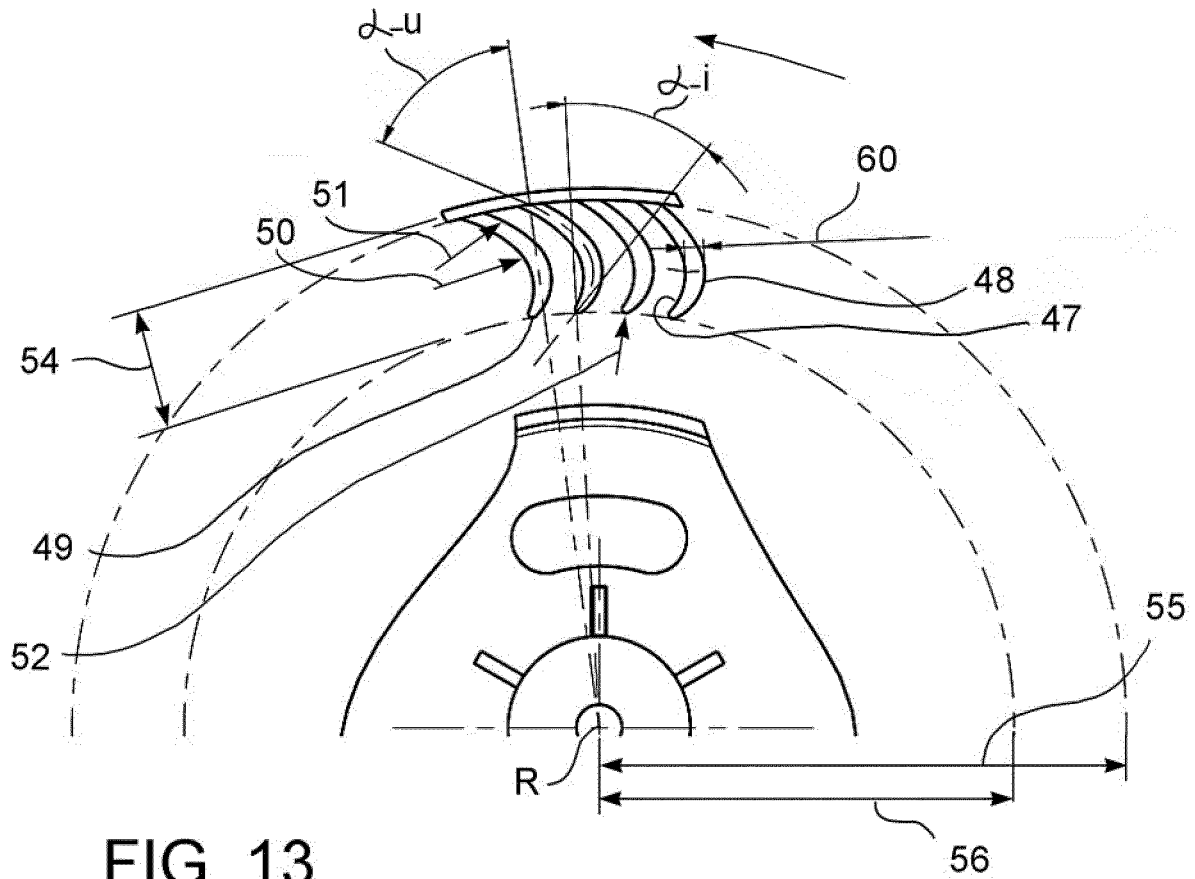


FIG. 12





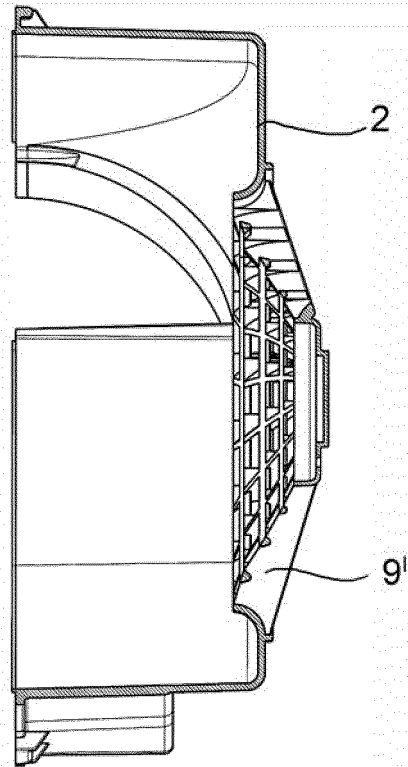


FIG. 15

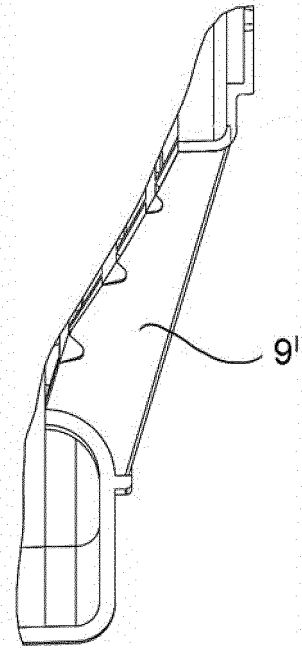


FIG. 16

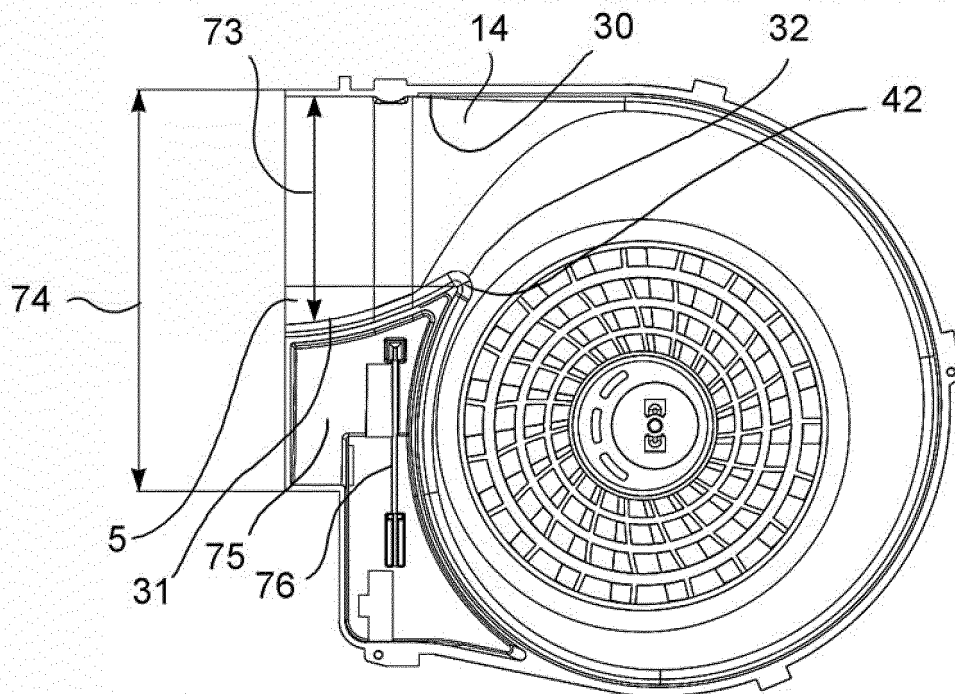


FIG. 17

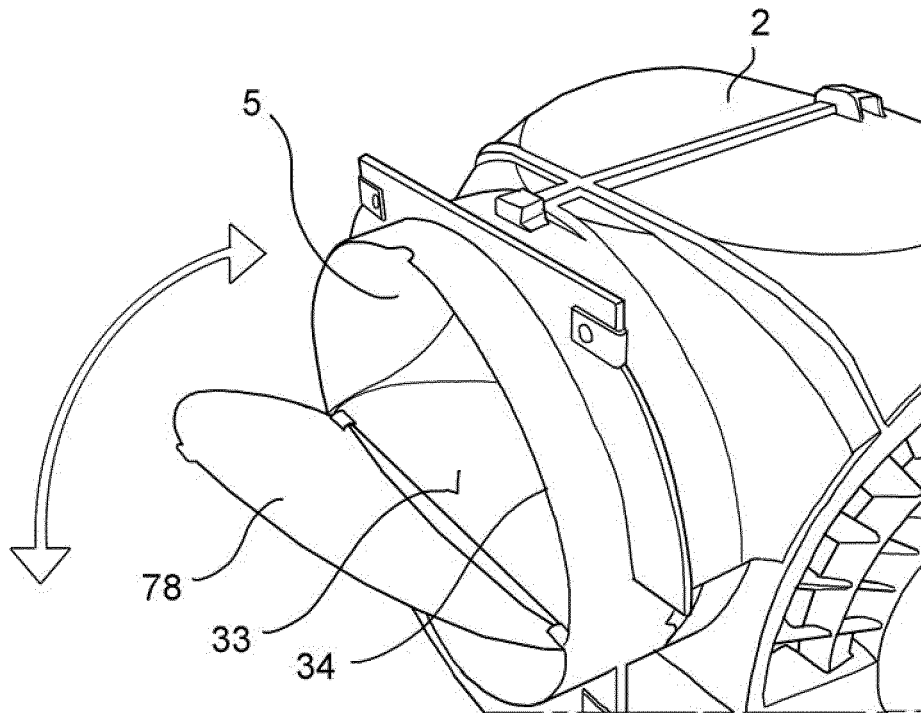


FIG. 19

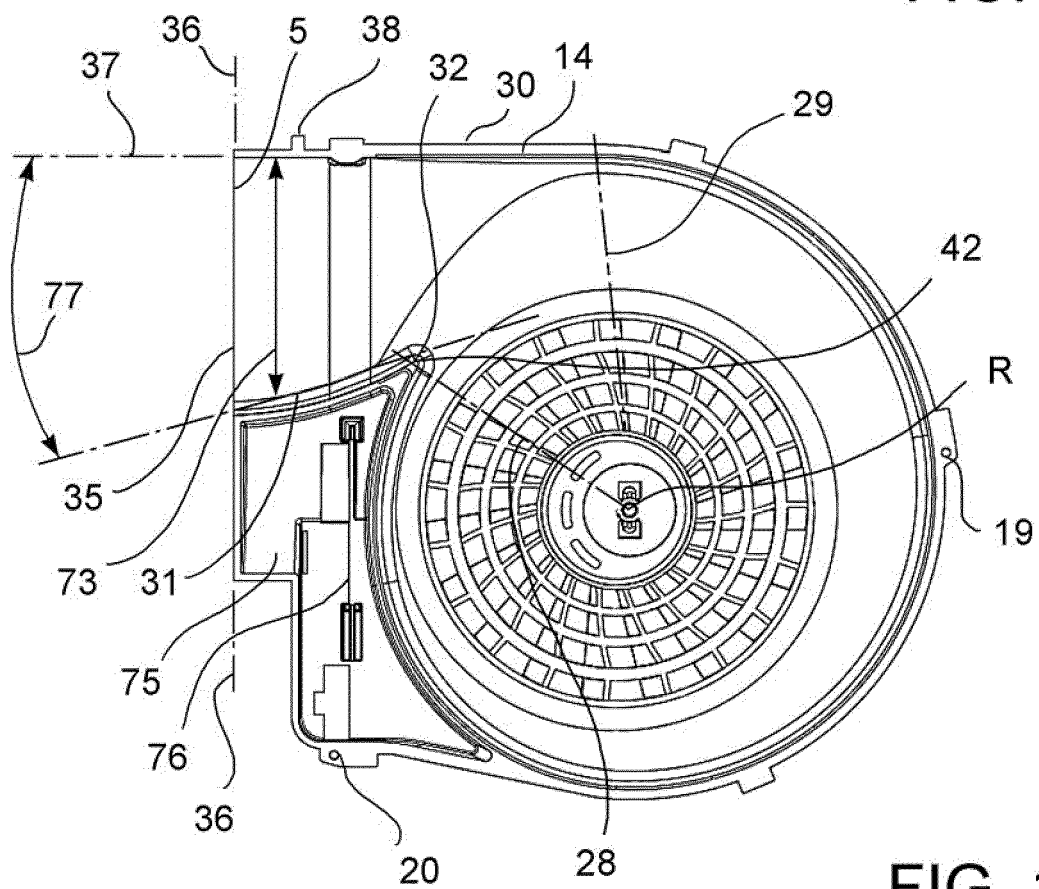


FIG. 18

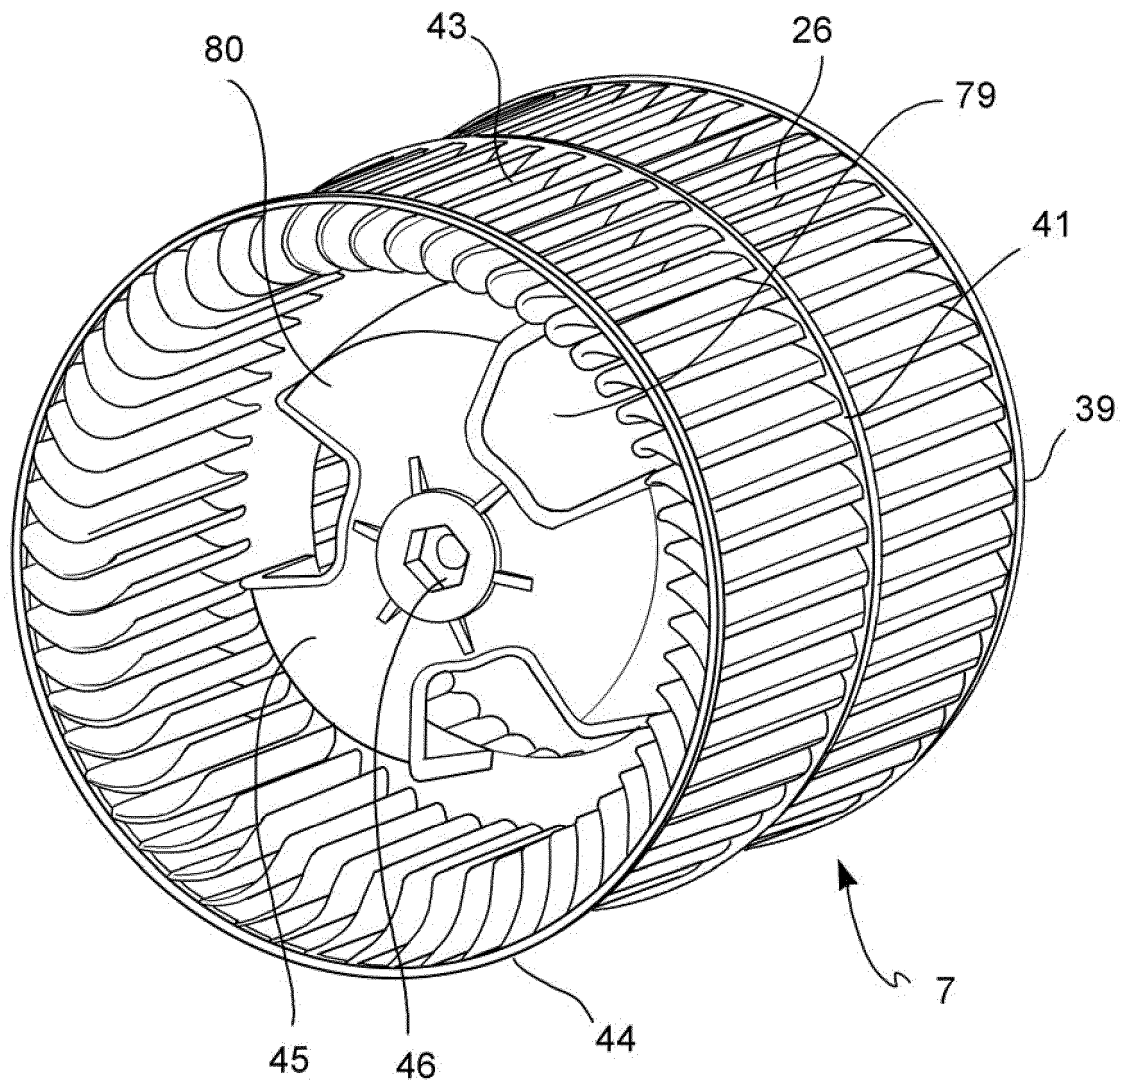


FIG. 20

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- EP 2365224 A [0002]
- EP 0985829 A [0002]
- JP H046600 B [0002]
- US 2010183433 A [0002]
- DE 102015213471 [0005]