

(19)



(11)

EP 3 367 009 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
29.08.2018 Bulletin 2018/35

(51) Int Cl.:
F24F 7/007 ^(2006.01) **F24F 13/32** ^(2006.01)
F24F 13/24 ^(2006.01)

(21) Application number: **17380008.7**

(22) Date of filing: **28.02.2017**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(71) Applicant: **Soler & Palau Research, S.L.**
08150 Parets del Vallés (Barcelona) (ES)

(72) Inventor: **Costa, Roger Madorell**
08150 Parets del Vallés (Barcelona) (ES)

(74) Representative: **Cabinet Plasseraud**
66, rue de la Chaussée d'Antin
75440 Paris Cedex 09 (FR)

(54) VENTILATION DEVICE

(57) The present invention relates to a ventilation device comprising a front part (1) with a suction mouth (2) through which air is introduced into the ventilation device, a motor (3) and impeller (4) assembly with blades (5) having an axis of rotation arranged axially with respect to the suction mouth (2), the motor (3) and impeller (4) assembly being configured such that during use, the air

is driven in a direction (D) which is perpendicular to the axis of rotation with a deflection angle (α) in the direction of rotation (G) of the impeller (4), and support means for connecting the motor (3) and impeller (4) assembly with the front part (1) comprising at least three arms (6) having a flat laminar shape and extending in the direction (D) in which the air is driven.

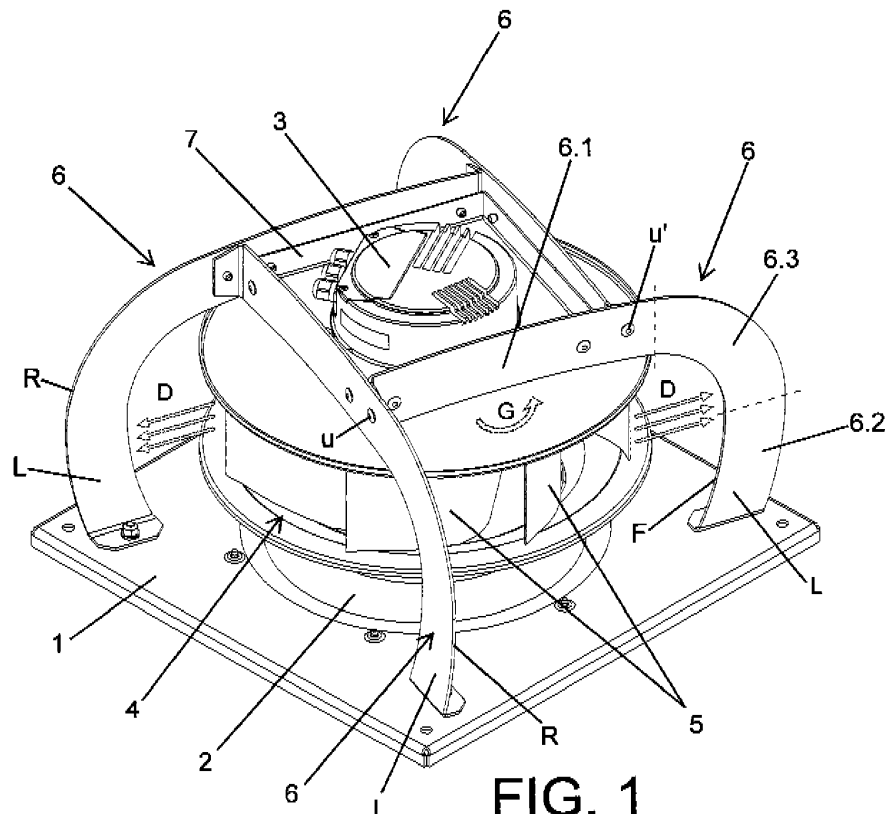


FIG. 1

EP 3 367 009 A1

Description

Field of the Art

[0001] The present invention relates to means for driving air which are used in ventilation installations, proposing a ventilation device with an improved support which determines an advantageous soundproofing embodiment.

State of the Art

[0002] In ventilation installations, on both the domestic and industrial level, it is important to prevent the noise that ventilation devices produce during operation from propagating through the structures supporting the installation, and this is conventionally resolved by providing ventilation devices with soundproofing solutions.

[0003] On the other hand, plug fan-type centrifugal fans are known and have been widely used in recent years as a ventilation module that can be coupled to ventilation boxes, air treatment units, in walls and drop ceilings with chambers for moving air, roof fans, etc.

[0004] Plug fan-type centrifugal fans comprise a front part with an air suction mouth, a motor-impeller assembly provided with blades the axis of rotation of which is arranged axially with respect to the air suction mouth and a support connecting the motor-impeller assembly with the front part.

[0005] The air is introduced axially into the ventilation device through the suction mouth due to the centrifugal force caused by the rotation of the blades of the impeller, and it is expelled from the ventilation device in a direction perpendicular to the axis of rotation of the impeller with a deflection angle in the direction of rotation of the impeller.

[0006] The supports used for connecting the motor-impeller assembly with the front part of the ventilation device are formed by tubular elements, quadrangular elements or bent metal sheets which, due to their configuration and arrangement, generate a certain degree of air distortion when the ventilation device is in operation.

[0007] There is therefore a need for a ventilation device with an improved support which allows reducing those distortions and at the same time withstanding the vibrations produced during operation.

Object of the Invention

[0008] The invention relates to a ventilation device having an improved soundproofing performance.

[0009] The ventilation device comprises:

- a front part with a suction mouth through which air is introduced into the ventilation device,
- a motor and impeller assembly with blades having an axis of rotation arranged axially with respect to the suction mouth, the motor and impeller assembly

being configured such that during use, the air is driven in a direction which is perpendicular to the axis of rotation with a deflection angle in the direction of rotation of the impeller, and

- support means for connecting the motor and impeller assembly with the front part comprising at least three arms having a flat laminar shape and extending in the direction in which the air is driven, such that the flat laminar shape of the arms and the arrangement thereof oriented in the direction in which the air is driven allows the airflow discharged by the ventilation device which is responsible for the occurrence of noises to not be affected by the arms.

[0010] The arms have a front face and side faces, wherein the front face has a smaller thickness than the side faces. Said front face of smaller thickness is facing the direction in which the air is driven, whereas the side faces are parallel to the direction in which the air is driven.

[0011] The arms have a first part connected to the motor and impeller assembly, a second part connected to the front part and a third part connecting the first part with the second part. The first part of each arm has a connection point for connecting with the arm located immediately adjacent thereto according to the opposite direction of rotation of the impeller, and a second connection point for connecting with the arm located immediately adjacent thereto according to the direction of rotation of the impeller. The connection of the arms to one another and the orientation thereof in the direction of rotation of the impeller allows the arms to withstand the torsional stresses generated by the motor and impeller assembly during the operation of the ventilation device without the arms deforming or producing a resonant effect.

[0012] Specifically, the flat laminar shape of the arms is such that the first part of the arms extends in a direction substantially perpendicular to the axis of rotation of the motor and impeller assembly, the second part extends in a direction substantially parallel to the axis of rotation of the motor and impeller assembly, and the third part connects the first part with the second part by way of a bend. The arms are preferably L-shaped.

[0013] It has been envisaged that at least the part of the arms facing the direction in which the air is driven has a curvature for reducing the noise caused by the passage of the blades.

[0014] A ventilation device is thereby obtained which, on one hand, due to the shape and orientation of its arms, minimizes the noise of the ventilation device due to the exposure to the expelled airflow to which the arms are subjected, whereas on the other hand, connecting the arms with one another and their orientation allows withstanding the torsional stresses generated by the motor and impeller assembly without the arms producing a resonant effect.

Description of the Drawings

[0015]

Figure 1 shows a perspective view of an embodiment of the ventilation device of the invention with four arms.

Figure 2 shows a side view of the ventilation device of Figure 1.

Figure 3 shows a top view of the ventilation device of Figure 1.

Figure 4 shows a sectioned side view of the ventilation device of Figure 1.

Figure 5 shows a schematic view of the orientation of the arms in the direction in which the air is driven out of the ventilation device.

Figures 6 to 11 show six different embodiments of the ventilation device of the invention.

Detailed Description of the Invention

[0016] As shown in the drawings, the ventilation device of the invention comprising a front part (1) with a suction mouth (2) for introducing air into the ventilation device, an assembly formed by a motor (3) and an impeller (4) provided with blades (5) for driving the suctioned air out of the ventilation device and arms (6) connecting the assembly formed by the motor (3) and the impeller (4) with the front part (1).

[0017] The motor (3) is partially integrated in the impeller (4) such that the arms (6) connect the part of the motor (3) projecting out of the impeller (4) with the front part (1) of the ventilation device in which the suction mouth (2) is located.

[0018] The axis of rotation of the motor (3) is coaxial with the axis of rotation of the impeller (4), and the axis of rotation of said assembly formed by the motor (3) and the impeller (4) is arranged axially with respect to the suction mouth (2).

[0019] Figure 4 shows the path the air follows through the ventilation device by means of arrows drawn with dashed lines. The rotation of the blades (5) of the impeller (4) causes the air to axially enter the ventilation device through the suction mouth (2) to then make a 90° turn and be driven out of the ventilation device in a direction (D) which is perpendicular (r) to the axis of rotation of the impeller (4) with a deflection angle (α) in the direction of rotation (G) of the impeller (4). The deflection angle (α) is comprised between 15° and 45°.

[0020] The schematic plan view of Figure 5 shows the direction (D) in which the air is driven out of the ventilation device. When the ventilation device is in operation, the outer profile of the blades (5) of the impeller (4) describes a circumference (c) depicted by a dashed line, such that when a blade (5) passes through a point (p) of said circumference (c) the air is driven with respect to said point (p) in the direction (D) which is perpendicular (r) to the axis of rotation of the impeller (4) with a deflection angle

(α) in the direction of rotation (G) of the impeller (4).

[0021] To prevent the arms (6) from distorting the output air and to prevent unwanted noises from being generated, the invention has envisaged that the arms (6) will have a flat laminar shape with a main longitudinal axis (x) (depicted by dashed lines) extending in the direction (D) in which the air is driven (see Figure 3). The arms (6), therefore, have a rectangular section with a front face (F), a rear face (R) and two side faces (L). The front face (F) has a smaller thickness than the side faces (L), said front face (F) of smaller thickness facing the direction (D) in which the air is driven, whereas the side faces (L) of larger thickness are parallel to the direction (D) in which the air is driven without creating interferences with the air.

[0022] The arms (6) have a first part (6.1) which is connected to the assembly formed by the motor (3) and the impeller (4), a second part (6.2) which is connected to the front part (1) and a third part (6.3) connecting the first part (6.1) with the second part (6.2). The first part (6.1) of each arm (6) has a connection point (u) for connecting with the arm (6) located immediately adjacent thereto according to the opposite direction of rotation (G) of the impeller (4), and a second connection point (u') for connecting with the arm (6) located immediately adjacent thereto according to the direction of rotation (G) of the impeller (4). This connection of the arms (6) with one another, together with the orientation thereof in the direction (D) in which the air is driven, means that the arms (6) work like struts, and that the connection with the front part (1) of the ventilation device is much more rigid against torsional vibrations of the motor (3).

[0023] As seen in Figure 2, the arms (6) are L-shaped, wherein the first part (6.1) extends in a direction substantially perpendicular to the axis of rotation of the motor (3), the second part (6.2) extends in a direction substantially parallel to the axis of rotation of the motor (3), and the third part (6.3) connects the first part (6.1) with the second part (6.2) by way of a bend.

[0024] The front face (F) of the arms (6) facing the direction (D) in which the air is driven has a curvature which tends to reduce the noise generated by the blades (5) of the impeller (4). As seen in Figure 2, the third part (6.3) of the arm (6) connecting the first part (6.1) with the second part (6.2) has a radius of curvature (r3) allowing a gradual transition between the first part (6.1) and the second part (6.2). The third part (6.3) of the arm (6) is precisely the part of the arm exposed the most to the air driven by the impeller (4), so since said part has a curvature, a "guillotine" effect reducing the noise caused by the passage of the blades (5) is generated, which would not be the case if the transition between the first part (6.1) and the second part (6.2) was by way of a 90° bend and did not have a radius of curvature (r3).

[0025] The first part (6.1) and the second part (6.2) also have a slight radius of curvature, such that the curvature of the second part (6.2) also helps to reduce the noise of the blades (5) of the impeller (4), whereas since all the parts of the arm (6) have a curvature on the front

face (F) thereof, the distribution of torsional vibrations that are transmitted to the arm (6) from the motor (3) is improved.

[0026] As shown in the drawings, the arms (6) are connected to the motor (3) through a flat bar (7), although the arms (6) may be directly connected to the motor (3) or to a casing surrounding the impeller (4), without this altering the concept of the invention.

[0027] The embodiment of the ventilation device shown in Figures 1 to 5 has four arms (6), although the number of arms (6) will be selected depending on the size of the motor (3) and impeller (4) assembly, having to use at least three arms (6) for connecting the motor (3) and impeller (4) assembly with the front part (1).

[0028] Figures 6 to 11 show different configurations of the arms (6). Figures 6 and 9 show a three-arm configuration, Figures 7 and 10 show a four-arm configuration and Figures 8 and 11 show a six-arm configuration.

[0029] As shown in said Figures 6 to 11, the position of the arms changes depending on the direction of rotation (G) of the impeller, therefore when the impeller rotates in the counterclockwise direction the arms are arranged as shown in Figures 6, 7 and 8, whereas when the impeller (4) rotates in the clockwise direction the arms are arranged as shown in Figures 9, 10 and 11.

[0030] The arms (6) are arranged according to a symmetrical distribution with respect to the axis of rotation of the motor (3) and impeller (4) assembly allowing the torsional vibrations of the motor (3) to be uniformly distributed throughout all the arms (6). When three arms (6) are used, the arms (6) are connected with one another forming a 60° angle; when four arms (6) are used, the arms (6) are connected with one another forming a 90° angle; whereas when six arms (6) are used, the arms (6) are connected with one another forming a 120° angle.

Claims

1. A ventilation device comprising:

- a front part (1) with a suction mouth (2) through which air is introduced into the ventilation device,
- a motor (3) and impeller (4) assembly with blades (5) having an axis of rotation arranged axially with respect to the suction mouth (2), the motor (3) and impeller (4) assembly being configured such that during use, the air is driven in a direction (D) which is perpendicular to the axis of rotation with a deflection angle (α) in the direction of rotation (G) of the impeller (4), and
- support means for connecting the motor (3) and impeller (4) assembly with the front part (1), **characterized in that** the support means comprise at least three arms (6) having a flat laminar shape and extending in the direction (D) in which the air is driven.

2. The ventilation device according to the preceding claim, **characterized in that** the arms (6) have a front face (F) and side faces (L), wherein the front face (F) has a smaller thickness than the side faces (L), said front face (F) of smaller thickness is facing the direction (D) in which the air is driven, whereas the side faces (L) are parallel to the direction (D) in which the air is driven.


3. The ventilation device according to any one of the preceding claims, **characterized in that** the arms (6) have a first part (6.1) connected to the motor (3) and impeller (4) assembly, a second part (6.2) connected to the front part (1) and a third part (6.3) connecting the first part (6.1) with the second part (6.2), wherein the first part (6.1) of each arm (6) has a connection point (u) for connecting with the arm (6) located immediately adjacent thereto according to the opposite direction of rotation (G) of the impeller (4), and a second connection point (u') for connecting with the arm (6) located immediately adjacent thereto according to the direction of rotation (G) of the impeller (4).

4. The ventilation device according to the preceding claim, **characterized in that** the first part (6.1) of the arms (6) extends in a direction substantially perpendicular to the axis of rotation of the motor (3) and impeller (4) assembly, the second part (6.2) extends in a direction substantially parallel to the axis of rotation of the motor (3) and impeller (4) assembly, and the third part (6.3) connects the first part (6.1) with the second part (6.2) by way of a bend.

5. The ventilation device according to any one of the preceding claims, **characterized in that** the arms (6) are L-shaped.

6. The ventilation device according to any one of the preceding claims, **characterized in that** the arms (6) are arranged according to a symmetrical distribution with respect to the axis of rotation of the motor (3) and impeller (4) assembly.

7. The ventilation device according to any one of the preceding claims, **characterized in that** at least the part of the arms (6) facing the direction (D) in which the air is driven has a curvature for reducing the noise caused by the passage of the blades (5).

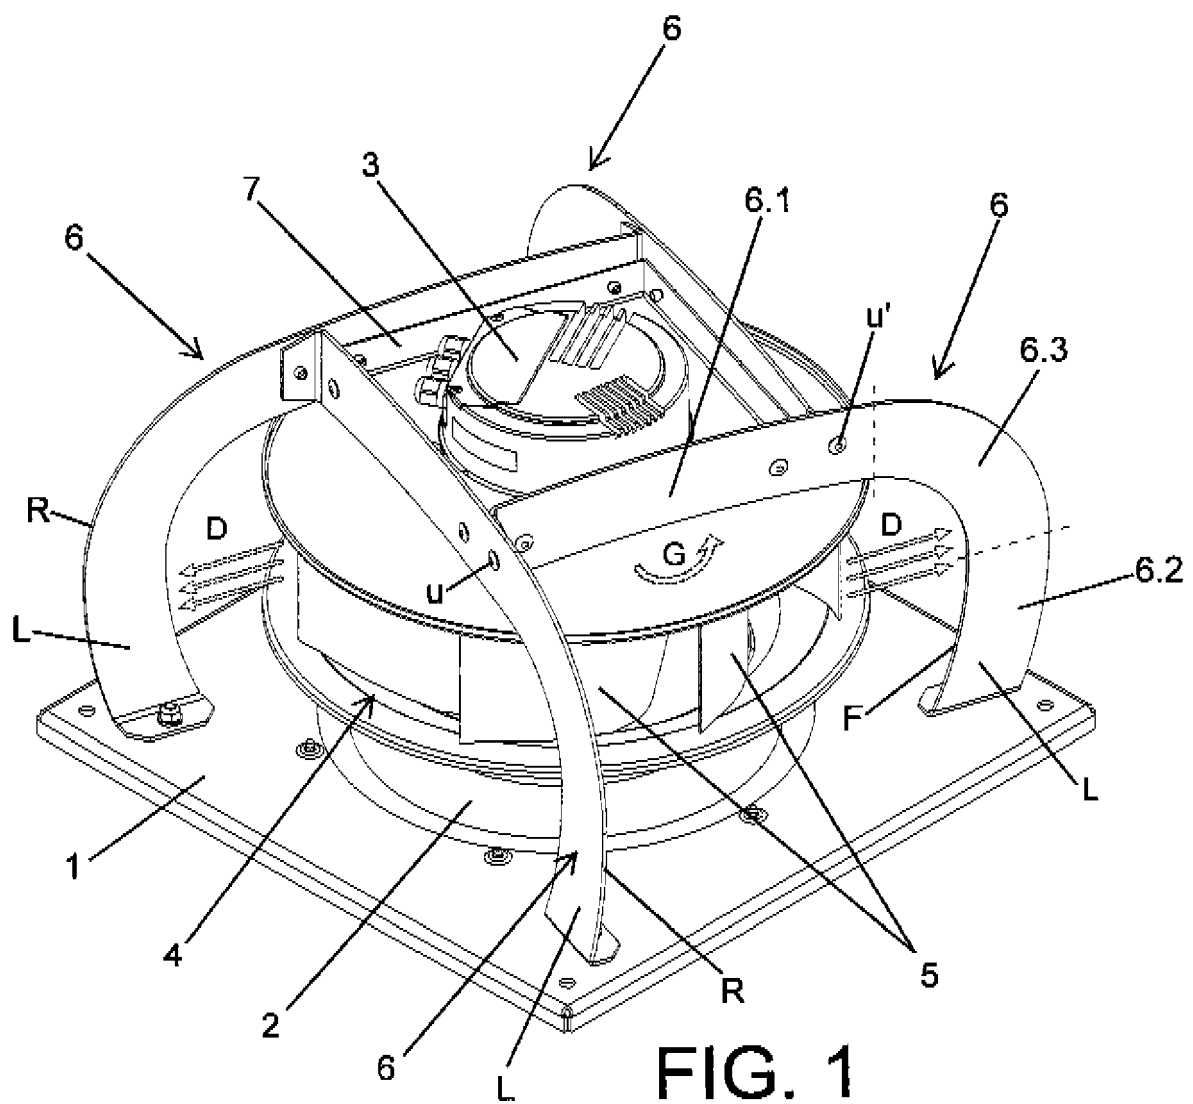

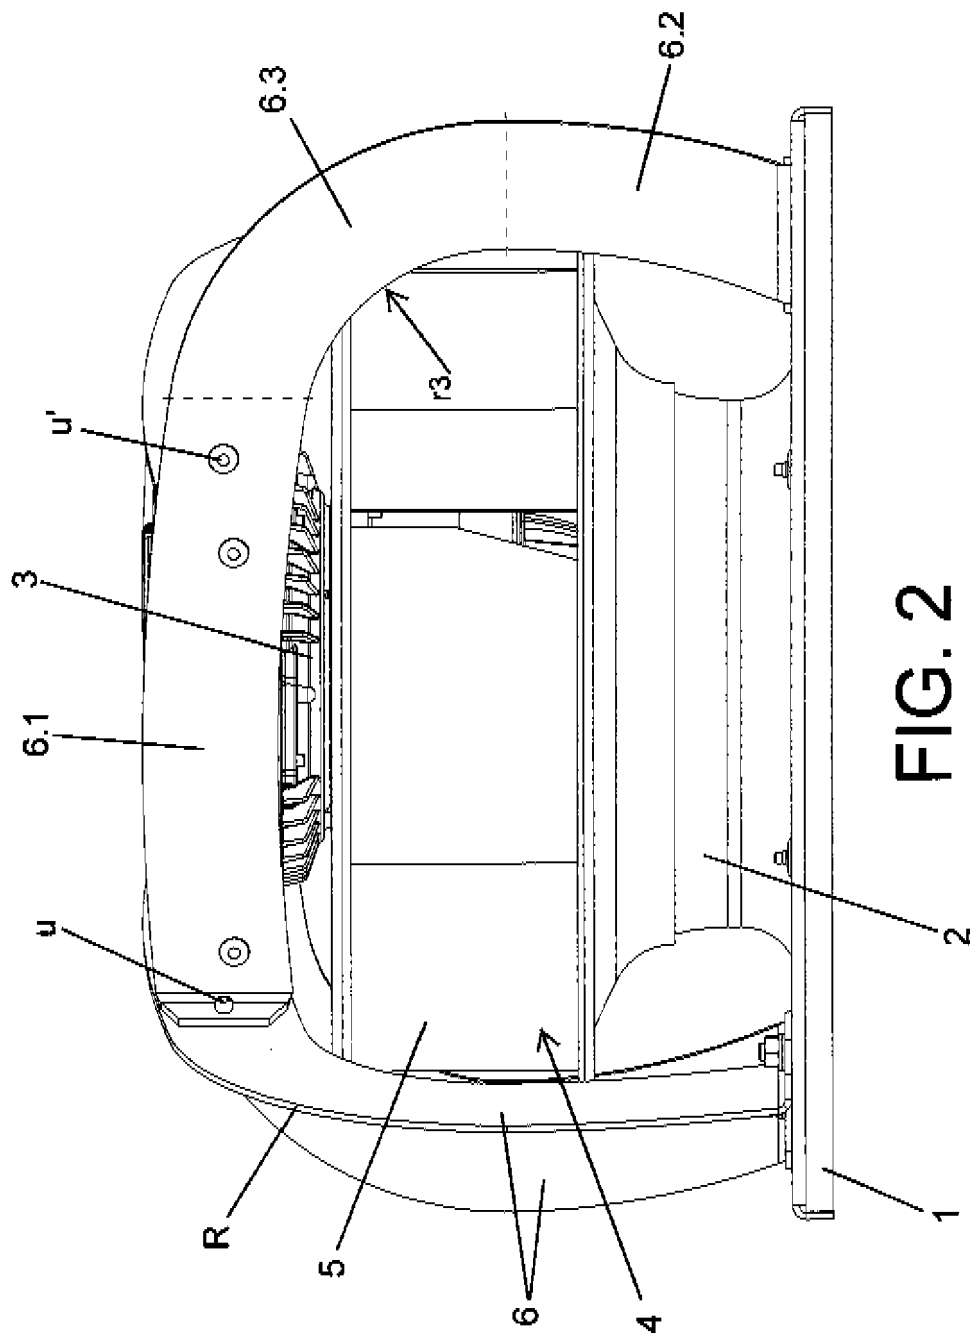


FIG. 2

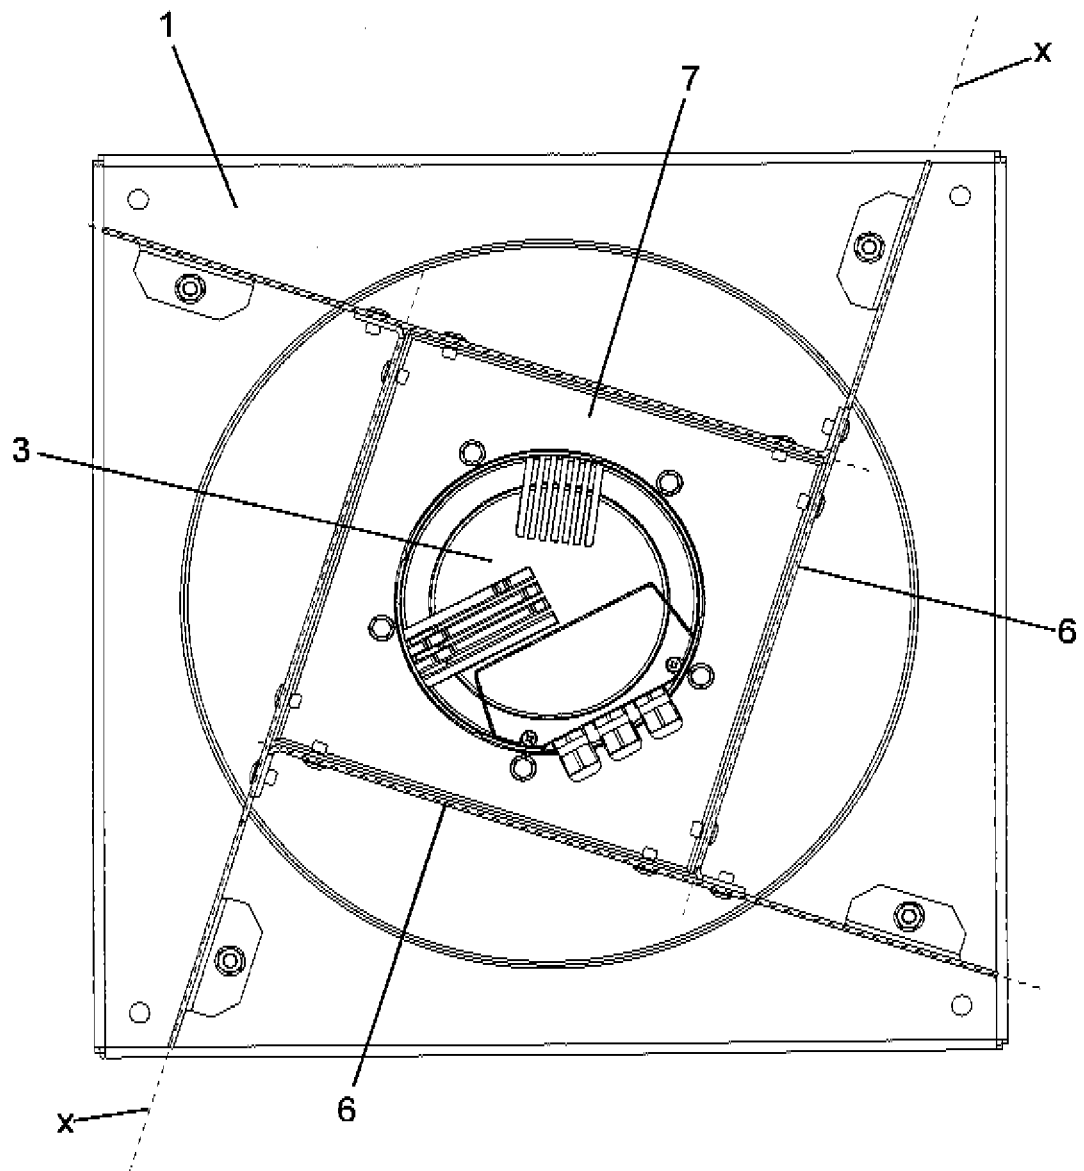


FIG. 3

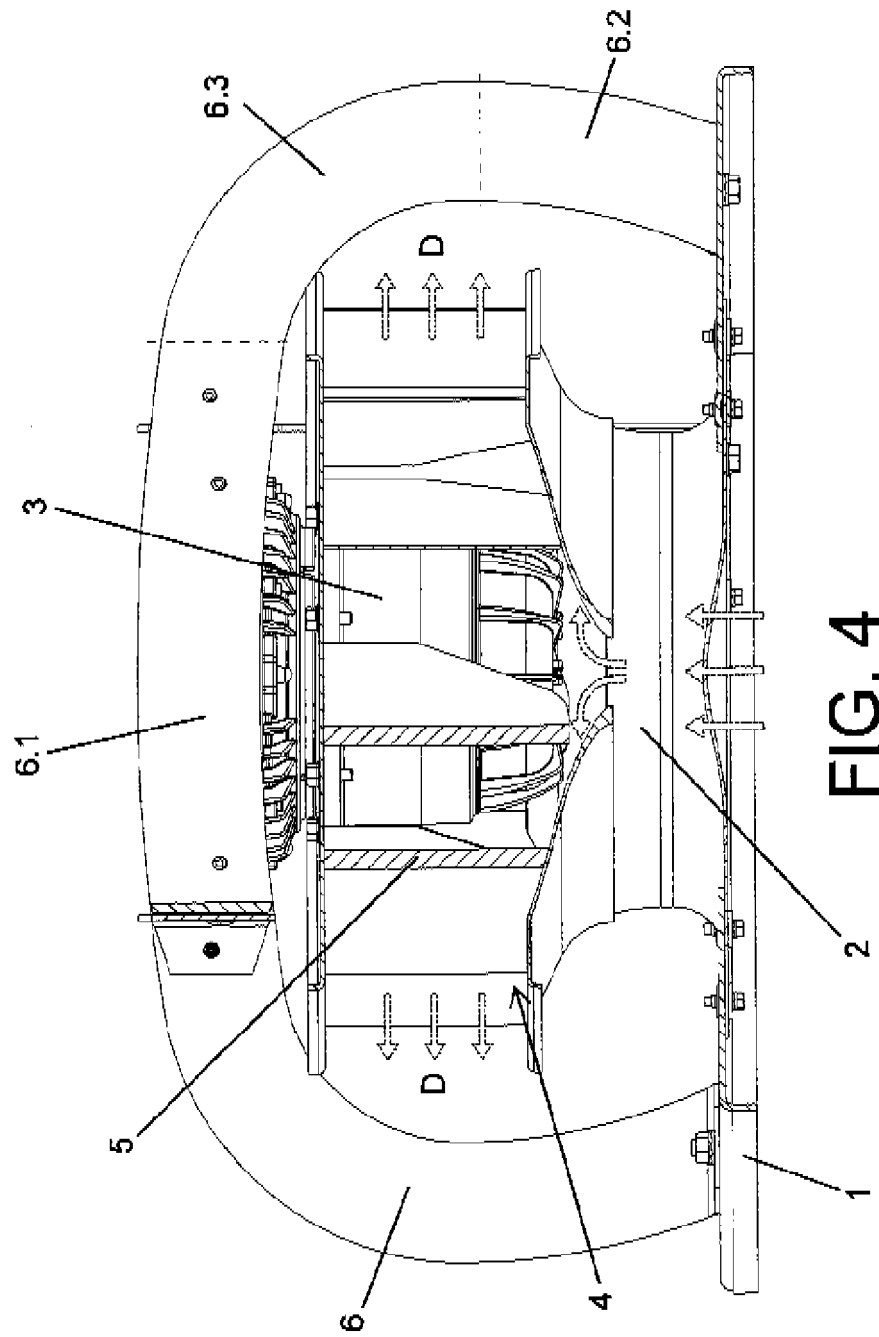


FIG. 4

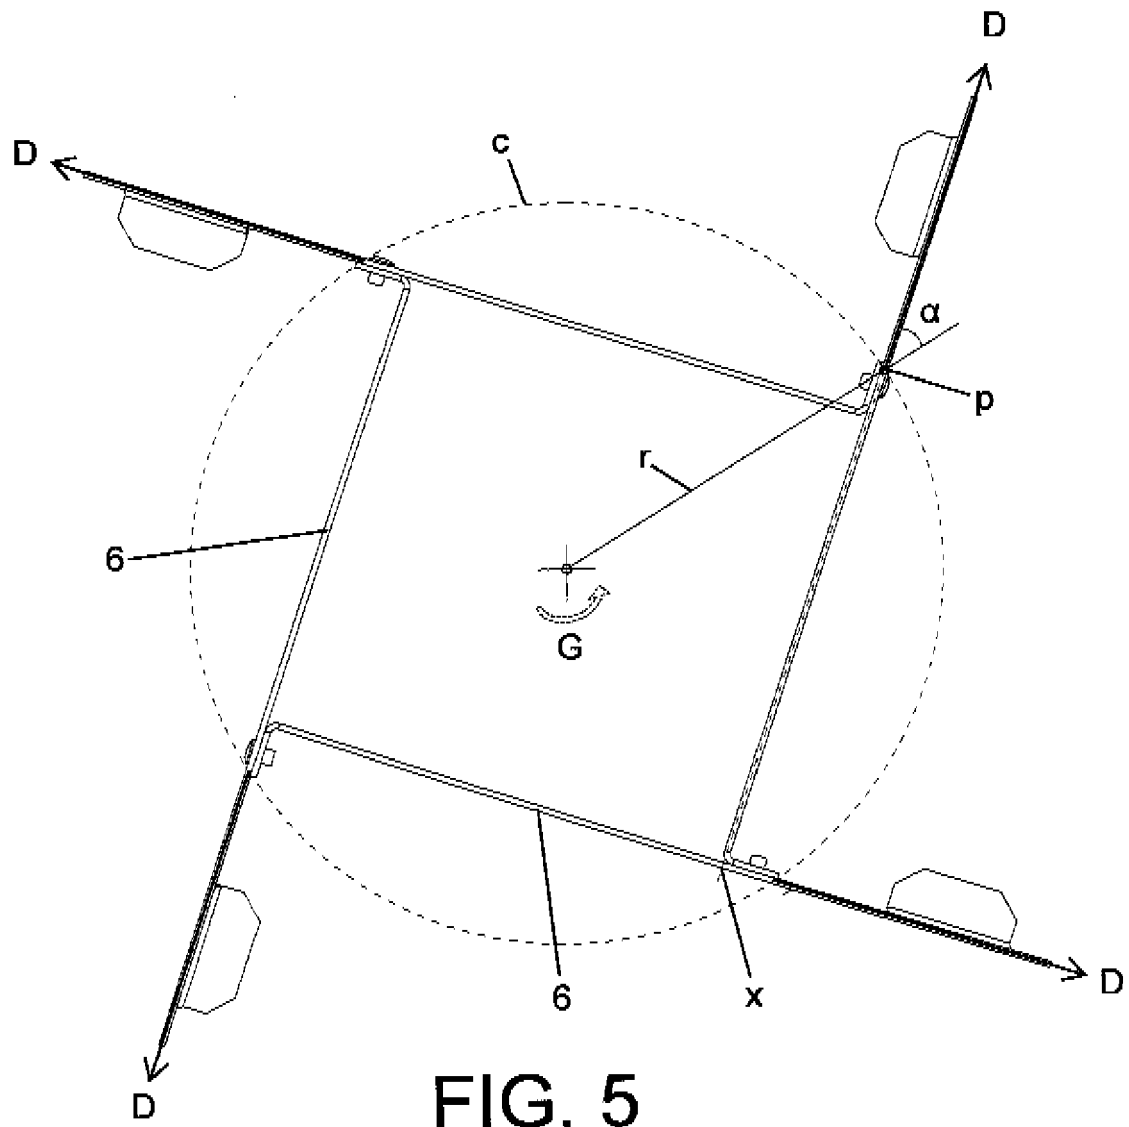


FIG. 5

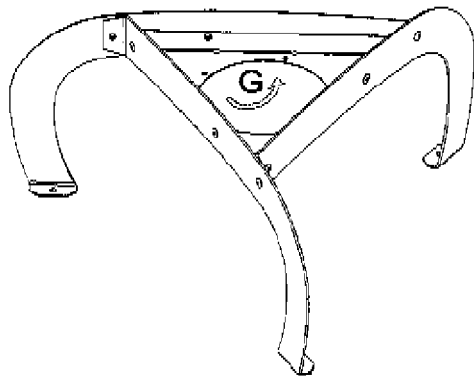


FIG. 6

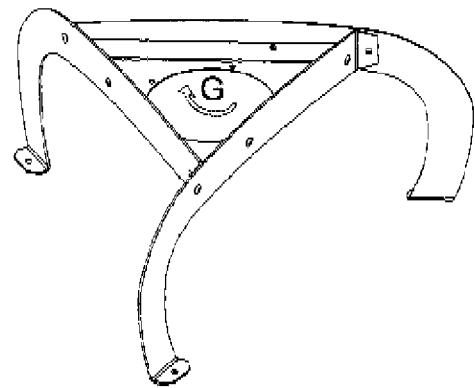


FIG. 9

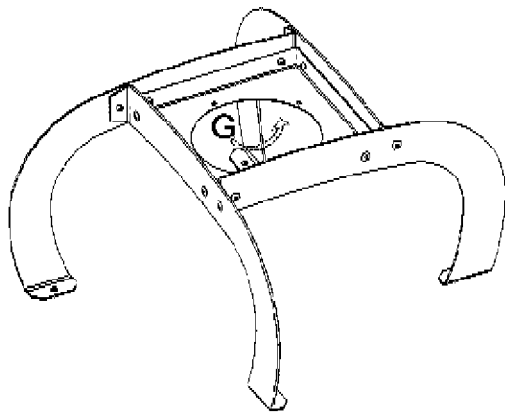


FIG. 7

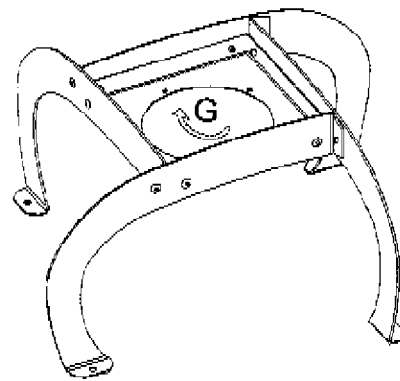


FIG. 10

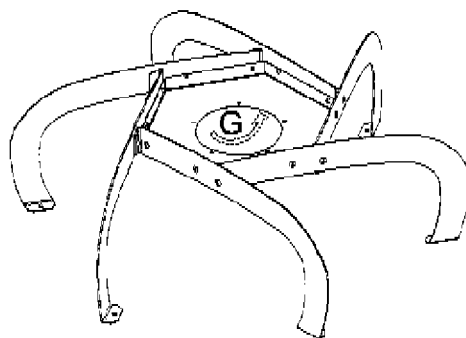


FIG. 8

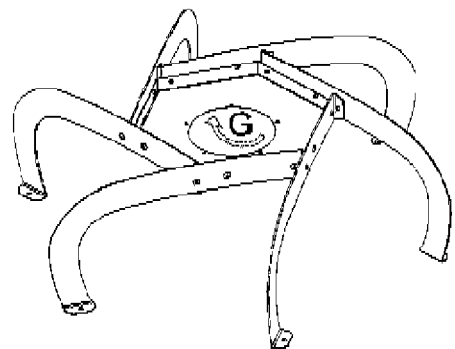


FIG. 11



EUROPEAN SEARCH REPORT

 Application Number
 EP 17 38 0008

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2011/200438 A1 (RUECKERT CHRISTIAN [DE] ET AL) 18 August 2011 (2011-08-18) * the whole document *	1-7	INV. F24F7/007 F24F13/32 F24F13/24
A	US 4 685 513 A (LONGHOUSE RICHARD E [US] ET AL) 11 August 1987 (1987-08-11) * the whole document *	1-7	
A	US 2016/032944 A1 (COCKS RACHELE BARBARA [US] ET AL) 4 February 2016 (2016-02-04) * the whole document *	1-7	
A	EP 2 080 912 A2 (HOLLAND CONDITIONING PARKEERSY [NL]) 22 July 2009 (2009-07-22) * the whole document *	1-7	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
			F24F F04D
Place of search		Date of completion of the search	Examiner
Munich		31 August 2017	Djemour, Anna
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 1
 EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 17 38 0008

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

31-08-2017

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2011200438 A1	18-08-2011	AT 548568 T	15-03-2012
		CN 101946092 A	12-01-2011
		DE 102008056459 A1	20-08-2009
		DE 202008002356 U1	25-06-2009
		EP 2242930 A1	27-10-2010
		ES 2382438 T3	08-06-2012
		US 2010329857 A1	30-12-2010
		US 2011200438 A1	18-08-2011
		WO 2009103606 A1	27-08-2009

US 4685513 A	11-08-1987	NONE	

US 2016032944 A1	04-02-2016	NONE	

EP 2080912 A2	22-07-2009	EP 2080912 A2	22-07-2009
		NL 1034926 C2	21-07-2009
