



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
12.09.2018 Bulletin 2018/37

(51) Int Cl.:
B29C 45/14 (2006.01)

(21) Application number: **18158708.0**

(22) Date of filing: **26.02.2018**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD TN

(72) Inventor: **BUCCO, Peter T.**
Cortland, OH 44410 (US)

(74) Representative: **Robert, Vincent et al**
Aptiv Services France SAS
Aptiv EMEA Patent Department
Bâtiment Le Raspail - Paris Nord 2
22, avenue des Nations
CS 65059 Villepinte
95972 Roissy CDG Cedex (FR)

(30) Priority: **09.03.2017 US 201715454280**

(71) Applicant: **Delphi Technologies LLC**
Troy, MI 48007 (US)

(54) **METHOD FOR MOLDING A RESILIENT MATERIAL AROUND A RIGID WORK PIECE**

(57) A method (100) of forming a resilient seal about a work piece (12) is presented. The method (100) includes the steps of providing (102) a work piece (12) defining a rib (14) circumferentially protruding from an outer surface (16) about a longitudinal axis of the work piece (12) and providing (104) a mold (20). The mold (20) defines a first cavity (22) configured to receive the work piece (12), a second cavity (24) circumferentially extending about the longitudinal axis of the work piece (12) and in communication with the first cavity (22), and a port (26)

in communication with the second cavity (24). The method (100) further includes the steps of inserting (106) the work piece (12) within the first cavity (22) such the rib (14) is circumferentially in intimate contact with an inner surface (30) of the first cavity (22), introducing (108) a curable resilient material (32) into the port (26), thereby filling the second cavity (24) with the resilient material (32), curing (110) the resilient material (32), and then removing (112) the work piece (12) from the mold (20).

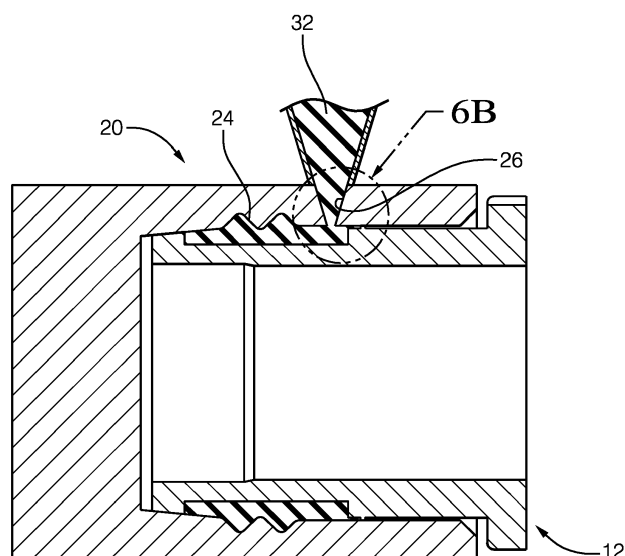


FIG. 6A

Description

TECHNICAL FIELD OF THE INVENTION

[0001] The invention generally relates to methods of molding a resilient material, and more particularly relates to a method of molding a resilient material around a rigid work piece.

BACKGROUND OF THE INVENTION

[0002] Known process for overmolding silicone onto a plastic component involves using an upper mold plate and a lower mold plate forming a cavity therebetween. The plastic component is placed into the cavity and then the upper and lower mold plates are closed and liquid silicone is injected into the mold and cured about the plastic component to form a finished component. The upper and lower mold plates are then separated and the finished component is removed from the removed from the cavity. The problem with this technique is that during the injection of the silicone material an interference fit between the plastic component and the mold cavity is required. The upper and lower mold plates are machined to very tight tolerances. However, it is difficult to maintain the same tight tolerances for the plastic component.

[0003] If the plastic component is undersized, this will cause the mold cavity to have an excessive clearance. Since silicone has such a low viscosity, a thin layer of silicone will squirt out between the cavity and the component creating unwanted excess material in what is commonly called "flashing". This flashing must then be removed from the component during an additional reworking process which not only increases manufacturing labor and time, but may also cause damage to the component or the silicone seal. On the other hand, if the plastic component is oversized, this will cause loading the component into the cavity to be difficult and create a misalignment that could lead to damage of the mold and/or the component. This the finished component will not be usable and will need to be scrapped.

[0004] Alternatively, the plastic component could be machined to a tight enough tolerance to eliminate over or undersized components. However, the machining operation would undesirable increase manufacturing costs and time of the plastic component.

[0005] An improved method of forming a silicone seal around a plastic component that compensates for dimensional variations in the component remains desired.

[0006] The subject matter discussed in the background section should not be assumed to be prior art merely as a result of its mention in the background section. Similarly, a problem mentioned in the background section or associated with the subject matter of the background section should not be assumed to have been previously recognized in the prior art. The subject matter in the background section merely represents different approaches, which in and of themselves may also be inventions.

BRIEF SUMMARY OF THE INVENTION

[0007] According to an embodiment, a method of forming a resilient seal about a work piece is provided. The method includes the steps of providing a work piece defining a rib circumferentially protruding from an outer surface about a longitudinal axis of the work piece and providing a mold. The mold defines a first cavity configured to receive the work piece, a second cavity circumferentially extending about the longitudinal axis of the work piece and in communication with the first cavity, and a port in communication with the second cavity. The method further includes the steps of inserting the work piece within the first cavity such the rib is circumferentially in intimate contact with an inner surface of the first cavity, introducing a curable resilient material into the port, thereby filling the second cavity with the resilient material, curing the resilient material, and then removing the work piece from the mold.

[0008] The rib may be at least partially deformed as the work piece is inserted within the first cavity. The work piece may define a third cavity circumferentially extending about the longitudinal axis and wherein the third cavity is in communication with the second cavity when the work piece is inserted within the first cavity. The rib may have a generally square cross sectional profile with a height of 0.04 mm and a width of 0.04 mm. The rib may be located rearward of the third cavity. The work piece may also define a second rib that circumferentially protrudes from the outer surface about the longitudinal axis of the work piece. This second rib may be located forward of the third cavity.

[0009] The curable resilient material may be a silicone based material. The work piece may be formed of a material such as polybutylene terephthalate (PBT), polyethylene terephthalate (PET), polyamide (PA), polycarbonate (PC), polypropylene (PP), and/or acrylonitrile butadiene styrene (ABS).

[0010] The mold may be a one piece unitary mold the work piece may be inserted into the first cavity through an opening defined by the first cavity. The hardness of the mold may be greater than the hardness of the work piece. The work piece may be an electrical connector body.

[0011] Further features and advantages of the invention will appear more clearly on a reading of the following detailed description of the preferred embodiment of the invention, which is given by way of non-limiting example only and with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

[0012] The present invention will now be described, by way of example with reference to the accompanying drawings, in which:

Fig. 1 is a flow chart of a method of method of forming

a resilient seal about a work piece in accordance with one embodiment;

Fig. 2A is a perspective view of a work piece having defining a rib circumferentially protruding from an outer surface about a longitudinal axis of the work piece in accordance with one embodiment;

Fig. 2B is a close up perspective view of the rib of Fig. 2A in accordance with one embodiment;

Fig. 3 is a cut away view of a mold defining a first cavity configured to receive the work piece of Fig. 2A, a second cavity circumferentially extending about the longitudinal axis of the work piece and in communication with the first cavity, and a port in communication with the second cavity in accordance with one embodiment;

Fig. 4 is a cut away view of the step of inserting the work piece of Fig. 2A into the mold of Fig. 3 in accordance with one embodiment;

Fig. 5A is a cross section view of the work piece of Fig. 2A inserted within the first cavity of the mold of Fig. 3 such the rib is circumferentially in intimate contact with an inner surface of the first cavity in accordance with one embodiment

Fig. 5B is a close up cross section view of the rib in intimate contact with an inner surface of the first cavity in accordance with one embodiment;

Fig. 6A is a cross section view of the step of introducing a curable resilient material into the port of the mold, thereby filling the second cavity with the resilient material in accordance with one embodiment; and

Fig. 6B is a close up cross section view of the rib 14 during the step of introducing a curable resilient material into the port of the mold in accordance with one embodiment.

DETAILED DESCRIPTION OF THE INVENTION

[0013] The method of forming a resilient seal around a work piece, for example a silicone environmental seal around a plastic electrical connector body, is described herein. The work piece includes a deformable rib that is in intimate contact with the inner walls of a mold used to form the seal about the work piece. This rib forms a dam that inhibits the material forming the seal to flow into areas of the mold in which it is not desired, thereby reducing the likelihood of "flashing" on the work piece.

[0014] In the following description, terms describing orientation such as "longitudinal" will refer to the mating axis X while "lateral" should be understood to refer to an axis perpendicular to the mating axis X, which is not necessarily the transverse axis. Furthermore, other terms such as "top" or "bottom" should be understood relative to an axis perpendicular to the mating axis X, which is not necessarily the vertical axis. As used herein the terms "front" and "forward" refer to a longitudinal orientation referenced towards the end of the work piece firstly inserted to the mold and the terms "back", "rear", "rear-

ward", and "behind" refer to a longitudinal orientation referenced towards the end of the work piece lastly inserted to the mold.

[0015] Fig. 1 illustrates a non-limiting method 100 of method of forming a resilient seal about a work piece. The method 100 includes the following steps.

[0016] STEP 102, PROVIDE A WORK PIECE DEFINING A RIB CIRCUMFERENTIALLY PROTRUDING FROM AN OUTER SURFACE ABOUT A LONGITUDINAL AXIS OF THE WORK PIECE, includes providing a work piece 12, a non-limiting example of which is illustrated in Fig. 2A. The work piece 12 defines a rib 14 that protrudes from an outer surface 16 of the work piece 12 and circumferentially extends about a longitudinal axis X of the work piece. The outer surface 16 of the work piece 12 also defines a work piece cavity 18 circumferentially extending about the longitudinal axis X of the work piece 12. The rib 14 may be located rearward of the work piece cavity 18. The work piece 12 illustrated in this example is an electrical connector body and will hereinafter referred to as the connector body 12. The connector body 12 is formed of a dielectric material such as polybutylene terephthalate (PBT), polyethylene terephthalate (PET), polyamide (PA), polycarbonate (PC), polypropylene (PP), or acrylonitrile butadiene styrene (ABS). As best shown in Fig. 2B, the rib 14 has a generally square cross sectional profile and preferably has a height of 0.04 mm and a width of 0.04 mm.

[0017] STEP 104, PROVIDE A MOLD HAVING A FIRST CAVITY, A SECOND CAVITY, AND A PORT, includes providing a mold 20, a non-limiting example of which is illustrated in Fig. 3. The mold 20 is configured for a secondary molding operation of molding a resilient seal about the connector body 12. The mold 20 defines a first cavity 22 that is configured to receive the connector body 12, hereinafter referred to as the receiving cavity 22. The mold also defines a second cavity 24 circumferentially extending about the longitudinal axis X of the mold 20 in which the resilient seal is formed, hereinafter referred to as the seal cavity 24. The seal cavity 24 is open to and in communication with the receiving cavity 22. The mold 20 also defines a port 26 configured to receive a resilient material, such as a silicone based material, in a liquid, fluid, or viscous form. The port 26 is in communication with the seal cavity 24. The hardness of the material forming the mold 20 is preferably greater than the hardness of the material forming the connector body 12. Typically, the mold 20 is formed of a tool grade steel. The mold 20 is a one piece unitary mold. The connector body 12 is inserted into the receiving cavity 22 through an opening 28 defined by the receiving cavity 22. The work piece cavity 18 is in communication with the seal cavity 24 when the connector body 12 is inserted within the receiving cavity 22.

[0018] STEP 106, INSERT THE WORK PIECE WITHIN THE FIRST CAVITY SUCH THE RIB IS CIRCUMFERENTIALLY IN INTIMATE CONTACT WITH AN INNER SURFACE OF THE FIRST CAVITY, includes in-

serting the connector body 12 within the receiving cavity 22 as shown in Fig. 4 such the rib 14 is circumferentially in intimate contact with an inner surface 30 of the receiving cavity 22 as illustrated in Figs. 5A and 5B. As the rib 14 comes into intimate contact with the inner surface 30 of the receiving cavity 22, the rib 14 is at least partially deformed.

[0019] STEP 108, INTRODUCE A RESILIENT MATERIAL INTO THE PORT, THEREBY FILLING THE SECOND CAVITY, includes introducing a curable resilient material 32 into the port 26, thereby filling the seal cavity 24 and the work piece cavity 18 with the resilient material 32 as illustrated in Fig. 6A. As best shown in Fig. 6B, the intimate contact or deformation of the rib 14 against the inner surface 30 of the receiving cavity 22 forms a dam between the seal cavity 24 and the receiving cavity 22, thereby preventing the liquid resilient material 32 from "flashing" into the receiving cavity 22 and onto the connector body 12.

[0020] STEP 110, CURE THE RESILIENT MATERIAL, includes curing the resilient material 32 in a known manner for the resilient material selected to form a resilient seal about the connector body 12.

[0021] STEP 112, REMOVE THE WORK PIECE FROM THE MOLD, includes removing the connector body 12 with the resilient seal from the mold 20.

[0022] Alternative embodiments of the method may be envisioned wherein the outer surface of the work piece defines a second rib that circumferentially protrudes from the outer surface about the longitudinal axis of the work piece. This second rib is preferably located forward of the work piece cavity.

[0023] From the foregoing detailed description, it can thus be seen that the present invention provides an improved method 100 for forming a resilient seal about a work piece 12, such as an electrical connector body 12, within a mold 20 in a manner to eliminate flashing. The method 100 of the present invention includes a work piece 12 having a circumferential rib 14 which is deformable to conform to the contour of the receiving cavity 22 so as to create a dam between the work piece 12 and the cavity 22. The deformable rib 14 also serves to compensate for dimensional variations of the work piece 12 and the receiving cavity 22 of the mold 20 such as a work piece 12 that is undersized, has slightly mismatched parting lines, and/or is slightly misshapen.

[0024] While this invention has been described in terms of the preferred embodiments thereof, it is not intended to be so limited, but rather only to the extent set forth in the claims that follow. Moreover, the use of the terms first, second, etc. does not denote any order of importance, but rather the terms first, second, etc. are used to distinguish one element from another. Furthermore, the use of the terms a, an, etc. do not denote a limitation of quantity, but rather denote the presence of at least one of the referenced items.

Claims

1. A method (100) of forming a resilient seal, comprising the steps of:

(102) providing a work piece (12) defining a rib (14) circumferentially protruding from an outer surface (16) about a longitudinal axis of the work piece (12);
(104) providing a mold (20), said mold (20) defining:

a first cavity (22) configured to receive the work piece (12),
a second cavity (24) circumferentially extending about the longitudinal axis of the work piece (12) and in communication with the first cavity (22), and
a port (26) in communication with the second cavity (24);

(106) inserting the work piece (12) within the first cavity (22) such the rib (14) is circumferentially in intimate contact with an inner surface (30) of the first cavity (22); and
(108) introducing a curable resilient material (32) into the port (26), thereby filling the second cavity (24) with the resilient material (32);
(110) curing the resilient material (32); and
(112) removing the work piece (12) from the mold (20).

2. The method (100) according to claim 1, wherein the rib (14) is at least partially deformed as the work piece (12) is inserted within the first cavity (22).
3. The method (100) according to any preceding claim, wherein the work piece (12) defines a third cavity circumferentially extending about the longitudinal axis and wherein the third cavity is in communication with the second cavity (24) when the work piece (12) is inserted within the first cavity (22).
4. The method (100) according to any preceding claim, wherein the rib (14) has a generally square cross sectional profile.
5. The method (100) according to any preceding claim, wherein a height of the rib (14) is 0.04 mm and a width of the rib (14) is 0.04 mm.
6. The method (100) according to claim 3, wherein the rib (14) is located rearward of the third cavity.
7. The method (100) according to any preceding claim, wherein the curable resilient material (32) is a silicone based material.

8. The method (100) according to any preceding claim,
wherein the work piece (12) is formed of a material
selected from the list consisting of polybutylene
terephthalate (PBT), polyethylene terephthalate
(PET), polyamide (PA), polycarbonate (PC), poly- 5
propylene (PP), and acrylonitrile butadiene styrene
(ABS).
9. The method (100) according to any preceding claim,
wherein the mold (20) is a unitary mold (20) and 10
wherein the work piece (12) is inserted into the first
cavity (22) through an opening (28) defined by the
first cavity (22).
10. The method (100) according to any preceding claim, 15
wherein a hardness of the mold (20) is greater than
a hardness of the work piece (12).
11. The method (100) according to any preceding claim,
wherein the work piece (12) is an electrical connector 20
body (12).

25

30

35

40

45

50

55

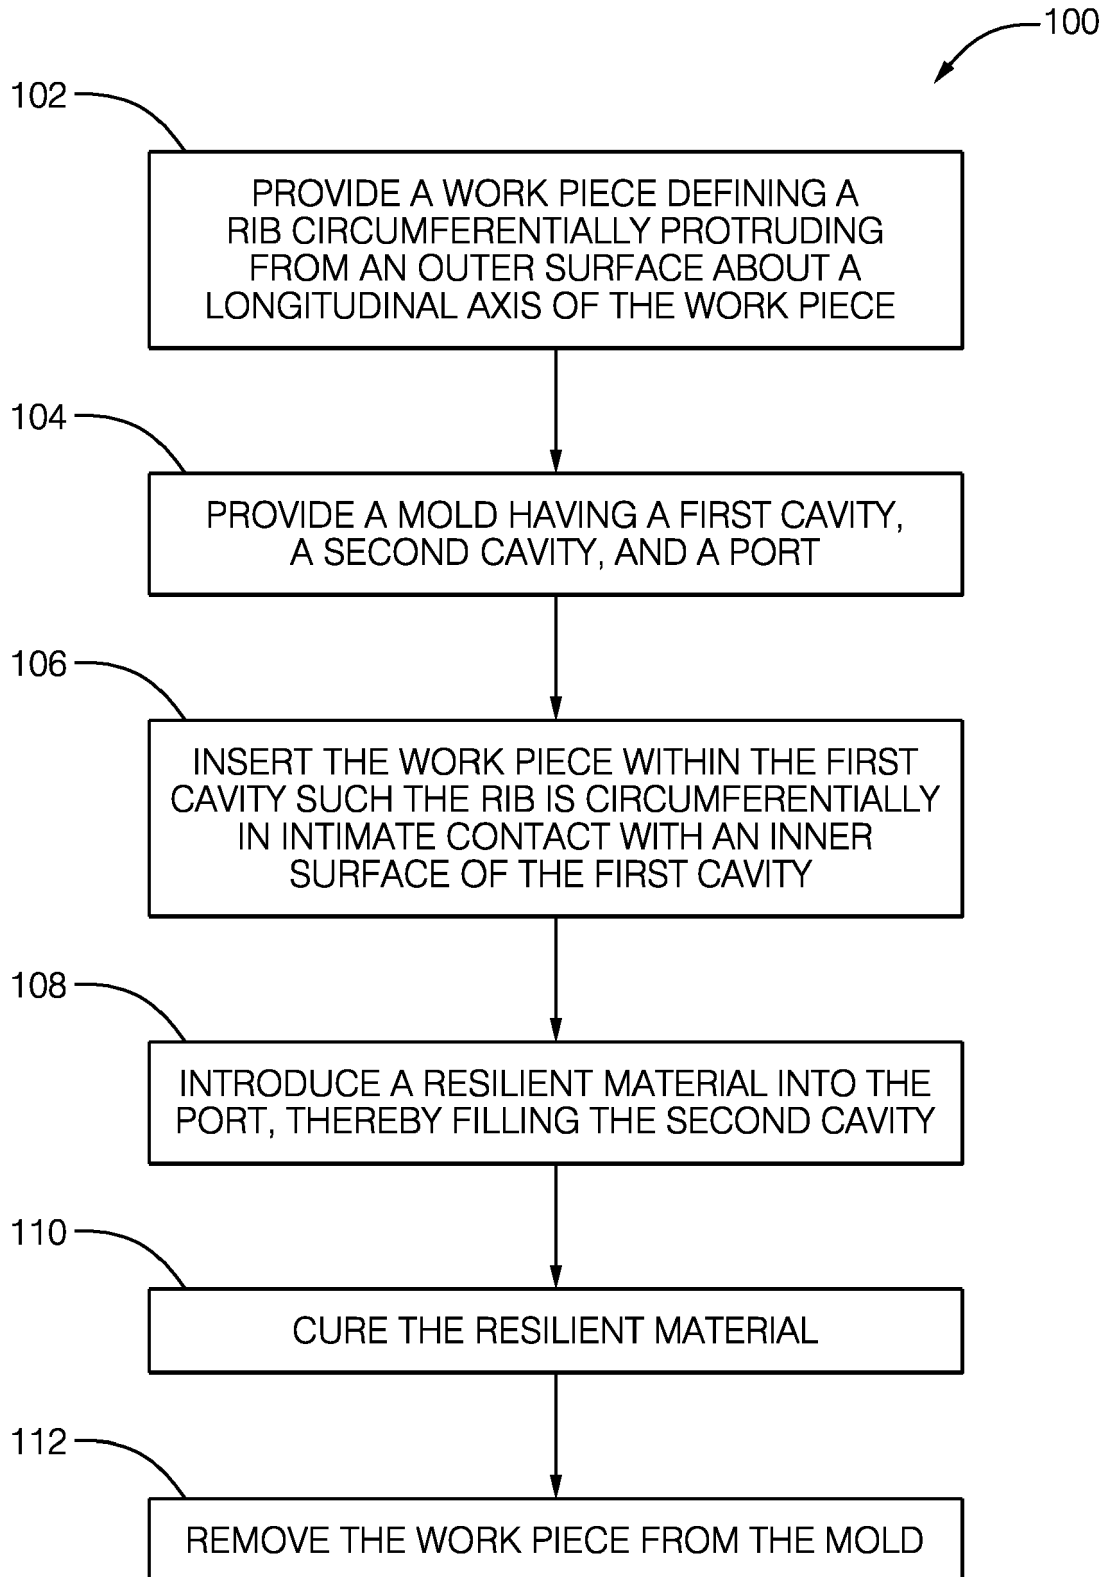


FIG. 1

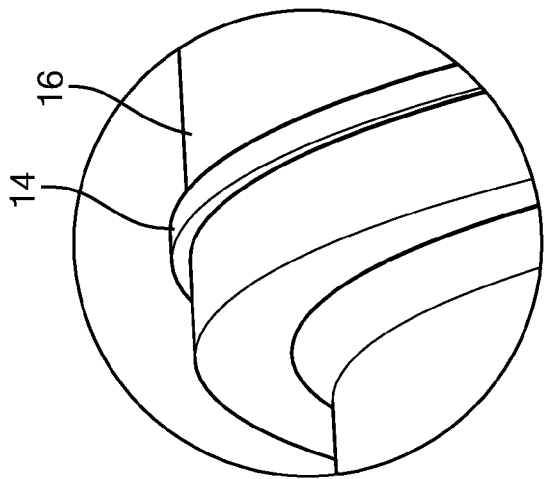


FIG. 2B

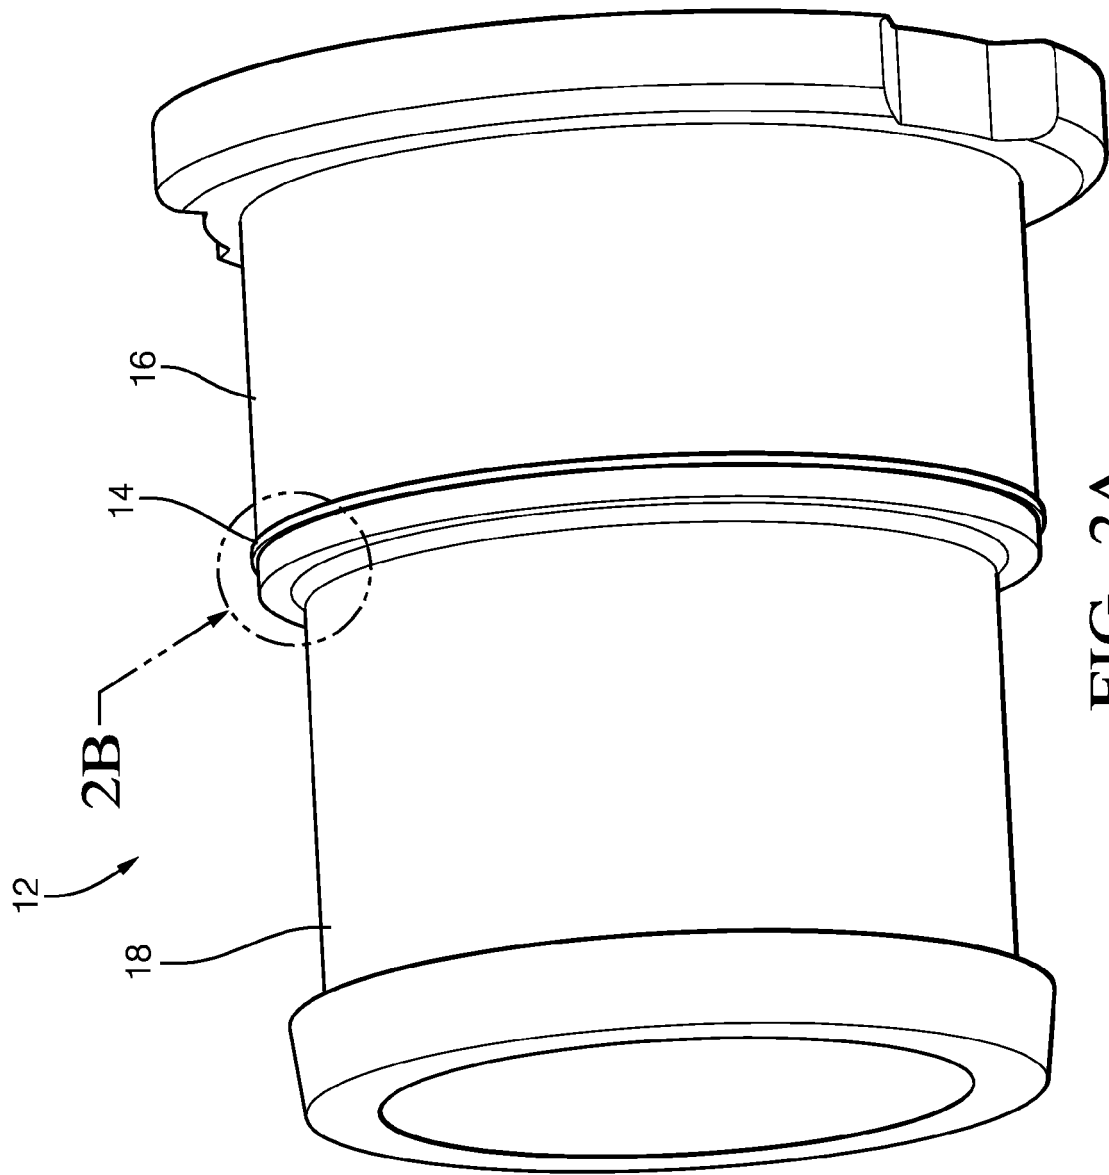


FIG. 2A

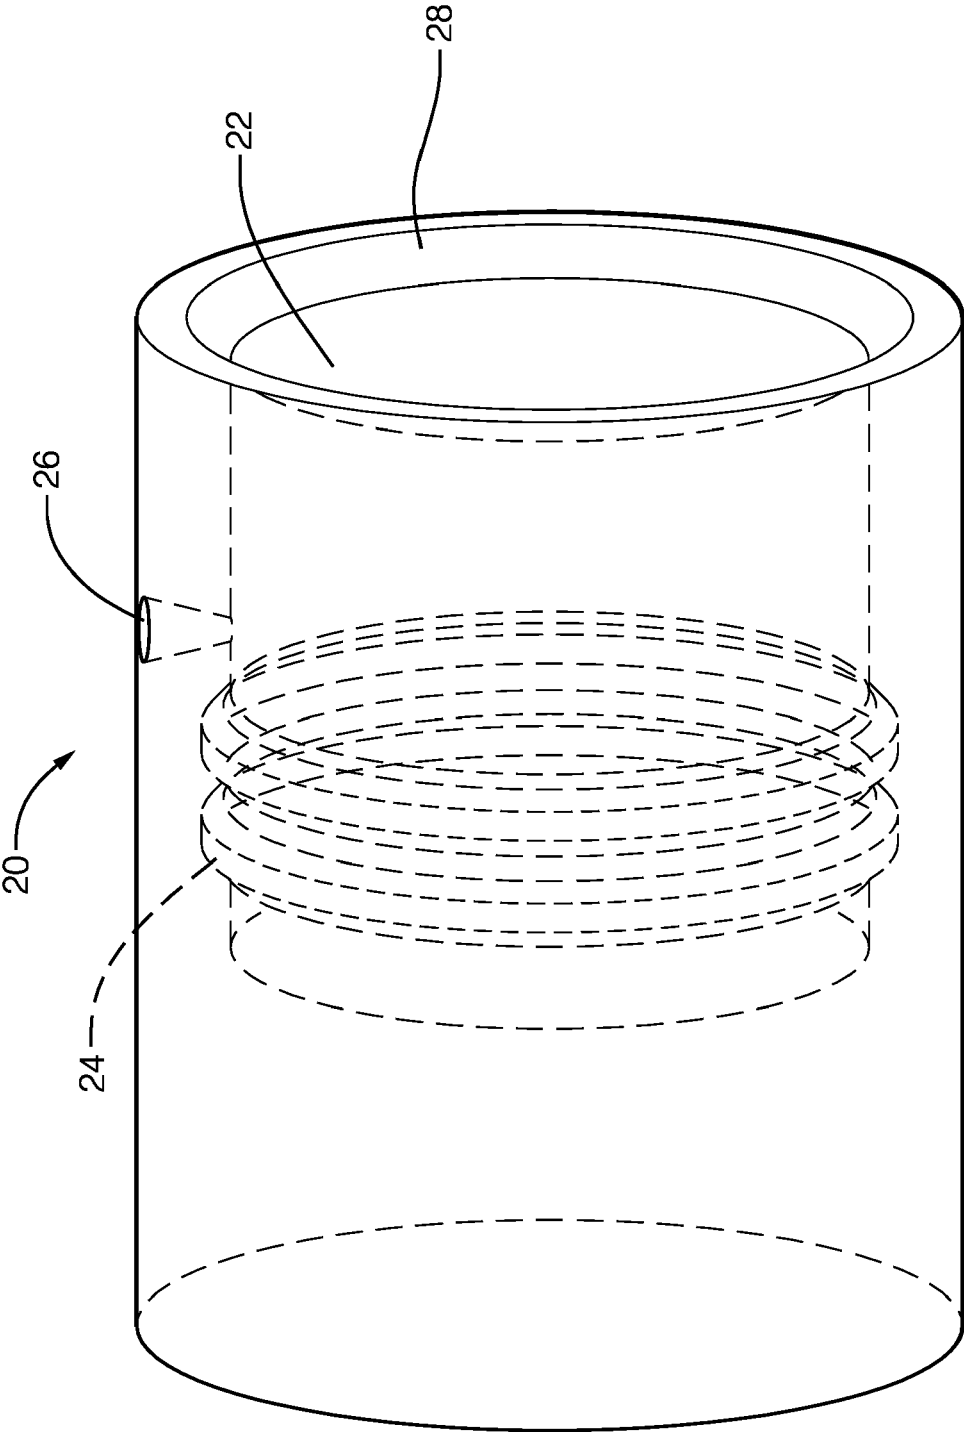


FIG. 3

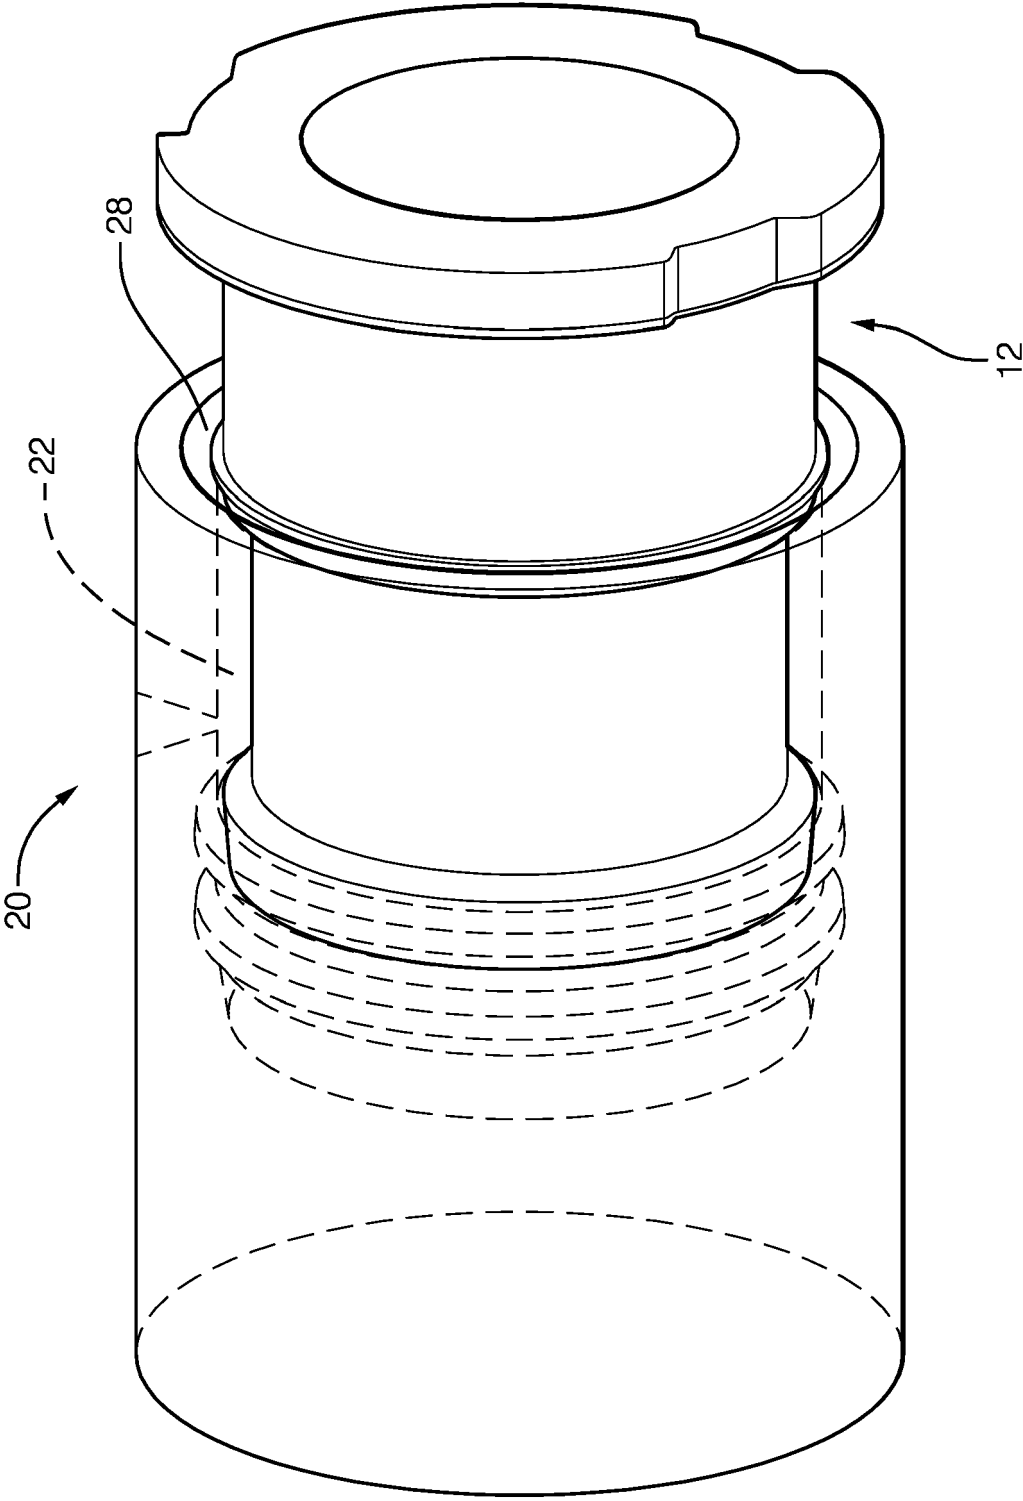


FIG. 4

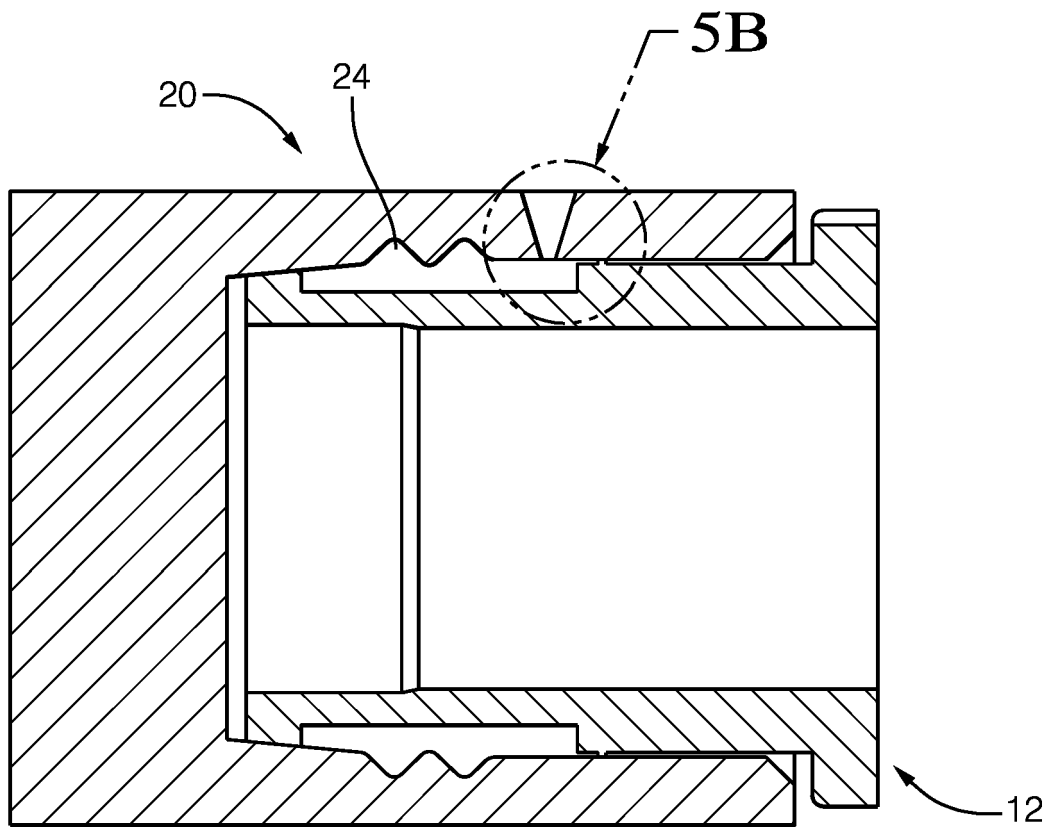


FIG. 5A

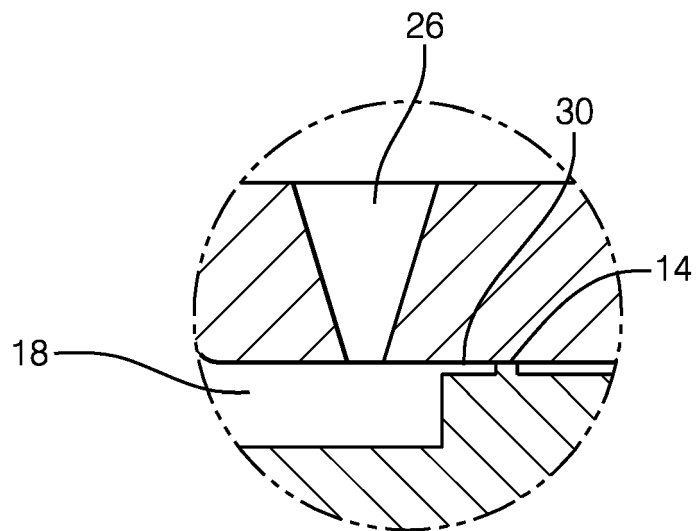


FIG. 5B

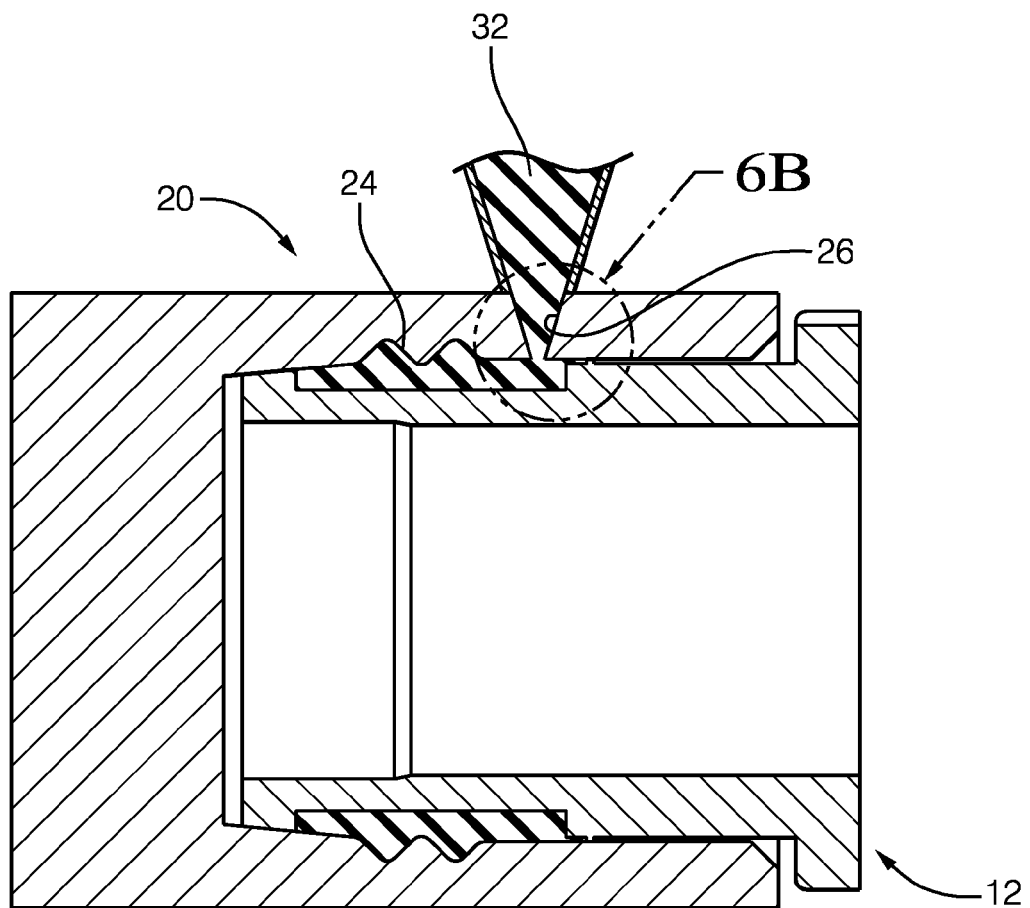


FIG. 6A

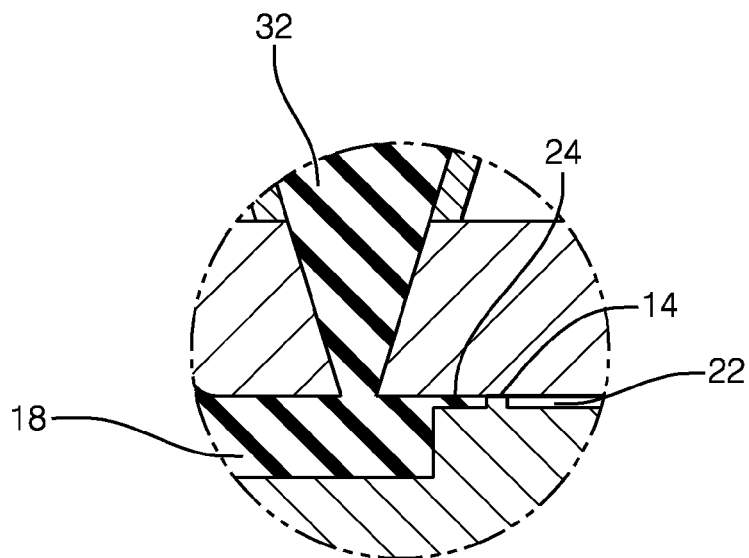


FIG. 6B



EUROPEAN SEARCH REPORT

 Application Number
 EP 18 15 8708

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	WO 94/00287 A1 (TOKAI RUBBER IND LTD [JP]; KAWASAKI MINORU [JP]; ISHIGURO HIROMASA [JP] 6 January 1994 (1994-01-06)	1-6,8	INV. B29C45/14
Y	* paragraphs [0014], [0019] - paragraphs [0021], [0025], [0034], [0045], [0070], [0075], [0097], [0104]; figures 9-14 *	1-11	
X	JP 2016 097645 A (CANON KK) 30 May 2016 (2016-05-30)	1-6,8	
Y	* paragraphs [0003], [0009], [0066], [0068]; figures 7-16 *	1-11	
Y	CA 2 091 950 A1 (ILLINOIS TOOL WORKS [US]) 10 October 1993 (1993-10-10) * paragraphs [0040], [0045], [0048], [0053], [0057]; figures 10-13 * * paragraph [0006] - paragraph [0011] *	1-11	
Y	US 2011/293925 A1 (KLANN CHARLES D [US] ET AL) 1 December 2011 (2011-12-01) * paragraphs [0044], [0048]; figures 1-9 * paragraphs [0023], [0027] *	7	TECHNICAL FIELDS SEARCHED (IPC) B29C
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 25 July 2018	Examiner Mans, Peter
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 1
 EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 18 15 8708

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-07-2018

10

15

20

25

30

35

40

45

50

55

ORM P0459

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9400287 A1	06-01-1994	DE 69325638 D1	19-08-1999
		DE 69325638 T2	06-04-2000
		EP 0606484 A1	20-07-1994
		EP 0810073 A2	03-12-1997
		US 5683647 A	04-11-1997
		WO 9400287 A1	06-01-1994

JP 2016097645 A	30-05-2016	CN 107000265 A	01-08-2017
		JP 2016097645 A	30-05-2016
		US 2017259476 A1	14-09-2017
		WO 2016084333 A1	02-06-2016

CA 2091950 A1	10-10-1993	CA 2091950 A1	10-10-1993
		ES 2061400 A2	01-12-1994
		GB 2266071 A	20-10-1993
		US 5306459 A	26-04-1994

US 2011293925 A1	01-12-2011	BR 112012029356 A2	26-07-2016
		CA 2799924 A1	01-12-2011
		CN 102905869 A	30-01-2013
		EP 2576178 A2	10-04-2013
		JP 6014209 B2	25-10-2016
		JP 2013526440 A	24-06-2013
		JP 2015178277 A	08-10-2015
		KR 20130018927 A	25-02-2013
		MX 341719 B	31-08-2016
		RU 2012155057 A	27-06-2014
		US 2011293925 A1	01-12-2011
		WO 2011150092 A2	01-12-2011
