

(19)



(11)

**EP 3 372 743 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:  
**28.07.2021 Bulletin 2021/30**

(51) Int Cl.:  
**E04B 2/74 (2006.01)**      **E04B 1/82 (2006.01)**  
**E06B 9/24 (2006.01)**

(21) Application number: **18160765.6**

(22) Date of filing: **08.03.2018**

(54) **ACOUSTIC PARTITION SYSTEM AND METHOD FOR MOUNTING AN ACOUSTIC PARTITION SYSTEM**

AKUSTISCHE TRENNWANDSYSTEM UND VERFAHREN ZUR MONTAGE EINES AKUSTISCHEN TRENNWANDSYSTEMS

SYSTÈME DE CLOISON ACOUSTIQUE ET PROCÉDÉ DE MONTAGE D'UN SYSTÈME DE CLOISON ACOUSTIQUE

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**

(30) Priority: **09.03.2017 NL 2018486**

(43) Date of publication of application:  
**12.09.2018 Bulletin 2018/37**

(73) Proprietor: **MYOTIS HOLDING B.V.**  
**7621 AG Borne (NL)**

(72) Inventor: **VAN DER VELDE, Peter**  
**7603 NK Almelo (NL)**

(74) Representative: **Mink-Lindenburg, Charlotte Hildegard**  
**Octrooibureau Mink B.V.**  
**P.O. Box 85658**  
**2508 CJ The Hague (NL)**

(56) References cited:  
**EP-A1- 3 211 171**      **CH-A- 476 482**  
**GB-A- 1 394 333**      **US-A- 5 664 613**  
**US-A1- 2014 090 788**

**EP 3 372 743 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

**[0001]** The present invention relates to a partition system for use in halls, such as sports halls.

**[0002]** The acoustics in sport halls is known to give rise to complaints from users, especially from people who must work in such halls, such as trainers and teachers. To improve the acoustic characteristics of sports halls it is known to cover the walls, ceiling and floor with panels of sound absorbing material.

**[0003]** Most sports halls are provided with one or more partition systems to divide the sports hall into smaller sections. Unfortunately, the acoustic characteristics deteriorate significantly, as soon as the partition systems are closed. Particularly, when a middle part of the hall is closed with partition systems at two sides, a considerable reverberation time combined with flutter-echoes is observed in the middle part of the hall.

**[0004]** The invention relates to a partition system, comprising a partition carrier, at least one pair of partition screens comprising sound absorbing material, that are interconnected at a predetermined distance and arranged on the partition carrier and motorized moving means for simultaneously moving the partition screens with respect to the partition carrier.

**[0005]** EP1174063 describes a partition curtain for use in halls, such as sports halls, comprising a curtain carrier, at least one pair of curtain sheets comprising sound absorbing material, that are interconnected at a predetermined mutual distance and arranged on the curtain carrier and motorized moving means for simultaneously moving the curtain sheets with respect to the curtain carrier. In the known partition curtain a layer of sound absorbing material is arranged on the outside of the curtain sheets. Document US 5 664 613 discloses a partition system according to the preamble of claim 1.

**[0006]** The invention has for its object to provide a partition system with improved sound isolation and improved sound absorption. More specifically the invention has for its object to provide a partition system that can full fill the noise standards for sports halls that are formulated as directives by several institutions, such as NOC NSF and ISA/Kiwa.

**[0007]** This object is achieved by the partition system as defined in claim 1, wherein the partition system comprises two or more chambers defined between the partition screens and the partition screens are interconnected by a series of strips essentially extending over the width of the partition screens. The strips are made of sound isolating material. The strips effectively define the chambers between the partition screens in which sound waves are attenuated. The chambers are acoustic chambers wherein sound waves are effectively attenuated. In addition, the chambers allow use of different partition screen materials with different acoustic characteristics for different chambers, thus providing an instrument for detailed sound control. Applicant expects the partition system to have high sound absorbing ability, particularly with respect to mid- and low frequency sounds.

**[0008]** According to the invention the partition screens are interconnected by a series of the strips that, in a first preferred embodiment, are spaced apart in height direction of the partition system. The strips or vanes offer a better sound control by forming a barrier for sound travel in height direction of the partition system. The chambers allow use of different partition screen materials with different acoustic characteristics in height direction of the partition system, thus providing an instrument for detailed sound control.

**[0009]** According to an elegant preferred embodiment of a partition system according to the invention each partition screen comprises a series of alternated screen panels and folding areas. The predefined folding areas allow for a controlled folding of the screen panels during lifting of the partition system. This results in a compact package of screen panels in the opened position and a relatively shallow partition system in the closed position. Preferably the strips are connected at the folding areas.

**[0010]** According to a further elaboration of the elegant preferred embodiment one or more of the screen panels comprise plates of sound absorbing material. The plates enhance the stiffness of the screen panels and contribute to controlled folding of the partition system.

**[0011]** According to an even further elaboration of the elegant preferred embodiment the moving means comprise pairs of pull bands that run parallel to the partition screens through the strips outside the centre of the strips. The features of this embodiment force adjacent screen panels to fold onto each other.

**[0012]** In an additional or alternative even further elaboration of the elegant preferred embodiment the distance between the partition screens enlarges in the direction towards the partition carrier. This can be achieved by enlarging the width of the strips in the direction towards the partition carrier. Consequently, adjacent screen panels are urged to fold onto each other.

**[0013]** According to the invention, the partition system comprises two or more partition modules, wherein each partition module is provided with module connecting means for releasably connecting partition modules at connecting areas. The partition modules can be prefabricated and interconnected in the sports hall. Consequently, mounting time is considerably reduced. Each partition module can be separately replaced for maintenance or repair which advantageously is cost saving. In addition thereto the partition modules allow for a wide variety of possibilities for composing the optimal acoustic characteristics of the partition system.

**[0014]** According to another efficient preferred embodiment the partition system according to the invention further comprises strip connecting means for releasably connecting the strips to the partition screens. The same advantages apply as for the partition modules: the strips of this preferred embodiment can be prefabricated and interconnected in

the sports hall. Thereby mounting time is considerably reduced. Each strip can be separately replaced for maintenance or repair which advantageously is cost saving. Each strip can be optimized to contribute to sound reduction. Preferably the strips are connected at the connecting areas.

**[0015]** Preferably the module and/or strip connecting means are zippers. The zippers are reliable connecting means and can function as folding areas to contribute to the controlled lifting and folding of the partition system.

**[0016]** According to the invention each partition module comprises at least one pair of partition screens interconnected by at least one strip.

**[0017]** In a practical preferred embodiment each partition screen of a partition module comprises two screen panels alternated by a folding area. Advantageously the panels of each module fold onto each other and adjacent folded modules fold onto each other.

**[0018]** The invention further relates to a method of assembling a partition system according to the invention, comprising the steps of:

- a) Selecting a first partition module with specific acoustic characteristics;
- b) Selecting a second partition module with specific acoustic characteristics; and
- c) Releasably connecting the second partition module to the first partition module to form the partition screens;
- d) Optionally selecting a subsequent partition module with specific acoustic characteristics;
- e) Releasably connecting the subsequent partition module to the partition screens; and
- f) Optionally repeating steps d) and e) until the partition screens are finished;
- g) Arranging the partition screens on the partition carrier.

**[0019]** The invention will be explained referring to the accompanying drawings in which

Figure 1 schematically shows a preferred embodiment of a partition system according to the invention;

Figure 2 schematically shows the partition system of figure 1 in cross section;

Figure 3 schematically shows a part of the partition system of figure 2 in more detail;

Figure 3A schematically shows a detailed section of figure 3;

Figure 3B schematically shows a variant of the detailed section of figure 3A;

Figure 4 schematically shows a part of the partition system of figure 1 in more detail; and

Figure 5 schematically shows the partition system of figure 1 in pulled up position.

**[0020]** The figures show a partition system 1 according to the invention in a preferred embodiment that is intended for use in a sports hall. Figure 1 schematically shows a preferred embodiment of a partition system 1 according to the invention. Figure 2 schematically shows the partition system 1 in cross section.

**[0021]** The partition system 1 comprises a pair of partition screens 2 comprising sound absorbing material. The partition screens 2 are interconnected at a predetermined mutual distance and arranged on a partition carrier 100. The partition carrier 100 is provided with motorized moving means 104 for simultaneously moving the partition screens 2 with respect to the partition carrier 100.

**[0022]** The partition screens 2 are interconnected by a series of strips 6 essentially extending over the width of the partition screens 2. The strips 6 are connected along both longitudinal sides thereof to the partition screens 2.

**[0023]** Each partition screen 2 comprises a series of screen panels 3 alternated by folding areas 4. A preferred embodiment of a panel 3 is shown in more detail in figure 3.

**[0024]** According to the invention the partition system 1 comprises two or more partition modules 10. Each partition module comprises at least one pair of partition screens 2 interconnected by one or more strips 6. A preferred embodiment of a strip 6 is shown in more detail in figure 4. Each partition module 10 is provided with connecting means 5 for releasably connecting the partition modules 10 at connecting areas to form the partition system 1. The connecting means are chosen such that the connecting areas 5 are further folding areas. Preferably the connecting means are zippers.

**[0025]** In the preferred embodiment each partition screen 2 in a partition module 10 comprises two screen panels 3 alternated by a folding area 4.

**[0026]** Figure 3 schematically shows the two lowest modules 10 of the partition system 1 in more detail. Figure 3A schematically shows a detailed section of figure 3. Figure 3B schematically shows a variant of the detailed section of figure 3A.

**[0027]** The partition screen of the partition module 10 comprises two panels 3 connected by a folding area. In the embodiment of figure 3A each panel 3 comprises several layers: an outer layer 31, an inner layer 32 and an intermediate layer 33 in between. Preferably the outer layer 31 is made of sound isolating material, for instance artificial leather. Preferably the outer layer 31 is made of reinforced material. Preferably the inner layer 32 is made of gauze screen. Preferably the intermediate layer 33 comprises plate like sound absorbing material, like PE or mineral wool. The folding area 4 is formed by attaching the outer layer 31 and the inner layer 32 together, preferably by stitching. At both outer

ends of the partition module 10 (parts of) zippers 5 are present. The variant of figure 3B differs over the embodiment of figure 3A in that it lacks the inner layer 32. Instead the layer 33 of sound absorbing material is directly attached to the outer layer 31, for example by bonding or gluing. The folding area 4 is formed at the outer layer 31, more specifically in areas of the outer layer 31 to which no layer 33 is attached.

5 **[0028]** Several types of modules 10 with different acoustic characteristics can be made based on the information disclosed herein. For instance, perforations can be provided in one or more of the panels 3 in a module 10. As another example the characteristics of the intermediate layer 32 of each panel 3 can be changed. Optionally the intermediate layer 32 can be omitted in one or more of the panels in a module. A tailor-made partition system 1 can be constructed by a person skilled in the art out of any combination of partition modules 10.

10 **[0029]** Figure 4 schematically shows a preferred embodiment of a strip or vane 6. Many types of materials are suitable for use in the strips. For instance, the same material that is used for the outer layer 31 of the panels 3 can be used for the strips. Preferably the material of the strips is a substantially closed material. The length of strip 6 is substantially equal to the width of the partition screen 2. The strip 6 is provided with strip connection means 26 along both longitudinal sides. Preferably the strip connection means 26 enable releasable connection of the strip 6 to the partition screen 2. In 15 the preferred embodiment the strip connection means 26 comprise zippers.

**[0030]** Strip 6 has opening 16 for pull bands 103. The openings lie outside the centre of the strips or vanes. Preferably one pair of openings 16 is present near each of the outer ends of the strips 6. Preferably the surface of the strips is closed, apart from the openings 16.

20 **[0031]** The partition carrier 100 comprises a head shaft 101 and a bottom beam 102. Pull bands 103 run from the head shaft 101 to the bottom beam 102 through the openings 16 in the strips 6. The partition screens 2 are connected to the bottom beam 102. Preferably beam connection means 7 are provided for releasable connection of the lowest module 10 to the bottom beam 102. In the preferred embodiment the beam connection means 7 comprise a kador bead 7 connected by sheet material 8 to the connection means 5.

25 **[0032]** The motorized moving means 104 drive the shaft 101 to wind up respectively unwind the pull bands 103 to pull up respectively let down the partition system 1. During pulling up the panels 3 of a module 10 move outwardly and the inner layers 32 fold onto each other. Next the outer layers of adjacent folded modules 10 fold onto each other. In pulled up position the panels of a partition system are arranged adjacently in vertical position under the head shaft 101. The folded position is shown in figure 5.

30 **[0033]** The partition system according to the invention can be easily assembled by the method according to the invention, comprising the following steps: selecting a first partition module with specific acoustic characteristics, selecting a second partition module with specific acoustic characteristics and releasably connecting the second partition module to the first partition module to form the partition screens. The acoustic characteristics of the second partition module can be equal to or can differ from the acoustic characteristics of the first partition module. In the preferred embodiment the releasable connection is made by zippers.

35 **[0034]** Optionally the method according to the invention further comprises the steps of: selecting a subsequent partition module with specific acoustic characteristics and releasably connecting the subsequent partition module to the partition screens. The acoustic characteristics of the subsequent partition module can be equal to or can differ from the acoustic characteristics of the first and second partition module. Optionally steps d) and e) are repeated until the partition screens are finished.

40 **[0035]** The method according to the invention further comprises the step of arranging the partition screens on the partition carrier. This step involves the sub steps of attaching the lowest partition module to the bottom beam and running the pull bands 103 through the partition system and attaching the pull bands 103 to the head shaft 101. These sub steps are not necessarily all performed in the last step. A person skilled in the art can change the order in which the sub steps are performed to optimize the assembly in each specific situation.

45 **[0036]** In the preferred embodiment shown the number of strips 6 equals the number of partition modules plus 1. Adjacent chambers 10 share a strip 6. The resulting material reduction leads to weight reduction, which is favourable, but not necessary. In the partition system chambers are formed by two opposing partition screens 2 and two opposing strips 6.

50 **[0037]** Applicants expectation regarding the high sound absorbing ability, particularly with respect to mid- and low frequency sounds, of the partition system according to the invention has been confirmed by tests of which the results for the sound absorption coefficient are shown in the following table.

	<i>frequency [Hz]</i>					
<i>Sound Absorption Coefficient</i>	<b>125</b>	<b>250</b>	<b>500</b>	<b>1.000</b>	<b>2.000</b>	<b>4.000</b>
<b>sporTIG partition wall 66% sound absorbing</b>	0,40	0,68	0,66	0,52	0,53	0,43
<b>sporTIG partition wall 100% sound absorbing</b>	0,33	0,76	0,82	0,71	0,73	0,60

(continued)

Sound Absorption Coefficient	frequency [Hz]					
	125	250	500	1.000	2.000	4.000
<b>sporTIG partition wall 100% sound reflecting</b>	0,53	0,50	0,24	0,13	0,09	0,05

**[0038]** The invention is of course not limited to the described and shown preferred embodiment, which is developed for use in sports accommodations or halls, such as gymnasiums, fitness rooms, ice rinks, indoor halls for tennis, squash, climbing et cetera. The partition system according to the invention is suitable for use as a motorized acoustic screen to divide spaces in any kind of facility or accommodation. Some non-limiting examples of other facilities or accommodations, wherein the partition system according to the invention can be used include factories, industry halls, exhibition halls and stock rooms.

**[0039]** The invention therefore extends to any embodiment falling within the scope of protection as defined in the claims.

### Claims

1. Partition system (1) for use in halls, such as sports halls, comprising a partition carrier (100), at least one pair of partition screens (2) comprising sound absorbing material, that are interconnected at a predetermined distance and arranged on the partition carrier and motorized moving means (104) for simultaneously moving the partition screens with respect to the partition carrier, wherein the partition system comprises two or more chambers for attenuating sound waves, which chambers are defined between the partition screens, wherein the partition screens are interconnected by a series of strips (6), made of sound isolating material, essentially extending over the width of the partition screens said partition system comprising two or more partition modules (10), wherein each partition module comprises at least one pair of partition screens interconnected by at least one strip, wherein the partition system is **characterized in that** each partition module is provided with module connecting means (5) for releasably connecting partition modules at connecting areas.
2. Partition system according to claim 1, wherein the strips (6), made of sound isolating material, are spaced apart in height direction of the partition system.
3. Partition system according to claim 1 or 2, wherein each partition screen (2) comprises a series of alternated screen panels (3) and folding areas (4, 5).
4. Partition system according to claim 3, wherein the strips (6) are connected at the folding areas (5).
5. Partition system according to claim 3 or 4, wherein one or more of the screen panels (3) comprise plates (33) of sound absorbing material.
6. Partition system according to one or more of the preceding claims, wherein the moving means (104) comprise pairs of pull bands (103) that run parallel to the partition screens (2) through the strips (6) outside the centre of the strips.
7. Partition system according to one or more of the preceding claims, wherein the distance between the partition screens (2) enlarges in the direction towards the partition carrier (100).
8. Partition system according to one or more of the preceding claims, further comprising strip connecting means (5) for releasably connecting the strips (6) to the partition screens (2).
9. Partition system according to claim 8, wherein the strips (6) are connected at the connecting areas.
10. Partition system according to one or more of the preceding claims, wherein the module connecting means and/or the strip connecting means are zippers (5).
11. Partition system according to one or more of the preceding claims, wherein each screen (2) of a partition module (10) comprises two screen panels (3) alternated by a folding area (4).

12. Method of assembling a partition system according to one or more of the preceding claims, comprising the steps of:

- a) Selecting a first partition module (10) with specific acoustic characteristics;
- b) Selecting a second partition module (10) with specific acoustic characteristics; and
- c) Releasably connecting the second partition module to the first partition module to form the partition screens (2);
- d) Optionally selecting a subsequent partition module (10) with specific acoustic characteristics;
- e) Releasably connecting the subsequent partition module (10) to the partition screens (2); and
- f) Optionally repeating steps d) and e) until the partition screens (2) are finished; and
- g) Arranging the partition screens on the partition carrier.

### Patentansprüche

1. Trennwandsystem (1) für den Einsatz in Hallen, wie z.B. Sporthallen, umfassend eine Trennwandhalterung (100), mindestens ein Paar Trennwandschirme (2) umfassend schallabsorbierendes Material, die in einem vorgegebenen Abstand miteinander verbunden sind und die auf der Trennwandhalterung angeordnet sind und motorisierte Bewegungsmittel (104), um gleichzeitig die Trennwandschirme relativ zur Trennwandhalterung zu bewegen, wobei das Trennwandsystem zwei oder mehr Kammern zur Dämpfung von Schallwellen umfasst, wobei die Kammern zwischen den Trennwandschirmen definiert sind, wobei die Trennwandschirme durch eine Reihe von Streifen (6) miteinander verbunden sind, die vorzugsweise aus schallisolierendem Material bestehen und sich im Wesentlichen über die Breite der Trennwandschirme erstrecken, wobei das Trennwandsystem zwei oder mehr Trennwandmodule (10) umfasst, wobei jedes Trennwandmodul mindestens ein Paar Trennwandschirme umfasst, die durch mindestens einen Streifen miteinander verbunden sind, wobei das Trennwandsystem **dadurch gekennzeichnet ist, dass** jedes Trennwandmodul mit Modulverbindungsmiteln (5) zum lösbaren Verbinden von Trennwandmodulen an Verbindungsbereichen versehen ist.
2. Trennwandsystem nach Anspruch 1, wobei die Streifen (6) aus schalldämmendem Material in Höhenrichtung des Trennwandsystems angeordnet sind.
3. Trennwandsystem nach Anspruch 1 oder 2, wobei jeder Trennwandschirm (2) eine Reihe von abwechselnd angeordneten Schirmpaneelen (3) und Faltbereichen (4, 5) umfasst.
4. Trennwandsystem nach Anspruch 3, wobei die Streifen (6) an den Faltbereichen (5) miteinander verbunden sind.
5. Trennwandsystem nach Anspruch 3 oder 4, wobei eine oder mehrere der Schirmpaneele (3) Platten (33) aus schallabsorbierendem Material umfassen.
6. Trennwandsystem nach einem oder mehreren der vorstehenden Ansprüche, wobei die Bewegungsmittel (104) Paare von Zugbändern (103) umfassen, die parallel zu den Trennwandschirmen (2) durch die Streifen (6) außerhalb der Streifenmitte verlaufen.
7. Trennwandsystem nach einem oder mehreren der vorgenannten Ansprüche, wobei sich der Abstand zwischen den Trennwandschirmen (2) in Richtung zur Trennwandhalterung (100) vergrößert.
8. Trennwandsystem nach einem oder mehreren der vorgenannten Ansprüche, ferner umfassend Streifenverbindungsmitel (5) zur lösbaren Verbindung der Streifen (6) mit den Trennwandschirmen (2).
9. Trennwandsystem nach Anspruch 8, wobei die Streifen (6) an den Verbindungsbereichen verbunden sind.
10. Trennwandsystem nach einem oder mehreren der vorgenannten Ansprüche, wobei die Modulverbindungsmitel und/oder die Streifenverbindungsmitel Reißverschlüsse (5) sind.
11. Trennwandsystem nach einem oder mehreren der vorgenannten Ansprüche, wobei jeder Schirm (2) eines Trennwandmoduls (10) zwei Schirmpaneele (3) umfasst, zwischen denen ein Faltbereich (4) angeordnet ist.
12. Verfahren zum Montieren eines Trennwandsystems nach einem oder mehreren der vorhergehenden Ansprüche, umfassend die Schritte:

## EP 3 372 743 B1

- a) Auswählen eines ersten Trennwandmoduls (10) mit spezifischen akustischen Eigenschaften;  
b) Auswählen eines zweiten Trennwandmoduls (10) mit spezifischen akustischen Eigenschaften; und  
c) Lösbares Verbinden des zweiten Trennwandmoduls mit dem ersten Trennwandmodul zur Bildung der Trennwandschirme (2);  
5 d) Optionales Auswählen eines nachfolgenden Trennwandmoduls (10) mit spezifischen akustischen Eigenschaften;  
e) Lösbares Verbinden des nachfolgenden Trennwandmoduls (10) mit den Trennwandschirmen (2); und  
f) Optionales Wiederholen der Schritte d) und e), bis die Trennwandschirme (2) fertig sind; und  
10 g) Anbringen der Trennwandschirme auf der Trennwandhalterung.

### Revendications

- 15 1. Système de cloisonnement (1) destiné à être utilisé dans des salles, telles que des salles de sport, comprenant un support de cloisonnement (100), au moins une paire d'écrans de cloisonnement (2) comprenant un matériau absorbant phonique, qui sont reliés entre eux à une distance prédéterminée et sont disposés sur le support de cloisonnement, et des moyens de déplacement motorisés (104) pour déplacer simultanément les écrans de cloisonnement par rapport au support de cloisonnement, le système de cloisonnement comprenant deux ou plusieurs  
20 chambres pour atténuer les ondes sonores, lesquelles chambres sont définies entre les écrans de cloisonnement, les écrans de cloisonnement étant reliés entre eux par une série de bandes (6), de préférence réalisées dans un matériau insonorisant et s'étendant essentiellement sur la profondeur des écrans de cloisonnement, le système de cloisonnement comprenant deux ou plusieurs modules de cloisonnement (10), chaque module de cloisonnement comprenant au moins une paire d'écrans de cloisonnement reliés entre eux par au moins une bande, le système de cloisonnement étant **caractérisé en ce que** chaque module de cloisonnement est pourvu de moyens de liaison  
25 de module (5) pour relier de manière détachable les modules de cloisonnement aux/au niveau de zones de liaison.
2. Système de cloisonnement selon la revendication 1, dans lequel les bandes (6), réalisées en matériau insonorisant, sont espacées les unes des autres dans le sens de la hauteur du système de cloisonnement.
- 30 3. Système de cloisonnement selon la revendication 1 ou 2, dans lequel chaque écran de cloisonnement (2) comprend une série alternée de panneaux d'écran (3) et de zones de pliage (4, 5).
4. Système de cloisonnement selon la revendication 3, dans lequel les bandes (6) sont raccordées au niveau des zones de pliage (5).  
35
5. Système de cloisonnement selon la revendication 3 ou 4, dans lequel un ou plusieurs des panneaux d'écran (3) comprennent des plaques (33) de matériau absorbant phonique.
6. Système de cloisonnement selon l'une ou plusieurs des revendications précédentes, dans lequel les moyens de déplacement (104) comprennent des paires de bandes de traction (103) qui s'étendent parallèlement aux écrans de cloisonnement (2) à travers les bandes (6) à l'extérieur du centre des bandes.  
40
7. Système de cloisonnement selon l'une ou plusieurs des revendications précédentes, dans lequel la distance entre les écrans de cloisonnement (2) s'élargit en direction du support de cloisonnement (100).  
45
8. Système de cloisonnement selon l'une ou plusieurs des revendications précédentes, comprenant en outre des moyens de liaison de bandes (5) pour raccorder de manière détachable les bandes (6) aux écrans de cloisonnement (2).
9. Système de cloisonnement selon la revendication 8, dans lequel les bandes (6) sont reliées au niveau des zones de liaison.  
50
10. Système de cloisonnement selon l'une ou plusieurs des revendications précédentes, dans lequel les moyens de liaison de modules et/ou les moyens de liaison de bandes sont des fermetures à glissière (5).  
55
11. Système de cloisonnement selon l'une ou plusieurs des revendications précédentes, dans lequel chaque écran (2) d'un module de cloisonnement (10) comprend deux panneaux d'écran (3) alternés par une zone de pliage (4).

## EP 3 372 743 B1

12. Procédé d'assemblage d'un système de cloisonnement selon l'une ou plusieurs des revendications précédentes, comprenant les étapes suivantes consistant à

5

a) sélectionner un premier module de cloisonnement (10) ayant des caractéristiques acoustiques spécifiques ;  
b) sélectionner un deuxième module de cloisonnement (10) avec des caractéristiques acoustiques spécifiques ;  
et

10

c) relier de manière détachable le deuxième module de cloisonnement au premier module de cloisonnement pour former les écrans de cloisonnement (2) ;

d) de façon facultative, sélectionner un module de cloisonnement supplémentaire (10) avec des caractéristiques acoustiques spécifiques ;

e) relier de manière détachable le module de cloisonnement supplémentaire (10) aux écrans de cloisonnement (2) ; et

15

f) de façon optionnelle, répéter les étapes d) et e) jusqu'à ce que les écrans de cloisonnement (2) soient terminés ; et

g) disposer les écrans de cloisonnement sur le support de cloisonnement.

20

25

30

35

40

45

50

55



Fig. 2

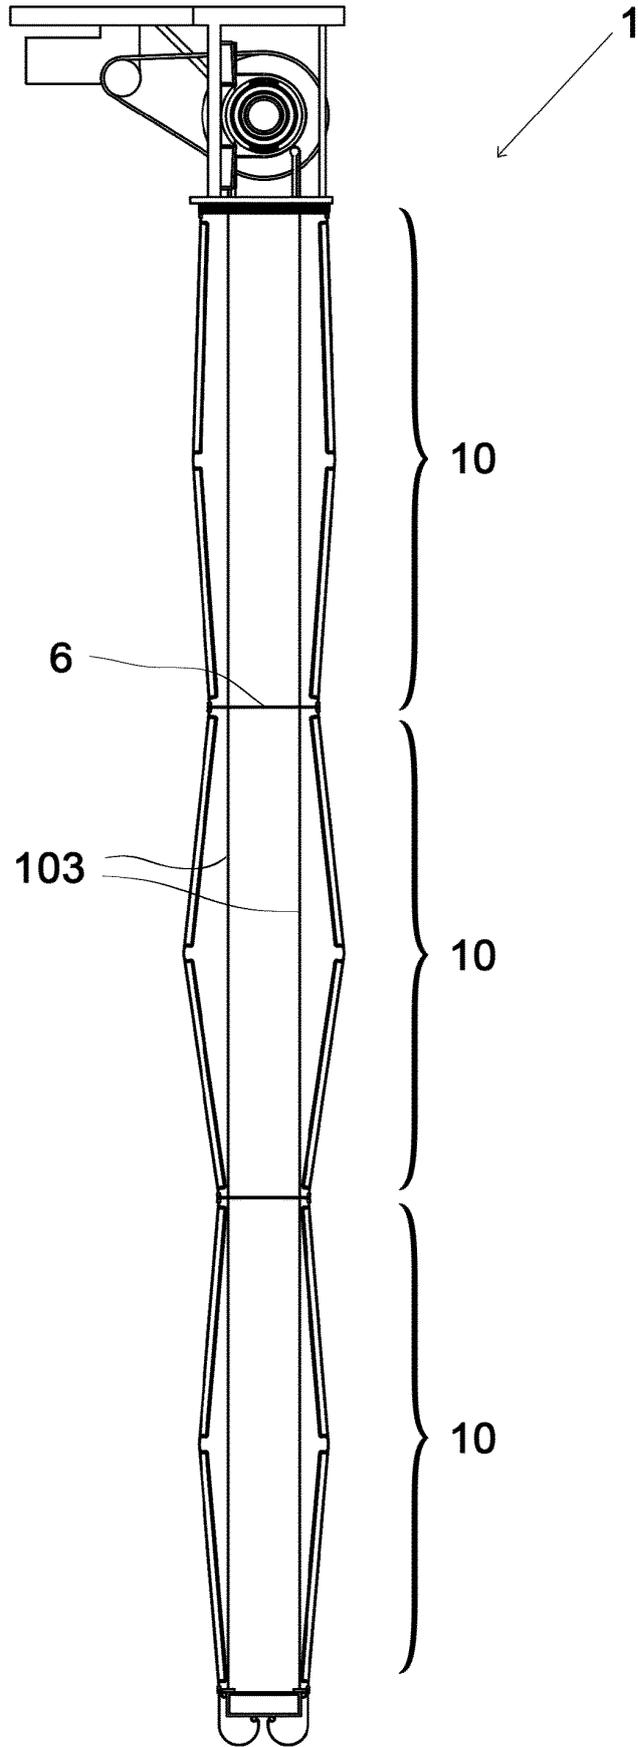


Fig. 3

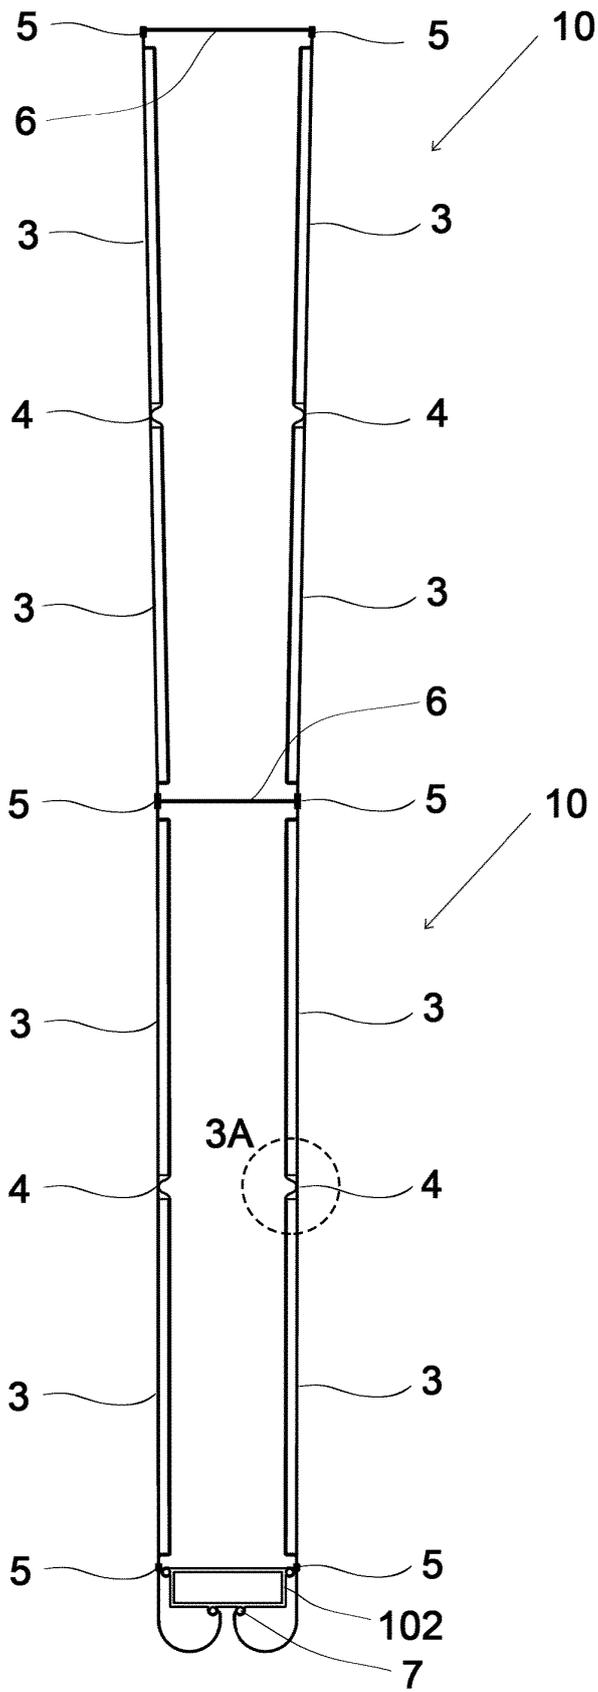


Fig. 3A

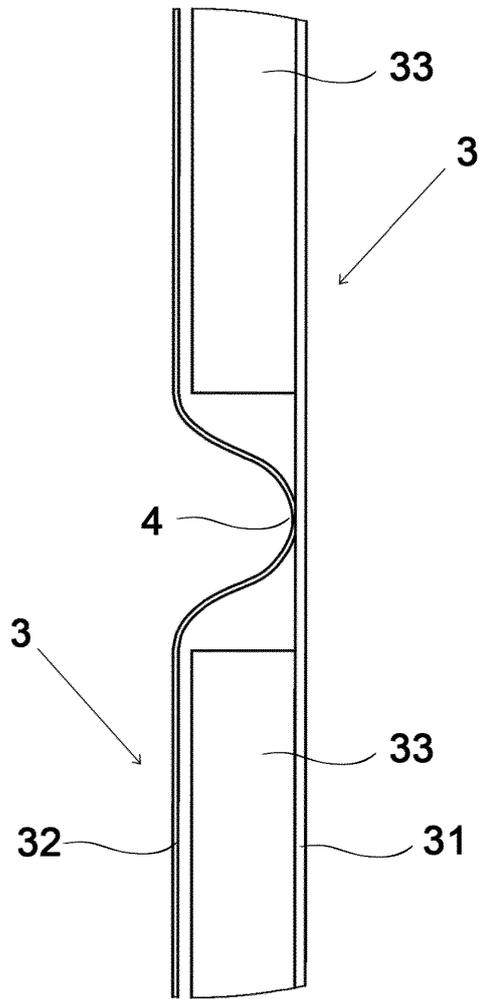


Fig. 3B

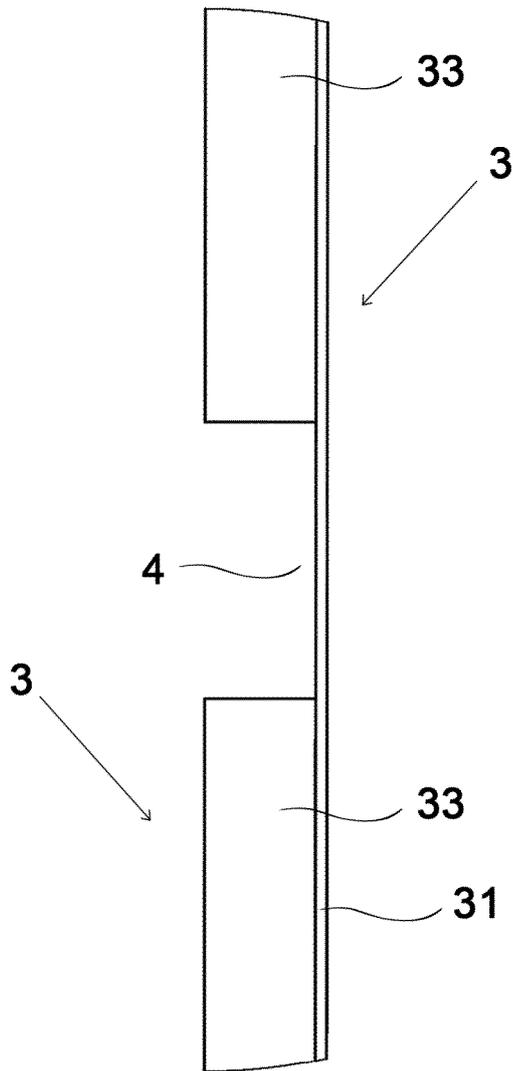


Fig. 4


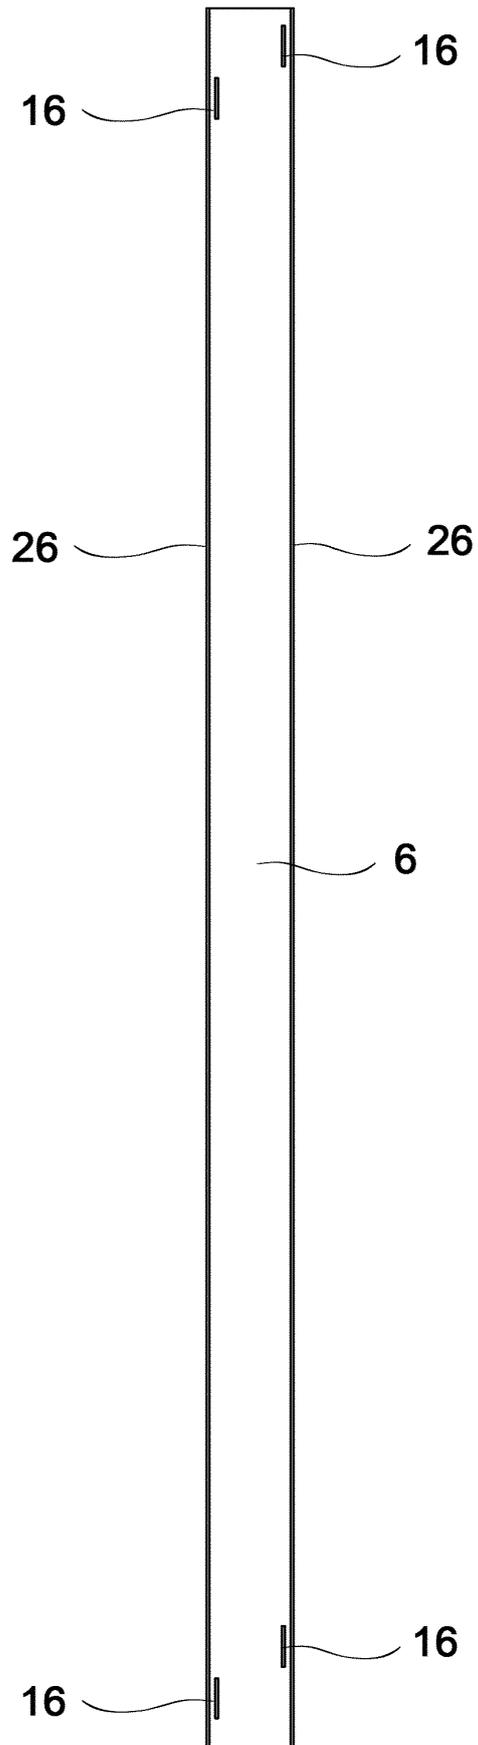


Fig. 5

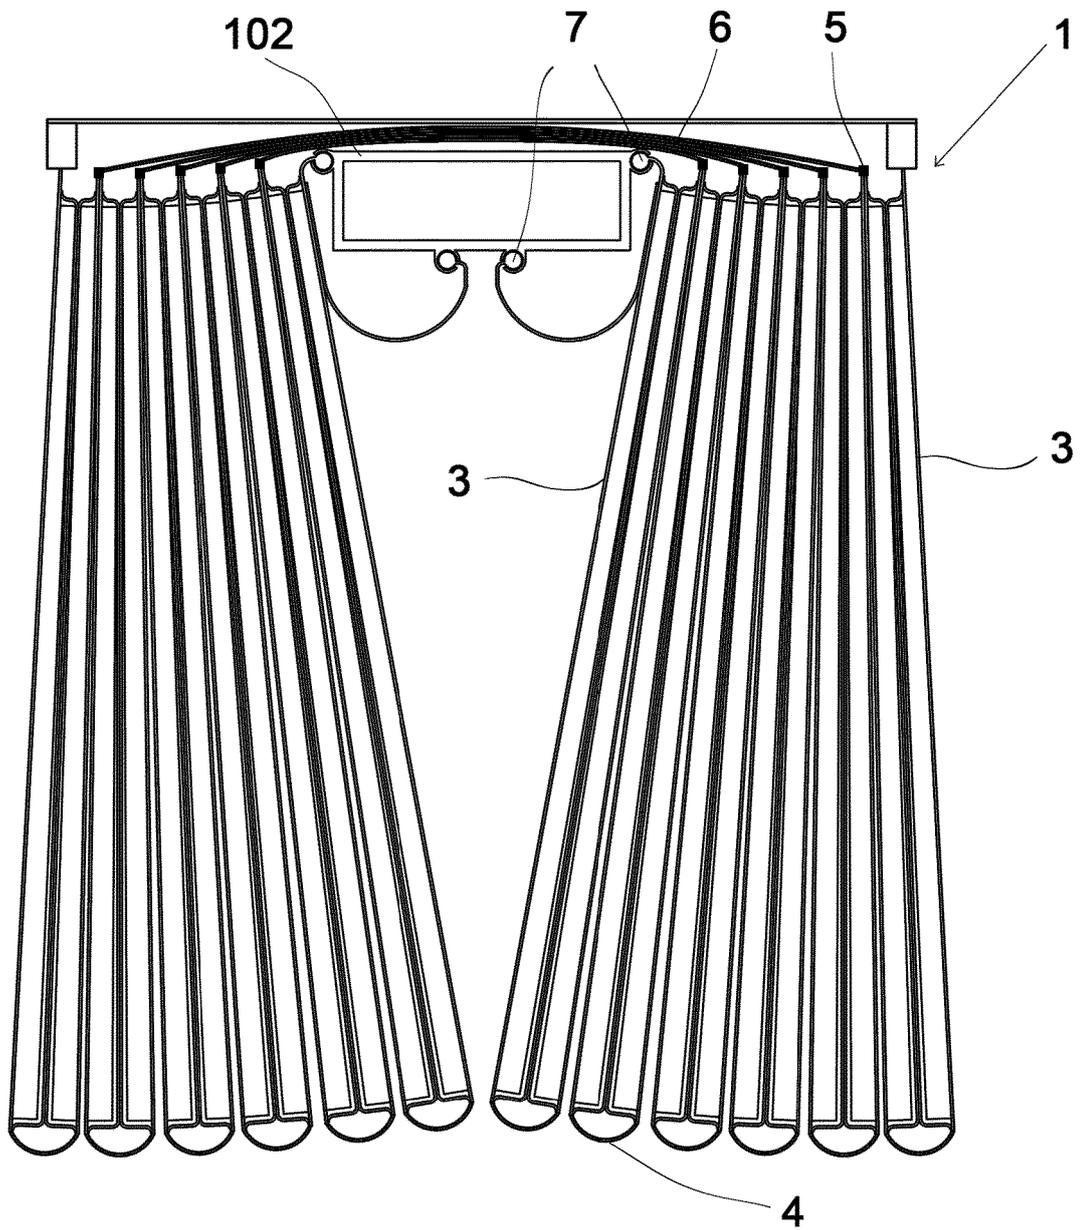

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- EP 1174063 A [0005]
- US 5664613 A [0005]