

(19)



(11)

EP 3 392 356 B9

(12)

CORRECTED EUROPEAN PATENT SPECIFICATION

(15) Correction information:
Corrected version no 1 (W1 B1)
Corrections, see
Description Paragraph(s) 9, 21, 67

(51) International Patent Classification (IPC):
C21D 8/12 ^(2006.01) **C21D 1/68** ^(2006.01)
C21D 1/72 ^(2006.01)

(48) Corrigendum issued on:
07.12.2022 Bulletin 2022/49

(52) Cooperative Patent Classification (CPC):
C21D 9/46; C21D 1/06; C21D 1/68; C21D 3/04;
C21D 6/008; C21D 8/1222; C21D 8/1233;
C21D 8/1255; C21D 8/1261; C21D 8/1283;
C21D 8/1288; C22C 38/001; C22C 38/008;
C22C 38/02; C22C 38/04; (Cont.)

(45) Date of publication and mention
of the grant of the patent:
03.08.2022 Bulletin 2022/31

(86) International application number:
PCT/KR2016/014743

(21) Application number: **16876054.4**

(87) International publication number:
WO 2017/105112 (22.06.2017 Gazette 2017/25)

(22) Date of filing: **15.12.2016**

(54) **ANNEALING SEPARATOR FOR ORIENTED ELECTRICAL STEEL SHEET, ORIENTED ELECTRICAL STEEL SHEET, AND MANUFACTURING METHOD OF ORIENTED ELECTRICAL STEEL SHEET**

GLÜHSEPARATOR FÜR ORIENTIERTES ELEKTRISCHES STAHLBLECH, ORIENTIERTES ELEKTRISCHES STAHLBLECH UND HERSTELLUNGSVERFAHREN FÜR EIN ORIENTIERTES ELEKTROSTAHLBLECH

SÉPARATEUR DE RECUIT POUR TÔLE D'ACIER ÉLECTRIQUE À GRAINS ORIENTÉS, TÔLE D'ACIER ÉLECTRIQUE À GRAINS ORIENTÉS ET PROCÉDÉ DE FABRICATION DE TÔLE D'ACIER ÉLECTRIQUE À GRAINS ORIENTÉS

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

- **HONG, Byung Deug**
Pohang-si
Gyeongsangbuk-do 37859 (KR)
- **KIM, Yun Su**
Pohang-si
Gyeongsangbuk-do 37859 (KR)

(30) Priority: **18.12.2015 KR 20150182243**

(43) Date of publication of application:
24.10.2018 Bulletin 2018/43

(74) Representative: **Zech, Stefan Markus**
Meissner Bolte Patentanwälte
Rechtsanwälte Partnerschaft mbB
Postfach 86 06 24
81633 München (DE)

(73) Proprietor: **POSCO Holdings Inc.**
Seoul 06194 (KR)

- (72) Inventors:
- **PARK, Chang Soo**
Pohang-si
Gyeongsangbuk-do 37859 (KR)
 - **PARK, Jong Ho**
Pohang-si
Gyeongsangbuk-do 37859 (KR)

- (56) References cited:
- | | |
|----------------------------|---------------------------|
| EP-A1- 2 765 219 | EP-A1- 3 257 960 |
| EP-A2- 0 164 828 | GB-A- 1 279 334 |
| JP-A- H1 088 244 | JP-A- H05 295 441 |
| KR-A- 20030 044 033 | KR-B1- 100 297 046 |
| KR-B1- 100 711 470 | KR-B1- 910 006 010 |
| US-A- 3 522 108 | US-A- 3 868 280 |

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 392 356 B9

(52) Cooperative Patent Classification (CPC): (Cont.)
C22C 38/06; C21D 1/72

Description**[Technical Field]**

5 **[0001]** An annealing separator for an oriented electrical steel sheet, an oriented electrical steel sheet, and a manufacturing method of an oriented electrical steel sheet are provided.

[Background Art]

10 **[0002]** An oriented electrical steel sheet has a texture in which an orientation of grains is in a $\{110\}<001>$ direction by containing 3.1 % of a Si component, and is an electrical steel sheet having an excellent magnetic characteristic in a rolling direction.

[0003] Recently, while an oriented electrical steel sheet with a high magnetic flux density is commercially available, a material having small iron loss has been requested. As a method for reducing the iron loss, the following four technical methods are known. i) A first method of accurately orienting a $\{110\}<001>$ grain direction of a magnetic easy axis of an oriented electrical steel sheet in a rolling direction, ii) a method of reducing an eddy current loss by adding a resistive additive element, iii) a method of minutely forming a magnetic domain through a chemical and physical method, and iv) a method of enhancing a surface property or imparting surface tension by a chemical method such as surface processing.

15 **[0004]** The iv) method is a method of improving magnetism of the material by positively improving the properties of the oriented electrical steel sheet surface. As a representative example, a method of forming an insulating film having a high tension characteristic on the surface of the electrical steel sheet has been researched.

[0005] It is usual for the insulating film to be formed on a forsterite (Mg_2SiO_4) series film that becomes a primary film of the steel sheet. This is a technology for producing the reduction effect of the iron loss by applying a tensile stress to the steel sheet by using a thermal expansion coefficient difference of an insulating film and a steel sheet that are formed on the primary film. US 3 522 108 discloses a steel sheet with an annealing separator comprising MnO and MgO.

25 **[0006]** Thus, the method for improving the tension characteristic of the film has focused on improving the characteristics of the insulating film. However, the primary film may also provide the tensile stress due to a low thermal expansion characteristic to the steel sheet. Therefore, this may effectively act on an electrical power loss of an iron core or improvement of self-deformation. In other words, since there is a thermal expansion coefficient difference between the steel sheet and the primary film, it is possible to apply the tensile stress characteristic.

30 **[0007]** Accordingly, if the tension characteristic can be increased by decreasing the thermal expansion coefficient of the primary film, the iron loss reduction effect of the steel sheet may be expected.

[DISCLOSURE]

35

[Technical Problem]

[0008] The present invention provides an annealing separator for an oriented electrical steel sheet to form the primary film with an improved tension characteristic, an oriented electrical steel sheet with reduced iron loss by including the same, and a manufacturing method of the oriented electrical steel sheet.

40

[Technical Solution]

[0009] An example of the present invention provides an annealing separator for an oriented electrical steel sheet includes: a first component including a Mg oxide or a Mg hydroxide; and a second component including one kind among an oxide and a hydroxide of a metal selected from Al, Ti, Cu, Cr, Ni, Ca, Zn, Na, K, Mo, In, Sb, Ba, Bi, and Mn, or two or more kinds thereof, and that satisfies Equation 1 below.

50

$$\text{[Equation 1]} \quad 3.8 < [A]/[B] < 9.5$$

[0010] (In Equation 1, [A] is a content of the second component with respect to a total amount (100 wt%) of the annealing separator, and [B] is a content of the first component with respect to the total amount (100 wt%) of the annealing separator).

55

[0011] In detail, the second component includes a Mn oxide or a Mn hydroxide.

[0012] In more detail, the second component may be MnO_2 , and the first component may be MgO.

[0013] Another example of the present invention provides an oriented electrical steel sheet including: an oriented

electrical steel sheet; and a primary film positioned on a surface of the oriented electrical steel sheet, wherein the primary film is made of two or more phases, the primary film includes a first phase including forsterite ($MgSi_2O_4$) and a second phase including one kind among an oxide of a metal selected from Al, Ti, Cu, Cr, Ni, Ca, Zn, Na, K, Mo, In, Sb, Ba, Bi, and Mn, or two or more kinds thereof, and the second phase is more than 22 area% or less than 89 area% with respect to a total area (100 area%) of the primary film.

[0014] The two or more phases included in the primary film may have different thermal expansion coefficients from each other.

[0015] The oriented electrical steel sheet may satisfy Equation 2 below.

$$[\text{Equation 2}] [C] \leq [D]$$

[0016] (In Equation 2, [C] is the content of the metal selected from Al, Ti, Cu, Cr, Ni, Ca, Zn, Na, K, Mo, In, Sb, Ba, Bi, and Mn in the steel sheet before high temperature annealing, and [D] is the content of the metal selected from Al, Ti, Cu, Cr, Ni, Ca, Zn, Na, K, Mo, In, Sb, Ba, Bi, and Mn in the steel sheet except for the primary film after completing high temperature annealing).

[0017] The second phase includes one kind, or two or more kinds thereof, among the Mn oxides.

[0018] In detail, the second phase may include one kind among MnO , MnO_2 , MnO_3 , Mn_2O_7 , Mn_2O_3 , Mn_3O_4 , $MnSiO_3$, Mn_2SiO_4 , $MnAl_2O_4$, $Mn_2Al_4Si_5O_{12}$, and $Mn_3Al_2Si_3O_{12}$, or two or more kinds thereof.

[0019] In detail, the oriented electrical steel sheet may satisfy Equation 3 below.

$$[\text{Equation 3}] [E] \leq [F]$$

[0020] (In Equation 3, [E] is the content of Mn in the steel sheet before high temperature annealing, and [F] is the Mn content of the steel sheet except for the primary film after completing high temperature annealing).

[0021] Another example of the present invention provides a manufacturing method of an oriented electrical steel sheet, including: a step of preparing a steel slab; a step of heating the steel slab; a step of hot-rolling the heated steel slab to manufacture a hot-rolled sheet; a step of cold-rolling the hot-rolled sheet after annealing the hot-rolled sheet to manufacture a cold-rolled sheet; a step of decarburizing and nitriding-annealing the cold-rolled sheet; a step of coating an annealing separator on the surface of the decarburized and nitriding-annealed steel sheet; a step of high temperature annealing the steel sheet to which the annealing separator is coated to obtain a primary film on the surface of the steel sheet; and a step of obtaining an oriented electrical steel sheet, wherein the annealing separator includes: a first component including a Mg oxide or a Mg hydroxide; and a second component including one kind among an oxide and a hydroxide of a metal selected from Al, Ti, Cu, Cr, Ni, Ca, Zn, Na, K, Mo, In, Sb, Ba, Bi, and Mn, or two or more kinds thereof, and that satisfies Equation 1 below.

$$[\text{Equation 1}] \quad 3.8 < [A]/[B] < 9.5$$

[0022] (In Equation 1, [A] is a content of the second component with respect to a total amount (100 wt%) of the annealing separator, and [B] is a content of the first component with respect to the total amount (100 wt%) of the annealing separator).

[0023] In the step of the decarburization and nitriding-annealing of the cold-rolled sheet, an oxidation layer including a silicon oxide or an iron oxide is formed on the surface of the decarburized and nitriding-annealed steel sheet.

[0024] In the step of high temperature annealing the steel sheet to which the annealing separator is coated to obtain the primary film on the surface of the steel sheet, the primary film may be formed by the oxidation layer including the silicon oxide or the iron oxide, the inside steel sheet, or a combination thereof; and the annealing separator.

[0025] In detail, the second component of the annealing separator includes one kind, or two or more kinds, of the Mn oxide and hydroxide,

[0026] In more detail, the second component of the annealing separator may be MnO_2 , and the first component may be MgO.

the primary film may include one kind among MnO , MnO_2 , MnO_3 , Mn_2O_7 , Mn_2O_3 , $MnSiO_3$, Mn_2SiO_4 , $MnAl_2O_4$, $Mn_2Al_4Si_5O_{12}$, $Mn_3Al_2Si_3O_{12}$, or two or more kinds thereof.

[0027] An annealing temperature of the step of high temperature annealing the steel sheet to which the annealing separator is coated to obtain the primary film on the surface of the steel sheet may be from 950 to 1250 °C.

[0028] The step of high temperature annealing the steel sheet to which the annealing separator is coated to obtain

the primary film on the surface of the steel sheet may include a step of increasing a temperature at an average of 50 °C/h to 650 °C for the steel sheet coated with the annealing separator and a step of increasing a temperature at an average of 15 °C/h from 650 °C to the annealing temperature in a mixed gas atmosphere of hydrogen and nitrogen.

[0029] The step of decarburizing and nitriding-annealing the cold-rolled sheet may be performed at 800 to 950 °C.

[0030] The steel slab may include 2.0 to 4.0 wt% of silicon (Si), 0.01 to 0.20 wt% of chromium (Cr), 0.02 to 0.04 wt% of aluminum (Al), 0.01 to 0.20 wt% of manganese (Mn), 0.04 to 0.07 wt% of carbon (C), 0.001 to 0.005 wt% of sulfur (S), 0.001 to 0.01 wt% of nitrogen (N), and Fe and other inevitable impurities as the remainder.

[0031] The examples of the present invention provide the annealing separator for the oriented electrical steel sheet for forming the primary film with the improved tension characteristic, the oriented electrical steel sheet manufactured by using the same and with the reduced iron loss, and the manufacturing method of the oriented electrical steel sheet using the annealing separator for the oriented electrical steel sheet.

[Advantageous Effects]

[Description of the Drawings]

[0032]

FIG. 1 is a view showing a distribution of a Mn element in a primary film of an oriented electrical steel sheet obtained by a usual method using EPMA equipment.

FIG. 2 is a view showing a distribution of a Mn element in a primary film of an oriented electrical steel sheet obtained through an exemplary embodiment of the present invention using EPMA equipment.

[Mode for Invention]

[0033] Hereinafter, exemplary embodiments of the present invention will be described in detail. The exemplary embodiments, however, are provided as examples, and the present invention is not limited thereto, but is defined within the range of claims to be described below.

[0034] The terms first, second, third, and the like are used to describe various portions, components, regions, layers, and/or sections, but the present invention is not limited thereto. These terms are used only to distinguish any portion, component, region, layer, or section from other portions, components, regions, layers, or sections. Therefore, a first portion, component, region, layer, or section to be described below may be referred to as a second portion, component, region, layer, or section without departing from the scope of the present invention.

[0035] The technical terms used herein are used merely for the purpose of describing a specific exemplary embodiment, and are not intended to limit the present invention. Singular expressions used herein include plural expressions unless they have expressly opposite meanings. The terms "comprises" and/or "comprising" used in the specification specify particular features, regions, integers, steps, operations, elements, components, but do not preclude the presence or addition of other features, regions, integers, steps, operations, elements, and/or components thereof.

[0036] It will be understood that when an element such as a layer, film, region, or substrate is referred to as being "on" another element, it can be directly on the other element or intervening elements may also be present. In contrast, when an element is referred to as being "directly on" another element, there are no intervening elements present.

[0037] If not defined differently, all the terminologies including the technical terminologies and scientific terminologies used herein have meanings that are the same as ones that those skilled in the art generally use. Terms defined in dictionaries should be construed as having meanings corresponding to the related prior art documents and those stated herein, and are not to be construed as being ideal or official, if not so defined.

[0038] Also, unless otherwise specified, "A to B" means A or more and B or less.

An annealing separator for an oriented electrical steel sheet

[0039] An example of the present invention provides an annealing separator for an oriented electrical steel sheet that includes: a first component including a Mg oxide or a Mg hydroxide; and a second component including one kind among an oxide and a hydroxide of a metal selected from Al, Ti, Cu, Cr, Ni, Ca, Zn, Na, K, Mo, In, Sb, Ba, Bi, and Mn, or two or more kinds of these, and that satisfies Equation 1 below.


$$\text{[Equation 1] } 0.05 < [A]/[B] < 10.5$$

[0040] (In Equation 1, [A] is a content of the second component with respect to a total amount (100 wt%) of the

annealing separator, and [B] is a content of the first component with respect to the total amount (100 wt%) of the annealing separator).

[0041] Generally, when manufacturing an oriented electrical steel sheet, in a decarburization and nitriding-annealing step, silicon (Si) of a component having a highest oxygen affinity in the steel sheet is reacted with oxygen such that SiO₂ is formed on the surface of the steel sheet. Also, in the annealing process, if oxygen gradually penetrates into the steel sheet, an iron(Fe)-based oxide (Fe₂SiO₄, etc.) is further formed. In other words, in the decarburization and nitriding-annealing process, an oxidation layer including SiO₂ and the iron (Fe)-based oxide is inevitably formed on the surface of the steel sheet.

[0042] After this decarburization and nitriding-annealing process, the annealing separator including a magnesium oxide or a magnesium hydroxide is coated on the surface of the steel sheet surface and then a high temperature annealing process is performed, and in this case, SiO₂ in the oxidation layer is reacted with the magnesium oxide or the magnesium hydroxide. This reaction may be represented by Chemical Reaction Formula 1 or Chemical Reaction Formula 2 below, and this corresponds to the reaction forming forsterite (Mg₂SiO₄), that is, the primary film. The forsterite layer produced by the Mg oxide or the Mg hydroxide helps to stably generate secondary recrystallization in a high temperature annealing process.



[0043] On the surface of the oriented electrical steel sheet, except for special cases, it is common to form a primary film mainly composed of the forsterite. The primary film typically prevents coalescence between the steel sheets that are spiral-wound in a coil and provides the tension due to thermal expansion difference with the steel sheet, thereby there are effects of decreasing the iron loss and providing insulation.

[0044] In addition to this, it is possible to improve the magnetic properties by converting the characteristics of the primary film formed on the surface of the oriented electrical steel sheet. Specifically, in addition to the above-mentioned forsterite, a new phase including other elements such as Al, Ti, Cu, Cr, Ni, Ca, Zn, Na, K, Mo, In, Sb, Ba, Bi, Mn, and the like as a main component is also produced in the primary film. Since these produced phases have different thermal expansion characteristics, the effects of the contraction and the expansion locally differ in the primary film. Accordingly, the tension effect of the primary film may be maximized, thereby obtaining the low iron loss of the steel sheet.

[0045] Specifically, it may be confirmed that the second component may contain the Mn oxide or the Mn hydroxide. Particularly, the Mn oxide may not only stably participate in the primary film formation reaction, but also the additional magnetic improvement effect may be expected as well as the characteristic improvement of the primary film. For example, the Mn oxide may be MnO, MnO₂, Mn₂O₃, or Mn₃O₄, and the Mn hydroxide may be Mn(OH)₄, MnSO₄(H₂O), or MnSO₄(H₂O)₅. However, it is not limited thereto.

[0046] In detail, the second component may be MnO₂, and the first component may be MgO.

[0047] The primary film formed on the surface of the steel sheet from the annealing separator in which the Mn oxide or hydroxide is mixed along with the Mg oxide or hydroxide additionally includes other phases as well as the forsterite phase. They are produced as the Mn oxide or hydroxide of the annealing separator as the main Mn oxide is reacted with SiO₂ of the oxidation layer, the Fe oxide, or the components inside the steel sheet formed during the decarburization and nitriding-annealing process. As a detailed example, the Mn oxide produced in the primary film may be MnO, MnO₂, MnO₃, Mn₂O₇, Mn₂O₃, MnSiO₃, Mn₂SiO₄, MnAl₂O₄, Mn₂Al₄Si₅O₁₂, Mn₃Al₂Si₃O₁₂, etc.

[0048] The MnO, MnO₂, MnO₃, Mn₂O₇, or Mn₂O₃ may be produced as the Mn oxide or hydroxide of the annealing separator is reacted with oxygen during the annealing process, and MnSiO₃ or Mn₂SiO₄ may be produced as the Mn oxide or hydroxide of the annealing separator is reacted with SiO₂ of the oxidation layer formed during the decarburization and nitriding-annealing process. MnAl₂O₄, Mn₂Al₄Si₅O₁₂, or Mn₃Al₂Si₃O₁₂ may be produced as the Mn oxide or hydroxide of the annealing separator is reacted with SiO₂ of the oxidation layer and Al inside the steel sheet during the decarburization and nitriding-annealing process. For example, a part of the Mn oxide may be produced through Chemical Reaction Formula 3.



[0049] The Mn oxides produced on the primary film have different thermal expansion coefficients from the forsterite phase (Mg₂SiO₄), and accordingly, the compression-expansion effect in the primary film is different. As a result, the tension effect of the primary film may be maximized, and accordingly, the iron loss of the steel sheet may be reduced.

[0050] Equation 1 is be $3.8 < [A]/[B] < 9.5$ for the annealing separator.

[0051] When a ratio [A]/[B] of two compositions is less than 0.05, the Mn oxide is not produced inside the primary film, and as the ratio is very small, it may be difficult to obtain the improvement effect of the film tension characteristic. When

the ratio $[A]/[B]$ of two compositions is more than 10.5, a precipitate such as MnS is excessively produced in the steel sheet surface, or the production speed is slow in the primary film such that secondary recrystallization growth is disturbed, and accordingly it is disadvantageous in obtaining the magnetic characteristic of the oriented electrical steel sheet. In detail, Equation 1 may be $0.1 \leq [A]/[B] \leq 9.5$, and this is supported by examples below and comparative examples in comparison thereto.

[0052] When using the annealing separator including the Mn oxide or the Mn hydroxide, in addition to the primary film's phase change, an additional property occurs in the steel sheet.

[0053] In detail, in the high temperature annealing process, the part of the Mn oxide or the Mn hydroxide included in the annealing separator is diffused and penetrates the steel such that the content of Mn of the steel sheet is increased.

[0054] Generally, Mn is known as an element that increases specific resistance of the iron, along with Si, Al, etc. Accordingly, if the Mn content in the steel increases, the specific resistance of the oriented electrical steel sheet finally obtained is increased such that the effect of the reduction of the iron loss appears.

[0055] However, an increase of the Mn content of the steel sheet may be obtained by changing an Mn input amount in a steelmaking process, however in this case, the property of the steel is changed such that the following processes such as hot rolling-cold rolling decarburization, nitriding-annealing, etc. are required.

[0056] In contrast, when using the annealing separator including the Mn oxide or hydroxide, since the Mn content of the steel sheet in an almost final step among the entire process for obtaining the oriented electrical steel sheet increases, it is unnecessary to consider the change of the following process like the case of changing the steelmaking component.

[0057] Resultantly, the present invention simultaneously has the effects of the tension increasing of the primary film through the use of the local thermal expansion difference and the specific resistance increasing through the Mn content increasing of the steel sheet, thereby the oriented electrical steel sheet with low iron loss may be obtained even without the conventional process.

The oriented electrical steel sheet

[0058] Another example of the present invention includes the oriented electrical steel sheet, and the primary film positioned on the surface of the oriented electrical steel sheet, wherein the primary film is made of two or more phases, the primary film includes the first phase including the forsterite (Mg_2SiO_4) and the second phase including one kind among the oxides of the metals selected from Al, Ti, Cu, Cr, Ni, Ca, Zn, Na, K, Mo, In, Sb, Ba, Bi, and Mn or two or more kinds thereof, and the second phase exceeds 3 area% and less than 94 area% for total area (100 area%) of the primary film.

[0059] As the primary film of the oriented electrical steel sheet includes two or more phases having the different thermal expansion coefficients from each other, the effect of the local compression-expansion in the primary film is differentiated. Accordingly, the tension effect of the primary film may be maximized, thereby obtaining low iron loss of the steel sheet.

[0060] The primary film formed from the annealing separator provided from one example of the present invention includes the second phase including one kind among the oxides of the metals selected from Al, Ti, Cu, Cr, Ni, Ca, Zn, Na, K, Mo, In, Sb, Ba, Bi, and Mn inside the film, or two or more kinds thereof.

[0061] The second phase may be included to exceed 3 area% and less than 94 area% for the total area (100 area%) of the primary film. When the area of the second phase is 3 % or less, the amount is too small to obtain the local compression-expansion effect such that the tension improvement effect may not appear. When the area of the second phase is 94 % or more, the ratio occupied with other phases in the primary film is small such that the tension improvement effect may not appear. In detail, the second phase may be included at 10 area% or more and 94 area% or less for the total area (100 area%) of the primary film. This is supported by examples below and comparative examples in comparison thereto.

[0062] When manufacturing the oriented electrical steel sheet, the part of the oxide or the hydroxide of the metal selected from Al, Ti, Cu, Cr, Ni, Ca, Zn, Na, K, Mo, In, Sb, Ba, Bi, and Mn included in the annealing separator is diffused and penetrates the steel in the high temperature annealing process such that the content of Al, Ti, Cu, Cr, Ni, Ca, Zn, Na, K, Mo, In, Sb, Ba, Bi, or Mn of the steel sheet increases. These metals may play a role of increasing the specific resistance. Accordingly, as the content of these metals in the steel increases, the specific resistance of the finally obtained oriented electrical steel sheet increases, thereby the effect of low iron loss appears. In detail, the oriented electrical steel sheet may be an oriented electrical steel sheet satisfying Equation 2 below.

$$[\text{Equation 2}] [C] \leq [D]$$

[0063] (In Equation 2, [C] is the content of the metal selected from Al, Ti, Cu, Cr, Ni, Ca, Zn, Na, K, Mo, In, Sb, Ba, Bi, and Mn in the steel sheet before high temperature annealing, and [D] is the content of the metal selected from Al, Ti, Cu, Cr, Ni, Ca, Zn, Na, K, Mo, In, Sb, Ba, Bi, and Mn in the steel sheet except for the primary film after the completion of high temperature annealing)

[0064] The second phase may include one kind, or two or more kinds thereof, among the Mn oxides. In detail, the second phase may include one kind among MnO, MnO₂, MnO₃, Mn₂O₇, Mn₂O₃, Mn₃O₄, MnSiO₃, Mn₂SiO₄, MnAl₂O₄, Mn₂Al₄Si₅O₁₂, and Mn₃Al₂Si₃O₁₂, or two or more kinds thereof.

[0065] When manufacturing the oriented electrical steel sheet, the part of the Mn oxide or the Mn hydroxide included in the annealing separator is diffused and penetrates in the high temperature annealing process such that the Mn content of the steel sheet increases. Generally, Mn is known as an element that increases the specific resistance of the iron along with Si, Al, etc. Accordingly, if the Mn content in the steel increases, the specific resistance of the oriented electrical steel sheet finally obtained is increased such that the effect of the reduction of the iron loss appears. In detail, the oriented electrical steel sheet may be an oriented electrical steel sheet satisfying Equation 3 below.

$$[\text{Equation 3}] [E] \leq [F]$$

[0066] (In Equation 3, [E] is the content of Mn in the steel sheet before high temperature annealing, and [F] is the Mn content of the steel sheet except for the primary film after the completion of high temperature annealing).

A manufacturing method of the oriented electrical steel sheet


[0067] Another example of the present invention provides a manufacturing method of the oriented electrical steel sheet including: a step of preparing a steel slab; a step of heating the steel slab; a step of hot-rolling the heated steel slab to manufacture a hot-rolled sheet; a step of cold-rolling the hot-rolled sheet after a hot-rolled sheet is annealed to manufacture a cold-rolled sheet; a step of decarburizing and nitriding-annealing the cold-rolled sheet; a step of coating an annealing separator on the surface of the decarburized and nitriding-annealed steel sheet; a step of high temperature annealing the steel sheet coated with the annealing separator to form the primary film on the surface of the steel sheet; and a step of obtaining the oriented electrical steel sheet, wherein the annealing separator includes a first component including the Mg oxide or the Mg hydroxide, and a second component including one kind among the oxide and the hydroxide of the metal selected from Al, Ti, Cu, Cr, Ni, Ca, Zn, Na, K, Mo, In, Sb, Ba, Bi, and Mn, or two or more kinds thereof, and satisfies Equation 1 below.

$$[\text{Equation 1}] 3.8 < [A]/[B] < 9.8$$

[0068] (In Equation 1, [A] is a content of the second component with respect to a total amount (100 wt%) of the annealing separator, and [B] is the content of the first component with respect to the total amount (100 wt%) of the annealing separator).

[0069] Generally, when manufacturing the oriented electrical steel sheet, in a decarburization and nitriding-annealing step, silicon (Si) as a component having a highest oxygen affinity in the steel sheet is reacted with oxygen such that SiO₂ is formed on the surface of the steel sheet. Also, in the annealing process, if oxygen is gradually penetrated into the steel sheet, an iron(Fe)-based oxide (Fe₂SiO₄, etc.) is further formed. In other words, in the decarburization and nitriding-annealing process, an oxidation layer including SiO₂ and the iron (Fe)-based oxide is inevitably formed on the surface of the steel sheet.

[0070] After this decarburization and nitriding-annealing process, the annealing separator including a magnesium oxide or a magnesium hydroxide is coated on the surface of the steel sheet surface and then a high temperature annealing process is performed, and in this case, SiO₂ in the oxidation layer is reacted with the magnesium oxide or the magnesium hydroxide. This reaction may be represented by Chemical Reaction Formula 1 or Chemical Reaction Formula 2 below, and this corresponds to the reaction forming forsterite (Mg₂SiO₄), that is, the primary film. The forsterite layer produced by the Mg oxide or the Mg hydroxide helps to stably generate secondary recrystallization in a high temperature annealing process.



[0071] On the surface of the oriented electrical steel sheet, except for special cases, it is common to form a primary film mainly composed of the forsterite. The primary film typically prevents coalescence between the steel sheets that are spiral-wound with a coil shape and provides the tension due to thermal expansion difference with the steel sheet,

thereby there are effects of decreasing the iron loss and providing the insulation.

[0072] In addition to this, it is possible to improve the magnetic properties by changing the characteristics of the primary film formed on the surface of the oriented electrical steel sheet. Specifically, in addition to the above-mentioned forsterite, a new phase including other elements such as Al, Ti, Cu, Cr, Ni, Ca, Zn, Na, K, Mo, In, Sb, Ba, Bi, Mn, and the like as a main component is also produced in the primary film. Since these produced phases have different thermal expansion characteristics, the effects of the contraction and the expansion locally differ in the primary film. Accordingly, the tension effect of the primary film may be maximized, thereby obtaining the low iron loss of the steel sheet.


[0073] Specifically, it may be confirmed that the second component may contain the Mn oxide or the Mn hydroxide. Particularly, the Mn oxide may not only stably participate in the primary film formation reaction, but the additional magnetic improvement effect may also be expected in addition to the characteristic improvement of the primary film. For example, the Mn oxide may be MnO, MnO₂, Mn₂O₃, or Mn₃O₄, and the Mn hydroxide may be Mn(OH)₄, MnSO₄(H₂O), or MnSO₄(H₂O)₅. However, it is not limited thereto.

[0074] In detail, the second component may be MnO₂, and the first component may be MgO.

[0075] The primary film formed on the surface of the steel sheet from the annealing separator in which the Mn oxide or hydroxide is mixed along with the Mg oxide or hydroxide additionally includes other phases as well as the forsterite phase. They are produced as the Mn oxide or hydroxide of the annealing separator as the main Mn oxide is reacted with SiO₂ of the oxidation layer, the Fe oxide, or the components inside the steel sheet formed during the decarburization and nitriding-annealing process. As a detailed example, the Mn oxide produced in the primary film may be MnO, MnO₂, MnO₃, Mn₂O₇, Mn₂O₃, MnSiO₃, Mn₂SiO₄, MnAl₂O₄, Mn₂Al₄Si₅O₁₂, Mn₃Al₂Si₃O₁₂, etc.

[0076] The MnO, MnO₂, MnO₃, Mn₂O₇, and Mn₂O₃ may be produced as the Mn oxide or hydroxide of the annealing separator is reacted with oxygen during the annealing process, and MnSiO₃ or Mn₂SiO₄ may be produced as the Mn oxide or hydroxide of the annealing separator is reacted with SiO₂ of the oxidation layer formed during the decarburization and nitriding-annealing process. MnAl₂O₄, Mn₂Al₄Si₅O₁₂, and Mn₃Al₂Si₃O₁₂ may be produced as the Mn oxide or hydroxide of the annealing separator is reacted with SiO₂ of the oxidation layer and Al inside the steel sheet during the decarburization and nitriding-annealing process. For example, a part of the Mn oxide may be produced by Chemical Reaction Formula 3.

[Chemical Reaction Formula 3]



[0077] The Mn oxides produced on the primary film have the different thermal expansion coefficients from the forsterite phase (Mg₂SiO₄), and accordingly, the compression-expansion effect in the primary film is differentiated. As a result, the tension effect of the primary film may be maximized, and accordingly, the iron loss of the steel sheet may be reduced.

[0078] In the manufacturing method of the oriented electrical steel sheet, Equation 1 is $3.8 < [A]/[B] < 9.5$.

[0079] When a ratio [A]/[B] of two compositions is less than 0.05, the Mn oxide is not produced inside the primary film, and the ratio is very small such that it may be difficult to obtain the improvement effect of the film tension characteristic. When a ratio [A]/[B] of two compositions is more than 10.5, a precipitate such as MnS is excessively produced in the steel sheet surface, or the production speed is slow in the primary film such that a secondary recrystallization growth is disturbed, and accordingly it is disadvantageous in obtaining the magnetic characteristic of the oriented electrical steel sheet. In detail, Equation 1 may be $0.1 \leq [A]/[B] \leq 9.5$. This is supported by examples below and comparative examples in comparison thereto.

[0080] When using the annealing separator including the Mn oxide or the Mn hydroxide, in addition to the primary film's phase change, an additional property occurs in the steel sheet.

[0081] In detail, in the high temperature annealing process, the part of the Mn oxide or the Mn hydroxide included in the annealing separator is diffused and penetrates into the steel such that the content of Mn of the steel sheet is increased.

[0082] Generally, Mn is known as an element that increases specific resistance of the iron along with Si, Al, etc. Accordingly, if the Mn content increases in the steel, the specific resistance of the oriented electrical steel sheet finally obtained is increased such that the effect of the reduction of the iron loss appears.

[0083] However, a general increase of the Mn content of the steel sheet may be obtained by changing an Mn input amount in a steelmaking process, however in this case, the property of the steel is changed such that the following processes such as hot rolling-cold rolling decarburization, nitriding-annealing, etc. are required.

[0084] In contrast, when using the annealing separator including the Mn oxide or hydroxide, since the Mn content of the steel sheet in an almost final step among the entire process for obtaining the oriented electrical steel sheet increases, it is unnecessary to consider the change of the following process like the case of changing the steelmaking components.

[0085] Resultantly, the present invention simultaneously has the effects of the tension increase of the primary film through the use of the local thermal expansion difference and the specific resistance increase through the Mn content increase of the steel sheet, thereby the oriented electrical steel sheet with low iron loss may be obtained even without the conventional process.

[0086] In the manufacturing method of the oriented electrical steel sheet, the step of the decarburization and nitriding-

annealing of the cold-rolled sheet may be performed at a temperature from 800 to 950 °C. When the temperature of the decarburization and nitriding-annealing is too low, in addition to not performing the decarburization and the nitriding well, the crystal grains are maintained in a fine state such that the crystal may be grown in an undesirable direction during high temperature annealing. When the temperature of the decarburization and nitriding-annealing is too high, a problem

that the primary recrystallized crystal grains are excessively grown may be generated.

[0087] The annealing temperature of the step of obtaining the primary film on the steel sheet surface by annealing the steel sheet coated with the annealing separator at a high temperature may be from 950 °C to 1250 °C. When the high temperature annealing temperature is too low, the primary film and the secondary recrystallization may not be formed. When the high temperature annealing temperature is too high, a productivity reduction and durability of a high temperature annealing equipment may be affected.

[0088] The step of obtaining the primary film on the steel sheet surface by annealing the steel sheet coated with the annealing separator at a high temperature may include a step of increasing the temperature of the steel sheet coated with the annealing separator to 650 °C at an average of 50 °C/h, and a step of increasing the temperature at an average of 15 °C/h from 650 °C to the annealing temperature, in a mixed gas atmosphere of hydrogen and nitrogen.

[0089] The step of obtaining the primary film on the steel sheet surface by annealing the steel sheet coated with the annealing separator at a high temperature may be performed for 18 to 22 hours.

[0090] The steel slab may include 2.0 to 4.0 wt% of silicon (Si), 0.01 to 0.20 wt% of chromium (Cr), 0.02 to 0.04 wt% of aluminum (Al), 0.01 to 0.20 wt% of manganese (Mn), 0.04 to 0.07 wt% of carbon (C), 0.001 to 0.005 wt% of sulfur (S), 0.001 to 0.01 wt% of nitrogen (N), and Fe and other inevitable impurities as the remainder.

[0091] Hereinafter, examples of the present invention and comparative examples will be described in detail. However, the following examples are for exemplary purposes only, and the scope of the present invention is not limited thereto.

Example - Manufacturing of the oriented electrical steel sheet

[0092] The steel slab including of C at 0.05 %, Si at 3.2 %, Mn at 0.01 %, Sn at 0.05 %, Al at 0.03 %, N at 0.004 %, as weight percentages, and Fe and other inevitable impurities as the remainder, is prepared.

[0093] Next, the steel slab is heated to a temperature of 1200 °C and then is hot-rolled to manufacture the hot-rolled sheet with a 2.6 mm thickness.

[0094] Next, after the hot-rolled sheet is soaked at a temperature of 900 °C for 180 seconds, the hot-rolled sheet is annealed and cooled, is acid-pickled, and then is cold-rolled to manufacture the cold-rolled sheet with a 0.30 mm thickness.

[0095] Next, the cold-rolled sheet is decarburized and nitriding-annealed in a mixed gas atmosphere of hydrogen, nitrogen, and ammonia, at a temperature of 840 °C and the dew point of 58 °C.

[0096] Next, the manganese oxide (MnO₂) and the magnesium oxide (MgO) are coated on the surface of the annealed steel sheet while variously changing a weight ratio thereof as shown in Table 1, and then are dried at a temperature of 600 °C for 12 seconds.

[0097] In the annealing separator ratio [A]/[B] of Table 1, [A] is the content of the manganese oxide (MnO₂) for the total amount (100 wt%) of the annealing separator, and [B] is the content of the magnesium oxide (MgO) for the total amount (100 wt%) of the annealing separator.

[0098] Next, for the steel sheet in which the annealing separator is coated and dried, after the temperature increases at an average of 50 °C/h to 650 °C and the temperature increases at an average of 15 °C/h in the mixed gas atmosphere of 50:50 as the weight ratio of hydrogen:nitrogen from 650 °C to 1200 °C, and the same temperature is maintained for 20 hours after reaching 1200 °C, it is cooled.

[0099] The finally obtained oriented electrical steel sheet is then surface-cleaned to manufacture the oriented electrical steel sheet in which the primary film is formed.

Experimental Examples

[0100] The tension effect and the magnetic characteristic depending on the ratio of the second phase except for the forsterite in the primary film of the oriented electrical steel sheet are confirmed.

Experimental Example 1

[0101] For the oriented electrical steel sheet of the example, the existence of the Mn oxide (the second phase) in the primary film is confirmed, and the area ratio of the Mn oxide (the second phase) in the primary film is measured. In Table 1, the area ratio of the second phase for the primary film means the area% of the Mn oxide (the second phase) in the primary film with respect to the total area (100 area%) of the primary film.

[0102] The existence of the Mn oxide in the primary film may be confirmed by using an Electro Probe Micro-Analyzer (EPMA). The measuring method of the EPMA is a method of quantitatively and qualitatively measuring the distribution

of the element in the film and the steel sheet, and FIG. 1 shows a result of analyzing the primary film of the general oriented electrical steel sheet, while FIG. 2 shows a result of analyzing the primary film of the oriented electrical steel sheet obtained through an exemplary embodiment of the present invention.

[0103] The distribution of the Mn element in the primary film is not confirmed in FIG. 1, however it may be confirmed that the region where the Mn element is distributed clearly appears in FIG. 2. That is, in the case of an exemplary embodiment of the present invention, it is confirmed that the Mn oxide exists in the primary film.

[0104] An area ratio of the Mn oxide (the second phase) in the primary film is measured by using EPMA equipment.

Experimental Example 2

[0105] An abnormal eddy current loss and iron loss of the oriented electrical steel sheet of the example are measured. The iron loss is estimated under a 50 Hz condition at 1.7 T by using a single sheet measuring method, and the abnormal eddy current loss is measured by using the above-described iron loss separation method with a single sheet tester.

[0106] Table 1 shows a measuring result of the abnormal eddy current loss and the iron loss.

Experimental Example 3

[0107] The Mn content of the steel sheet before and after the high temperature annealing and the specific resistance value of the steel sheet after the high temperature annealing are measured. The Mn content of the steel sheet before and after the high temperature annealing is measured by using an Inductively Coupled Plasma-Atomic Emission Spectrometer (ICP-AES) after removing the primary film. The specific resistance value of the steel sheet after the high temperature annealing is measured by using 4 point probes after removing the primary film of a 300X60 cm high temperature annealing specimen.

[0108] The measuring results are shown in Table 2.

(Table 1)

	Annealing separator ratio ([A]/[B])	Area ratio of a second phase in a primary film (%)	Abnormal eddy current loss (W/kg)	Iron loss (W17/50)
Comparative Example 1	0.05	3	0.512	0.99
Example 1	0.1	10	0.469	0.95
Example 2	1.2	14	0.465	0.96
Example 3	3.8	22	0.453	0.94
Example 4	5.9	47	0.427	0.91
Example 5	8.4	72	0.438	0.93
Example 6	9.5	89	0.467	0.93
Comparative Example 2	10.5	94	0.515	1.01
Comparative Example 3	12.3	97	0.521	1.05

(Table 2)

	Before high temperature annealing Mn content (ppm)	After high temperature annealing Mn content (ppm)	Specific resistance ($\mu\Omega \cdot \text{cm}$)
Comparative Example 1	980	979	48.72
Example 1	980	1250	48.79
Example 2	980	1800	49.10
Example 3	980	1950	49.43

(continued)

	Before high temperature annealing Mn content (ppm)	After high temperature annealing Mn content (ppm)	Specific resistance ($\mu\Omega \cdot \text{cm}$)
5 Example 4	980	2130	49.55
Example 5	980	2800	49.98
Example 6	980	3010	50.64
10 Comparative Example 2	980	3000	50.64
Comparative Example 3	980	2760	50.38

15 **[0109]** According to Table 1, it may be confirmed that the ratio of the second phase in the primary film produced after the high temperature annealing and the values of the abnormal eddy current loss and the iron loss are differentiated depending on the weight ratio ([A]/[B]) of MnO₂ and MgO of the annealing separator. That is, when the weight ratio [A]/[B] of the annealing separator is less than 0.1 or more than 10, high values of the abnormal eddy current loss and the iron loss are measured compared with the case of from 0.1 to 10.

20 **[0110]** Also, when the ratio of the Mn oxide (the second phase) in the primary film is less than 10 % and more than 90 %, it may be confirmed that the magnetic characteristic is inferior compared with the case of 10 % to 90 %. Accordingly, when the ratio of the Mn oxide (the second phase) produced in the primary film is less than 10 % or more than 90 %, a thermal expansion difference effect of the phases configuring the primary film clearly appears.

25 **[0111]** This fact may be further confirmed through the measurement values of the abnormal eddy current loss of Table 1. The abnormal eddy current loss measured by the iron loss separation method decreases as the tension effect of the primary film increases, and the values of the abnormal eddy current loss of Examples 1 to 6 are small compared with Comparative Examples 1 to 3. Accordingly, it may be confirmed that the tension characteristic of the primary film produced in Examples 1 to 6 is excellent.

30 **[0112]** Also, as the content of the MnO₂ included in the annealing separator increases, the Mn content of the steel sheet after the high temperature annealing increases, and accordingly it may be confirmed that the specific resistance increases together therewith. (Table 2) As the specific resistance increases, since the iron loss is improved, the improvement result of the iron loss in the example is considered to also be complicatedly affected by the increase effect of the specific resistance according to the increase of the Mn content as well as the tension effect of the primary film.

35 **[0113]** However, in the case of Comparative Examples 2 and 3, even if the specific resistance increases, the iron loss increases, and this is because the tension effect of the primary film not only deteriorates compared with the exemplary embodiments, but also a large amount of precipitates such as MnS is produced in the steel sheet surface while the content of MnO₂ increases in the annealing separator such that the secondary recrystallization is not normally generated.

40 **[0114]** While this invention has been described in connection with what is presently considered to be practical exemplary embodiments, it is to be understood that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover various modifications within the scope of the appended claims.

Claims

45 1. An annealing separator for an oriented electrical steel sheet, comprising:

a first component including a Mg oxide or a Mg hydroxide; and
 a second component including a Mn oxide or a Mn hydroxide,
 wherein Equation 1 below is satisfied:

$$[\text{Equation 1}] \quad 3.8 \leq [A]/[B] \leq 9.5$$

55 (in Equation 1, [A] is a content of the second component with respect to a total amount (100 wt%) of the annealing separator, and [B] is a content of the first component with respect to the total amount (100 wt%) of the annealing separator).

2. The annealing separator for the oriented electrical steel sheet of claim 1, wherein the second component is MnO_2 , and the first component is MgO .
- 5 3. An oriented electrical steel sheet comprising: an oriented electrical steel sheet; and a primary film positioned on a surface of the oriented electrical steel sheet, wherein the primary film is made of two or more phases, the primary film includes a first phase including forsterite (MgSi_2O_4) and a second phase including one kind, or two or more kinds thereof, among the Mn oxides, and the second phase is 22 area% to 89 area% with respect to a total area (100 area%) of the primary film.
- 10 4. The oriented electrical steel sheet of claim 3, wherein two or more phases included in the primary film have different thermal expansion coefficients from each other.
- 15 5. The oriented electrical steel sheet of claim 3, wherein the oriented electrical steel sheet satisfies Equation 2 below: [Equation 2] $[C] \leq [D]$ (in Equation 2, [C] is a content of the metal selected from Al, Ti, Cu, Cr, Ni, Ca, Zn, Na, K, Mo, In, Sb, Ba, Bi, and Mn in the steel sheet before high temperature annealing, and [D] is a content of the metal selected from Al, Ti, Cu, Cr, Ni, Ca, Zn, Na, K, Mo, In, Sb, Ba, Bi, and Mn in the steel sheet except for the primary film after completing high temperature annealing).
- 20 6. The oriented electrical steel sheet of claim 3, wherein the second phase includes one kind among MnO , MnO_2 , MnO_3 , Mn_2O_7 , Mn_2O_3 , Mn_3O_4 , MnSiO_3 , Mn_2SiO_4 , MnAl_2O_4 , $\text{Mn}_2\text{Al}_4\text{Si}_5\text{O}_{12}$, and $\text{Mn}_3\text{Al}_2\text{Si}_3\text{O}_{12}$, or two or more kinds thereof.
- 25 7. The oriented electrical steel sheet of claim 6, wherein the oriented electrical steel sheet satisfies Equation 3 below: [Equation 3] $[E] \leq [F]$ (in Equation 3, [E] is a content of Mn in the steel sheet before high temperature annealing, and [F] is a Mn content of the steel sheet except for the primary film after completing high temperature annealing).
- 30 8. A manufacturing method of an oriented electrical steel sheet, comprising: a step of preparing a steel slab; a step of heating the steel slab; a step of hot-rolling the heated steel slab to manufacture a hot-rolled sheet; a step of cold-rolling the hot-rolled sheet after annealing the hot-rolled sheet to manufacture a cold-rolled sheet; a step of decarburizing and nitriding-annealing the cold-rolled sheet; a step of coating an annealing separator on the surface of the decarburized and nitriding-annealed steel sheet; a step of high temperature annealing the steel sheet to which the annealing separator is coated to obtain a primary film on the surface of the steel sheet; and a step of obtaining an oriented electrical steel sheet, wherein the annealing separator includes:
- 35 a first component including a Mg oxide or a Mg hydroxide; and
a second component including a Mn oxide or a Mn hydroxide, and satisfies Equation 1 below:
- [Equation 1] $3.8 \leq [A]/[B] \leq 9.5$
- 40 (in Equation 1, [A] is a content of the second component with respect to a total amount (100 wt%) of the annealing separator, and [B] is a content of the first component with respect to the total amount (100 wt%) of the annealing separator).
- 45 9. The manufacturing method of claim 8, wherein in the step of the decarburization and nitriding-annealing of the cold-rolled sheet, an oxidation layer including a silicon oxide or an iron oxide is formed on the surface of the decarburized and nitriding-annealed steel sheet.
- 50 10. The manufacturing method of claim 9, wherein in the step of high temperature annealing the steel sheet to which the annealing separator is coated to obtain the primary film on the surface of the steel sheet, the primary film is formed by the oxidation layer including: the silicon oxide or the iron oxide, the inside steel sheet, or a combination thereof; and the annealing separator.
- 55 11. The manufacturing method of claim 8, wherein an annealing temperature of the step of high temperature annealing the steel sheet to which the annealing separator is coated to obtain the primary film on the surface of the steel sheet is from 950 to 1250 °C.
12. The manufacturing method of claim 8, wherein the step of high temperature annealing the steel sheet to which the

annealing separator is coated to obtain the primary film on the surface of the steel sheet includes: a step of increasing a temperature at an average of 50 °C/h to 650 °C for the steel sheet coated with the annealing separator; and a step of increasing a temperature at an average of 15 °C/h from 650 °C to the annealing temperature in a mixed gas atmosphere of hydrogen and nitrogen.

- 5
13. The manufacturing method of claim 8, wherein the step of decarburizing and nitriding-annealing the cold-rolled sheet is performed at 800 to 950 °C.

10 **Patentansprüche**

1. Glühseparator für ein orientiertes Elektrostahlblech, umfassend:

15 eine erste Komponente, die ein Mg-Oxid oder ein Mg-Hydroxid beinhaltet; und eine zweite Komponente, die ein Mn-Oxid oder ein Mn-Hydroxid beinhaltet, wobei die nachstehende Gleichung 1 erfüllt ist:

$$[Gleichung 1] \quad 3,8 \leq [A]/[B] \leq 9,5$$

20 (in Gleichung 1 ist [A] ein Gehalt an der zweiten Komponente bezogen auf eine Gesamtmenge (100 Gew.-%) des Glühseparators und [B] ist ein Gehalt an der ersten Komponente bezogen auf die Gesamtmenge (100 Gew.-%) des Glühseparators).

- 25 2. Glühseparator für das orientierte Elektrostahlblech nach Anspruch 1, wobei die zweite Komponente MnO₂ ist und die erste Komponente MgO ist.
- 30 3. Orientiertes Elektrostahlblech, umfassend: ein orientiertes Elektrostahlblech; und einen primären Film, der auf einer Oberfläche des orientierten Elektrostahlblechs angeordnet ist, wobei der primäre Film aus zwei oder mehr Phasen besteht, wobei der primäre Film eine erste Phase beinhaltet, die Forsterit (MgSi₂O₄) beinhaltet, und eine zweite Phase beinhaltet, die eine Art oder zwei oder mehr Arten davon unter den Mn-Oxiden beinhaltet, und die zweite Phase 22 Flächen-% bis 89 Flächen-% bezogen auf eine Gesamtfläche (100 Flächen-%) des primären Films beträgt.
- 35 4. Orientiertes Elektrostahlblech nach Anspruch 3, wobei zwei oder mehr Phasen, die in dem primären Film beinhaltet sind, voneinander verschiedene Wärmeausdehnungskoeffizienten aufweisen.
- 40 5. Orientiertes Elektrostahlblech nach Anspruch 3, wobei das orientierte Elektrostahlblech die nachstehende Gleichung 2 erfüllt: [Gleichung 2] [C] ≤ [D] (in Gleichung 2 ist [C] ein Gehalt an dem Metall ausgewählt aus Al, Ti, Cu, Cr, Ni, Ca, Zn, Na, K, Mo, In, Sb, Ba, Bi und Mn in dem Stahlblech vor dem Hochtemperaturglühen und ist [D] ein Gehalt an dem Metall ausgewählt aus Al, Ti, Cu, Cr, Ni, Ca, Zn, Na, K, Mo, In, Sb, Ba, Bi und Mn in dem Stahlblech mit Ausnahme des primären Films nach dem Abschließen des Hochtemperaturglühens).
- 45 6. Orientiertes Elektrostahlblech nach Anspruch 3, wobei die zweite Phase eine Art unter MnO, MnO₂, MnO₃, Mn₂O₇, Mn₂O₃, Mn₃O₄, MnSiO₃, Mn₂SiO₄, MnAl₂O₄, Mn₂Al₄Si₅O₁₂ und Mn₃Al₂Si₃O₁₂ oder zwei oder mehr Arten davon beinhaltet.
- 50 7. Orientiertes Elektrostahlblech nach Anspruch 6, wobei das orientierte Elektrostahlblech die nachstehende Gleichung 3 erfüllt: [Gleichung 3] [E] ≤ [F] (in Gleichung 3 ist [E] ein Gehalt an Mn in dem Stahlblech vor dem Hochtemperaturglühen und ist [F] ein Mn-Gehalt des Stahlblechs mit Ausnahme des primären Films nach dem Abschließen des Hochtemperaturglühens).
- 55 8. Herstellungsverfahren für ein orientiertes Elektrostahlblech, umfassend: einen Schritt zum Erzeugen einer Stahlbramme; einen Schritt zum Erhitzen der Stahlbramme; einen Schritt zum Warmwalzen der erhitzten Stahlbramme, um ein warmgewalztes Blech herzustellen; einen Schritt zum Kaltwalzen des warmgewalzten Blechs nach dem Glühen des warmgewalzten Blechs, um ein kaltgewalztes Blech herzustellen; einen Schritt zum Entkohlen und Nitrierglühen des kaltgewalzten Blechs; einen Schritt zum Auftragen eines Glühseparators auf die Oberfläche des entkohnten und nitriergelühten Stahlblechs; einen Schritt zum Hochtemperaturglühen des Stahlblechs, auf das der Glühseparator aufgetragen ist, um einen primären Film auf der Oberfläche des Stahlblechs zu erhalten; und einen

Schritt zum Erhalten eines orientierten Elektrostahlblechs, wobei der Glühseparator Folgendes beinhaltet:

eine erste Komponente, die ein Mg-Oxid oder ein Mg-Hydroxid beinhaltet; und
eine zweite Komponente, die ein Mn-Oxid oder ein Mn-Hydroxid beinhaltet und die nachstehende Gleichung
1 erfüllt:

$$[\text{Gleichung 1}] \quad 3,8 \leq [A]/[B] \leq 9,5$$

(in Gleichung 1 ist [A] ein Gehalt an der zweiten Komponente bezogen auf eine Gesamtmenge (100 Gew.-%) des Glühseparators und ist [B] ein Gehalt an der ersten Komponente bezogen auf die Gesamtmenge (100 Gew.-%) des Glühseparators).

9. Herstellungsverfahren nach Anspruch 8, wobei in dem Schritt zum Entkohlen und Nitrierglühen des kaltgewalzten Blechs eine Oxidationsschicht, die ein Siliziumoxid oder ein Eisenoxid beinhaltet, auf der Oberfläche des entkohlten und nitriergelühten Stahlblechs ausgebildet wird.
10. Herstellungsverfahren nach Anspruch 9, wobei in dem Schritt zum Hochtemperaturlühen des Stahlblechs, auf das der Glühseparator aufgetragen ist, um den primären Film auf der Oberfläche des Stahlblechs zu erhalten, der primäre Film durch die Oxidationsschicht ausgebildet wird, die Folgendes beinhaltet: das Siliziumoxid oder das Eisenoxid, das Innenstahlblech oder eine Kombination davon; und den Glühseparator.
11. Herstellungsverfahren nach Anspruch 8, wobei eine Glühtemperatur des Schrittes zum Hochtemperaturlühen des Stahlblechs, auf das der Glühseparator aufgetragen ist, um den primären Film auf der Oberfläche des Stahlblechs zu erhalten, 950 bis 1250 °C beträgt.
12. Herstellungsverfahren nach Anspruch 8, wobei der Schritt zum Hochtemperaturlühen des Stahlblechs, auf das der Glühseparator aufgetragen ist, um den primären Film auf der Oberfläche des Stahlblechs zu erhalten, Folgendes beinhaltet: einen Schritt zum Erhöhen einer Temperatur mit durchschnittlich 50 °C/h auf 650 °C für das mit dem Glühseparator beschichtete Stahlblech; und einen Schritt zum Erhöhen einer Temperatur mit durchschnittlich 15 °C/h von 650 °C auf die Glühtemperatur in einer Mischgasatmosphäre aus Wasserstoff und Stickstoff.
13. Herstellungsverfahren nach Anspruch 8, wobei der Schritt zum Entkohlen und Nitrierglühen des kaltgewalzten Blechs bei 800 bis 950 °C durchgeführt wird.

Revendications

1. Séparateur de recuit pour une tôle d'acier électrique à grains orientés, comprenant:

un premier composant incluant un oxyde de Mg ou un hydroxyde de Mg; et
un second composant incluant un oxyde de Mn ou un hydroxyde de Mn,
dans lequel l'équation 1 ci-dessous est satisfaite:

$$[\text{Équation 1}] \quad 3,8 \leq [A]/[B] \leq 9,5$$

(dans l'équation 1, [A] est une teneur du second composant par rapport à une quantité totale (100 % en poids) du séparateur de recuit, et [B] est une teneur du premier composant par rapport à la quantité totale (100 % en poids) du séparateur de recuit).

2. Séparateur de recuit pour la tôle d'acier électrique à grains orientés selon la revendication 1, dans lequel le second composant est MnO₂, et le premier composant est MgO.
3. Tôle d'acier électrique à grains orientés comprenant: une tôle d'acier électrique à grains orientés; et un film primaire positionné sur une surface de la tôle d'acier électrique à grains orientés, dans laquelle le film primaire est constitué de deux phases ou plus, le film primaire inclut une première phase incluant de la forstérite (MgSi₂O₄) et une seconde phase incluant une sorte, ou deux sortes de ceux-ci ou plus, parmi les oxydes de Mn, et la seconde phase représente

EP 3 392 356 B9

22 % en aire à 89 % en aire par rapport à une aire totale (100 % en aire) du film primaire.

4. Tôle d'acier électrique à grains orientés selon la revendication 3, dans laquelle deux phases ou plus incluses dans le film primaire ont des coefficients de dilatation thermique différents l'une de l'autre.
5. Tôle d'acier électrique à grains orientés selon la revendication 3, dans laquelle la tôle d'acier électrique à grains orientés satisfait l'équation 2 ci-dessous:

$$[\text{Équation 2}] \quad [C] \leq [D]$$

(dans l'équation 2, [C] est une teneur du métal choisi parmi Al, Ti, Cu, Cr, Ni, Ca, Zn, Na, K, Mo, In, Sb, Ba, Bi et Mn dans la tôle d'acier avant un recuit à haute température, et [D] est une teneur du métal choisi parmi Al, Ti, Cu, Cr, Ni, Ca, Zn, Na, K, Mo, In, Sb, Ba, Bi et Mn dans la tôle d'acier à l'exception du film primaire après achèvement du recuit à haute température).

6. Tôle d'acier électrique à grains orientés selon la revendication 3, dans laquelle la seconde phase inclut une sorte parmi MnO, MnO₂, MnO₃, Mn₂O₇, Mn₂O₃, Mn₃O₄, MnSiO₃, Mn₂SiO₄, MnAl₂O₄, Mn₂Al₄Si₅O₁₂ et Mn₃Al₂Si₃O₁₂, ou deux sortes de ceux-ci ou plus.
7. Tôle d'acier électrique à grains orientés selon la revendication 6, dans laquelle la tôle d'acier électrique à grains orientés satisfait l'équation 3 ci-dessous:

$$[\text{Équation 3}] \quad [E] \leq [F]$$

(dans l'équation 3, [E] est une teneur de Mn dans la tôle d'acier avant recuit à haute température, et [F] est une teneur en Mn de la tôle d'acier à l'exception du film primaire après achèvement du recuit à haute température).

8. Procédé de fabrication d'une tôle d'acier électrique à grains orientés, comprenant: une étape de préparation d'une brame d'acier; une étape de chauffage de la brame d'acier; une étape de laminage à chaud de la brame d'acier chauffée pour fabriquer une tôle laminée à chaud; une étape de laminage à froid de la tôle laminée à chaud après recuit de la tôle laminée à chaud pour fabriquer une tôle laminée à froid; une étape de décarburation et de recuit de nitruration de la tôle laminée à froid; une étape de revêtement d'un séparateur de recuit sur la surface de la tôle d'acier décarburee et ayant fait l'objet d'un recuit de nitruration; une étape de recuit à haute température de la tôle d'acier sur laquelle le séparateur de recuit est revêtu pour obtenir un film primaire sur la surface de la tôle d'acier; et une étape d'obtention d'une tôle d'acier électrique à grains orientés, dans lequel le séparateur de recuit inclut:

un premier composant incluant un oxyde de Mg ou un hydroxyde de Mg; et

un second composant incluant un oxyde de Mn ou un hydroxyde de Mn, et satisfaisant l'équation 1 ci-dessous:

$$[\text{Équation 1}] \quad 3,8 \leq [A]/[B] \leq 9,5$$

(dans l'équation 1, [A] est une teneur du second composant par rapport à une quantité totale (100 % en poids) du séparateur de recuit, et [B] est une teneur du premier composant par rapport à la quantité totale (100 % en poids) du séparateur de recuit).

9. Procédé de fabrication selon la revendication 8, dans lequel à l'étape de décarburation et de recuit de nitruration de la tôle laminée à froid, une couche d'oxydation incluant un oxyde de silicium ou un oxyde de fer est formée sur la surface de la tôle d'acier décarburee et ayant fait l'objet d'un recuit de nitruration.
10. Procédé de fabrication selon la revendication 9, dans lequel à l'étape de recuit à haute température de la tôle d'acier sur laquelle le séparateur de recuit est revêtu pour obtenir le film primaire sur la surface de la tôle d'acier, le film primaire est formé par la couche d'oxydation incluant: l'oxyde de silicium ou l'oxyde de fer, la tôle en acier intérieure, ou une combinaison de ceux-ci; et le séparateur de recuit.
11. Procédé de fabrication selon la revendication 8, dans lequel une température de recuit de l'étape de recuit à haute

EP 3 392 356 B9

température de la tôle d'acier sur laquelle le séparateur de recuit est revêtu pour obtenir le film primaire sur la surface de la tôle en acier est de 950 à 1250 °C.

- 5
12. Procédé de fabrication selon la revendication 8, dans lequel l'étape de recuit à haute température de la tôle d'acier sur laquelle le séparateur de recuit est revêtu pour obtenir le film primaire sur la surface de la tôle d'acier inclut: une étape d'augmentation d'une température à une moyenne de 50 °C/h jusqu'à 650 °C pour la tôle d'acier revêtue du séparateur de recuit; et une étape d'augmentation d'une température à une moyenne de 15 °C/h de 650 °C jusqu'à la température de recuit dans une atmosphère de gaz mixte d'hydrogène et d'azote.
- 10
13. Procédé de fabrication selon la revendication 8, dans lequel l'étape de décarburation et de recuit de nitruration de la tôle laminée à froid est réalisée à 800 à 950 °C.
- 15
- 20
- 25
- 30
- 35
- 40
- 45
- 50
- 55

FIG. 1


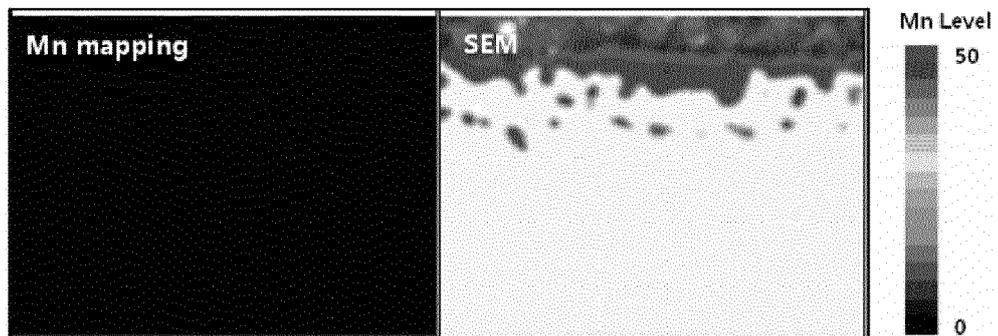


FIG. 2

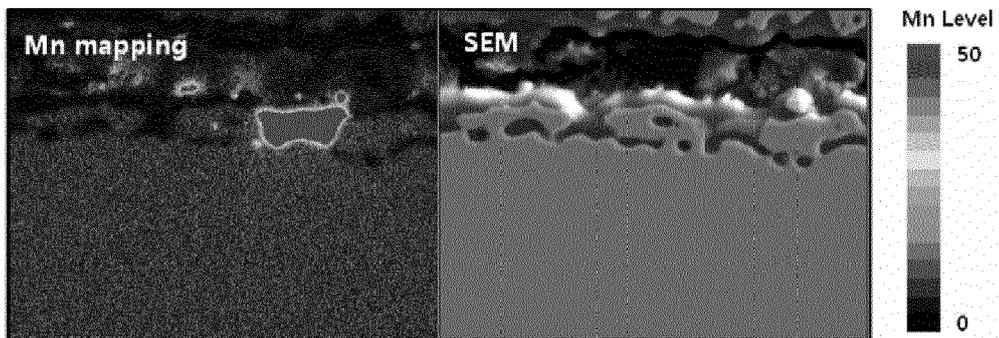

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 3522108 A [0005]