

(19)



(11)

EP 3 399 100 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
26.03.2025 Bulletin 2025/13

(21) Application number: **16880207.2**

(22) Date of filing: **27.12.2016**

(51) International Patent Classification (IPC):
D21C 9/10 (2006.01) **D21C 5/00** (2006.01)
D21H 17/21 (2006.01) **D21H 21/10** (2006.01)
D21H 21/18 (2006.01) **D21C 3/02** (2006.01)
D21H 11/04 (2006.01)

(52) Cooperative Patent Classification (CPC):
D21C 3/02; D21C 3/22; D21C 5/005; D21C 9/10;
D21H 21/10; D21H 27/002; D21H 21/18

(86) International application number:
PCT/BR2016/050355

(87) International publication number:
WO 2017/112995 (06.07.2017 Gazette 2017/27)

(54) **METHOD FOR PRODUCING CELLULOSE PULP, CELLULOSE PULP AND USE THEREOF, PAPER**

VERFAHREN ZUR HERSTELLUNG VON ZELLSTOFF, ZELLSTOFF UND VERWENDUNG DAVON, PAPIER

PROCÉDÉ DE PRODUCTION DE PULPE DE CELLULOSE, PULPE DE CELLULOSE ET SON UTILISATION, PAPIER

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

(30) Priority: **29.12.2015 BR 102015329113**

(43) Date of publication of application:
07.11.2018 Bulletin 2018/45

(73) Proprietor: **Fibria Celulose S.A.**
CEP: 04551-010 São Paulo - SP (BR)

(72) Inventors:
 • **MAMBRIM FILHO, Otávio**
29199-192 Aracruz - ES (BR)
 • **ALVES DE MELO, Leonardo**
12246-875 São José dos Campos - SP (BR)

(74) Representative: **Herzog IP Patentanwalts GmbH**
Steinstraße 16-18
40212 Düsseldorf (DE)

(56) References cited:
WO-A1-00/68500 **WO-A1-03/048449**
WO-A1-2008/055327 **WO-A1-2013/090272**
WO-A1-94/20672 **WO-A1-98/06892**
WO-A1-99/34058 **JP-A- H1 046 495**
US-A- 5 169 497 **US-A- 5 423 946**
US-A- 5 501 770 **US-A- 5 507 914**
US-A- 5 691 193 **US-A1- 2002 100 568**
US-B1- 6 939 437

- **SARKAR, J.M. ET AL.:** "Applying enzymes and polymers to enhance the freeness of recycled fiber", **TAPPI JOURNAL (USA, vol. 78, no. 2, February 1995 (1995-02-01), pages 89 - 95, XP 000541957**
- **REID, L ET AL.:** "Pectinase in papermaking: solving retention problems in mechanical pulp bleached with hydrogen peroxide", **ENZYME AND MICROBIAL TECHNOLOGY, vol. 26, no. 2-4, 2000, pages 115 - 123, XP 055398020**
- **MORAN, B.R.:** "Enzyme treatment improves refining efficiency, recycled fiber freeness", **PULP & PAPER, vol. 70, no. 9, September 1996 (1996-09-01), pages 119 - 121, XP009511374**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 399 100 B1

Description**FIELD OF THE INVENTION**

5 **[0001]** The present invention relates to an improved process for the production of cellulose pulps with increased quality and applicability of said pulps, especially their physical resistance properties and degree of resistance to drainage, through an enzymatic treatment step comprised in the production process of said cellulose pulp, concomitantly with the polymer dosage based on carbohydrates.

10 **BACKGROUND OF THE INVENTION**

[0002] The quality and final characteristics of a paper are directly associated with the type of cellulose fiber used in its composition. In recent years, several studies have been carried out to relate the impact of changes in the characteristics of cellulose fibers on the physical-mechanical properties of paper. Among these characteristics of the cellulose fibers, their flexibility and their number of carboxylic groups are considered important for the development of paper with physical resistance, without compromising its structure.

[0003] Besides the concern with fiber quality and the improvement of its characteristics, the paper and pulp industry faces constant challenges to solve the problems related to the high consumption of industrial water in its processes, which results in high energy consumption.

20 **[0004]** The enzymatic treatments described in the prior art were introduced in the cellulose fiber production process as a solution to promote the reduction of the consumption of the chemicals employed in the process through their action, and with that, also to improve the characteristics of the effluent generated by the process. Another result of the enzymes dosage in the process is the reduction of energy expenditure.

[0005] As for the physical strength properties of cellulose fibers, it can be stated that they are related to the amount of carboxylic groups present and to the flexibility of the fibers.

[0006] The greater the amount of carboxylic groups present in the fibers, and the more flexible these fibers, the greater physical strength, that is, traction will be imparted to the paper produced therefrom.

[0007] This is due to the increase in the area of contact between the fibers with these characteristics, which then enables a growth in the number of bonds between said fibers. In addition, the increase of carboxylic groups or ligands allows the formation of greater number of hydrogen bonds.

[0008] Some prior art documents also mention the differentiation of the physical properties of fibers and paper by the application of enzymes in the production process. However, according to the already described in the state of the art, increasing the physical strength of the pulp, via the use of enzymes, often compromises its drainage. Or even, when there is an improvement in the drainage capacity of the fiber, there is a worsening in its physical resistance.

35 **[0009]** Document WO2003/021033 describes a process for producing tissue paper in a machine, where the paper product contains cellulose fibers. An enzymatic treatment is carried out on the cellulose fibers in order to increase the number of reactive aldehyde groups on the surface of said fibers. The treatment disclosed in said document consists of mixing an aqueous suspension of cellulose fibers with one or more hydrolytic enzymes, optionally in the presence of surfactants, other non-cellulase/hemicellulase enzymes or non-hydrolytic chemical reagents wherein the aldehyde groups are formed in the the surface of the fibers or in their proximity. The use of these hydrolytic enzymes, in particular cellulases, is responsible for the degradation of the fibrous cell wall, impairing the tensile properties of the paper.

[0010] Gonzales *et al.* (2013) describes a process of pulp enzymatic treatment combined with the addition of nanofibrillated celluloses (NFC) which results in the improvement of the physical and mechanical properties of a pulp suspension used in papermaking. However, the results of the study showed that there was no increase in fiber drainage.

45 **[0011]** Pommier *et al.* (1989) describes the enzymatic action on cellulose pulp as a "peeling effect" and suggests that the enzymes defibrillate the cellulose fibers by removing molecules with high affinity for water, but with a small contribution to the overall hydrogen bonding potential of the fibers. This reduction in pulp-water interactions allows a greater drainage of the pulp. However, it leads to a reduction in the strength and length of the fiber, in addition to an excessive production of fines. As a consequence, paper strength is dramatically affected.

50 **[0012]** Document WO00/68500 is related to a process for producing paper materials such as paper, liberboard or corrugated linerboard with improved wet strength.

Document WO03/048449 refers to methods of presence of the bleaching pulp that combine xylanase enzymes with hydrogen peroxide, peracids, or a combination thereof, wherein the hydrogen peroxide and peracids do not destroy the activity of the xylanase.

55 **[0013]** Document WO94/20672 is related to a method for the bleaching of hardwood and softwood pulp without chlorine or chlorine derivatives that provides a pulp with high brightness, good physical strength and a low degree of brightness reversion.

[0014] Document WO2013/090272 refers to methods for reducing the effects of wetlapping, drying, and hornification of

pulp fibers and, consequently, increasing the pulp drainage and strength properties in the final pulp or paper product.

[0015] While performing an enzymatic treatment step in the cellulose refining process is known from the prior art, it is imperative to develop a process in which the application of the enzyme results in an increase in the surface area of the cellulose fiber without compromising the physical properties of the treated fiber, and in which the obtained cellulose pulp exhibits greater physical - traction and tear - resistance and at least the maintenance of its degree of resistance to drainage.

SUMMARY OF THE INVENTION

[0016] The present invention aims to provide cellulose pulps with improved surface properties, these properties being also observed on paper produced from said cellulose pulp.

[0017] A first embodiment of the present invention relates to a process for producing cellulose pulp from cellulosic feedstock by dosing enzymes at certain concentrations and process step.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018]

Figure 1 - shows a simplified flowchart showing the enzymatic treatment step concomitantly with carbohydrate-based polymer dosage according to a preferred embodiment of the invention.

Figure 2 - shows a graph illustrating an increase in the surface area of the fiber with the enzyme dosage.

Figure 3 - shows graphs with assay data confirming that the enzymatic treatment can alter the reactivity of the fibers surface, evaluated through the zeta potential.

Figure 4 - shows a graph illustrating the increase in the tensile index of the pulp of the present invention compared with the reference pulp.

Figure 5 - shows a graph illustrating the increase in the tear index of the pulp of the present invention compared with the reference pulp.

Figure 6 - shows a graph illustrating a comparison between the degree of drainability of the pulp of the present invention and that of the reference pulp.

Figure 7 - shows a graph demonstrating that paper produced from the pulp of the present invention reproduces the tensile gains that the pulp of the present invention exhibits.

Figure 8 - shows the pilot paper production machine.

DETAILED DESCRIPTION OF THE INVENTION

[0019] The present invention relates to a process for the production of cellulose pulp with increased quality and applicability of said pulps, especially their physical resistance properties, at least the maintenance of their degree of resistance to drainage, through an enzymatic treatment step, concomitantly with the dosage of a carbohydrate-based polymer comprised in the production process of said cellulose pulp.

[0020] The carbohydrate-based polymer may be selected from the group consisting of: starch, carboxymethylcellulose, guar gum, among others.

[0021] The enzymatic treatment comprises the use of enzyme or mixture of hydrolytic enzymes (EZ), known to one skilled in the art and commercially available, and which may be selected from the group consisting of: α -amilase, β -amilase, glucan 1,4- α -glucosidase, cellulase, endo-1,3(4)- β -glucanase, inulinase, endo-1,4- β -xylanase, oligo-1,6-glucosidase, dextranase, chitinase, polygalacturonase, liozyme, exo- α -sialidase, α -glucosidase, β -glucosidase, α -galactosidase, β -galactosidase, α -mannosidase, β -mannosidase, β -fructofuranosidase, α,α -trehalase, β -glucuronidase, endo-1,3- β -xilanase, amilo-1,6-glucosidase, hialuronoglucosaminidase, hialuronoglucuronidase, xilan 1,4- β -xilosidase, β -D-fucosidase, glucan endo-1,3- β -D-glucosidase, α -L-rhamnosidase, pululanase, GDP-glucosidase, β -L-rhamnosidase, fucoidanase, glucosilceramidase, galactosilceramidase, galactosilgalactosilglucosilceramidase, sucrose α -glucosidase, α -N-acetilgalactosaminidase, α -N-acetilglucosaminidase.

[0022] The performance of the enzyme or enzyme mixture (EZ) available in the market occurs in the surface area of the cellulose fiber, potentiating the adsorption capacity of the fiber modifying chemicals during the pulp production process.

[0023] However, the dosage of enzymes in excessive concentrations may cause them to act more deeply in the fibers, which could significantly alter their physical resistance and their degree of resistance to drainage and even degrade the walls of said fibers fibers.

[0024] The inventors have found increased physical strength and, surprisingly, at least the maintenance of the degree of drainability of the cellulose pulp obtained by the process described herein, by defining specific enzyme levels to be dosed together with the carbohydrate-based polymer, in the step after bleaching of the pulp and before drying of said pulp.

[0025] Figure 1 shows the steps of the process of the present invention. The process for producing the cellulose pulp

comprises the steps of:

- a) treating the cellulosic feedstock through the chemical or semi-chemical pulping process to produce brown cellulose pulp (BP);
- b) bleaching the brown cellulose pulp through the bleaching sequence to obtain the white pulp;
- c) adding the carbohydrate-based polymer (B), wherein the dosage of said polymer ranges from 2 to 12 kg/ton of cellulose pulp;
- c) adding the enzyme or enzyme mixture to the white slurry pulp already doped with the carbohydrate-based polymer (B), wherein the addition of the enzyme (E) or enzyme mixture takes place according to the following conditions:

- i. reaction temperature between 40 and 90°C;
- ii. reaction pH between 3.0 and 9.0 using a strong base or a strong acid for pH adjustment, controlled by means of pH measurement;
- iii. reaction time between 10 and 300 minutes;
- iv. enzyme amount between 10 g of EZ and 200 g of EZ per ton of cellulose;

- e) conveying the doped white slurry pulp to and through the reaction tower before the drying machine (TMCB); and
- f) drying (S) the doped white slurry pulp to obtain the cellulose pulp (CL).

[0026] Figure 2 shows that the dosage of 50, 100 or 200 g/ton of enzyme causes an increase in the fiber surface area when compared with a reference sample. The reference sample is a white slurry pulp that has not been doped, that is, it did not receive a dosage of the carbohydrate-based polymer and enzyme or mixture of enzymes.

[0027] The enzymatic treatment applied under controlled conditions of the kinetic variables of the reactions involved, namely temperature, pH and time, leads to a greater efficiency of the treatment and with that, an enzyme dosage more optimized for the production process of cellulose pulp.

[0028] Figure 3 shows the increased reactivity of the fiber produced by the process of the present invention. The reactivity is represented by the zeta potential.

[0029] Figures 4 and 5 demonstrate the physical strength gains of the pulp obtained by the process described in the present invention when compared to the reference pulp. Furthermore, Figure 6 proves the maintenance of the degree of resistance to drainage of the pulp of the present invention in comparison with the reference pulp.

[0030] The paper obtained from the pulp of the present invention reproduces these gains in physical resistance as shown in Figure 7.

[0031] Furthermore, since the dosage of the enzyme or commercial enzyme mixture takes place prior to the drying step of the white slurry pulp, said enzyme or enzyme mixture undergoes denaturation during said drying step, which results in a cellulose pulp (CL) without residues of enzyme or enzyme mixtures, as proved by the performance of the ELISA assay.

[0032] In a preferred embodiment of the present invention, the cellulose pulp production process comprises the steps of:

- a) treating the cellulosic feedstock through the chemical pulping process, chemical pulping being preferably a Kraft process, to produce brown cellulose pulp (BP);
- b) bleaching the brown cellulose pulp through a bleaching sequence comprising treatment with hot chlorine dioxide (DHT), followed by treatment with soda and peroxide (OPE), followed by treatment with chlorine dioxide (D1);
- c) adding the carbohydrate-based polymer (B), wherein the dosage of said polymer ranges from 2 to 12 kg/ton of cellulose pulp, adding preferably between 3 and 10 Kg of polymer/ton of cellulose pulp;
- d) adding the enzyme or enzyme mixture to the white slurry pulp already doped with the carbohydrate-based polymer (B), wherein the addition of the enzyme (E) or enzyme mixture takes place according to the following conditions:

- i. reaction temperature between 50 and 80°C;
- ii. reaction pH between 3.5 and 8.0, using either sodium hydroxide or sulfuric acid for pH adjustment;
- iii. reaction time between 30 and 120 minutes;
- iv. enzyme amount between 20 g of EZ and 100 g of EZ per ton of cellulose;

- e) conveying the added white slurry pulp to and through the reaction tower before the drying machine (TMCB); and
- f) drying (S) the doped white slurry pulp to obtain the cellulose pulp (CL).

[0033] In another preferred embodiment of the present invention, the cellulose pulp production process can be described as:

- a) treating the cellulosic feedstock through the chemical pulping process, wherein the chemical pulping is preferably a

Kraft process, to produce brown cellulose pulp (BP);

b) bleaching the brown cellulose pulp through a bleaching sequence comprising treatment with hot chlorine dioxide (DHT), followed by treatment with soda and peroxide (OPE), followed by treatment with chlorine dioxide (D1);

c) adding the enzyme or enzyme mixture to the white slurry pulp, wherein the addition of the enzyme (E) or enzyme mixture takes place according to the following conditions:

- i. reaction temperature between 50 and 80°C;
- ii. reaction pH between 3.5 and 8.0, using either sodium hydroxide or sulfuric acid for the adjustment;
- iii. reaction time between 30 and 120 minutes;
- iv. enzyme amount between 20 g of EZ and 100 g of EZ per ton of cellulose;

d) adding the carbohydrate-based polymer (B), wherein the dosage of said polymer ranges from 2 to 12 kg/ton of cellulose pulp, dosing preferably between 3 and 10 kg of polymer/ton of cellulose pulp;

e) conveying the doped white slurry pulp to and through the reaction tower before the drying machine (TMCB); and

f) drying (S) the doped white slurry pulp to obtain the cellulose pulp (CL).

[0034] The chemical pulping process, more specifically the Kraft pulping process, as already described in the state of the art, comprises treating the fibers of vegetable origin, including the following steps:

a) digestion - where vegetable fibers are boiled together with sodium hydroxide and sodium sulphide to separate the brown cellulose pulp (BP) from the lignin;

b) separation of the black liquor from the cellulose - the black liquor must be separated from the brown cellulose pulp (BP);

c) recovery boiler - the black liquor is treated until it can be burned in the recovery boiler to generate energy;

d) closing the circuit by recovering sodium hydroxide, sodium sulphide and water;

e) transformation of the brown cellulose pulp (BP) into bleached cellulose (CL); said transformation comprising:

- i) washing the cellulose pulp with water to remove residual black liquor;
- ii) pre-bleaching;
- iii) bleaching;
- iv) cellulose (CL) drying.

[0035] In other embodiments of the present invention, the step (b) of bleaching a brown cellulose pulp (BC) from the pulping process of the cellulose pulp of the present invention may be selected from the group consisting of:

1) treatment with hot dioxide (DOHOT), followed by oxidative peroxide extraction (OPE), followed by final treatment with dioxide (D) - elemental chlorine-free product (ECF);

2) acidification stage with sulfuric or hydrochloric acid (A), DO (not-hot dioxide treatment), followed by oxidative peroxide extraction (OPE), followed by another dioxide treatment (D1), followed by peroxide extraction (pE), followed by another dioxide treatment (D2) - elemental chlorine-free product (ECF);

3) hot dioxide treatment (HOTDo), followed by oxidative peroxide extraction (OPE), followed by treatment with dioxide with soda neutralization, and another dioxide treatment stage (DnD) - elemental chlorine-free product (ECF);

4) a stage of delignification (O) followed by the conveyance of pulp to and into an acid tower, washing, use of ozone with extraction (AZe), followed by another washing, then dioxide treatment (d) and addition of peroxide (P) - elemental chlorine-free product (ECF);

5) a delignification stage (O), followed by acidification (aZe) for 15 minutes, followed by ozone application, followed by extraction, then washing with water, dioxide treatment (D), washing again, peroxide addition (P), followed by washing, and finally drying - elemental chlorine-free product (ECF);

6) a delignification stage (O), followed by an acidification stage with sulfuric or hydrochloric acid (A) followed by ozone extraction (Ze), followed by peroxide addition (P) followed by a further peroxide addition (P) - elemental chlorine-free product and chlorine-based compounds (TCF);

7) a delignification stage (O), using ozone extraction (aZe), followed by peroxide addition (P) followed by a further peroxide addition (P) - elemental chlorine-free product and chlorine-based compounds (TCF);

8) delignification (OO) with oxygen to lower the Kappa number by 35%, acidification stage with sulfuric or hydrochloric acid, and hot dioxide treatment (HOTDo), followed by oxidative peroxide extraction (OPE), followed by dioxide treatment (D), and final peroxide addition (P) - elemental chlorine-free product (ECF).

[0036] In the last bleaching stage, the carbohydrate-based polymer and commercial enzyme or enzyme mixture are

dosed, which are then conveyed to and through a homogenization device, which ensures the greatest contact between the products dosed and the fiber. Then, this mixture is transferred to a mixing pump where effective mixing of the additives takes place. Thereafter, the carbohydrate-based polymer-doped pulp and commercial enzyme or enzyme mixture is pumped into a reaction tower, where the mixture remains for 10 to 300 minutes, preferably for 30 to 120 minutes, at a temperature between 40 and 90°C, preferably between 50 and 80°C, and pH ranging from 3.0 to 9.0, preferably ranging from 3.5 to 8.0, using sodium hydroxide or sulfuric acid for pH adjustment, in order to complete the reaction.

[0037] The obtained pulp is then diluted and pumped into the drying step. Then, the cellulose pulp (CL) is obtained for the paper market.

[0038] The inventors have further found that, contrary to the teachings of the state of the art, the process described herein results in a cellulose pulp (CL) with higher physical strength, that is, to tear and traction, and also with at least the maintenance degree of resistance to drainage, as shown in Figures 4 to 6.

[0039] According to a preferred embodiment of the present invention, the enzymatic treatment is carried out by the action of hydrolytic enzymes, for example, cellulases, or mixture of cellulases with other enzymes available on the market with fillers ranging from 20 to 100 grams of enzyme per ton of cellulose.

[0040] Said enzymatic treatment (E) is conducted in a step subsequent to the bleaching process of the pulp obtained by the chemical pulping process, and prior to the drying step (D) of the pulp so that it is then used in papermaking.

[0041] Preferably, the enzymatic treatment has a retention time in the range of 30 to 120 minutes, a pH in the range of 3.5 to 8.0, a temperature in the range of 50 to 80°C, preferably when the hydrolytic enzyme is a cellulase.

[0042] The fibers used in the process of the present invention may be so-called vegetable fibers, preferably short fibers, more preferably eucalyptus fibers.

[0043] The cellulose pulp of the present invention, obtained by a process including an enzymatic treatment step, concurrently dosing a carbohydrate-based polymer, surprisingly presents an increased surface area of the cellulose fiber without compromising the physical properties of the treated fiber, and also ensuring that the obtained cellulose pulp exhibits greater physical resistance - to traction and tear - and at least maintain its degree of resistance to drainage.

EXAMPLES

[0044] The following examples will better illustrate the present invention and the particular conditions and parameters described represent preferred but not limiting embodiments of the present invention.

EXAMPLE 1: POLYMER PRODUCTION PROCESS - ADDITION OF POLYMER FOLLOWED BY ENZYME ADDITION

[0045] For a Kraft pulping process, the carbohydrate-based polymer, but specifically starch, was used in a dosage of 3 to 10 kg/ton of cellulose pulp from short fibers. Thereafter, 30 to 50 g of EZ per ton of cellulose were added, wherein the reaction conditions are as follows: temperature from 50 to 90°C, pH 3.0 to 8.0, over a period from 60 to 240 minutes. The used bleaching sequence was an ECF sequence.

EXAMPLE 2: POLYMER PRODUCTION PROCESS - ADDITION OF ENZYME FOLLOWED BY POLYMER ADDITION

[0046] For a Kraft pulping process" 30 to 50 g of EZ per ton of cellulose were added from short fibers, wherein the reaction conditions are as follows: temperature from 50 to 90°C, pH 3.0 to 9.0, over a period from 60 to 240 minutes. Thereafter, a carbohydrate-based polymer, but specifically starch, was dosed at a dosage of 3 to 10 kg/tonne of cellulose pulp. The used bleaching sequence was an ECF sequence.

EXAMPLE 3: DESCRIPTION OF THE COMPARATIVE TESTS WITH THE REFERENCES.

[0047] Comparative tests for evaluating the characteristics of the cellulose pulp obtained from the process of the present invention were carried out with the concomitant addition of carbohydrate-based polymer and commercially available enzyme or enzyme mixture.

[0048] In the laboratory tests, the equipment used was a cellulose bleach reactor with a capacity of 300 g of dry fibers and total automatic control of the process conditions, which were adjusted to: temperature of 50°C, pH of 7.0 and reaction time of 120 minutes. The amount of enzyme or enzyme mixture used ranged from 0 (Reference) to 50 to 200 g/tsa (Samples A, B, C and D).

[0049] The results of the laboratory tests are described in Table 1.

EP 3 399 100 B1

TABLE 1:

Sample	Enzyme amount	Tear Index (Nm ² /kg)	Tensile Index (Nm/g)
Reference	0	5.9	34.9
Sample A	50 g/tsa	7.7	52.2
Sample B	100 g/tsa	7.0	53.2
Sample C	150 g/tsa	6.3	55.8
Sample D	200 g/tsa	5.7	55.1

[0050] As can be evidenced by the above results, there was an improvement in the rates of tear and traction of the obtained pulp.

[0051] The comparative tests were followed by tests on larger scale, when the reactor having a dry pulp capacity of 100 kg and having automatic control of the process variables was used. The variables were maintained: temperature of 50°C, pH of 7.0 and reaction time of 120 minutes. The amount of enzyme or enzyme mixture used was 50 g/t.

[0052] Again, it was possible to verify that, in comparison to the reference, the pulp of the present invention showed improved physical strength without compromising its degree of resistance to drainage. The results are described in Table 2.

TABLE 2

Sample	Drainability (°SR)	Tear Index (Nm ² /kg)	Tensile Index (Nm/g)
Reference	17.5	3.8	23.2
Sample 50 g/tsa	20.0	5.8	30.6

[0053] Also, tests on an even larger scale were carried out, and also demonstrated the improvement in the physical resistance of the obtained pulp, maintaining the degree of resistance to drainage. The amount of enzyme or mixture of enzymes used was 30 g/tsa and 50 g/t.

[0054] The results are shown in table 3 below.

TABLE 3

Sample	Drainability (°SR)	Tear Index (Nm ² /kg)	Tensile Index (Nm/g)
Reference A	23.5	3.1	22.4
Reference B	21.0	3.4	22.7
Batch 1	21.0	5.2	27.2
Batch 2	21.0	6.5	27.4
Batch 3	22.0	4.5	27.5
Batch 4	21.0	5.5	27.7
Batch 5	21.0	5.3	27.3

[0055] The data are graphically represented in Figures 4, 5 and 6.

[0056] The reproducibility of the improved physical strength characteristics of the pulp of the present invention has therefore been observed from the laboratory scale to larger scales.

EXAMPLE 4:A PAPER MANUFACTURING PROCESS USING THE PULP OF THIS INVENTION

[0057] The capability of the pulp of the present invention was evaluated in a tissue pilot machine.

[0058] The preparation of the slurry was carried out in batch, where 4.2 tons of slurry were prepared.

[0059] After preparation, the slurry was sent for testing in a commercially-available tissue paper machine, as shown in Figure 8.

[0060] As a result, it was observed that the results of the physical strength on paper reproduced the gains in physical strength that were observed in the pulp of the present invention. Specifically, the tensile index increased over 50%, as

shown in Figure 7.

[0061] These improved properties - tear index and tensile index - were transferred to the obtained paper, especially tissue paper, and writing and printing paper; moreover, the papermaking process from the pulp thus obtained exhibits productivity gains and resource savings, as it ensures a more efficient drainage/drying, since the degree of resistance to drainage is maintained.

Claims

- 10 **1.** Process for producing a cellulose pulp from cellulosic feedstock **characterized by** comprising the steps of:
- 15 a) treating the cellulosic feedstock through a chemical or semi-chemical pulping process to produce a brown cellulose pulp (BP);
 b) bleaching the brown cellulose pulp through a bleaching sequence to obtain a white slurry pulp;
 c) adding a carbohydrate-based polymer (B) to the white slurry pulp, wherein the carbohydrate-based polymer (B) is selected from the group consisting of starch, carboxymethylcellulose and guar gum, and wherein the dosage of said polymer ranges from 2 to 12 kg/ton of cellulose pulp;
 d) adding an enzyme or enzyme mixture to the white slurry pulp with the carbohydrate-based polymer (B), wherein the addition of the enzyme (E) or enzyme mixture takes place according to the following conditions:
- 20 i. reaction temperature between 40 and 90°C;
 ii. reaction pH between 3.0 and 9.0;
 iii. reaction time between 10 and 300 minutes;
 iv. enzyme amount between 10 g of EZ and 200 g of EZ per ton of cellulose;
- 25 e) conveying the white slurry pulp with the carbohydrate-based polymer (B) to and through the reaction tower before the drying machine (TMCB); and
 f) drying (S) the white slurry pulp with the carbohydrate-based polymer (B) to obtain the cellulose pulp (CL).
- 30 **2.** Process according to claim 1, **characterized in that** the cellulosic feedstock is a vegetable fiber.
- 3.** Process according to claim 2, **characterized in that** the vegetable fiber is a short fiber, more preferably, a eucalyptus fiber.
- 35 **4.** Process according to claims 1 to 3, **characterized in that** the pulping process is a Kraft process.
- 5.** Process according to claims 1 to 4, **characterized in that** bleaching comprises using an ECF or TCF bleaching sequence.
- 40 **6.** Process according to claims 1 to 5, **characterized in that** the addition of the enzyme (E) or enzyme mixture takes place according to the following conditions:
- i. reaction temperature between 50 and 80°C;
 ii. reaction pH between 3.5 and 8.0;
 45 iii. reaction time between 30 and 120 minutes;
 iv. enzyme amount between 20 g of EZ and 100 g of EZ per ton of cellulose.
- 7.** Process for producing a cellulose pulp from cellulosic feedstock **characterized by** comprising the steps of and in that order:
- 50 a) treating the cellulosic feedstock through a chemical or semi-chemical pulping process to produce a brown cellulose pulp (BP);
 b) bleaching the brown cellulose pulp through a bleaching sequence to obtain a white slurry pulp;
 c) adding an enzyme or enzyme mixture to the white slurry pulp, wherein the addition of the enzyme (E) or enzyme mixture takes place according to the following conditions:
- 55 i. reaction temperature between 40 and 90°C;
 ii. reaction pH between 3.0 and 9.0;

- iii. reaction time between 10 and 300 minutes;
- iv. enzyme amount between 10 g of EZ and 200 g of EZ per ton of cellulose;

5 d) adding the carbohydrate-based polymer (B), wherein the dosage of said polymer ranges from 2 to 12 kg/ton of cellulose pulp, wherein the carbohydrate-based polymer (B) is selected from the group consisting of starch, carboxymethylcellulose and guar gum;

e) conveying the white slurry pulp with the carbohydrate-based polymer (B) to and through the reaction tower before the drying machine (TMCB); and

f) drying (S) the white slurry pulp with the carbohydrate-based polymer (B) to obtain the cellulose pulp (CL).

10 **8.** Process according to claim 7, **characterized in that** the vegetable fiber is a short fiber, more preferably a eucalyptus fiber.

15 **9.** Process according to claims 7 to 8, **characterized in that** the pulping process is a Kraft process.

10. Process according to claims 7 to 9, **characterized in that** the addition of the enzyme (E) or enzyme mixture takes place according to the following conditions:

- 20 i. reaction temperature between 50 and 80°C;
- ii. reaction pH between 3.5 and 8.0;
- iii. reaction time between 30 and 120 minutes;
- iv. enzyme amount between 20 g of EZ and 100 g of EZ per ton of cellulose.

25 Patentansprüche

1. Ein Verfahren zur Herstellung einer Zellulosepulpe aus zellulosehaltigem Ausgangsmaterial, **dadurch gekennzeichnet, dass** es die folgenden Schritte umfasst:

30 a) Behandeln des zellulosehaltigen Ausgangsmaterials durch ein chemisches oder halbchemisches Aufschlussverfahren zur Herstellung eines braunen Zellstoffs (BP);

b) Bleichen der braunen Zellulosepulpe durch eine Bleichsequenz, um eine weiße Suspensionspulpe zu erhalten;

35 c) Zugeben eines Polymers auf Kohlenhydratbasis (B) zu der weißen Suspensionspulpe, wobei das Polymer auf Kohlenhydratbasis (B) aus der Gruppe ausgewählt ist, die aus Stärke, Carboxymethylcellulose und Guargummi besteht, und wobei die Dosierung des Polymers im Bereich von 2 bis 12 kg/Tonne Cellulosepulpe liegt;

d) Zugeben eines Enzyms oder einer Enzymmischung zu der weißen Suspensionspulpe mit dem Polymer auf Kohlenhydratbasis (B), wobei die Zugabe des Enzyms (E) oder der Enzymmischung gemäß den folgenden Bedingungen erfolgt:

- 40 i. einer Reaktionstemperatur zwischen 40 und 90 °C;
- ii. einem Reaktions-pH-Wert zwischen 3,0 und 9,0;
- iii. einer Reaktionszeit zwischen 10 und 300 Minuten;
- iv. einer Enzymmenge zwischen 10 g EZ und 200 g EZ pro Tonne Zellulose;

45 e) Fördern der weißen Suspensionspulpe mit dem Polymer auf Kohlenhydratbasis (B) zu und durch den Reaktionsturm vor der Trocknungsmaschine (TMCB); und

f) Trocknen (S) der weißen Suspensionspulpe mit dem Polymer auf Kohlenhydratbasis (B), um die Zellulosepulpe (CL) zu erhalten.

50 **2.** Das Verfahren nach Anspruch 1, **dadurch gekennzeichnet, dass** das zellulosehaltige Ausgangsmaterial eine Pflanzenfaser ist.

55 **3.** Das Verfahren nach Anspruch 2, **dadurch gekennzeichnet, dass** die pflanzliche Faser eine Kurzfaser, vorzugsweise eine Eukalyptusfaser, ist.

4. Das Verfahren nach einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, dass** das Aufschlussverfahren ein Kraftverfahren ist.

EP 3 399 100 B1

5. Das Verfahren nach einem der Ansprüche 1 bis 4, **dadurch gekennzeichnet, dass** das Bleichen unter Verwendung einer ECF- oder TCF-Bleichsequenz erfolgt.
6. Das Verfahren nach einem der Ansprüche 1 bis 5, **dadurch gekennzeichnet, dass** die Zugabe des Enzyms (E) oder Enzymgemisches unter folgenden Bedingungen erfolgt:
- einer Reaktionstemperatur zwischen 50 und 80°C;
 - einem Reaktions-pH-Wert zwischen 3,5 und 8,0;
 - einer Reaktionszeit zwischen 30 und 120 Minuten;
 - einer Enzymmenge zwischen 20 g EZ und 100 g EZ pro Tonne Zellulose.
7. Ein Verfahren zur Herstellung eines Zellstoffs aus zellulosehaltigem Ausgangsmaterial, **dadurch gekennzeichnet, dass** es die folgenden Schritte in dieser Reihenfolge umfasst:
- Behandeln des zellulosehaltigen Ausgangsmaterials durch ein chemisches oder halbchemisches Aufschlussverfahren zur Herstellung eines braunen Zellstoffs (BP);
 - Bleichen der braunen Zellulosepulpe durch eine Bleichsequenz, um eine weiße Suspensionspulpe zu erhalten;
 - Zugeben eines Enzyms oder einer Enzymmischung zur weißen Suspensionspulpe, wobei die Zugabe des Enzyms (E) oder der Enzymmischung gemäß den folgenden Bedingungen erfolgt:
 - einer Reaktionstemperatur zwischen 40 und 90 °C;
 - einem Reaktions-pH-Wert zwischen 3,0 und 9,0;
 - einer Reaktionszeit zwischen 10 und 300 Minuten;
 - einer Enzymmenge zwischen 10 g EZ und 200 g EZ pro Tonne Zellulose;
 - Zugeben des Polymers (B) auf Kohlenhydratbasis, wobei die Dosierung des Polymers im Bereich von 2 bis 12 kg/Tonne Zellulosepulpe liegt, wobei das Polymer (B) auf Kohlenhydratbasis aus der Gruppe ausgewählt ist, die aus Stärke, Carboxymethylcellulose und Guarkernmehl besteht;
 - Fördern der weißen Suspensionspulpe mit dem Polymer auf Kohlenhydratbasis (B) zu und durch den Reaktionsturm vor der Trocknungsmaschine (TMCB); und
 - Trocknen (S) der weißen Suspensionspulpe mit dem Polymer auf Kohlenhydratbasis (B), um die Zellulosepulpe (CL) zu erhalten.
8. Das Verfahren nach Anspruch 7, **dadurch gekennzeichnet, dass** die pflanzliche Faser eine Kurzfaser, vorzugsweise eine Eukalyptusfaser, ist.
9. Das Verfahren nach einem der Ansprüche 7 bis 8, **dadurch gekennzeichnet, dass** das Aufschlussverfahren ein Kraftverfahren ist.
10. Das Verfahren nach einem der Ansprüche 7 bis 9, **dadurch gekennzeichnet, dass** die Zugabe des Enzyms (E) oder der Enzymmischung unter folgenden Bedingungen erfolgt:
- einer Reaktionstemperatur zwischen 50 und 80°C;
 - einem Reaktions-pH-Wert zwischen 3,5 und 8,0;
 - einer Reaktionszeit zwischen 30 und 120 Minuten;
 - einer Enzymmenge zwischen 20 g EZ und 100 g EZ pro Tonne Zellulose.

50 Revendications

1. Un procédé de production d'une pâte de cellulose à partir d'une matière première cellulosique, **caractérisé par** les étapes suivantes :
- traiter la matière première cellulosique par un procédé de réduction en pâte chimique ou semi-chimique pour produire une pâte brune de cellulose (BP) ;
 - blanchir la pâte de cellulose brune par une séquence de blanchiment pour obtenir une pâte blanche ;
 - ajouter d'un polymère à base d'hydrates de carbone (B) à la pâte blanche, le polymère à base d'hydrates de

EP 3 399 100 B1

carbone (B) étant choisi dans le groupe constitué par l'amidon, la carboxyméthylcellulose et la gomme de guar, et le dosage dudit polymère étant compris entre 2 et 12 kg/tonne de pâte de cellulose ;
d) ajouter d'une enzyme ou d'un mélange d'enzymes à la pâte blanche avec le polymère à base d'hydrates de carbone (B), l'ajout de l'enzyme (E) ou du mélange d'enzymes s'effectuant dans les conditions suivantes :

- 5
- i. une température de réaction comprise entre 40 et 90 °C ;
 - ii. un pH de réaction compris entre 3,0 et 9,0 ;
 - iii. un temps de réaction compris entre 10 et 300 minutes ;
 - iv. une quantité d'enzymes comprise entre 10 g d'EZ et 200 g d'EZ par tonne de cellulose ;
- 10
- e) acheminer la pâte blanche avec le polymère à base d'hydrates de carbone (B) vers et à travers la tour de réaction avant la machine de séchage (TMCB) ; et
 - f) sécher (S) la pâte blanche avec le polymère à base de glucides (B) pour obtenir la pâte de cellulose (CL).

15 **2.** Le procédé selon la revendication 1, **caractérisé par le fait que** la matière première cellulosique est une fibre végétale.

3. Le procédé selon la revendication 2, **caractérisé par le fait que** la fibre végétale est une fibre courte, plus préférentiellement une fibre d'eucalyptus.

20 **4.** Le procédé selon les revendications 1 à 3, **caractérisé par le fait que** le procédé de mise en pâte est un procédé Kraft.

5. Le procédé selon les revendications 1 à 4, **caractérisé par le fait que** le blanchiment comprend l'utilisation d'une séquence de blanchiment ECF ou TCF.

25 **6.** Le procédé selon les revendications 1 à 5, **caractérisé par le fait que** l'addition de l'enzyme (E) ou du mélange d'enzymes s'effectue dans les conditions suivantes :

- 30
- i. une température de réaction comprise entre 50 et 80°C ;
 - ii. un pH de réaction compris entre 3,5 et 8,0 ;
 - iii. un temps de réaction compris entre 30 et 120 minutes ;
 - iv. une quantité d'enzymes comprise entre 20 g d'EZ et 100 g d'EZ par tonne de cellulose.

35 **7.** Un procédé de production d'une pâte de cellulose à partir d'une matière première cellulosique, **caractérisé par les étapes suivantes et dans cet ordre :**

- a) traiter la matière première cellulosique par un procédé de réduction en pâte chimique ou semi-chimique pour produire une pâte brune de cellulose (BP) ;
- b) blanchir la pâte de cellulose brune par une séquence de blanchiment pour obtenir une pâte blanche ;
- c) ajouter d'une enzyme ou d'un mélange d'enzymes à la pâte blanche, ajouter de l'enzyme (E) ou du mélange d'enzymes s'effectuant dans les conditions suivantes :

- 40
- i. une température de réaction comprise entre 40 et 90 °C ;
 - ii. un pH de réaction compris entre 3,0 et 9,0 ;
 - iii. un temps de réaction compris entre 10 et 300 minutes ;
 - iv. une quantité d'enzymes comprise entre 10 g d'EZ et 200 g d'EZ par tonne de cellulose ;
- 45

d) ajouter du polymère à base d'hydrates de carbone (B), le dosage dudit polymère étant compris entre 2 et 12 kg/tonne de pâte de cellulose, le polymère à base d'hydrates de carbone (B) étant choisi dans le groupe constitué de l'amidon, de la carboxyméthylcellulose et de la gomme de guar ;

50 e) acheminer la pâte blanche avec le polymère à base d'hydrates de carbone (B) vers et à travers la tour de réaction avant la machine de séchage (TMCB) ; et

f) sécher (S) de la pâte blanche avec le polymère à base de glucides (B) pour obtenir la pâte de cellulose (CL).

55 **8.** Le procédé selon la revendication 7, **caractérisé par le fait que** la fibre végétale est une fibre courte, plus préférentiellement une fibre d'eucalyptus.

9. Le procédé selon les revendications 7 à 8, **caractérisé par le fait que** le procédé de mise en pâte est un procédé Kraft.

EP 3 399 100 B1

10. Le procédé selon les revendications 7 à 9, **caractérisé par le fait que** l'addition de l'enzyme (E) ou du mélange d'enzymes s'effectue dans les conditions suivantes :

- i. une température de réaction comprise entre 50 et 80°C ;
- ii. un pH de réaction compris entre 3,5 et 8,0 ;
- iii. un temps de réaction compris entre 30 et 120 minutes ;
- iv. une quantité d'enzymes comprise entre 20 g d'EZ et 100 g d'EZ par tonne de cellulose.

5

10

15

20

25

30

35

40

45

50

55

FIGURE 1

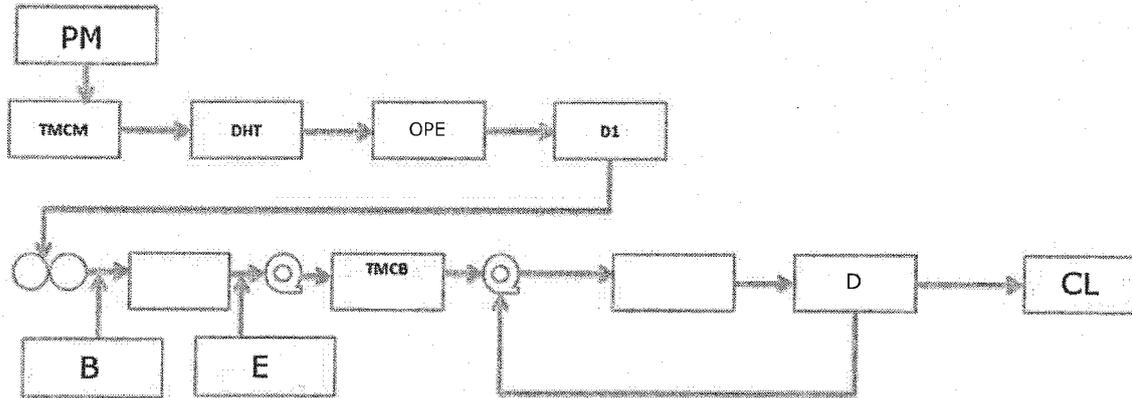


FIGURE 2

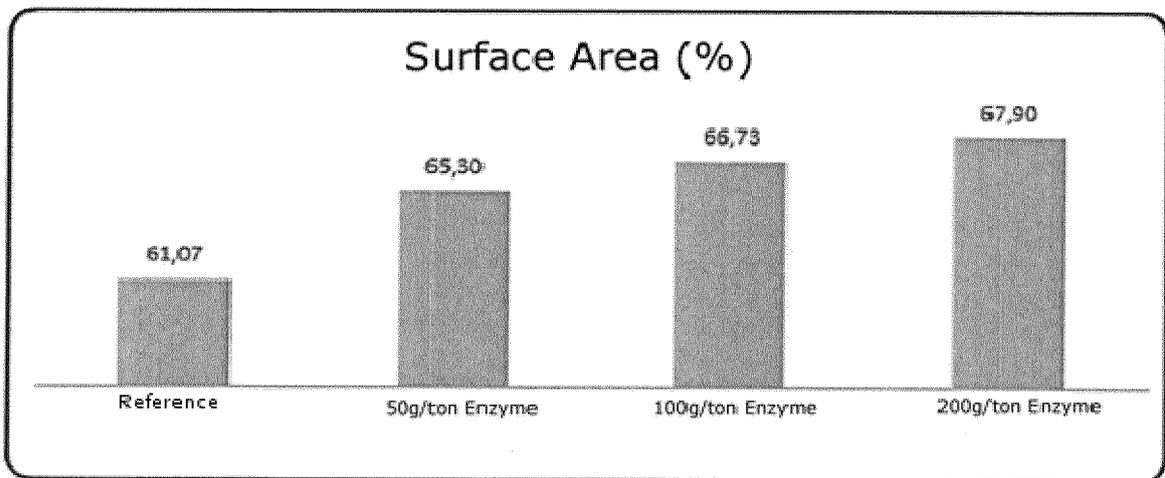


FIGURE 3

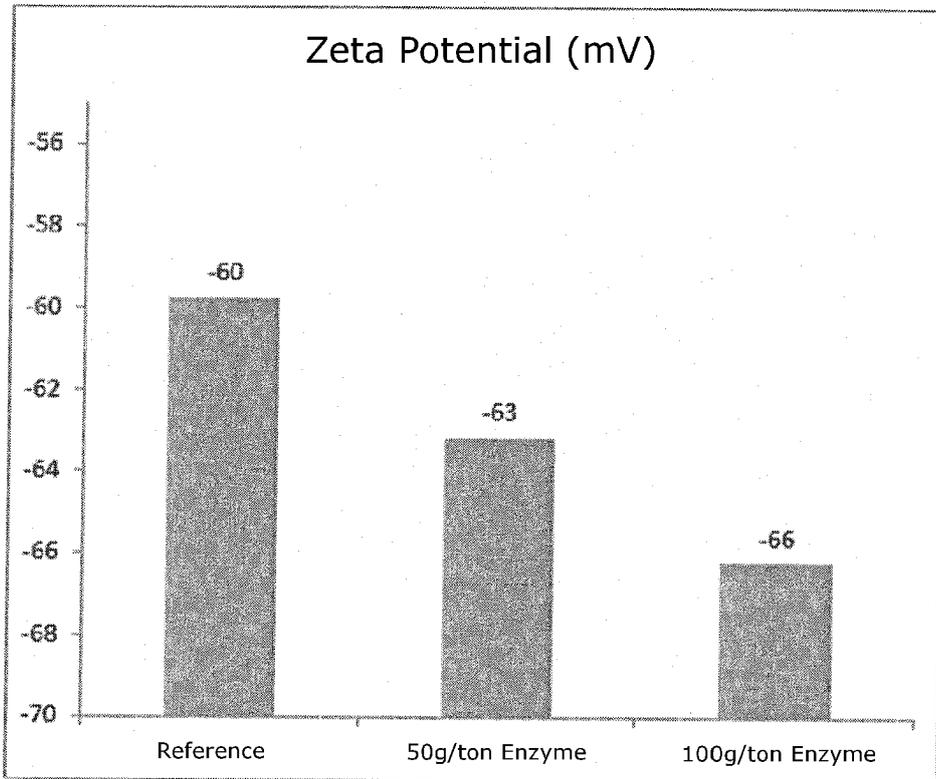


FIGURE 4

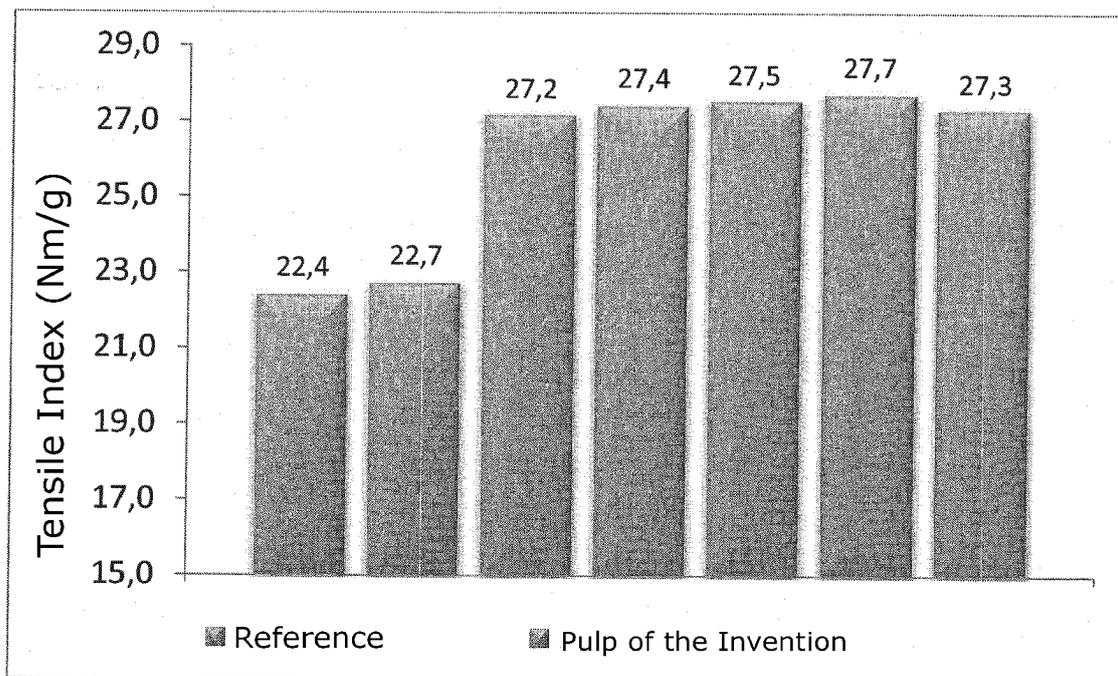


FIGURE 5

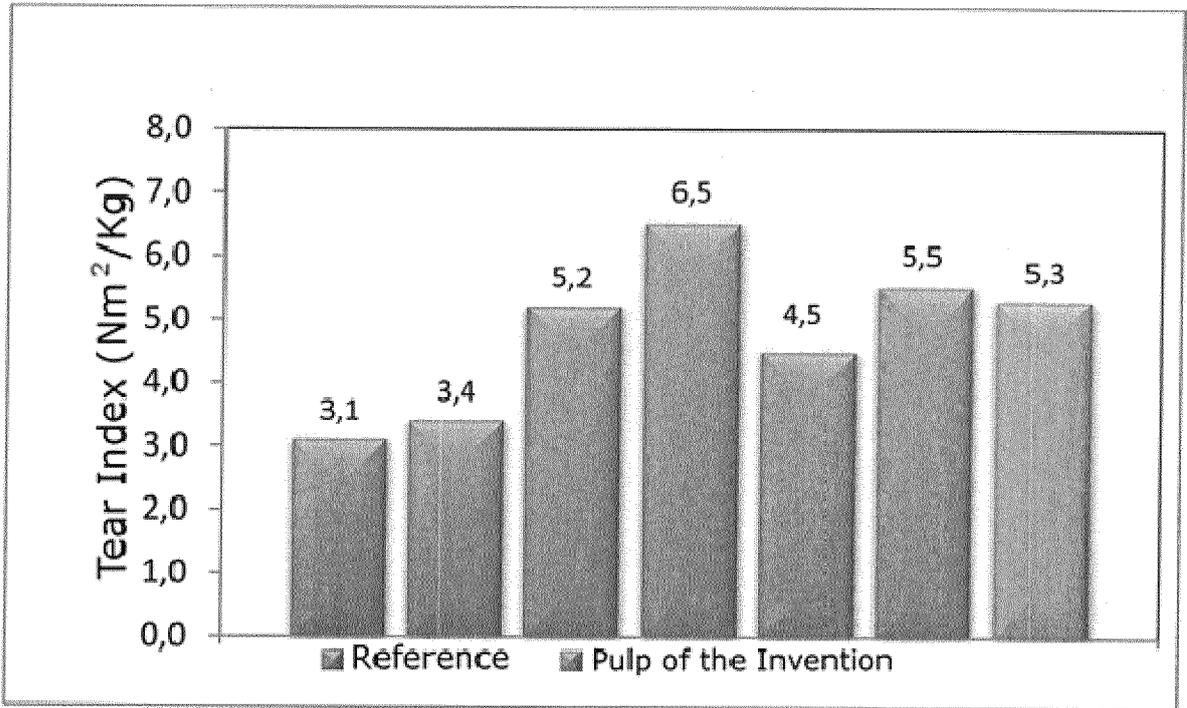


FIGURE 6

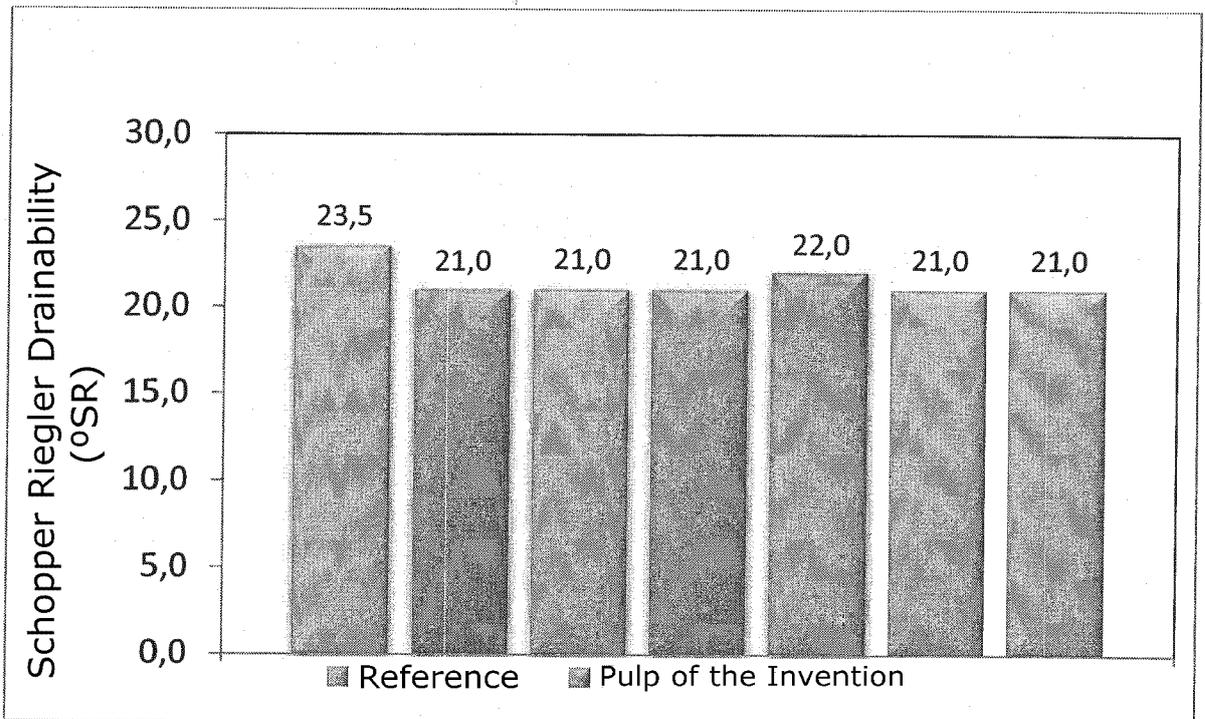


FIGURE 7


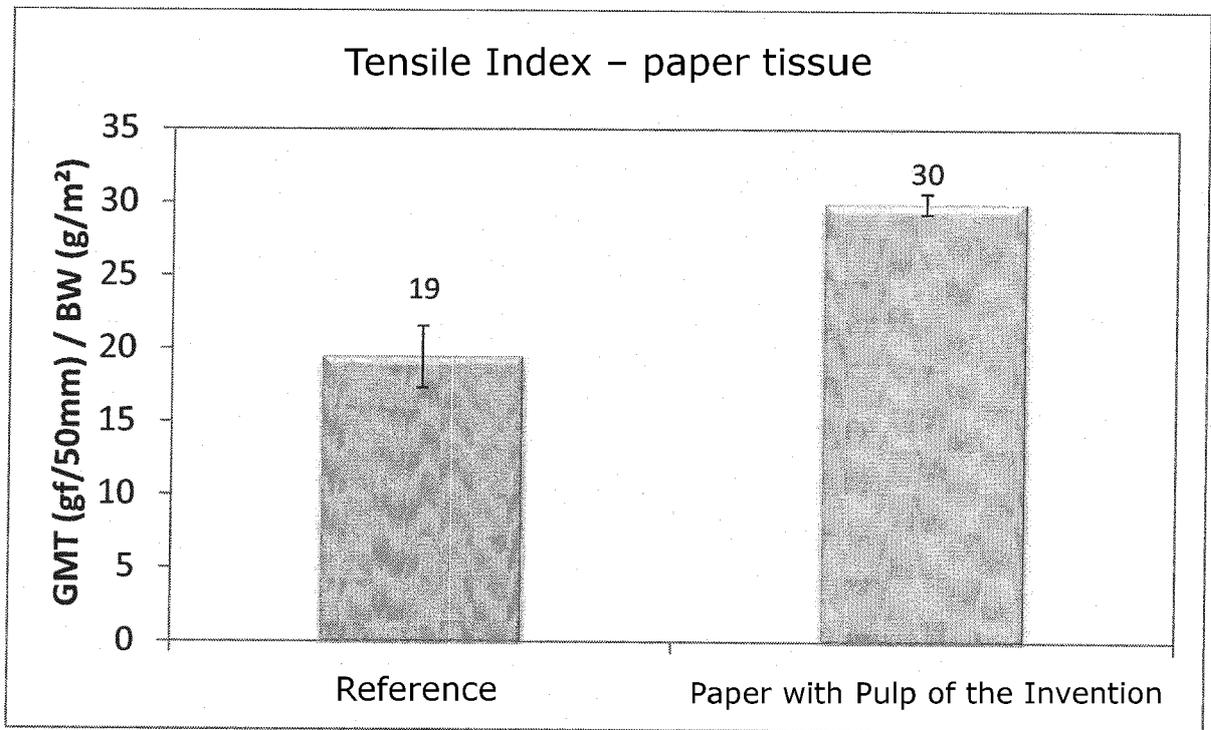


FIGURE 8

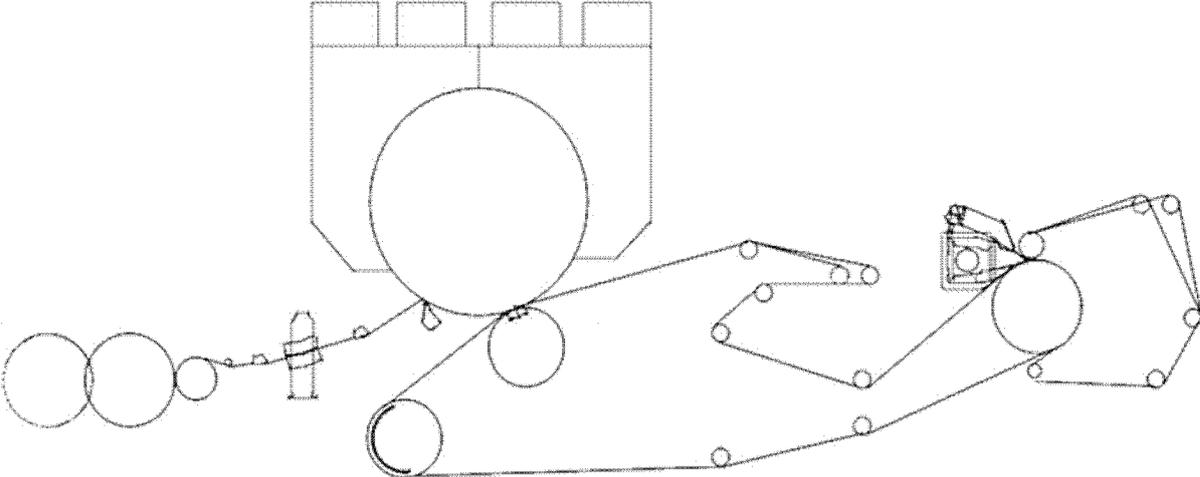

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2003021033 A [0009]
- WO 0068500 A [0012]
- WO 03048449 A [0012]
- WO 9420672 A [0013]
- WO 2013090272 A [0014]