

(19)



(11)

**EP 3 399 265 A1**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**07.11.2018 Bulletin 2018/45**

(51) Int Cl.:  
**F28D 1/03** (2006.01)  
**F28F 1/40** (2006.01)  
**F28F 1/02** (2006.01)

(21) Application number: **17169134.8**

(22) Date of filing: **02.05.2017**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**  
Designated Extension States:  
**BA ME**  
Designated Validation States:  
**MA MD**

(72) Inventor: **DURBECQ, Gael**  
**51100 Reims (FR)**


(74) Representative: **Neuviale, Bertrand**  
**Valeo Systèmes Thermiques**  
**ZA L'Agiot**  
**8, rue Louis Lormand**  
**CS 80517 La Verrière**  
**78322 Le Mesnil Saint Denis Cedex (FR)**

(71) Applicant: **Valeo Systemes Thermiques**  
**78320 Le Mesnil Saint Denis (FR)**

(54) **A FLAT TUBE FOR A HEAT EXCHANGER AND A HEAT EXCHANGER**

(57) Flat tube for a heat exchanger, with two open ends defining its longitudinal direction, comprising a first wall (1) and a second wall (2) which are flat and parallel to each other, thereby delimiting the inner space of the tube, and further comprising an inner fin (3) located between the first and the second walls (1, 2). One of the

lateral sides of the first wall (1) comprises a main fold (4) running along the longitudinal direction. Arms of the main fold (4) form a slit (5) facing the inner space of the tube, and the lateral side (6) of the second wall (2) is bent to cover the main fold (4).

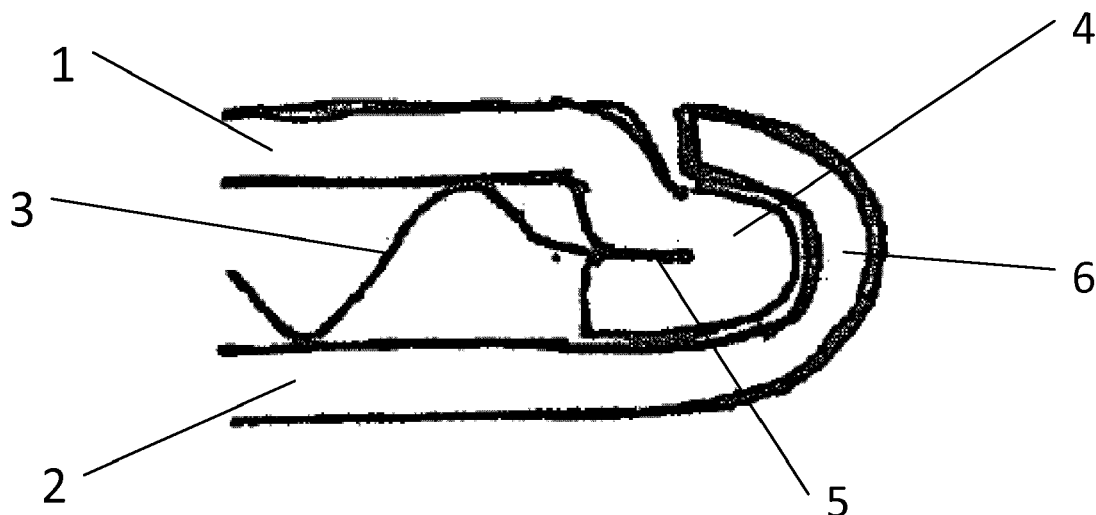

**Fig. 2**

**EP 3 399 265 A1**

## Description

**[0001]** The object of the invention is a flat tube for a heat exchanger and a heat exchanger.

**[0002]** There are known in the art tubes for heat exchangers, for example condensers, which are used to guide a fluid and enable its cooling.

**[0003]** Such heat exchangers can be implemented in vehicles, e.g. cars. These vehicles are directly exposed to debris such as stones or other objects, either when they are moving or when they are stationary. The stones can travel at significant speed and can impact the heat exchanger, which in most cases is situated in front of the car and is at least partly exposed or can be reached after passing through the radiator grill. Impact of such objects can cause damage to the elements of the heat exchanger, which may lead to leaks of the fluid flowing through them and/or to deterioration of their performance.

**[0004]** It is thus desirable to provide an improved tube for a heat exchanger, which would be more resistant to debris and consequently which would reduce a chance of leakage and/or decrease in performance.

**[0005]** The object of invention is a flat tube for a heat exchanger, with two open ends defining its longitudinal direction, comprising a first wall and a second wall which are flat and parallel to each other, thereby delimiting the inner space of the tube, and further comprising an inner fin located between the first and the second walls, wherein one of the lateral sides of the first wall comprises a main fold running along the longitudinal direction, wherein arms of the main fold form a slit facing the inner space of the tube, and the lateral side of the second wall is bent to cover the main fold.

**[0006]** Preferably, the lateral side of the fin adjacent to the main fold leans on the slit of the main fold.

**[0007]** Preferably, the lateral side of the fin adjacent to the main fold is placed inside the slit of the main fold.

**[0008]** Preferably, the lateral side of the fin adjacent to the main fold, placed inside the slit, is a single layer of that fin.

**[0009]** Preferably, the lateral side of the fin adjacent to the main fold, placed inside the slit, is compressed by the arms of the main fold.

**[0010]** Preferably, plane of the slit is parallel to planes of the first wall and the second wall.

**[0011]** Preferably, the slit is located in the middle of the distance between the first wall and the second wall.

**[0012]** Preferably, the slit of the main fold is displaced towards the plane of the first wall or the second wall.

**[0013]** Preferably, the lateral side of the first wall comprises a secondary fold, adjacent to one of the arms of the main fold.

**[0014]** Preferably, the lateral side of the first wall comprises two secondary folds, adjacent to both arms of the main fold.

**[0015]** Preferably, the lateral side of the second wall, bent over the main fold, is folded along this main fold.

**[0016]** Preferably, the thickness of the reinforced tube

nose in lateral direction is in the range  $[0.5 \times \text{tube height} ; 1.5 \times \text{tube height}]$  and preferentially in the range  $[0.5 \times \text{tube height} ; \text{tube height}]$ .

**[0017]** Another object of the invention is a heat exchanger comprising a tube as described.

**[0018]** The object of the invention has been presented by means of a drawing, in which:

Fig. 1 shows a general shape of a flat tube,

Fig. 2 presents a tube according to the first embodiment,

Fig. 3 presents exemplary path of stones impacting the tube.

Fig. 4 presents a tube according to the second embodiment,

Fig. 5 presents a tube according to the third embodiment,

Fig. 6 presents a tube according to the fourth embodiment.

**[0019]** Fig. 1 presents a general shape of a flat tube which is an object of the invention. The invention specifically regards tube nose, which is depicted in detail in the following figures. The tube is defined by reference to general directions: longitudinal and lateral. These are presented in Fig. 1, as y axis and x axis, respectively. The reinforced tube nose can be located on the front area of the heat exchanger (e.g. condenser), e.g. facing the road.

**[0020]** Fig. 2 shows a flat tube according to the invention in the first embodiment. The tube comprises a first wall 1 and a second wall 2, which are flat and parallel to each other. Together they delimit the inner space of the tube. The tube has two opened ends, which define a longitudinal direction of the tube and a general path for the fluid flow. The tube can further comprise an inner fin 3. The fin can be a corrugated fin having a wave-like form. Other shapes of fins are also envisaged. One of the lateral sides of the first wall 1 is folded to form a main fold 4 along the longitudinal direction. The main fold 4 comprises a slit 5 facing the delimited space inside the flat tube. This slit 5 is constituted by two substantially parallel arms of the main fold 4. The term "slit" is used here to describe a very narrow gap of possibly minimal or no play, as opposed to a channel of height larger than a thickness of a single layer of the fin 3. The lateral side end of the fin 3, adjacent to the main fold 4, can be leaned on the slit 5 of the main fold 4. This may facilitate positioning of the fin 3 in the tube during manufacturing. Further, the lateral side end of the fin 3, adjacent to the main fold 4, can be placed inside the slit 5 of the main fold 4. In this way, the fin 3 can be attached to the tube by being compressed by arms of said main fold 4. By compression it is meant that the fin 3 inside the slit 5 is contacted and

pressed by both arms of the main fold 4 substantially along all their lengths. Fragment of the fin 3 inside the slit 5 enhances resistance of the tube nose. Moreover, such attachment of the fin 3 inside the main fold 4 improves the whole arrangement of the flat tube against shocks from impacts, improving its mechanical integrity, e.g. by preventing movement of the fin 3 inside the tube upon strong hit.

**[0021]** The main fold 4 can be formed in the middle between the first wall 1 and the second wall 2, so that the slit 5 will also be in the middle between the first wall 1 and the second wall 2. This facilitates a substantially identical resistance from both sides of the tube, i.e. the resistance will be improved substantially identically with respect to stones impacting from the side of the first wall 1 and from the side of the second wall 2, as illustrated in Fig. 3.

**[0022]** It is also envisaged to position the main fold 4 (and consequently the slit 5) at another distance with respect to the first or second walls. For example, the main fold 4 located closer to the first wall 1 will contribute more to its resistance from the side of said first wall 1. Similarly, the main fold 4 located nearer the second wall 2 will contribute more to its resistance from the side of said second wall 2. In other words, the slit 5 (plane of the slit) of the main fold 4 can be displaced towards the plane of the first or second wall 1, 2. By term "plane" it is meant a general plane of the flat portion. Such feature may be advantageous in case of an unorthodox arrangement of the tubes, e.g. oriented an angle with respect to driving direction or at angle corresponding to statistically more probable angle of stone impact.

**[0023]** Preferably, the lateral side of the fin 3 adjacent to the main fold 4, placed inside the slit 5, is a single layer of that fin 3. This simplifies the manufacturing process and saves material.

**[0024]** Preferably, the slit 5 is substantially parallel to the first and second walls, and to the general lateral direction of the fin 3. In other words, plane of the slit 5 is parallel to planes of the first wall 1 and the second wall 2. Consequently, the fragment of the fin 3 placed inside the slit 5 effectively enhances the rigidity of the tube at minimal cost of both production and material. At the same time, such orientation ensures a substantially identical resistance from both sides of the tube, as illustrated in Fig. 3.

**[0025]** The respective end of the second wall 2 is bent around the main fold 4 so that it encompasses it. In other words, the lateral end of the second wall 2 forms a side wall 6, which covers the main fold 4 of the first wall 1. This further strengthens the tube. At the same time it protects the main fold 4 and enables the tube to have a unitary, unobtrusive shape.

**[0026]** Fig. 4 shows the second embodiment of the invention. In this embodiment, the side wall 6 also comprises a fold. This fold extends along the circumference of the main fold 4. This provides a more resistant side wall 6, because it is layered and consequently harder to

damage, bend etc.

**[0027]** Fig. 5 shows the third embodiment of the invention. In this embodiment, the lateral side of the first wall 1 further comprises secondary folds 7, before and after (above and below) the main fold 4 with slit 5. These secondary folds 7 improve resistance of the tube at lateral side. They also allow to impart more pressure onto the lateral end of the fin 3 inserted into the slit 5, e.g. by further compression of the main fold 4, thereby improving connection of the fin 3 to the flat tube. Selecting the number of the secondary folds 7 enables for easy control of the general height of the flat tube, as their count directly translates into combined thicknesses.

**[0028]** Fig. 6 shows the fourth embodiment of the invention. This embodiment comprises a secondary fold 7, before (above) the main fold 4 with slit 5. This secondary fold 7 improves resistance of the tube at lateral side. It also allows to impart more pressure onto the lateral end of the fin 4 inserted into the slit 5, e.g. by further compression of the main fold 4, thereby improving connection of the fin 4 to the flat tube. In this embodiment, the side wall 6 also comprises a fold. This fold extends along the circumference of the main fold 4. This provides a more resistant side wall 6, because it is layered and consequently harder to damage, bend etc.

**[0029]** The embodiments present a slit 5 of certain lateral length. The lateral length of slit 5 of the main fold 4 is dependent on the lateral length of the arms of the main fold 4. The longer the slit 5, the more resistant the nose of the tube, as the thicknesses of the main fold 4 and the side of the second wall 6 compound at longer distance. As the side of the fin 4 runs deeper in the slit 5, the resistance is further improved.

**[0030]** The tube according to the invention may be a tube made of a single sheet of material. It can also be made of two sheets of material, constituting for example separately its first and second walls. Consequently, the disclosed nose of the tube can be present on one lateral side of the tube, or both lateral sides of the tube. The thickness of the reinforced tube nose can be in the range [ $0.5 \times$  tube height ;  $1.5 \times$  tube height] and preferentially in the range [ $0.5 \times$  tube height; tube height]. The tube height here is defined along an axis perpendicular to longitudinal and lateral directions.

**[0031]** These tubes can be produced by roll forming, similar to the process for currently known tubes with bends or folds.

## Claims

1. A flat tube for a heat exchanger, with two open ends defining its longitudinal direction, comprising a first wall (1) and a second wall (2) which are flat and parallel to each other, thereby delimiting the inner space of the tube, and further comprising an inner fin (3) located between the first and the second walls (1, 2), wherein one of the lateral sides of the first wall

(1) comprises a main fold (4) running along the longitudinal direction, wherein arms of the main fold (4) form a slit (5) facing the inner space of the tube, and the lateral side (6) of the second wall (2) is bent to cover the main fold (4).

5

2. The tube according to claim 1, wherein the lateral side of the fin (3) adjacent to the main fold (4) leans on the slit (5) of the main fold (4).

10

3. The tube according to claim 1, wherein the lateral side of the fin (3) adjacent to the main fold (4) is placed inside the slit (5) of the main fold (4).

4. The tube according to claim 3, wherein the lateral side of the fin (3) adjacent to the main fold (4), placed inside the slit (5), is a single layer of that fin (3).

15

5. The tube according to claim 3 or 4, wherein the lateral side of the fin (3) adjacent to the main fold (4), placed inside the slit (5), is compressed by the arms of the main fold (4).

20

6. The tube according to any preceding claim, wherein plane of the slit (5) is parallel to planes of the first wall (1) and the second wall (2).

25

7. The tube according to any preceding claim, wherein the slit (5) is located in the middle of the distance between the first wall (1) and the second wall (2).

30

8. The tube according to any preceding claim, wherein the slit (5) of the main fold (4) is displaced towards the plane of the first wall (1) or the second wall (2).

35

9. The tube according to any preceding claim, wherein the lateral side of the first wall (1) comprises a secondary fold (7), adjacent to one of the arms of the main fold (4).

40

10. The tube according to any preceding claim, wherein the lateral side of the first wall (1) comprises two secondary folds (7), adjacent to both arms of the main fold (4).

45

11. The tube according to any preceding claim, wherein the lateral side of the second wall (2), bent over the main fold (4), is folded along this main fold (4).

12. The tube according to any preceding claim, wherein the thickness of the reinforced tube nose in lateral direction is in the range  $[0.5 \times \text{tube height} ; 1.5 \times \text{tube height}]$  and preferentially in the range  $[0.5 \times \text{tube height} ; \text{tube height}]$ .

50

55

13. A heat exchanger comprising a tube according to any of claim 1-12.

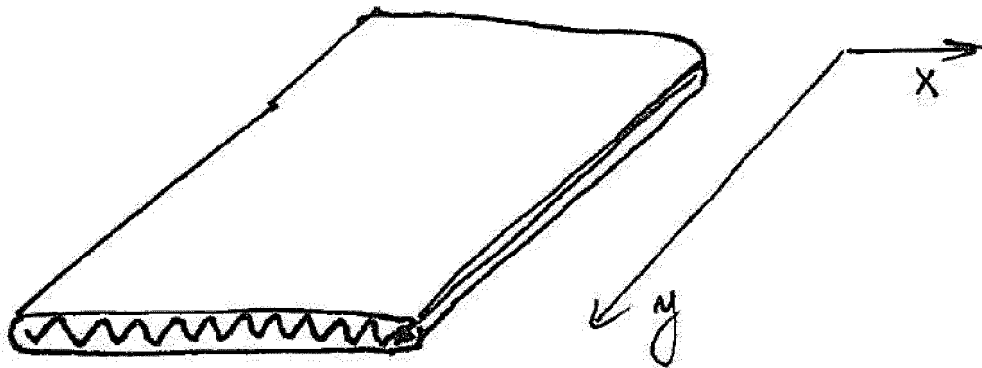


Fig. 1

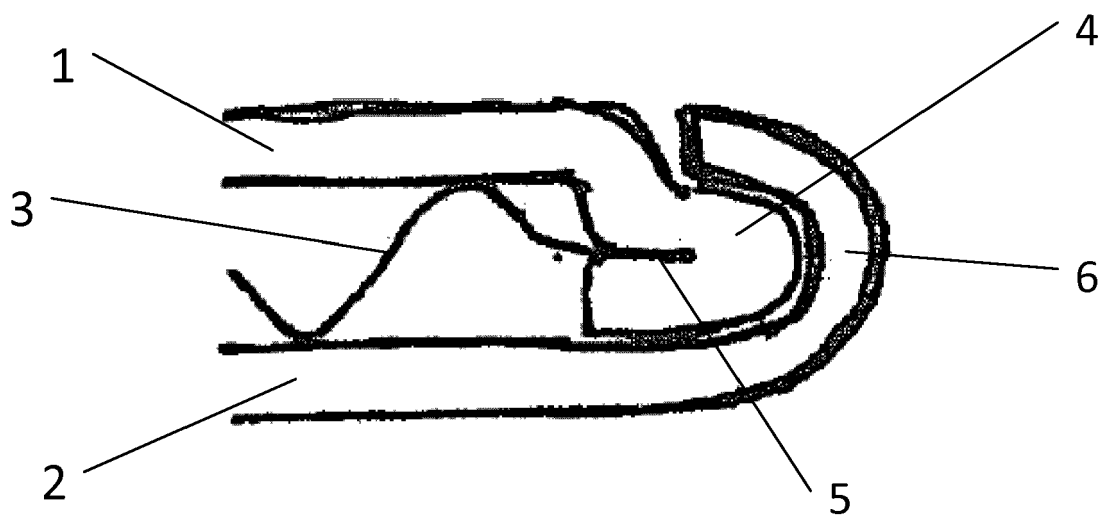


Fig. 2

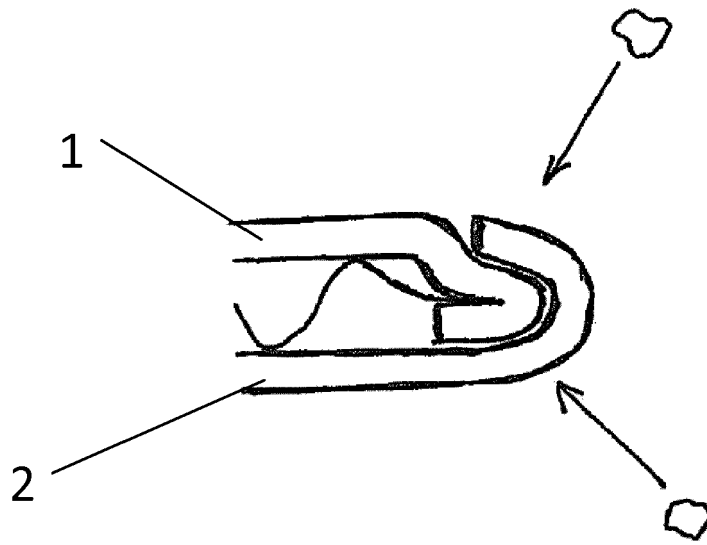


Fig. 3

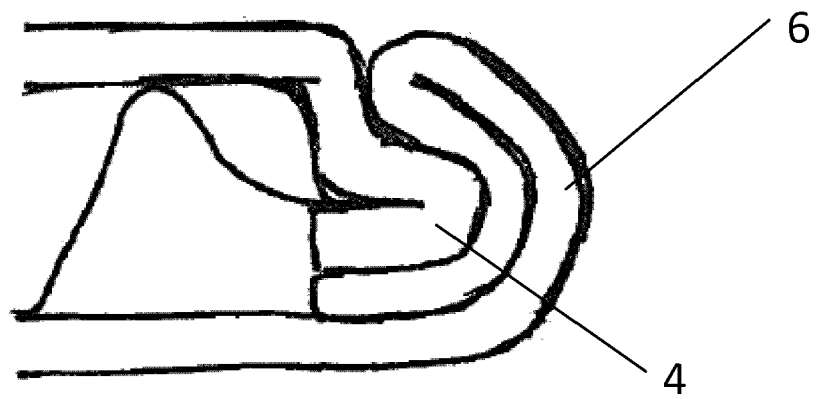


Fig. 4

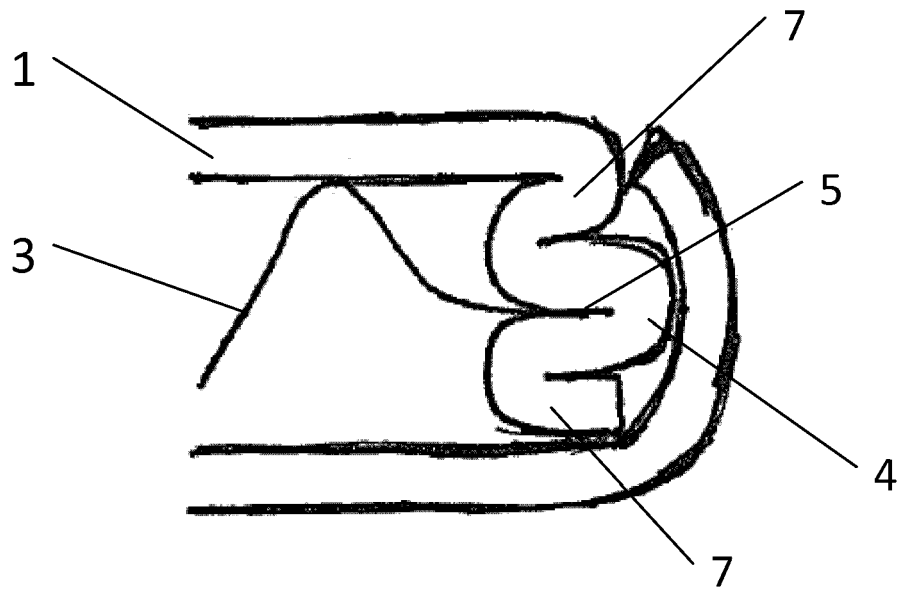


Fig. 5

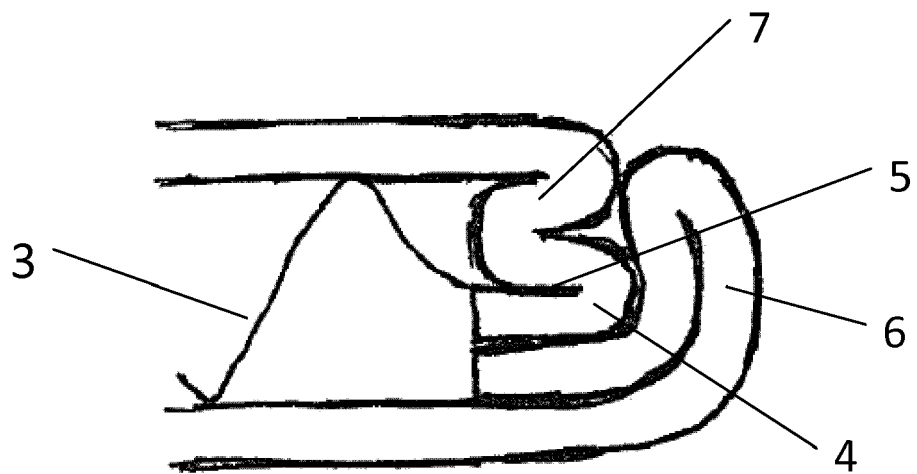


Fig. 6



## EUROPEAN SEARCH REPORT

 Application Number  
 EP 17 16 9134

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	DE 10 2007 004993 A1 (MODINE MFG CO [US]) 7 August 2008 (2008-08-07)	1-7, 11-13	INV. F28D1/03
A	* pages 3-4; figures 1-2 * -----	8-10	F28F1/02 F28F1/40
X	US 2009/019695 A1 (ZOBEL WERNER [DE] ET AL) 22 January 2009 (2009-01-22)	1-7,9-13	
A	* pages 5-16; figures 1-2,4-11,25-31 * -----	8	
X	US 2012/031602 A1 (EISELE SIEGFRIED [DE]) 9 February 2012 (2012-02-09)	1-3,5-7, 11-13	
A	* page 3; figures 7-8 * -----	4,8-10	
X	JP H07 158999 A (HANDA KUNIO) 20 June 1995 (1995-06-20)	1,6,7, 11,13	
	* abstract; figures 1-2 * -----		
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)  F28D F28F
Place of search <b>Munich</b>		Date of completion of the search <b>6 November 2017</b>	Examiner <b>Merkt, Andreas</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... & : member of the same patent family, corresponding document	

 1  
 EPO FORM 1503 03.02 (P04C01)



**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 17 16 9134

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

06-11-2017

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 102007004993 A1	07-08-2008	BR PI0806839 A2	23-12-2014
		CN 101600523 A	09-12-2009
		DE 102007004993 A1	07-08-2008
		EP 2117742 A1	18-11-2009
		EP 2251115 A1	17-11-2010
		US 2010024508 A1	04-02-2010
		WO 2008092563 A1	07-08-2008
-----			
US 2009019695 A1	22-01-2009	NONE	
-----			
US 2012031602 A1	09-02-2012	NONE	
-----			
JP H07158999 A	20-06-1995	NONE	
-----			