



(11) **EP 3 403 631 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Abstract

(51) Int Cl.:
A61F 13/475 ^(2006.01) **A61F 13/49** ^(2006.01)
A61F 13/511 ^(2006.01) **A61F 13/534** ^(2006.01)

(48) Corrigendum issued on:
20.02.2019 Bulletin 2019/08

(43) Date of publication:
21.11.2018 Bulletin 2018/47

(21) Application number: **17200847.6**

(22) Date of filing: **09.11.2017**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(71) Applicant: **Drylock Technologies NV**
9240 Zele (BE)

(72) Inventors:
• **SMET, Steven**
9240 Zele (BE)
• **VAN INGELGEM, Werner**
9240 Zele (BE)
• **DERYCKE, Tom**
9240 Zele (BE)
• **VERDUYN, Dries**
9240 Zele (BE)


(30) Priority: **15.05.2017 EP 17171110**
27.07.2017 EP 17183453
11.09.2017 EP 17190395
09.10.2017 EP 17195498
11.10.2017 EP 17195872
13.10.2017 EP 17196434
25.10.2017 EP 17198349
25.10.2017 EP 17198368
26.10.2017 EP 17198652

(74) Representative: **D'Halleweyn, Nele Veerle Trees**
Gertrudis et al
Arnold & Siedsma
Bezuidenhoutseweg 57
2594 AC The Hague (NL)

(54) **ABSORBENT ARTICLE WITH CHANNELS AND METHOD FOR MANUFACTURING THEREOF**

(57) An absorbent article comprising a liquid pervious topsheet, a liquid impervious backsheet, and an absorbent core comprising an absorbent material between a top core wrap sheet and a back core wrap sheet, said absorbent core being positioned in between said topsheet and said backsheet; said absorbent core having a first and second longitudinal edge (131, 132) and a front and rear transverse edge (133, 134), wherein the absorbent core is provided with a plurality of attachment zones where the top core wrap sheet is attached to the back core wrap sheet, wherein the plurality of attachment zones comprises: at least a first and a second elongate attachment zone, said first and second elongate attachment zone extending next to each other from a crotch region in the direction of the front and/or rear transverse edge; at least one connecting attachment zone connecting said first attachment zone with said second attach-

ment zone.

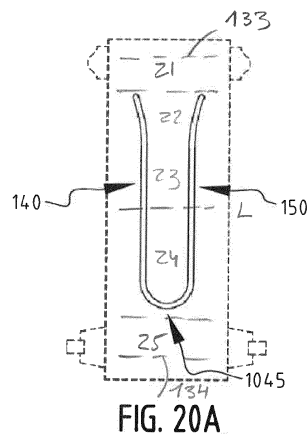

EP 3 403 631 A8