



(11) **EP 3 416 331 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 54

(51) Int Cl.:
H04L 5/00 (2006.01) **H04L 5/02 (2006.01)**
H04L 5/04 (2006.01) **H04L 27/26 (2006.01)**

(48) Corrigendum issued on:
20.02.2019 Bulletin 2019/08

(43) Date of publication:
19.12.2018 Bulletin 2018/51

(21) Application number: **18187576.6**

(22) Date of filing: **13.06.2006**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR

(30) Priority: **15.06.2005 KR 20050051558**

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
15167235.9 / 2 924 909
06747506.1 / 1 891 783

(71) Applicant: **LG Electronics Inc.**
Seoul, 07336 (KR)

(72) Inventors:
• **KIM, Hak Seong**
06772 Seoul (KR)
• **KIM, Bong Hoe**
426-180 Gyeonggi-do (KR)

- **ROH, Dong Wook**
151-870 Seoul (KR)
- **AHN, Joon Kui**
156-781 Seoul (KR)
- **SEO, Dong Youn**
135-830 Seoul (KR)
- **LEE, Jung Hoon**
158-072 Seoul (KR)

(74) Representative: **Ter Meer Steinmeister & Partner**
Patentanwälte mbB
Nymphenburger Straße 4
80335 München (DE)


Remarks:

This application was filed on 06-08-2018 as a
divisional application to the application mentioned
under INID code 62.

(54) **METHOD AND APPARATUS FOR RECEIVING DATA SYMBOLS IN A WIRELESS COMMUNICATION SYSTEM**

(57) A method for receiving uplink data is disclosed. More specifically, the method includes receiving said uplink data in at least two-subcarrier groups, demapping symbols of said uplink data from said at least two-subcarrier groups and then demodulating said demapped symbols of said uplink data.

FIG. 1

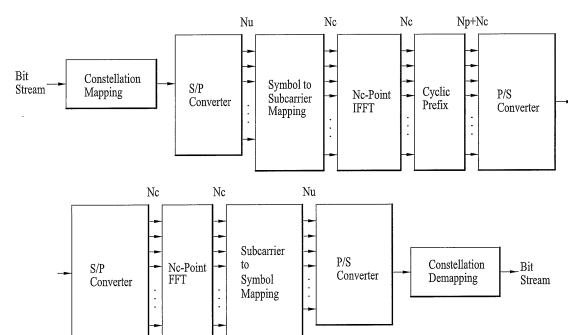

EP 3 416 331 A8