

(19)



(11)

EP 3 420 201 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

22.01.2020 Bulletin 2020/04

(51) Int Cl.:

F01K 23/04 ^(2006.01)

F01K 23/10 ^(2006.01)

(86) International application number:

PCT/EP2017/053813

(21) Application number: **17706241.1**

(22) Date of filing: **20.02.2017**

(87) International publication number:

WO 2017/144422 (31.08.2017 Gazette 2017/35)

(54) WASTE HEAT RECOVERY CASCADE CYCLE AND METHOD

KASKADENKREISLAUF UND VERFAHREN ZUR ABWÄRMERÜCKGEWINNUNG

CYCLE EN CASCADE DE RÉCUPÉRATION DE CHALEUR PERDUE ET PROCÉDÉ

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **22.02.2016 IT UB20160955**

(43) Date of publication of application:

02.01.2019 Bulletin 2019/01

(73) Proprietor: **Nuovo Pignone Tecnologie Srl**

50127 Florence (IT)

(72) Inventors:

- **DEL TURCO, Paolo**
50127 Florence (IT)

• **AUCIELLO, Jury**

50127 Florence (IT)

• **CAPODANNO, Stefano**

50127 Florence (IT)

• **AMIDEI, Simone**

50127 Florence (IT)

(74) Representative: **BRP Renaud & Partner mbB**

Rechtsanwälte Patentanwälte

Steuerberater et al

Königstraße 28

70173 Stuttgart (DE)

(56) References cited:

WO-A1-2015/034987

CH-A- 276 514

US-A1- 2012 131 919

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 420 201 B1

Description

FIELD OF THE INVENTION

[0001] The present disclosure relates to power conversion systems. Some embodiments disclosed herein concern power conversion systems using low-temperature thermodynamic cycles, such as a Rankine cycles or a Brayton cycles, to recover heat from a heat source, e.g. heat from a concentrated solar power plant, or else waste heat from any suitable industrial plant. Some embodiments specifically provide for low-temperature thermodynamic cycles arranged in a cascade configuration with a top, high-temperature thermodynamic cycle.

BACKGROUND ART

[0002] CH 276 514 A discloses a method for producing work from heat.

[0003] US 2012/131919 A1 discloses a driven starter pump.

[0004] Waste heat is often produced as a byproduct of industrial processes, where heat from streams of high-temperature fluids must be removed.

[0005] Typical industrial processes which produce waste heat are those using gas turbines for mechanical drive as well as power generation applications, gas engines and combustors. These processes typically release exhaust combustion gases into the atmosphere at temperatures considerably higher than the ambient temperature. The exhaust gas contains waste heat that can be usefully exploited, e.g. to produce additional mechanical power in a bottom, low-temperature thermodynamic cycle. The waste heat of the exhaust gas provides thermal energy to the bottom, low-temperature thermodynamic cycle, wherein a fluid performs cyclic thermodynamic transformations, exchanging heat at a lower temperature with the environment.

[0006] Waste heat can be converted into useful mechanical power by a variety of heat engine systems that employ thermodynamic cycles, such as steam Rankine cycles, organic Rankine or Brayton cycles, CO₂ cycles or other power cycles. Rankine, Brayton and similar thermodynamic cycles are typically steam-based processes that recover and utilize waste heat to generate steam/vapor for driving a turbine, a turboexpander or the like. The pressure and thermal energy of the steam or vapor is partly converted into mechanical energy in the turboexpander, turbine or other power-converting machine and finally used to drive a load, such as an electric generator, a pump, a compressor or other driven device or machinery.

[0007] Conversion of waste heat into useful mechanical power can substantially improve the overall efficiency of the power conversion system, contributing to the reduction of fuel consumption and reducing the environmental impact of the power conversion process. Similar advantages in terms of energy saving and reduction of

environmental impact of human industrial activities can be envisaged when other low-temperature heat sources are exploited for mechanical power production, e.g. solar plants, where solar energy is concentrated and used to directly or indirectly heat a process fluid which can be processed in a thermodynamic cycle.

[0008] Therefore, high-efficiency methods and systems for transforming low-temperature thermal power into useful mechanical or electrical power are desirable.

SUMMARY OF THE INVENTION

[0009] According to one aspect, power conversion systems are disclosed herein, for converting heat from a relatively low-temperature heat source, into useful power with improved overall efficiency. More specifically, disclosed herein are embodiments of a power conversion system, comprising a first working fluid circuit configured to flow a first working fluid therethrough. The system further comprises a heater configured to circulate the first working fluid in heat exchange relationship with a heat source to vaporize the first working fluid. The heat source can be a waste heat source, such as exhaust gases from an internal combustion engine (e.g. a reciprocating internal combustion engine, or a gas turbine engine). In other embodiments the heat source can be a concentrated solar plant, a waste heat source of an industrial facility or any other source of heat.

[0010] The first working fluid circuit comprises a first expander configured to expand the first working fluid therein and generate mechanical power therewith and a first pump or compressor. The first working fluid thus undergoes cyclical thermodynamic transformations of heating, expanding, condensing/cooling, pumping, with which part of the heat power delivered to the first working fluid by the heat source is converted into useful mechanical power by the first expander.

[0011] The power conversion system further comprises a second working fluid circuit to flow a second working fluid through which a second working fluid flows. the second working fluid can have the same chemical composition as the first working fluid or a different chemical composition.

[0012] A heat transfer arrangement is further provided, which is configured for transferring heat from a low pressure side of the first working fluid circuit to a high pressure side of the second working fluid circuit and vaporize the second working fluid.

[0013] The second working fluid circuit comprises an expander arrangement configured to expand the second working fluid and generate mechanical power therewith. The second working fluid circuit further comprises a second pump or compressor for processing the second working fluid, such that the latter undergoes cyclic thermodynamic transformations in the second working fluid circuit, whereby part of the heat transferred from the first working fluid circuit to the second working fluid circuit is converted into useful mechanical power by the expander

arrangement.

[0014] The first pump or compressor of the first working fluid circuit is drivingly coupled to the expander arrangement and driven by mechanical power generated therewith.

[0015] The system further comprises a second heat recuperator, with a heat-dispensing side in heat exchange relationship with a heat-receiving side, the heat-dispensing side being fluidly coupled to the second working fluid circuit and the heat-receiving side being fluidly coupled to the first working fluid circuit, such that heat is transferred from the second working fluid, circulating in the heat-dispensing side of the second heat recuperator, to the first working fluid circulating in the heat-receiving side of the second heat recuperator.

[0016] According to some embodiments, also the second pump or compressor can be driven by mechanical power generated by the expander arrangement. In other embodiments, the second pump or compressor can be powered by an electric motor.

[0017] Mechanical power generated by the first expander can be used as such, e.g. for mechanical drive applications. These may include, but are not limited to driving a turbomachine, such as a compressor. In other embodiments part or the entire mechanical power generated by the first expander can be converted into electric power. A part of said electric power can be used to drive an electric motor which drives the second pump or compressor.

[0018] When both the first pump or compressor and the second pump or compressor are driven by mechanical power generated by the expander arrangement, this latter may include a single expander, which is drivingly coupled to both first and second pump or compressor. In other embodiments, the expander arrangement may include two expanders, one for each pump or compressor.

[0019] According to a further aspect, a method for producing useful power from heat from a heat source, is disclosed. According to embodiments disclosed herein, the method comprises the following steps:

circulating a first working fluid by means of a first pump or compressor through a first working fluid circuit having a high pressure side and a low pressure side, wherein the high pressure side is in heat exchange relationship with the heat source and the low pressure side is in heat exchange relationship with a second working fluid circuit;
transferring thermal energy from the heat source to the first working fluid;
expanding the first working fluid through a first expander arranged between the high pressure side and the low pressure side of the first working fluid circuit, and generate mechanical power therewith;
transferring low-temperature heat from the first working fluid circuit to the second working fluid circuit; wherein the second working fluid circuit comprises

a high pressure side and a low pressure side, an expander arrangement between the high pressure side and the low pressure side, and a second pump or compressor between the low pressure side and the high pressure side;

expanding a second working fluid circulating in the second working fluid circuit in the expander arrangement and generating mechanical power therewith; driving the first pump or compressor by means of mechanical power generated by the expander arrangement;

transferring heat from the second working fluid circuit to the first working fluid circuit by means of a heat recuperator.

[0020] Features and embodiments are disclosed here below and are further set forth in the appended claims, which form an integral part of the present description. The above brief description sets forth features of the various embodiments of the present invention in order that the detailed description that follows may be better understood and in order that the present contributions to the art may be better appreciated. There are, of course, other features of the invention that will be described hereinafter and which will be set forth in the appended claims. In this respect, before explaining several embodiments of the invention in details, it is understood that the various embodiments of the invention are not limited in their application to the details of the construction and to the arrangements of the components set forth in the following description or illustrated in the drawings. The invention is capable of other embodiments and of being practiced and carried out in various ways. Also, it is to be understood that the phraseology and terminology employed herein are for the purpose of description and should not be regarded as limiting.

[0021] As such, those skilled in the art will appreciate that the conception, upon which the disclosure is based, may readily be utilized as a basis for designing other structures, methods, and/or systems for carrying out the several purposes of the present invention.

[0022] It is important, therefore, that the claims be regarded as including such equivalent constructions.

BRIEF DESCRIPTION OF THE DRAWINGS

[0023] A more complete appreciation of the disclosed embodiments of the invention and many of the attendant advantages thereof will be readily obtained as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings, wherein:

Figs. 1 to 5 illustrate five exemplary embodiments of power systems including waste heat recovery cycles.

DETAILED DESCRIPTION

[0024] The following detailed description of the exemplary embodiments refers to the accompanying drawings. The same reference numbers in different drawings identify the same or similar elements. Additionally, the drawings are not necessarily drawn to scale. Also, the following detailed description does not limit the invention. Instead, the scope of the invention is defined by the appended claims.

[0025] Reference throughout the specification to "one embodiment" or "an embodiment" or "some embodiments" means that the particular feature, structure or characteristic described in connection with an embodiment is included in at least one embodiment of the subject matter disclosed. Thus, the appearance of the phrase "in one embodiment" or "in an embodiment" or "in some embodiments" in various places throughout the specification is not necessarily referring to the same embodiment(s). Further, the particular features, structures or characteristics may be combined in any suitable manner in one or more embodiments.

[0026] In the following disclosure of exemplary embodiments reference is made to a combined hybrid thermodynamic cycle, including a top, high-temperature thermodynamic cycle, the low-temperature source whereof provides waste heat to a bottom, low-temperature thermodynamic cycle system. It shall, however, be understood that according to other embodiments, the power conversion system disclosed herein can be used to exploit heat power at relatively low temperatures from other heat sources, e.g. waste heat from other industrial processes, such as geothermal processes.

[0027] In the following disclosure of exemplary embodiments reference is made to combined hybrid thermodynamic cycles, including a top, high-temperature thermodynamic cycle, temperature sink whereof represents a heat source providing waste heat to cascade-arranged a bottom, low-temperature thermodynamic cycles. It shall, however, be understood that according to other embodiments, the power systems disclosed herein can be used to exploit heat power at relatively low temperatures from other heat sources, e.g. waste heat from other industrial processes, such as geothermal processes.

[0028] The power conversion system is configured such that mechanical power generated by at least two expanders of two thermodynamic cycles in cascade-arrangement are used to generate mechanical power for driving at least one pump or compressor of said cycles, and for further providing useful mechanical power which can e.g. be converted into electric power.

[0029] Fig.1 schematically illustrates a combined power conversion system 12 including a top, high-temperature thermodynamic system 1 and a combined, bottom, low-temperature thermodynamic system 2. The top, high-temperature thermodynamic system 1 can be comprised of a gas turbine engine 3 and an electric generator 5 driven by mechanical power generated by the gas tur-

bine engine 3 and available on the output driveshaft 3A of the latter. The gas turbine engine 3 can comprise a compressor section 4, a combustor section 6 and a turbine section 8. The electric generator 5 is connected to an electric power distribution grid G. An electric power conditioning device 10 can be interposed between the electric generator 5 and the electric power distribution grid G.

[0030] The bottom, low-temperature thermodynamic system 2 comprises a first working fluid circuit 11 and a second working fluid circuit 13. A first working fluid circulates in the first working fluid circuit 11 and is subject to cyclic thermodynamic transformations, by means of which heat from the top, high-temperature thermodynamic system 1 is partly converted into mechanical power and partly transferred, at a lower temperature, to the second working fluid circuit 13. In this latter, a second working fluid circulates and is subject to cyclic thermodynamic transformations, by means of which heat from the first working fluid circuit 11 is partly converted into additional mechanical power and partly discharged at a lower temperature at the cold side of the second working fluid circuit 13.

[0031] Thus, waste heat from the top, high-temperature thermodynamic system 1 is exploited in a two-step thermodynamic cycle producing mechanical power through expansion in respective expanders in the first and second working fluid circuits 11, 13.

[0032] The same working fluid can be used in the first and second working fluid circuits 11, 13, i.e. fluid having the same or substantially the same composition can be used in the two working fluid circuits. For instance, carbon dioxide (CO₂) can be exploited in the first working fluid circuit 11 and in the second working fluid circuit 13. In other embodiments, different working fluids, i.e. fluids having different chemical composition can be used in the two working fluid circuits 11, 13. In the first case, the two circuits can be placed in fluid communication, if needed, for instance to transfer part of the working fluid from the first working fluid circuit to the second working fluid circuit or vice-versa.

[0033] Suitable working fluids which can be used in the system described herein include, but are not limited to fluids commonly used in Organic Rankine Cycles (ORC), such as pentane and cyclopentane.

[0034] The thermodynamic cycle performed by the working fluid in the first working fluid circuit or in the second working fluid circuit or in both said working fluid circuits can be a supercritical cycle, i.e. the working fluid can be in a supercritical state in at least one portion of the thermodynamic cycle.

[0035] The first working fluid circuit 11 comprises a heater, wherein the first working fluid of the first working fluid circuit is heated and evaporated. The heater can be a waste heat recovery exchanger 7, which is in heat exchange relationship with the exhaust combustion gas flow from the gas turbine engine 1. Heat can be exchanged directly in the waste heat recovery heat ex-

changer 7, from the exhaust combustion gas to the working fluid that circulates in the first working fluid circuit 11 of the low-temperature thermodynamic system 2. In other embodiments, an intermediate heat transfer loop can be provided, wherein a heat transfer fluid, such as diathermic oil or the like, circulates to transfer heat from a first heat exchanger, in heat exchange relationship with the exhaust combustion gas flow, to the waste heat recovery exchanger.

[0036] The first working fluid circuit 11 further comprises a first expander 15 having an inlet in fluid communication with the waste heat recovery exchanger 7 and an outlet in fluid communication with a first pressure boosting device, such as a pump or compressor 17. Along the first working fluid circuit 11, between the first expander 15 and the first pressure or compressor 17, heat removal means are arranged, which remove low-temperature heat from the first working fluid. These heat removal means can comprise a first heat recuperator 19 and a first cooler 21. The first heat recuperator 19 embodies a heat transfer arrangement, for transferring heat from the first working fluid circuit 11 to the second working fluid circuit 13. The first working fluid flows in the heat-dispensing side of the first heat recuperator 19 in heat exchange relationship with the second working fluid, which flows in the heat-receiving side of the first heat recuperator 19, such that heat is transferred from the first working fluid to the second working fluid. The first working fluid is further cooled in the first cooler 21, exchanging heat with a heat sink, e.g. water or air.

[0037] The delivery side of the first pump or compressor 17 is fluidly coupled to a second heat recuperator 23. The first working fluid flows in the heat-receiving side of the second heat recuperator 23, in heat exchange relationship with the second working fluid, which flows in the heat-dispensing side of the second heat recuperator 23.

[0038] The first expander 15 and the first pump or compressor 17 divide the first working fluid circuit 11 into a high pressure side and a low pressure side. The high pressure side extends from the delivery side of the first pump or compressor 17 to the inlet side of the first expander 15. The low pressure side extends from the outlet of the first expander 15 to the suction side of the pump or compressor 17.

[0039] The second working fluid circuit 13 comprises the heat-receiving side of the first heat recuperator 19, an expander arrangement comprised of a second expander 25 and a second pressure boosting device, i.e. a second pump or compressor 27. Between the second expander 25 and the second pump or compressor 27 heat removing means are arranged. The heat removing means can include the heat-dispensing side of the second heat recuperator 23 and a second cooler 29, arranged between the second heat recuperator 23 and the second pump or compressor 27.

[0040] In the exemplary embodiment of Fig.1 the first expander 15 is drivingly coupled to an electric generator 31. The first expander 15 can be directly connected to

the electric generator 31. In other embodiments a gearbox 33 can be provided between the first expander 15 and the electric generator 31. The electric generator 31 can be electrically connected to an electric power distribution grid G. An electric power conditioning device 35 can be arranged between the electric generator 31 and the electric distribution grid G.

[0041] The second expander 25 is drivingly coupled to the first pump or compressor 17, such that this latter is driven by mechanical power generated by the second expander 25.

[0042] The second pump or compressor can be driven by an electric motor 37 which can be connected to the electric power distribution grid G or directly to the electric generator 31. In some embodiments the electric motor 37 can be directly connected to the second pump or compressor 27. In other embodiments, as shown in Fig.1, a gearbox 39 can be arranged between the second pump or compressor 27 and the electric motor 37.

[0043] The expander arrangement comprising the second expander 25 and the second pump or compressor 27 divide the second working fluid circuit 13 in a low pressure side, extending from the outlet of the second expander 25 to the suction side of the second pump or compressor 27, and a high pressure side, extending from the delivery side of the second pump or compressor 27 to the inlet of the second expander 25.

[0044] The system described so far operates as follows. The gas turbine engine 3 is powered by gaseous or liquid fossil fuel and generates mechanical power which is converted into electric power by the electric generator 5 and delivered to the electric power distribution grid G. The exhaust combustion gas of the gas turbine engine 3 flows through the heater 7 in heat exchange relationship with the first working fluid circulating in the first working fluid circuit 11. Heat from the combustion gas is exploited to evaporate the first working fluid, which is then expanded in the first expander 15. The enthalpy drop between across the first expander 15 is converted by the first expander 15 into mechanical power and the latter is in turn converted into electric power by the electric generator 31.

[0045] A by-pass line 41 with a by-pass valve 43 can be arranged in parallel to the first expander 15, such that part or the whole of the first working fluid flow can bypass the first expander 15, e.g. during a start-up phase.

[0046] The expanded first working fluid exiting the first expander 15 flows through the heat-dispensing side of the first heat recuperator 19, where heat from the first working fluid is transferred to the second working fluid circulating in the second working fluid circuit 13. Low-pressure, partly cooled first working fluid is then further cooled in the first cooler 21 against a cooling medium, such as ambient air or water. The low-pressure, cooled first working fluid is then processed through the first pump or compressor 17, which boosts the pressure of the first working fluid from the low pressure of the low pressure side of the first working fluid circuit, to the high pressure

of the high-pressure side of the first working fluid circuit 11.

[0047] The pressurized first working fluid is then pre-heated in the second heat recuperator 23 by heat exchange against the second working fluid circulating in the second working fluid circuit 13 and finally delivered to the heater 7 where it is evaporated again.

[0048] The second working fluid is heated and evaporated in the heat-receiving side of the second heat recuperator 19 and expanded in the second expander 25. The enthalpy drop across the second expander 25 is converted into mechanical power which is used to drive the first pump or compressor 17 of the first working fluid circuit 11. The expanded second working fluid from the second expander 25 is then cooled in the second heat recuperator 23, if provided, and in the second cooler 29. More specifically, the second working fluid flows in the heat-dispersing side of the second heat recuperator 23 in heat exchange relationship with the first working fluid which flows in the heat-receiving side of the second heat recuperator. In the second cooler 29 the expanded and partly cooled second working fluid is in heat exchange relationship with a cooling medium, such as air or water and is brought to the final bottom temperature of the cycle prior to being processed through the second pump or compressor 27. Therefrom, the pressurized second working fluid is delivered to the first heat recuperator 19 to be heated and evaporated again, and repeat the above described thermodynamic cycle.

[0049] The above described power conversion system converts high-temperature heat contained in the combustion gas of the gas turbine engine 3 into useful electric power through the electric generator 31. The net electric power produced by the system is reduced by the amount of electric power needed to drive the second pump or compressor 27, said amount of power being, however, much less than the total electric power generated by the electric generator 31. The first pump or compressor 17 is, conversely, driven by the second expander 25 and does not need to consume electric power provided by the electric generator 31 or by the electric distribution grid G.

[0050] Fig.2 illustrates the power conversion system 12 of Fig.1, wherein a connection line 51 is provided between the second working fluid circuit 13 and the first working fluid circuit 11. A valve 53 is provided along the connection line 51. Acting upon the valve 53 working fluid can be caused to flow from one working fluid circuit to the other or vice-versa.

[0051] A further power conversion system according to the present disclosure is illustrated in Fig.3. The same reference numbers designate the same or equivalent parts, components or elements as shown in Fig.1, which will not be described again. In the power conversion system 12 of Fig. 3 both the first pump or compressor 17 and the second pump or compressor 27 are driven by the second expander 25. The electric motor 37 is thus dispensed with. A gear box (not shown) can be provided

between the second expander 25 and the first pump or compressor 1 and/or between the second pump or compressor 27 and the first pump or compressor 17.

[0052] In some embodiments, the first pump or compressor 17 and the second pump or compressor 27 can be driven by two separate expanders, rather by the same expander, as illustrated in Fig. 3. In the exemplary embodiment of Fig. 4 an arrangement with two separate expanders for driving the first pump or compressor 17 and the second pump or compressor 27 is illustrated. The elements, parts or components corresponding or equivalent to those of Fig.1 are labeled with the same reference numbers and will not be described again.

[0053] In the embodiment of Fig. 4 the second working fluid circuit 13 comprises an expander arrangement, globally labeled 24, comprised of a second expander 25.1 and a third expander 25.2. The second expander 25.1 and the third expander 25.2 are arranged in series along the second working fluid circuit 13. The second working fluid is thus firstly partly expanded in the second expander 25.1 and subsequently further expanded in the third expander 25.2. The second expander 25.1 is drivingly connected to the second pump or compressor 27, while the third expander 25.2 is drivingly connected to the first pump or compressor 17, such that mechanical power generated by the two enthalpy drops across the second expander 25.1 and the third expander 25.2 is used to drive both pumps or compressors 17, 27 of the power conversion system 12.

[0054] In some embodiments an adjusting valve 61 can be arranged along the second working fluid circuit 13, between the second expander 25.1 and the third expander 25.2. The adjusting valve 61 can be operated to adjust an intermediate pressure between the second expander 25.1 and the third expander 25.2, such that the enthalpy drop across the second expander 25.1 and the third expander 25.2 can be modified according to the operating conditions of the power conversion system 12.

[0055] In some embodiments, a by-pass valve 63 can be further provided along a by-pass line 65 arranged in parallel to the third expander 25.2, to adjust the mass flow of the second working fluid flowing through the third expander 25.2.

[0056] According to some embodiments, a gear box 67 can be arranged between second expander 25.1 and the second pump or compressor 27 driven thereby. In some embodiments, a gear box 69 can be arranged between the third expander 25.2 and the first pump or compressor 17.

[0057] Fig. 5 illustrates a further embodiment of a power conversion system according to the present disclosure. The same reference numbers as used in Figs.1 to 4 designate the same or equivalent parts, components or elements, which will not be described again. In the embodiment of Fig. 5 the second working fluid circuit comprises an expander arrangement 24 which, similarly to the embodiment of Fig. 4, comprises a second expander 25.1 and a third expander 25.2. Differently from Fig.4,

however, according to the embodiment of Fig.5 the second expander 25.1 is drivingly connected to the first pump or compressor 17, rather than to the second pump or compressor 27. The third expander 25.2 is in turn drivingly connected to the second pump or compressor 27. Gear boxes 67 and 699 can be provided between the expanders 25.1 and 25.2 and the respective pumps or compressors 17 and 27.

[0058] In the embodiment of Fig. 5 a by-pass valve 71 is arranged on a by-pass line 73 in parallel to the second expander 25.1, to adjust the mass flow of the second working fluid through the second expander 25.1 and tune the operation of the second expander 25.1 according to the operating conditions of the power conversion system 12.

[0059] Several additional modifications of the power conversion systems described herein are possible. For instance, one, some or all the gear boxes provided in any one of the embodiments disclosed herein can be replaced by variable speed drives, which allow a variation of the transmission ratio between an inlet shaft and an outlet shaft, thus providing additional adjustment options. Additionally, further pressure adjustment valves or flow adjustment valves can be provided in the first working fluid circuit 11 or in the second working fluid circuit 13.

[0060] Each expander described herein in connection to the various embodiments can be a single-stage or a multi-stage expander, or else can in actual fact be comprised of two or more expanders arranged in series or in parallel. The expanders can be axial expanders, radial expander or mixed expanders. Variable inlet guide nozzles can further be provided at the inlet of one or more of the expanders or single stages thereof, providing additional degrees of freedom for adjusting the operating conditions of the expanders.

[0061] As mentioned above, while in Figs 1 to 5 the heat source which provides heat to the first working fluid circuit 11 and the second working fluid circuit 13 is exhaust gas from a gas turbine engine, in other embodiments, heat from a different heat source can be provided. For instance, heat from a concentrated solar power plant, waste heat from an internal reciprocating engine, and more in general any industrial waste heat can be used.

[0062] While the disclosed embodiments of the subject matter described herein have been shown in the drawings and fully described above with particularity and detail in connection with several exemplary embodiments, it will be apparent to those of ordinary skill in the art that many modifications, changes, and omissions are possible without materially departing from the novel teachings, the principles and concepts set forth herein, and advantages of the subject matter recited in the appended claims. Hence, the proper scope of the disclosed innovations should be determined only by the broadest interpretation of the appended claims so as to encompass all such modifications, changes, and omissions. In addition, the order or sequence of any process or method steps may be varied or re-sequenced according to alternative

embodiments.

Claims

1. A power conversion system comprising:

a first working fluid circuit (11) having a high pressure side and a low pressure side and configured to flow a first working fluid therethrough; a heater (7) configured to circulate the first working fluid in heat exchange relationship with a heat source (3) to vaporize the first working fluid; a first expander (15) arranged between the high pressure side and the low pressure side of the first working fluid circuit (11), configured to expand the first working fluid therein and generate mechanical power therewith; a first pump or compressor (17) arranged between the low pressure side and the high pressure side of the first working fluid circuit (11); a second working fluid circuit (13) having a high pressure side and a low pressure side and configured to flow a second working fluid therethrough; a heat transfer arrangement (19), configured for transferring heat from the low pressure side of the first working fluid circuit (11) to the high pressure side of the second working fluid circuit (13) and vaporize the second working fluid; an expander arrangement (24; 25) arranged between the high pressure side and the low pressure side of the second working fluid circuit (13), configured to expand the second working fluid therein and generate mechanical power therewith; a second pump or compressor (27) arranged between the low pressure side and the high pressure side of the second working fluid circuit (13); wherein the first pump or compressor (17) is drivingly coupled to the expander arrangement (24; 25) and driven by mechanical power generated therewith; the power conversion system is **characterized by** comprising a second heat recuperator (23), with a heat-dispensing side in heat exchange relationship with a heat-receiving side, the heat-dispensing side being fluidly coupled to the second working fluid circuit (13) and the heat-receiving side being fluidly coupled to the first working fluid circuit (11), such that heat is transferred from the second working fluid, circulating in the heat-dispensing side of the second heat recuperator, to the first working fluid circulating in the heat-receiving side of the second heat recuperator.

2. The power conversion system of claim 1, wherein the first expander (15) is drivingly coupled to a rotating load (31).
3. The power conversion system of claim 2, wherein the rotating load (31) comprises an electric generator, configured for converting mechanical power generated by the first expander (15) into electric power.
4. The power conversion system of one or more of the preceding claims, wherein the second pump or compressor (27) is drivingly coupled to an electric motor (37).
5. The power conversion system of one or more of claims 1 to 3, wherein the second pump or compressor (27) is drivingly coupled to the expander arrangement (24), whereby both the first pump or compressor (17) and the second pump or compressor (27) are driven by mechanical power generated by the expander arrangement (24).
6. The power conversion system of one or more of the preceding claims, wherein the expander arrangement comprises a second expander (25), drivingly coupled to a shaft line, and wherein the first pump or compressor (17) and the second pump or compressor (27) are drivingly coupled to the shaft line.
7. The power conversion system of one or more of the preceding claims, wherein the expander arrangement (24) comprises a top expander (25.1) and a bottom expander (25.2) arranged in series between the high pressure side and the low pressure side of the second working fluid circuit (13), such that the second working fluid is sequentially expanded in the top expander (25.1) and in the bottom expander (25.2), and wherein one of said first pump or compressor (17) and second pump or compressor (27) is drivingly coupled to the top expander (25.1) and the other of said first pump or compressor (17) and second pump or compressor (27) is drivingly coupled to the bottom expander (25.2).
8. The power conversion system of one or more of the preceding claims, wherein the heat transfer arrangement (19) comprises a first heat recuperator (19), with a heat-dispensing side in heat exchange relationship with a heat-receiving side, the heat-dispensing side being fluidly coupled to the first working fluid circuit (11) and the heat-receiving side being fluidly coupled to the second working fluid circuit (13), such that heat is transferred from the first working fluid circulating in the heat-dispensing side of the first heat recuperator to the second working fluid circulating in the heat-receiving side of the first heat recuperator (19).
9. The power conversion system of claim 8, wherein the heat-dispensing side of the first heat recuperator (19) is fluidly coupled to the first working fluid circuit (11) between the first expander (15) and the first pump or compressor (17), and the heat-receiving side of the first heat recuperator (19) is fluidly coupled to the second working fluid circuit (13) between the second pump or compressor (27) and the expander arrangement (24; 25).
10. The power conversion system of claim 8 or 9, wherein the first working fluid circuit (11) further comprises a first cooler (21), fluidly coupled to the first working fluid circuit (11) between the heat-dispensing side of the first heat recuperator (19) and the first pump or compressor (17).
11. The power conversion system of one or more of the preceding claims, wherein the high-temperature side of the second heat recuperator (23) is fluidly coupled to the second working fluid circuit (13) between the expander arrangement (24; 25) and the second pump or compressor (27), and the low-temperature side of the second heat recuperator (23) is fluidly coupled to the first working fluid circuit (11) between the first pump or compressor (17) and the heater (7).
12. The power conversion system of one or more of the preceding claims, wherein the second working fluid circuit (13) further comprises a second cooler (29), fluidly coupled to the second working fluid circuit (13) between the second heat recuperator (23) and the second pump or compressor (27).
13. The power conversion system of one or more of the preceding claims, further comprising a connection line (51) between the first working fluid circuit (11) and the second working circuit (13), configured for transferring working fluid from the first working fluid circuit (11) to the second working fluid circuit (13) or vice-versa, a valve (53) being disposed on the connection line (51).
14. A method for producing useful power from heat from a heat source, comprising the following steps:
 - circulating a first working fluid by means of a first pump or compressor (17) through a first working fluid circuit (11) having a high pressure side and a low pressure side, wherein the high pressure side is in heat exchange relationship with the heat source and the low pressure side is in heat exchange relationship with a second working fluid circuit (13);
 - transferring thermal energy from the heat source to the first working fluid;
 - expanding the first working fluid through a first

expander (15) arranged between the high pressure side and the low pressure side of the first working fluid circuit (11), and generate mechanical power therewith;

transferring low-temperature heat from the first working fluid circuit (11) to the second working fluid circuit (13); wherein the second working fluid circuit (13) comprises a high pressure side and a low pressure side, an expander arrangement (25; 24) between the high pressure side and the low pressure side, and a second pump or compressor (27) between the low pressure side and the high pressure side;

expanding a second working fluid circulating in the second working fluid circuit (13) in the expander arrangement (25; 24) and generating mechanical power therewith;

driving the first pump or compressor (17) by means of mechanical power generated by the expander arrangement (25, 24);

the method is **characterized in** comprising the following step:

transferring heat from the second working fluid circuit (13) to the first working fluid circuit (11) by means of a heat recuperator (23).

15. The method of claim 14, further comprising the step of rotating a load (31) with mechanical power generated by the first expander (15).

Patentansprüche

1. Energieumwandlungssystem, umfassend:

einen ersten Arbeitsfluidkreislauf (11) mit einer Hochdruckseite und einer Niederdruckseite, der so konfiguriert ist, dass ein erstes Arbeitsfluid hindurchströmt;

eine Heizvorrichtung (7), die so konfiguriert ist, dass sie das erste Arbeitsfluid in Wärmeaustauschbeziehung mit einer Wärmequelle (3) zirkuliert, um das erste Arbeitsfluid zu verdampfen; einen ersten Expander (15), der zwischen der Hochdruckseite und der Niederdruckseite des ersten Arbeitsfluidkreislaufs (11) angeordnet ist und der so konfiguriert ist, dass das erste Arbeitsfluid darin expandiert wird und dadurch mechanische Energie erzeugt wird;

eine erste Pumpe oder einen ersten Kompressor (17), angeordnet zwischen der Niederdruckseite und der Hochdruckseite des ersten Arbeitsfluidkreislaufs (11);

einen zweiten Arbeitsfluidkreislauf (13) mit einer Hochdruckseite und einer Niederdruckseite, der so konfiguriert ist, dass ein zweites Arbeitsfluid hindurchströmt;

eine Wärmeübertragungsanordnung (19), die

so konfiguriert ist, dass Wärme von der Niederdruckseite des ersten Arbeitsfluidkreislaufs (11) zu der Hochdruckseite des zweiten Arbeitsfluidkreislaufs (13) übertragen wird und das zweite Arbeitsfluid verdampft wird;

eine Expanderanordnung (24; 25), die zwischen der Hochdruckseite und der Niederdruckseite des zweiten Arbeitsfluidkreislaufs (13) angeordnet ist und die so konfiguriert ist, dass das zweite Arbeitsfluid darin expandiert wird und dadurch mechanische Energie erzeugt wird;

eine zweite Pumpe oder einen zweiten Kompressor (27), angeordnet zwischen der Niederdruckseite und der Hochdruckseite des zweiten Arbeitsfluidkreislaufs (13);

wobei die erste Pumpe oder der erste Kompressor (17) antriebsmäßig mit der Expanderanordnung (24; 25) gekoppelt ist und durch die dadurch erzeugte mechanische Energie angetrieben wird;

wobei das Energieumwandlungssystem **dadurch gekennzeichnet ist, dass** es einen zweiten Wärmerekuperator (23) mit einer Wärme abgebenden Seite in Wärmeaustauschbeziehung mit einer Wärme aufnehmenden Seite umfasst, wobei die Wärme abgebende Seite in Fluidverbindung mit dem zweiten Arbeitsfluidkreislauf (13) steht und die Wärme aufnehmende Seite in Fluidverbindung mit dem ersten Arbeitsfluidkreislauf (11) steht, sodass Wärme von dem zweiten Arbeitsfluid, das in der Wärme abgebenden Seite des zweiten Wärmerekuperators zirkuliert, an das erste Arbeitsfluid übertragen wird, das in der Wärme aufnehmenden Seite des zweiten Wärmerekuperators zirkuliert.

2. Energieumwandlungssystem nach Anspruch 1, wobei der erste Expander (15) antriebsmäßig mit einer rotierenden Last (31) gekoppelt ist.

3. Energieumwandlungssystem nach Anspruch 2, wobei die rotierende Last (31) einen Stromgenerator umfasst, der so konfiguriert ist, dass er mechanische Energie, die durch den ersten Expander (15) erzeugt wird, in elektrische Energie umwandelt.

4. Energieumwandlungssystem nach einem oder mehreren der vorstehenden Ansprüche, wobei die zweite Pumpe oder der zweite Kompressor (27) antriebsmäßig mit einem Elektromotor (37) gekoppelt ist.

5. Energieumwandlungssystem nach einem oder mehreren der Ansprüche 1 bis 3, wobei die zweite Pumpe oder der zweite Kompressor (27) antriebsmäßig mit der Expanderanordnung (24) gekoppelt ist, wodurch sowohl die erste Pumpe oder der erste Kompressor (17) als auch die zweite Pumpe oder der zweite Kompressor (27) durch mechanische Energie angetrieben

ben werden, die durch die Expanderanordnung (24) erzeugt wird.

6. Energieumwandlungssystem nach einem oder mehreren der vorstehenden Ansprüche, wobei die Expanderanordnung einen zweiten Expander (25) umfasst, der antriebsmäßig mit einem Wellenstrang gekoppelt ist, und wobei die erste Pumpe oder der erste Kompressor (17) und die zweite Pumpe oder der zweite Kompressor (27) antriebsmäßig mit dem Wellenstrang gekoppelt sind. 5
7. Energieumwandlungssystem nach einem oder mehreren der vorstehenden Ansprüche, wobei die Expanderanordnung (24) einen oberen Expander (25.1) und einen unteren Expander (25.2) in Reihe zwischen der Hochdruckseite und der Niederdruckseite des zweiten Arbeitsfluidkreislaufts (13) umfasst, sodass das zweite Arbeitsfluid nacheinander im oberen Expander (25.1) und im unteren Expander (25.2) expandiert wird, und wobei eine von der ersten Pumpe oder dem ersten Kompressor (17) und der zweiten Pumpe oder dem zweiten Kompressor (27) antriebsmäßig mit dem oberen Expander (25.1) gekoppelt ist und die andere von der ersten Pumpe oder dem ersten Kompressor (17) und der zweiten Pumpe oder dem zweiten Kompressor (27) antriebsmäßig mit dem unteren Expander (25.2) gekoppelt ist. 10 15 20 25
8. Energieumwandlungssystem nach einem oder mehreren der vorstehenden Ansprüche, wobei die Wärmeübertragungsanordnung (19) einen ersten Wärmerekuperator (19) mit einer Wärme abgebenden Seite in Wärmeaustauschbeziehung mit einer Wärme aufnehmenden Seite umfasst, wobei die Wärme abgebende Seite in Fluidverbindung mit dem ersten Arbeitsfluidkreislauf (11) steht und die Wärme aufnehmende Seite in Fluidverbindung mit dem zweiten Arbeitsfluidkreislauf (13) steht, sodass Wärme von dem ersten Arbeitsfluid, das in der Wärme abgebenden Seite des ersten Wärmerekuperators zirkuliert, an das zweite Arbeitsfluid übertragen wird, das in der Wärme aufnehmenden Seite des ersten Wärmerekuperators (19) zirkuliert. 30 35 40 45
9. Energieumwandlungssystem nach Anspruch 8, wobei die Wärme abgebende Seite des ersten Wärmerekuperators (19) in Fluidverbindung mit dem ersten Arbeitsfluidkreislauf (11) zwischen dem ersten Expander (15) und der ersten Pumpe oder dem ersten Kompressor (17) steht und die Wärme aufnehmende Seite des ersten Wärmerekuperators (19) in Fluidverbindung mit dem zweiten Arbeitsfluidkreislauf (13) zwischen der zweiten Pumpe oder dem zweiten Kompressor (27) und der Expanderanordnung (24; 25) steht. 50 55
10. Energieumwandlungssystem nach Anspruch 8 oder

9, wobei der erste Arbeitsfluidkreislauf (11) ferner einen ersten Kühler (21) umfasst, der in Fluidverbindung mit dem ersten Arbeitsfluidkreislauf (11) zwischen der Wärme abgebenden Seite des ersten Wärmerekuperators (19) und der ersten Pumpe oder dem ersten Kompressor (17) steht.

11. Energieumwandlungssystem nach einem oder mehreren der vorstehenden Ansprüche, wobei die Hochtemperaturseite des zweiten Wärmerekuperators (23) in Fluidverbindung mit dem zweiten Arbeitsfluidkreislauf (13) zwischen der Expanderanordnung (24; 25) und der zweiten Pumpe oder dem zweiten Kompressor (27) steht und die Niederdruckseite des zweiten Wärmerekuperators (23) in Fluidverbindung mit dem ersten Arbeitsfluidkreislauf (11) zwischen der ersten Pumpe oder dem ersten Kompressor (17) und dem Heizgerät (7) steht.
12. Energieumwandlungssystem nach einem oder mehreren der vorstehenden Ansprüche, wobei der zweite Arbeitsfluidkreislauf (13) ferner einen zweiten Kühler (29) umfasst, der in Fluidverbindung mit dem zweiten Arbeitsfluidkreislauf (13) zwischen dem zweiten Wärmerekuperator (23) und der zweiten Pumpe oder dem zweiten Kompressor (27) steht.
13. Energieumwandlungssystem nach einem oder mehreren der vorstehenden Ansprüche, ferner umfassend eine Verbindungsleitung (51) zwischen dem ersten Arbeitsfluidkreislauf (11) und dem zweiten Arbeitsfluidkreislauf (13), die so konfiguriert ist, dass sie das Arbeitsfluid aus dem ersten Arbeitsfluidkreislauf (11) zum zweiten Arbeitsfluidkreislauf (13) oder umgekehrt überträgt, wobei ein Ventil (53) an der Verbindungsleitung (51) angeordnet ist.
14. Verfahren zum Erzeugen von Nutzleistung aus Wärme von einer Wärmequelle, umfassend die folgenden Schritte:

Zirkulieren eines ersten Arbeitsfluids mittels einer ersten Pumpe oder eines ersten Kompressors (17) durch einen ersten Arbeitsfluidkreislauf (11) mit einer Hochdruckseite und einer Niederdruckseite, wobei die Hochdruckseite in Wärmeaustauschbeziehung mit der Wärmequelle steht und die Niederdruckseite in Wärmeaustauschbeziehung mit einem zweiten Arbeitsfluidkreislauf (13) steht;
Übertragen thermischer Energie von der Wärmequelle an das erste Arbeitsfluid;
Expandieren des ersten Arbeitsfluids durch einen ersten Expander (15), der zwischen der Hochdruckseite und der Niederdruckseite des ersten Arbeitsfluidkreislaufts (11) angeordnet ist, und dadurch Erzeugen von mechanischer Energie;

Übertragen von Niedertemperaturwärme von dem ersten Arbeitsfluidkreislauf (11) an den zweiten Arbeitsfluidkreislauf (13); wobei der zweite Arbeitsfluidkreislauf (13) eine Hochdruckseite und eine Niederdruckseite, eine Expanderanordnung (25; 24) zwischen der Hochdruckseite und der Niederdruckseite und eine zweite Pumpe oder einen zweiten Kompressor (27) zwischen der Niederdruckseite und der Hochdruckseite umfasst;
 Expandieren eines zweiten Arbeitsfluids, das in dem zweiten Arbeitsfluidkreislauf (13) zirkuliert, in der Expanderanordnung (25; 24) und dadurch Erzeugen mechanischer Energie;
 Antreiben der ersten Pumpe oder des ersten Kompressors (17) mittels mechanischer Energie, die durch die Expanderanordnung (25, 24) erzeugt wird;
 wobei das Verfahren **dadurch gekennzeichnet ist, dass** es den folgenden Schritt umfasst:
 Übertragen von Wärme von dem zweiten Arbeitsfluidkreislauf (13) an den ersten Arbeitsfluidkreislauf (11) mittels eines Wärmerekupérators (23).

15. Verfahren nach Anspruch 14, ferner umfassend den Schritt des Rotierens einer Last (31) mit mechanischer Energie, die durch den ersten Expander (15) erzeugt wird.

Revendications

1. Système de conversion de puissance comprenant :

un premier circuit de fluide de travail (11) ayant un côté haute pression et un côté basse pression et configuré pour faire s'écouler un premier fluide de travail à travers celui-ci ;
 un chauffage (7) configuré pour faire circuler le premier fluide de travail en relation d'échange thermique avec une source de chaleur (3) pour vaporiser le premier fluide de travail ;
 un premier détendeur (15) agencé entre le côté haute pression et le côté basse pression du premier circuit de fluide de travail (11), configuré pour détendre le premier fluide de travail en son sein et générer ainsi une puissance mécanique ;
 une première pompe ou un premier compresseur (17) agencé entre le côté basse pression et le côté haute pression du premier circuit de fluide de travail (11) ;
 un deuxième circuit de fluide de travail (13) ayant un côté haute pression et un côté basse pression et configuré pour faire s'écouler un deuxième fluide de travail à travers celui-ci ;
 un agencement de transfert thermique (19), configuré pour transférer de la chaleur du côté

basse pression du premier circuit de fluide de travail (11) vers le côté haute pression du deuxième circuit de fluide de travail (13) et vaporiser le deuxième fluide de travail ;
 un agencement de détendeur (24 ; 25) agencé entre le côté haute pression et le côté basse pression du deuxième circuit de fluide de travail (13), configuré pour détendre le deuxième fluide de travail en son sein et générer ainsi une puissance mécanique ;
 une deuxième pompe ou un deuxième compresseur (27) agencé entre le côté basse pression et le côté haute pression du deuxième circuit de fluide de travail (13) ;
 dans lequel la première pompe ou le premier compresseur (17) est couplé par entraînement à l'agencement de détendeur (24 ; 25) et entraîné par une puissance mécanique ainsi générée ;
 le système de conversion de puissance est **caractérisé en ce qu'il** comprend un deuxième récupérateur de chaleur (23), avec un côté de distribution de chaleur en relation d'échange thermique avec un côté de réception de chaleur, le côté de distribution de chaleur étant couplé fluidiquement au deuxième circuit de fluide de travail (13) et le côté de réception de chaleur étant couplé fluidiquement au premier circuit de fluide de travail (11), de telle sorte que de la chaleur est transférée à partir du deuxième fluide de travail, circulant dans le côté de distribution de chaleur du deuxième récupérateur de chaleur, vers le premier fluide de travail circulant dans le côté de réception de chaleur du deuxième récupérateur de chaleur.

2. Système de conversion de puissance selon la revendication 1, dans lequel le premier détendeur (15) est couplé par entraînement à une charge rotative (31).
3. Système de conversion de puissance selon la revendication 2, dans lequel la charge rotative (31) comprend un générateur électrique, configuré pour convertir une puissance mécanique générée par le premier détendeur (15) en puissance électrique.
4. Système de conversion de puissance selon une ou plusieurs des revendications précédentes, dans lequel la deuxième pompe ou le deuxième compresseur (27) est couplé par entraînement à un moteur électrique (37).
5. Système de conversion de puissance selon une ou plusieurs des revendications 1 à 3, dans lequel la deuxième pompe ou le deuxième compresseur (27) est couplé par entraînement à l'agencement de détendeur (24), moyennant quoi l'un et l'autre parmi la

première pompe ou le premier compresseur (17) et la deuxième pompe ou le deuxième compresseur (27) sont entraînés par une puissance mécanique générée par l'agencement de détendeur (24).

6. Système de conversion de puissance selon une ou plusieurs des revendications précédentes, dans lequel l'agencement de détendeur comprend un deuxième détendeur (25), couplé par entraînement à une ligne d'arbre, et dans lequel la première pompe ou le premier compresseur (17) et la deuxième pompe ou le deuxième compresseur (27) sont couplés par entraînement à la ligne d'arbre.
7. Système de conversion de puissance selon une ou plusieurs des revendications précédentes, dans lequel l'agencement de détendeur (24) comprend un détendeur supérieur (25.1) et un détendeur inférieur (25.2) agencés en série entre le côté haute pression et le côté basse pression du deuxième circuit de fluide de travail (13), de telle sorte que le deuxième fluide de travail est séquentiellement détendu dans le détendeur supérieur (25.1) et dans le détendeur inférieur (25.2), et dans lequel l'un parmi ladite première pompe ou ledit premier compresseur (17) et ladite deuxième pompe ou ledit deuxième compresseur (27) est couplé par entraînement au détendeur supérieur (25.1) et l'autre parmi ladite première pompe ou ledit premier compresseur (17) et ladite deuxième pompe ou ledit deuxième compresseur (27) est couplé par entraînement au détendeur inférieur (25.2).
8. Système de conversion de puissance selon une ou plusieurs des revendications précédentes, dans lequel l'agencement de transfert thermique (19) comprend un premier récupérateur de chaleur (19), avec un côté de distribution de chaleur en relation d'échange thermique avec un côté de réception de chaleur, le côté de distribution de chaleur étant couplé fluidiquement au premier circuit de fluide de travail (11) et le côté de réception de chaleur étant couplé fluidiquement au deuxième circuit de fluide de travail (13), de telle sorte que de la chaleur est transférée du premier fluide de travail circulant dans le côté de distribution de chaleur du premier récupérateur de chaleur vers le deuxième fluide de travail circulant dans le côté de réception de chaleur du premier récupérateur de chaleur (19).
9. Système de conversion de puissance selon la revendication 8, dans lequel le côté de distribution de chaleur du premier récupérateur de chaleur (19) est couplé fluidiquement au premier circuit de fluide de travail (11) entre le premier détendeur (15) et la première pompe ou le premier compresseur (17), et le côté de réception de chaleur du premier récupérateur de chaleur (19) est couplé fluidiquement au

deuxième circuit de fluide de travail (13) entre la deuxième pompe ou le deuxième compresseur (27) et l'agencement de détendeur (24 ; 25).

10. Système de conversion de puissance selon la revendication 8 ou 9, dans lequel le premier circuit de fluide de travail (11) comprend en outre un premier refroidisseur (21), couplé fluidiquement au premier circuit de fluide de travail (11) entre le côté de distribution de chaleur du premier récupérateur de chaleur (19) et la première pompe ou le premier compresseur (17).
11. Système de conversion de puissance selon une ou plusieurs des revendications précédentes, dans lequel le côté haute température du deuxième récupérateur de chaleur (23) est couplé fluidiquement au deuxième circuit de fluide de travail (13) entre l'agencement de détendeur (24 ; 25) et la deuxième pompe ou le deuxième compresseur (27), et le côté basse température du deuxième récupérateur de chaleur (23) est couplé fluidiquement au premier circuit de fluide de travail (11) entre la première pompe ou le premier compresseur (17) et le chauffage (7).
12. Système de conversion de puissance selon une ou plusieurs des revendications précédentes, dans lequel le deuxième circuit de fluide de travail (13) comprend en outre un deuxième refroidisseur (29), couplé fluidiquement au deuxième circuit de fluide de travail (13) entre le deuxième récupérateur de chaleur (23) et la deuxième pompe ou le deuxième compresseur (27).
13. Système de conversion de puissance selon une ou plusieurs des revendications précédentes, comprenant en outre une ligne de raccordement (51) entre le premier circuit de fluide de travail (11) et le deuxième circuit de travail (13), configurée pour transférer un fluide de travail du premier circuit de fluide de travail (11) vers le deuxième circuit de fluide de travail (13) ou inversement, une soupape (53) étant disposée sur la ligne de raccordement (51).
14. Procédé de production de puissance utile à partir de chaleur provenant d'une source de chaleur, comprenant les étapes suivantes :
la circulation d'un premier fluide de travail au moyen d'une première pompe ou d'un premier compresseur (17) à travers un premier circuit de fluide de travail (11) ayant un côté haute pression et un côté basse pression, dans lequel le côté haute pression est en relation d'échange thermique avec la source de chaleur et le côté basse pression est en relation d'échange thermique avec un deuxième circuit de fluide de travail (13) ;

le transfert d'énergie thermique de la source de chaleur vers le premier fluide de travail ;
 la détente du premier fluide de travail à travers un premier détendeur (15) agencé entre le côté haute pression et le côté basse pression du premier circuit de fluide de travail (11), et générer de puissance mécanique avec celle-ci ;
 le transfert d'une chaleur à basse température du premier circuit de fluide de travail (11) vers le deuxième circuit de fluide de travail (13) ; dans lequel le deuxième circuit de fluide de travail (13) comprend un côté haute pression et un côté basse pression, un agencement de détendeur (25 ; 24) entre le côté haute pression et le côté basse pression, et une deuxième pompe ou un deuxième compresseur (27) entre le côté basse pression et le côté haute pression ;
 la détente d'un deuxième fluide de travail circulant dans le deuxième circuit de fluide de travail (13) dans l'agencement de détendeur (25 ; 24) et la génération de puissance mécanique avec celle-ci ;
 l'entraînement de la première pompe ou du premier compresseur (17) au moyen de puissance mécanique générée par l'agencement de détendeur (25, 24) ;
 le procédé est **caractérisé en ce qu'il** comprend l'étape suivante :
 le transfert de chaleur du deuxième circuit de fluide de travail (13) vers le premier circuit de fluide de travail (11) au moyen d'un récupérateur de chaleur (23).

15. Procédé selon la revendication 14, comprenant en outre l'étape consistant à faire tourner une charge (31) avec une puissance mécanique générée par le premier détendeur (15).

40

45

50

55

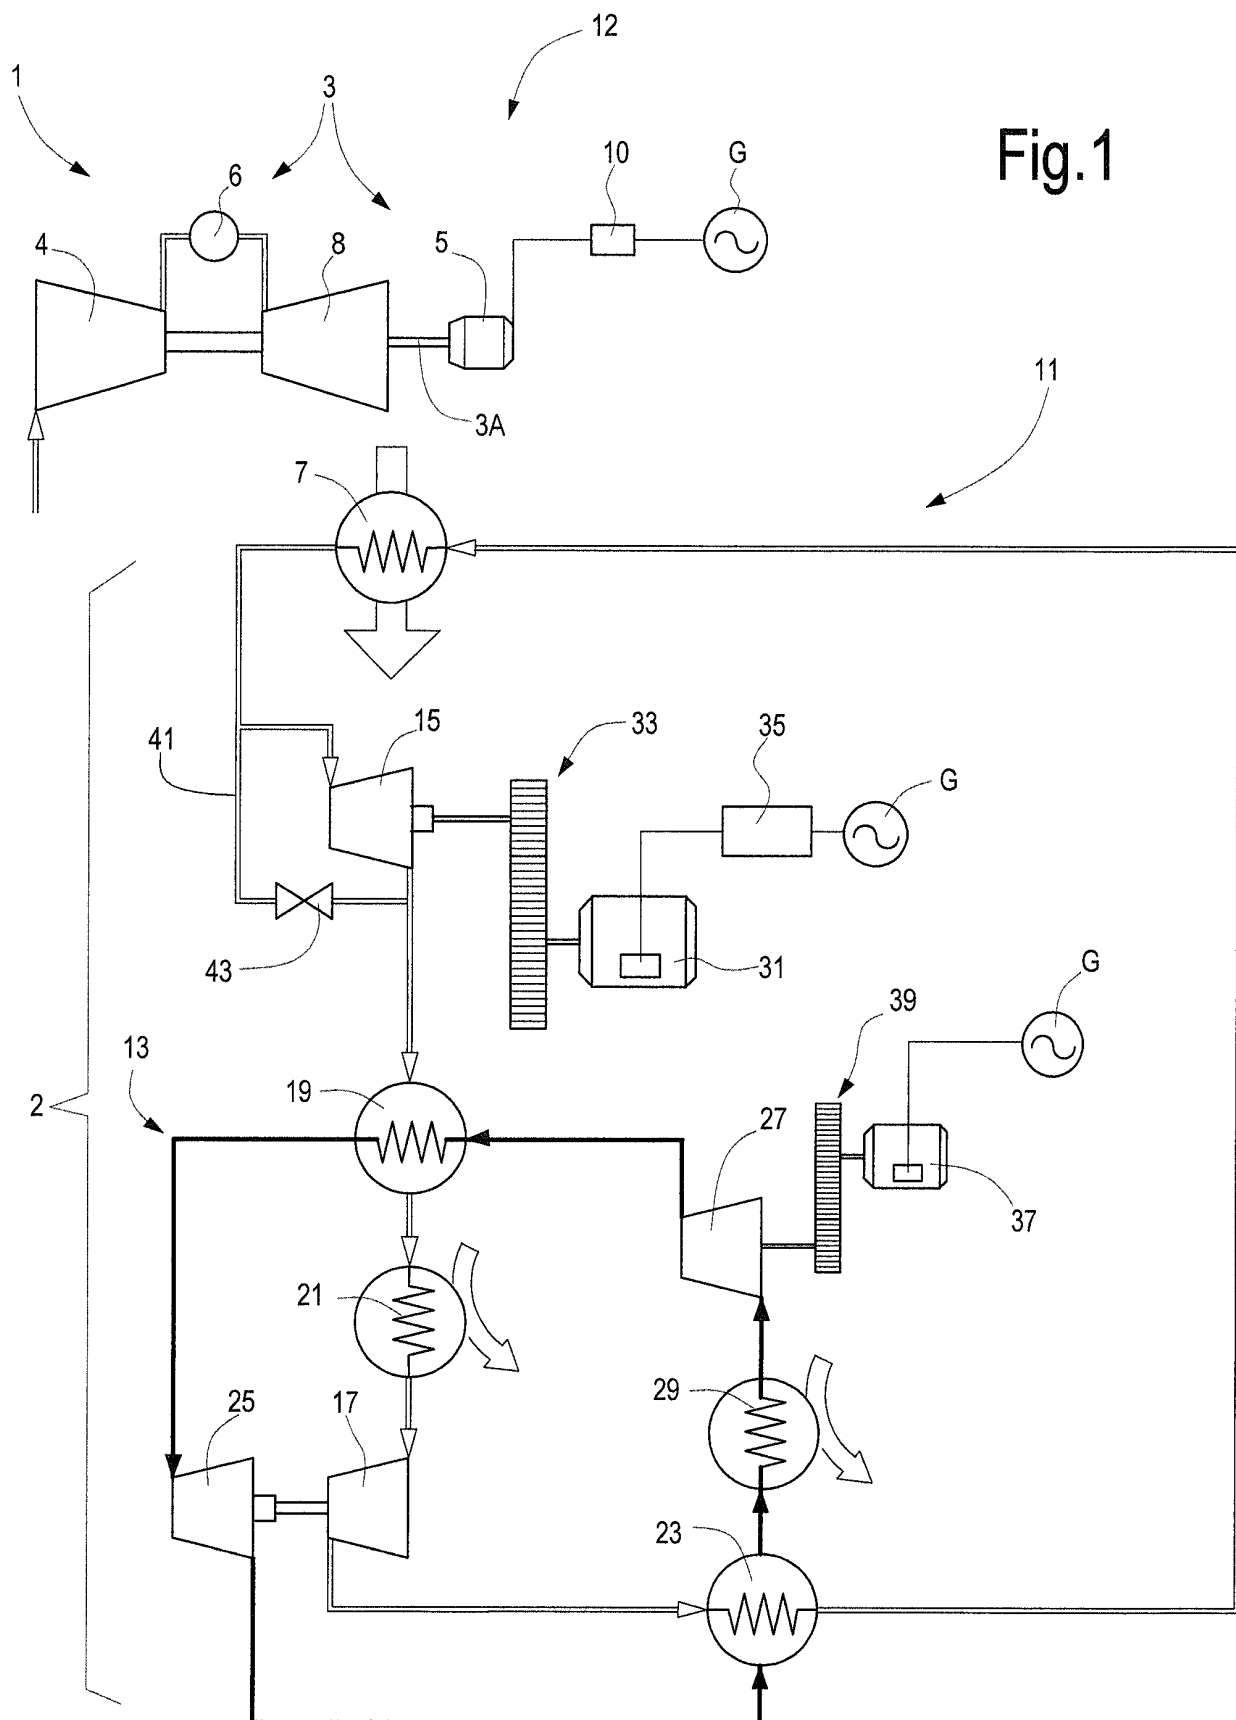
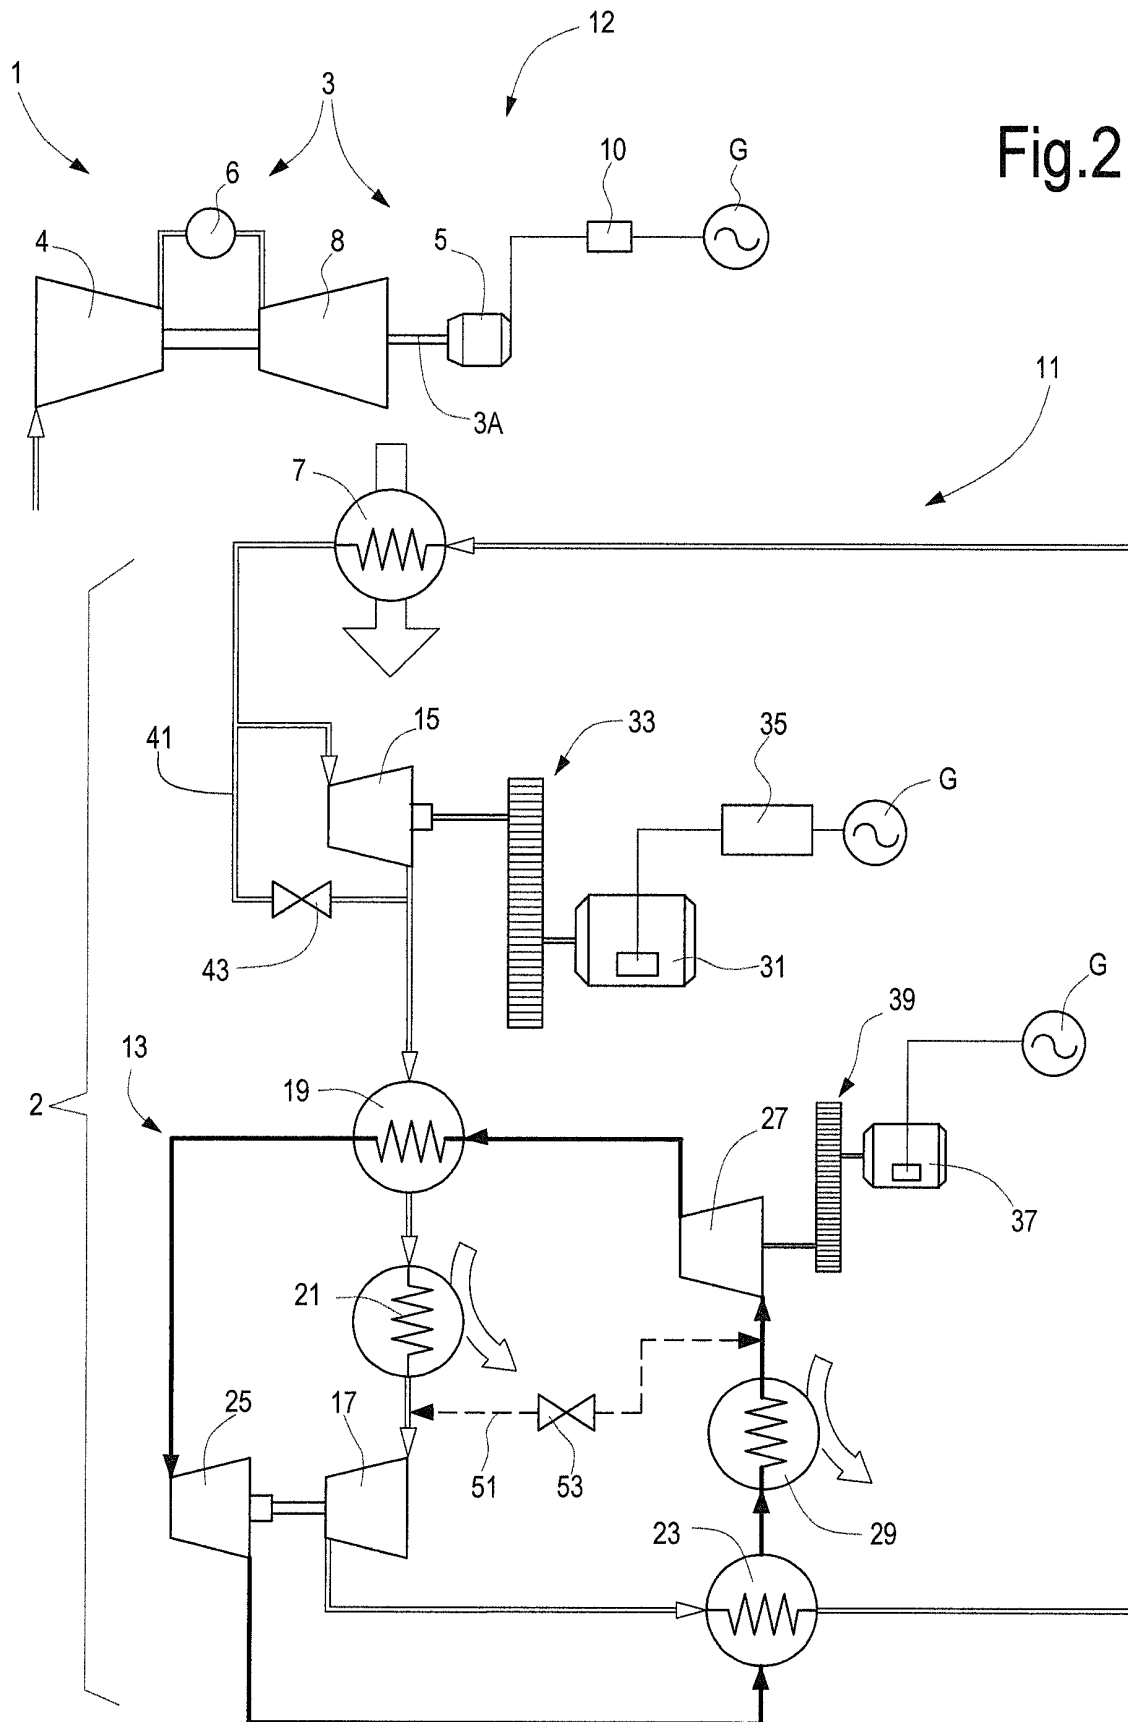


Fig.1




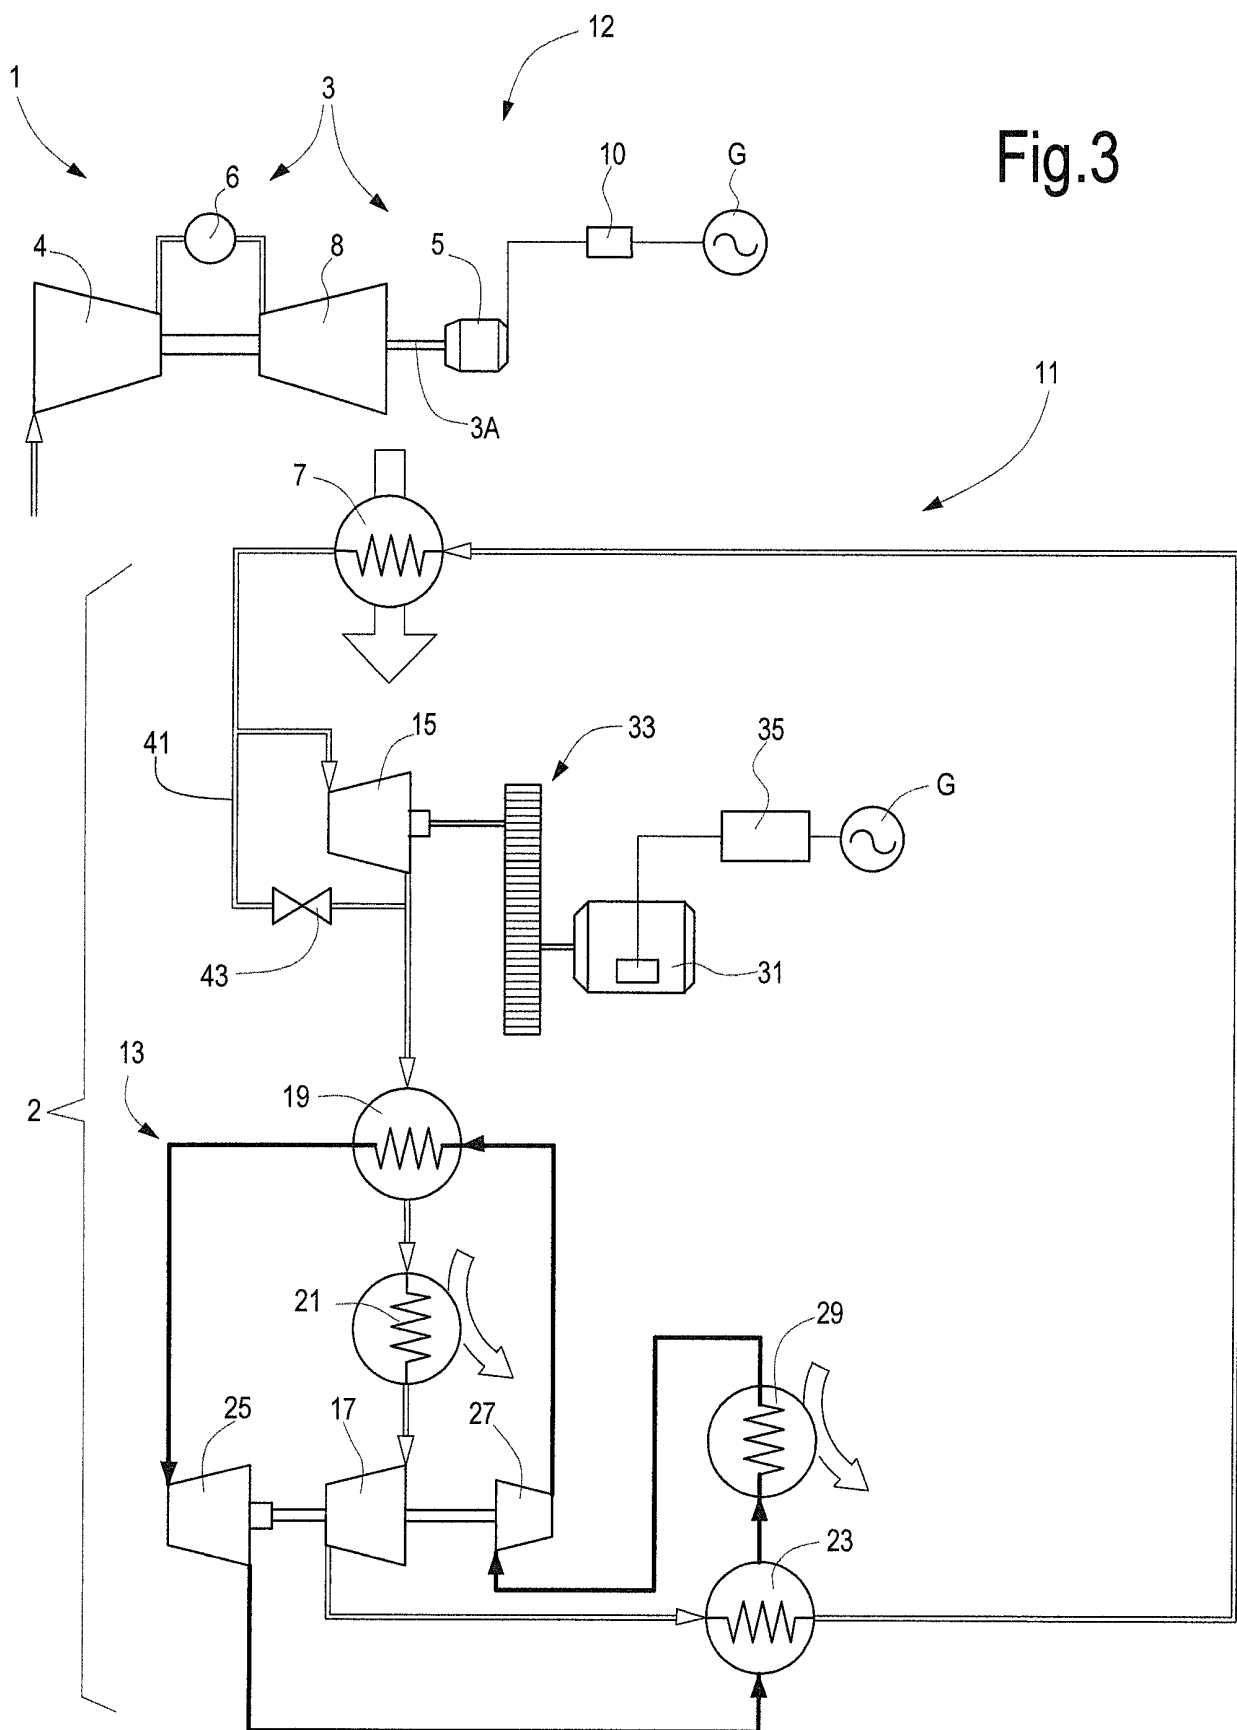


Fig.3

Fig.5

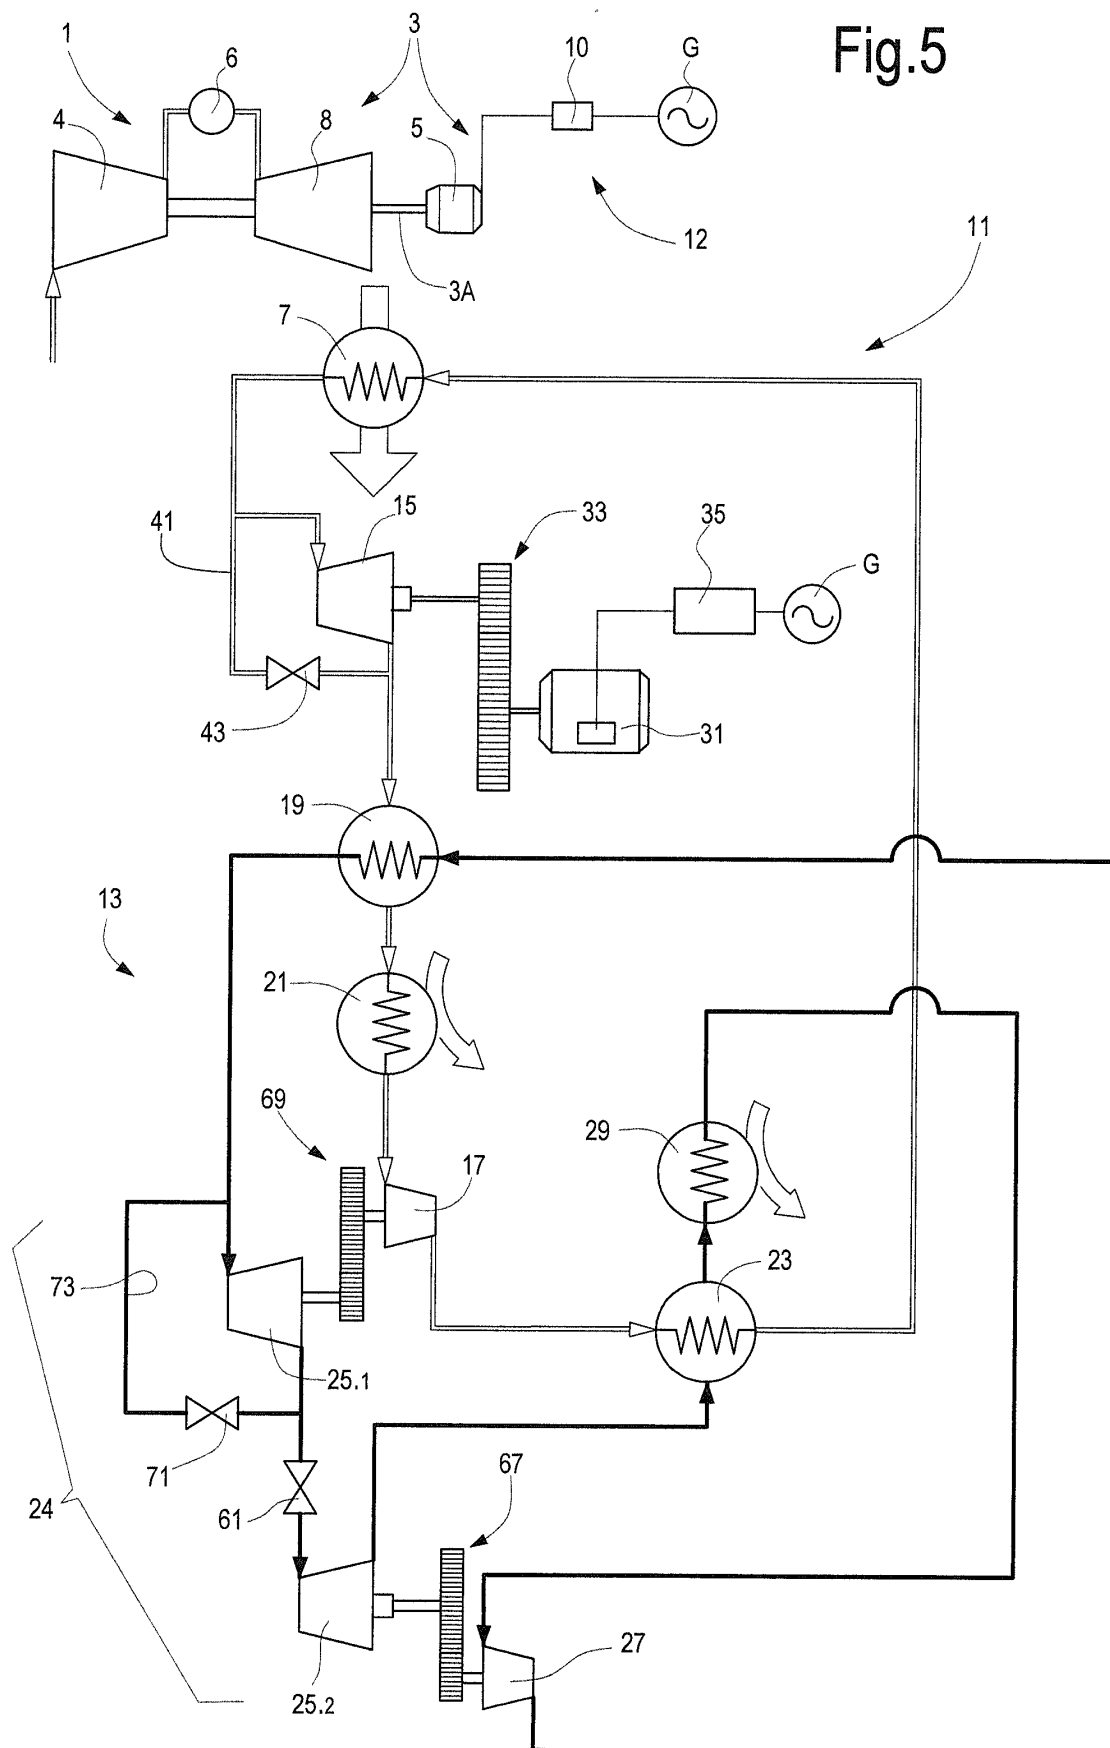

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CH 276514 A [0002]
- US 2012131919 A1 [0003]