



(11)

EP 3 436 680 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

12.10.2022 Bulletin 2022/41

(21) Application number: **16717510.8**

(22) Date of filing: **31.03.2016**

(51) International Patent Classification (IPC):

F02D 41/14 ^(2006.01) **F02B 71/00** ^(2006.01)
F01B 11/00 ^(2006.01) **F02D 39/10** ^(2006.01)
H02P 25/06 ^(2016.01) **F02G 1/043** ^(2006.01)

(52) Cooperative Patent Classification (CPC):

F02D 41/1497; F01B 11/007; F01B 11/02;
F02B 71/00; F02D 39/10

(86) International application number:

PCT/US2016/025417

(87) International publication number:

WO 2017/171816 (05.10.2017 Gazette 2017/40)

(54) **CONTROL OF PISTON TRAJECTOY IN A LINEAR GENERATOR**

STEUERUNG DER KOLBENTRAJEKTORIE IN EINEM LINEAREN AKTUATOR

COMMANDE DE TRAJECTOIRE DE PISTON DANS UN ACTUATEUR LINEAIRE

(84) Designated Contracting States:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

(43) Date of publication of application:

06.02.2019 Bulletin 2019/06

(73) Proprietor: **Mainspring Energy, Inc.**

Menlo Park, CA 94025 (US)

(72) Inventors:

- **ROELLE, Matthew**
Belmont, California 94002 (US)
- **GADDA, Christopher**
Palo Alto, California 94301 (US)

(74) Representative: **Haley Guiliano International LLP**

26-28 Bedford Row
London WC1R 4HE (GB)

(56) References cited:

WO-A1-2005/100764 **WO-A1-2005/100764**
WO-A1-2014/172382 **DE-A1- 10 241 101**
DE-A1-102008 030 633 **US-A1- 2006 124 083**

- **TOR ARNE JOHANSEN ET AL: "Free-Piston Diesel Engine Timing and Control-Toward Electronic Cam- and Crankshaft", IEEE TRANSACTIONS ON CONTROL SYSTEMS TECHNOLOGY, IEEE SERVICE CENTER, NEW YORK, NY, US, vol. 9, no. 3, 1 March 2002 (2002-03-01), XP011013724, ISSN: 1063-6536**
- **ZASECK KEVIN ET AL: "Adaptive control approach for cylinder balancing in a hydraulic linear engine", 2013 AMERICAN CONTROL CONFERENCE, IEEE, 17 June 2013 (2013-06-17), pages 2171-2176, XP032476582, ISSN: 0743-1619, DOI: 10.1109/ACC.2013.6580157 ISBN: 978-1-4799-0177-7 [retrieved on 2013-08-14]**
- **HANIPAH M RAZALI ET AL: "Recent commercial free-piston engine developments for automotive applications", APPLIED THERMAL ENGINEERING, PERGAMON, OXFORD, GB, vol. 75, 5 October 2014 (2014-10-05), pages 493-503, XP029111677, ISSN: 1359-4311, DOI: 10.1016/J.APPLTHERMALENG.2014.09.039**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present disclosure relates to free-piston combustion engines and, more particularly, the present disclosure relates to control of piston trajectory in a free-piston combustion engine.

Background

[0002] Some free-piston engines rely on position versus time control of pistons in which a desired position versus time trajectory of a piston is determined based on an initial position of the piston. As the system causes a piston to move, the control strategy measures how much the piston is deviating from the desired position versus time trajectory and attempts to compensate for any deviation in order to bring the piston closer to the desired position versus time trajectory. Some free-piston engines rely on control strategies that measure how much a piston is deviating from other suitable trajectories (e.g., position versus velocity) and attempt to compensate for any deviation in order to bring the piston closer to the desired trajectory.

[0003] These approaches typically rely on an open-form solution for controlling a piston's movement based on a previously determined trajectory and often do not take into account changing conditions in the engine, which would affect the movement of the piston. For example, after the desired trajectory is determined, conditions in the engine can change such that the desired trajectory is no longer applicable. Movement of the piston will still, however, be based on the original desired trajectory and deviation therefrom.

[0004] Patent document WO2005100764 A1 discloses a method and system for controlling a free-piston energy converter in which effects of events, like combustion events, in at least one of at least two cylinders, are decoupled from each other by predicting forces acting on the moving mass of the converter during a stroke of the moving mass and by evaluating or estimating a value representing a force which is exerted onto the moving mass, so that the moving mass reaches a desired reference condition or state, like a desired reference kinetic energy, at a certain position along the stroke.

Brief Description of the Drawings

[0005] The solution is provided by the features of the independent method claim 1. Variations are as described by the dependent claims.

[0006] The present disclosure, in accordance with one or more various embodiments, is described in detail with reference to the following figures. The drawings are provided for purposes of illustration only and merely depict typical or example embodiments. These drawings are provided to facilitate an understanding of the concepts disclosed herein and shall not be considered limiting of the breadth, scope, or applicability of these concepts. It should be noted that for clarity and ease of illustration these drawings are not necessarily made to scale.

FIG. 1 is a diagram of three illustrative free-piston combustion engine configurations.

FIG. 2 is a cross-sectional drawing illustrating a two-piston, single-combustion section, integrated gas springs, and separated linear electromagnetic machine engine, in accordance with some embodiments of the present disclosure.

FIG. 3 is a diagram illustrating the two-stroke piston cycle of the two-piston integrated gas springs engine of **FIG. 2**, in accordance with some embodiments of the present disclosure.

FIG. 4 is a cross-sectional drawing illustrating an alternative two-piston, separated gas springs, and separated linear electromagnetic machine engine, in accordance with some embodiments of the present disclosure.

FIG. 5 is a cross-sectional drawing illustrating a single-piston, integrated internal gas spring engine, in accordance with some embodiments of the present disclosure.

FIG. 6 is a cross-sectional drawing illustrating an embodiment of a gas spring rod, in accordance with some embodiments of the present disclosure.

FIG. 7 is a cross-sectional drawing illustrating a two-piston, integrated internal gas springs engine, in accordance with some embodiments of the present disclosure.

FIG. 8 illustrates exemplary position, force, and power diagrams of a free-piston engine over a compression and an expansion stroke, in accordance with some embodiments of the present disclosure.

FIG. 9 illustrates other exemplary position, force, and power diagrams of a free-piston engine over a compression and an expansion stroke, in accordance with some embodiments of the present disclosure.

FIG. 10 is a block diagram of an illustrative piston engine system in accordance with some embodiments of the present disclosure.

FIG. 11 illustrates an exemplary position-velocity and position-force trajectories of a free-piston engine over a compression and an expansion stroke, in accordance with some embodiments of the present disclosure.

FIG. 12 shows a flow diagram of illustrative steps for causing movement of a free-piston assembly along a propagation path in accordance with some embodiments of the present disclosure.

FIG. 13 illustrates other exemplary position-velocity and position-force trajectories of a free-piston engine over a compression and an expansion stroke, in accordance with some embodiments of the present disclosure.

FIG. 14 illustrates other exemplary position-velocity and position-force trajectories of a free-piston engine over a compression and an expansion stroke, in accordance with some embodiments of the present disclosure.

FIG. 15 shows an illustrative state diagram for a hybrid control technique in accordance with some embodiments of the present disclosure.

[0007] The figures are not intended to be exhaustive or to limit the disclosure to the precise form disclosed. It should be understood that the concepts and embodiments disclosed can be practiced with modification and alteration, and that the disclosure is limited only by the claims.

Detailed Description

[0008] Various embodiments of the present disclosure are directed towards controlling a free-piston linear combustion engine. In at least one embodiment, the engine comprises: (i) a cylinder comprising a combustion section, (ii) at least one free-piston assembly in contact with the combustion section, (iii) at least one driver section in contact with the at least one free-piston assembly that stores energy during an expansion stroke of the engine (iv) and at least one linear electromagnetic machine (LEM) that directly converts between kinetic energy of the at least one free-piston assembly and electrical energy. It should be noted, however, that further embodiments may include various combinations of the above-identified features and physical characteristics.

[0009] The present disclosure is related to a control technique for determination and implementation of a trajectory for one or more of the piston assemblies in a free-piston engine. As used herein, the term "trajectory" refers to a sequence of data pairs that describe the motion of a piston assembly in a free-piston engine, such as, for example, a position-force trajectory (a sequence of position-force pairs), a time-position trajectory (a sequence of time-position pairs), or a position-velocity trajectory (a sequence of position-velocity pairs). A position-force trajectory defines the force acting on a piston assembly at one or more specified positions of the piston assembly, a time-position trajectory defines the position of a piston assembly at one or more specified instances in time, and a position-velocity trajectory defines the velocity of a piston assembly at one or more specified positions of the piston assembly. At least one of the elements in a data pair of a trajectory may be considered the abscissa in a functional relationship with the other data element being ordinate. In the case of multiple free-piston assemblies in one engine (e.g., arranged as opposed-pistons with a shared combustion section), a trajectory may include data pairs for each respective piston assembly. It will be understood that, while a trajectory is generally described as being a sequence of data pairs, a trajectory may, under certain conditions, include only a single data pair (e.g., a single position-force pair in the case of a position-force trajectory).

[0010] In accordance with the present disclosure, a processing sub-system of a free-piston engine computes a position-force trajectory for one or more piston assemblies in a free-piston engine based at least on a current position of the one or more piston assemblies and a desired engine performance. As used herein with respect to control of a free-piston engine, the term "desired engine performance" refers to operating the engine such that the one or more piston assemblies apex at desired respective positions, that the one or more piston assemblies reach desired respective target positions with a respective specified velocity or acceleration, that one or more piston assemblies reach desired respective target positions with any other suitable parameter or condition, or any combination thereof. The processing sub-system determines particular force values based on a position-force trajectory that are to be effected on the one or more piston assemblies as a function of their positions along their respective propagation paths between respective apices. It will be understood that, while the present disclosure is described in the context of determining force values that are effected on a piston assembly, any other suitable parameter value can be calculated for effecting the movement of a piston assembly. For example, any suitable gas pressure value can be used to effect movement of a piston assembly, such as, for example, with respect to a gas pressure supplied by an external compressed gas source or effecting a gas pressure by adjusting an aspect of a gas spring. As used herein, the term "propagation path" refers to a positional path along which a piston assembly traverses. For example, a processing sub-system may first calculate a position-force trajectory for the one or more piston assemblies based at least on a current position of the one or more piston assemblies and a desired engine performance, and then subsequently determine force values, based on the calculated position-force trajectory, to apply to the one or more piston assemblies over a specified time or position interval in order to achieve the desired engine performance. The force values may be applied to the one or more piston assemblies by, for example, exerting an electromagnetic force onto the one or more piston assembly. In some embodiments, the processing sub-system calculates the position-force trajectory based on the operating state of the free-piston engine. The operating state of a free-piston engine refers to the calculated, measured, or estimated values or indicators of the state of the engine (i.e., its dynamical system state) and any other suitable calculated, measured, or estimated values or indicators of the operating characteristics, performance, parameters, and environment of the engine. For example, one or more sensors could be used to measure pressure, temperature, forces, velocities, acceleration, position, any other suitable

parameter or condition, or any combination thereof at respective sections or components of the free-piston engine. This sensor information can be processed by the processing sub-system to compute a position-force trajectory to achieve a desired engine performance.

[0011] In one suitable approach, the processing sub-system calculates a position-force trajectory for a piston assembly when a particular trigger is activated (e.g., in response to a particular event, at a particular threshold crossing, any other suitable trigger, or any combination thereof). In another suitable approach, the processing sub-system calculates a position-force trajectory repeatedly throughout an engine stroke or cycle. For example, the calculations may be performed at particular time intervals (e.g., 1 kHz, 10 kHz, etc.) or at particular discrete position intervals (e.g., every 1 millimeter, every 1 micron, etc.). In another suitable approach, as the operating state of the free-piston engine changes, the processing sub-system may calculate a new position-force trajectory.

[0012] The calculation of each position-force trajectory is made without regard to a deviation from a previously calculated trajectory (position-force trajectory, time-position trajectory, or any other suitable trajectory). It will be understood that a position-force trajectory calculation is determined using for example one or more calculations, one or more prescriptions, or any combination thereof, including, for example, the use of a look-up table, a curve-fitting, or both. This aspect allows for changes in and to the operating state of the free-piston engine (rapid or slow, intended or unintended) to be accounted for in each new position-force trajectory calculation, thereby providing a control technique for a free-piston engine that is capable of rejecting disturbances in the operating state of the free-piston engine. The calculation of each position-force trajectory may also be computed without regard to the timing of a desired engine performance. That is, each position-force trajectory is defined without a time component and is calculated without specifying the time in which a desired engine performance occurs (e.g., the time in which a piston assembly apices or otherwise reaches a target position). In some instances, with suitable assumptions about engine gas properties, conditions, and parameters, the calculation of a position-force trajectory may rely on a close-form solution. In other instances, the calculation of a position-force trajectory may rely on a numerically iterative solution (e.g., using a solver to calculate a solution).

[0013] In some embodiments, the current operating parameters of a free-piston engine may be estimated based on a preceding force applied to the one or more piston assemblies that was calculated as part of a previous position-force trajectory. The estimated engine operating parameters may be used in conjunction with the current position of the one or more piston assemblies to calculate a new position-force trajectory. For example, an immediately preceding force value as either determined or as actually applied to a piston assembly could be used to update an estimate of current gas pressure in a combustion section or driver section of a free-piston engine by, for example, applying a smoothing technique (e.g., IRR or FIR filter) to a previously estimated or measured gas pressure and adjusting for the change in gas pressure caused at least in part by the immediately preceding applied force. This aspect can avoid the need for expensive and unreliable sensors (e.g., pressure sensors) in a free-piston engine, thereby providing a low cost and high reliability control technique for a free-piston engine.

[0014] In some embodiments, for a free-piston engine with multiple piston assemblies (e.g., arranged as opposed-pistons with a shared combustion section), in addition to the processing sub-system calculating a position-force trajectory for each respective piston assembly, the processing sub-system may also calculate synchronization forces for the multiple piston assemblies and cause certain forces to be applied to the multiple piston assemblies based on the calculations to synchronize the movements of the multiple piston assemblies as desired.

[0015] In some embodiments, the processing sub-system may employ a hybrid control strategy that switches between multiple control techniques, wherein at least one of the control techniques is based on calculating a position-force trajectory as disclosed herein. The processing sub-system may, for example, utilize a position-force trajectory control technique during times when the operating state of the engine is unsteady (e.g., during engine start-up) and utilize a different, less robust, control technique during times when the operating state of the engine is sufficiently steady (e.g., delivering constant and steady power). The processing sub-system may, for example, switch from a less robust control technique to a more robust position-force trajectory control technique when an unintended change in the operating state of the engine is detected (e.g., a combustion misfire event, a higher than expected friction event, a change in fuel quality event, any other suitable change in the operating state of the engine, or any combination thereof). In some instances, a less robust control technique may rely on a time-position trajectory that is calculated based on a previously determined position-force trajectory (e.g., as measured during an entire engine stroke or cycle) that was calculated while the processing sub-system was previously employing a position-force trajectory control technique. In some instances, the less robust control technique may depend on a deviation from a previously determined trajectory (position-force trajectory, time-position trajectory, or any other suitable trajectory).

[0016] Generally, free-piston combustion engine configurations can be broken down into three categories: 1) two opposed pistons, single combustion chamber, 2) single piston, dual combustion chambers, and 3) single piston, single combustion chamber. A diagram of the three common free-piston combustion engine configurations is shown in **FIG. 1**. Several illustrative embodiments of linear free-piston combustion engines are illustrated in commonly assigned U.S. Patent No. 8,662,029, issued on March 4, 2014, and entitled "High-efficiency linear combustion engine". It will be understood that while the present disclosure is presented in the context of certain specific illustrative embodiments of linear

free-piston combustion engines, the concepts discussed herein are applicable to any other suitable free-piston combustion engines, including, for example, non-linear free-piston engines. Free-piston engines generally include one or more free-piston assemblies that are free from mechanical linkages that translate the linear motion of the piston assembly into rotary motion (e.g., a slider-crank mechanism) or free from mechanical linkages that directly control piston dynamics (e.g., a locking mechanism). Free-piston engines have a number of benefits over such mechanically-linked piston engines, which lead to increased efficiency. For example, due to the inherent architectural limitations of mechanically-linked piston engines, free-piston engines can be configured with higher compression ratios and expansion ratios, which lead to higher engine efficiencies as, described in the previously referenced

[0017] U.S. Patent No. 8,662,029. Moreover, free-piston engines allow for increased variability in the compression and expansion ratios, including allowing for the compression ratio to be greater than the expansion ratio and allowing for the expansion ratio to be greater than the compression ratio, which may also increase the engine efficiency. The free-piston engine architecture also allows for increased control of the compression ratio on an engine cycle-to-cycle basis, which allows for adjustments due to variable fuel quality and fuel type. Additionally, due to the lack of mechanical linkages, free-piston engines result in substantially lower side loads on the piston assemblies, which allows for oil-less operation, and in turn, reduced friction and losses resulting therefrom.

[0018] It will be understood that while the present disclosure is presented in the context of a free-piston internal combustion engine, the teachings and concepts presented herein are applicable to other types of free-piston devices, such as free-piston compressors in which combustion does not take place or free-piston compressors in which internal combustion does take place. In such systems without combustion, electrical energy is converted into mechanical energy by a LEM to compress a fluid (liquid or gaseous) in a compression chamber or compression section. In such systems with combustion, fuel energy is converted into mechanical energy, possibly in conjunction with the conversion of electrical energy, to compress a fluid in a compression chamber or compression section. Additionally, the teachings and concepts presented herein are applicable to free-piston heat engines which convert an external heat resource into electricity or to compress a fluid.

[0019] FIG. 2 is a cross-sectional drawing illustrating one embodiment of a two-piston, single-combustion section, integrated gas springs, and separated LEM free-piston internal combustion engine **100**. This free-piston, internal combustion engine **100** directly converts the chemical energy in a fuel into electrical energy via an LEM **200**. As used herein, the term "fuel" refers to matter that reacts with an oxidizer. Such fuels include, but are not limited to: (i) hydrocarbon fuels such as natural gas, biogas, gasoline, diesel, and biodiesel; (ii) alcohol fuels such as ethanol, methanol, and butanol; (iii) hydrogen; and (iv) mixtures of any of the above. The engines described herein are suitable for both stationary power generation and mobile power generation (e.g., for use in vehicles).

[0020] Engine **100** includes a cylinder **105** with two opposed piston assemblies **120** dimensioned to move within the cylinder **105** and meet at a combustion section **130** in the center of the cylinder **105**. Each piston assembly **120** may include a piston **125** and a piston rod **145**. The piston assemblies **120** are free to move linearly within the cylinder **105**.

[0021] With further reference to FIG. 2, the volume between the backside of the piston **125**, piston rod **145**, and the cylinder **105** is referred to herein as the driver section **160**. As used herein, a "driver section" refers to a section of an engine cylinder capable of storing energy and providing energy to displace the piston assembly without the use of combustion. The driver section **160**, in some embodiments, may contain a non-combustible fluid (i.e., gas, liquid, or both). In the illustrated embodiment, the fluid in the driver section **160** is a gas that acts as a gas spring. Driver section **160** stores energy from an expansion stroke of the piston cycle and provides energy for a subsequent stroke of the piston cycle, i.e. the stroke that occurs after an expansion stroke. For example, kinetic energy of the piston may be converted into potential energy of the gas in the driver section during an expansion stroke of the engine. In some embodiments, the potential energy stored in the driver section can be sufficient to perform the compression stroke (or an exhaust stroke or any other suitable stroke occurring subsequent to the expansions stroke) without, for example, any additional net electrical input by a motor force. As used herein, the term "piston cycle" refers to any series of piston movements that begin and end with the piston **125** in substantially the same configuration. One common example is a four-stroke piston cycle, which includes an intake stroke, a compression stroke, an expansion stroke, and an exhaust stroke. Additional alternate strokes may form part of a piston cycle as described throughout this disclosure. A two-stroke piston cycle is characterized as having an expansion stroke and a compression stroke. As used herein, an "expansion stroke" refers to a stroke of a piston cycle during which the piston assembly moves from a top-dead-center ("TDC") position to a bottom-dead-center ("BDC") position, where TDC refers to the position of the piston assembly, or assemblies, when the combustion section volume is at a minimum and BDC refers to the position of the piston assembly, or assemblies, when the combustion section volume is at a maximum. As noted above, since the compression ratio and expansion ratio of a free-piston engine can vary or be varied from cycle-to-cycle, the TDC and BDC positions can also vary or be varied from cycle-to-cycle, in some embodiments. Accordingly, as will be described below in further detail, an expansion stroke may refer to an intake stroke, an expansion stroke, or both. In some embodiments, the amount of energy to be stored by the driver section during an expansion stroke may be determined based on various criteria and controlled by a controller and associated processing circuitry as will be described below in further detail.

[0022] For purposes of brevity and clarity, the driver section will primarily be described herein in the context of a gas spring and may be referred to herein as the "gas section," "gas springs" or "gas springs section." It will be appreciated that in some arrangements, the driver section **160** may include one or more other mechanisms in addition to or in place of a gas spring. For example, such mechanisms can include one or more mechanical springs, magnetic springs, or any suitable combination thereof. In some arrangements, a highly efficient linear alternator may be included that operates as a motor, which may be used in place of or in addition to a spring (pneumatic, hydrodynamic, or mechanical) for generating compression work. It will be understood by those skilled in the art that in some embodiments, the geometry of the driver section may be selected to minimize losses and maximize the efficiency of the driver section. For example, the diameter and/or dead volume of the driver section may be selected to minimize losses and maximize the efficiency of the driver section. As used herein, the term "dead volume" refers to the volume of the driver section when the piston assembly is at its furthest possible BDC position (*i.e.*, when the volume of the combustion section is at its greatest before the piston assembly contacts a physical stop). In some embodiments, for example, if the driver section is a gas or hydraulic spring, the diameter of the section may be different than the combustion section in order to provide for increased efficiency. Certain embodiments of gas springs will be described below in further detail with reference to **FIGS. 8-12**.

[0023] Combustion ignition can be achieved via, for example, compression ignition and/or spark ignition. Fuel can be directly injected into the combustion chamber **130** ("direct injection") or intake ports **180** ("port fuel injection") via fuel injectors and/or mixed with air prior to and/or during air intake ("premixed injection"). The engine **100** can operate with lean, stoichiometric, or rich combustion using liquid fuels, gaseous fuels, or both, including hydrocarbons, hydrogen, alcohols, or any other suitable fuels as described above.

[0024] Cylinder **105** may include injector ports **170**, intake ports **180**, exhaust ports **185**, and driver gas exchange ports **190**, for exchanging matter (solid, liquid, gas, or plasma) with the surroundings. As used herein, the term "port" includes any opening or set of openings (*e.g.*, a porous material) which allows matter exchange between the inside of the cylinder **105** and its surroundings. It will be understood that the ports shown in **FIG. 2** are merely illustrative. In some arrangements, fewer or more ports may be used. The above-described ports may or may not be opened and closed via valves. The term "valve" may refer to any actuated flow controller or other actuated mechanism for selectively passing matter through an opening. Valves may be actuated by any means, including but not limited to: mechanical, electrical, magnetic, camshaft-driven, hydraulic, or pneumatic means. The number, location, and types of ports and valves may depend on the engine configuration, injection strategy, and piston cycle (*e.g.*, two- or four-stroke piston cycles). In some embodiments, the matter exchange of the ports may be achieved by the movement of the piston assembly, which may cover and/or uncover the ports as necessary to allow exchange of matter.

[0025] In some embodiments, the operation of driver section **160** may be adjustable. In some embodiments, driver gas exchange ports **190** may be utilized to control characteristics of the driver section. For example, driver gas exchange ports **190** may be used to control the amount, temperature, pressure, any other suitable characteristics, and/or any combination thereof of the gas in the driver section. In some embodiments, adjusting any of the aforementioned characteristics and thus adjusting the amount of mass in the cylinder may vary the effective spring constant of the gas spring. In some embodiments, the geometry of driver section **160** may be adjusted to obtain desirable operation. In some embodiments, the dead volume within the cylinder may be adjusted to vary the spring constant of the gas spring. It will be understood that any of the aforementioned control and adjustment of the driver section **160** and the gas therein may provide for control of the amount of energy stored by driver section **160** during an expansion stroke of engine **100**. It will also be understood that the aforementioned control of the characteristics of the gas in driver section **160** also provides for variability in the frequency of engine **100**.

[0026] Engine **100** includes a pair of LEMs **200** for directly converting the kinetic energy of the piston assemblies **120** into electrical energy (*e.g.*, during a compression stroke, during an expansion stroke, during an exhaust stroke, and/or during an intake stroke). Each LEM **200** is also capable of directly converting electrical energy into kinetic energy of the piston assembly **120**. In some embodiments, the LEMs **200** may convert electrical energy into kinetic energy of the piston in order to start-up the engine, but need not convert electrical energy into kinetic energy during operation once the engine has started and sufficient fuel chemical energy is being converted into kinetic energy of the piston, at least part of which may be stored in the driver section **160** during expansion strokes. In some embodiments, start-up of the engine may be achieved by any other suitable technique, including, for example, the use of stored compressed gas. As illustrated, the LEM **200** includes a stator **210** and a translator **220**. Specifically, the translator **220** is coupled to the piston rod **145** and moves linearly within the stator **210**, which may remain stationary. In addition, the LEM **200** can be a permanent magnet machine, an induction machine, a switched reluctance machine, or any combination thereof. The stator **210** and translator **220** can each include magnets, coils, iron, or any suitable combination thereof. Because the LEM **200** directly transforms the kinetic energy of the pistons to and from electrical energy (*i.e.*, there are no mechanical linkages), the mechanical and frictional losses are minimal compared to conventional engine-generator configurations. Furthermore, because the LEM **200** is configured to convert portions of the kinetic energy of the piston assemblies into electrical energy during any stroke of a piston cycle, and engine **100** includes an adjustable driver section **160** configured to store energy from an expansion stroke that can be converted to electrical energy during a subsequent stroke, the

LEM 200 may be configured to have a lower electrical capacity than, for example, an LEM or other device that requires conversion of all energy within a single stroke of a piston cycle (e.g., only within the expansion stroke). Accordingly, in some embodiments, the associated linear alternator and power electronics of the LEM 200 may be reduced in size, weight, and/or electrical capacity. This may result in decreased size and cost of components, increased efficiency, increased reliability, and increased utilization as will be understood by one of ordinary skill in the art. Accordingly, the frequency and therefore power output of the engine may be increased in some embodiments.

[0027] It will be understood by one of ordinary skill in the art that each LEM 200 may be operated as both a generator and a motor. For example, when LEMs 200 convert kinetic energy of piston assemblies 120 into electrical energy they operate as generators. When acting as generators, the forces applied to translators 220 are in the opposite direction of the motion of piston assemblies 120. Conversely, when LEMs 200 convert electric energy into kinetic energy of piston assemblies 120 they operate as motors. When acting as motors, the forces applied to translators 220 are in the same direction as the motion of piston assemblies 120. For ease of reference, the center line in FIG. 2 (near injector ports 170) and corresponding figures may be considered the origin, with the positive direction for each piston assembly being away from the center, in the outward direction.

[0028] The embodiment shown in FIG. 2 operates using a two-stroke piston cycle. A diagram illustrating the two-stroke piston cycle 300 of the two-piston integrated gas springs engine 100 of FIG. 2 is illustrated in FIG. 3. As illustrated in FIG. 3, engine 100 may operate using a two-stroke piston cycle including a compression stroke and an expansion stroke, with the pistons located at BDC prior to the compression stroke, and at top-dead-center TDC prior to the expansion stroke. As used herein with reference to the two-piston embodiment, BDC may refer to the point at which the pistons are furthest from each other. As used herein with reference to the two-piston embodiment, TDC may refer to the point at which the pistons are closest to each other. When at or near BDC, and if the driver section is to be used to provide compression work, the pressure of the gas within the driver section 160 is greater than the pressure of the combustion section 130, which forces the pistons 125 away from BDC and inwards towards each other, i.e., in the negative direction. The gas in the driver section 160 can be used to provide some or all of the energy required to perform a compression stroke. As described above, in some embodiments, the piston 125 may be forced away from BDC by any other suitable mechanism, including a mechanical spring, a magnetic spring, or any other suitable mechanism that may be used to provide compression work. While the LEM 200 may also provide some of the energy required to perform a compression stroke, in a preferred embodiment, when sufficient energy is being produced during combustion, enough energy may be stored in the driver section 160 such that LEM 200 need not convert any electrical energy into kinetic energy of the piston 125 because the energy stored in driver section 160 may be transferred to the piston to provide the requisite compression work. The LEM 200 may also extract energy during the compression stroke. For example, if the gas in the driver section 160 (or other suitable means as described above) provides excess energy for performing the compression stroke, the LEM 200 may convert a portion of the kinetic energy of the piston assembly 120 into electrical energy.

[0029] The amount of energy required to perform a compression stroke may depend on the desired compression ratio, the pressure and temperature of the combustion section 130 at the beginning of the compression stroke, the mass of the piston assembly 120, system losses, as well as other properties and operating conditions of the engine. As described above, driver section 160 may provide all of the energy needed for the compression stroke so that no other energy input (from LEM 200 or any other source) is necessary. In some embodiments, some energy may be input during the compression stroke from the LEM 200, but the net energy during the compression stroke is still positive (e.g., more energy converted to electricity than input over the stroke). A compression stroke continues until combustion occurs, which typically occurs at a time when the velocities of the pistons 125 are at or near zero. Combustion causes an increase in the temperature and pressure within the combustion section 130, which forces the pistons 125 outward toward the LEMs 200. During an expansion stroke, a portion of the kinetic energy of the piston assembly 120 may be converted into electrical energy by the LEM 200 and another portion of the kinetic energy does compression work on the gas (or other compression mechanism) in the driver section 160. Alternatively, all of the kinetic energy of the piston assembly may be stored in driver section 160. An expansion stroke continues until the velocities of the pistons 125 are zero. After the expansion stroke and before the subsequent compression stroke, with pistons 125 at or near BDC, the engine may exhaust combustion products and intake air, an air/fuel mixture, or an air/fuel/combustion products mixture. This process may be referred to herein as "breathing" or "breathing at or near BDC." It will be appreciated by those of ordinary skill in the art that breathing may be achieved in any suitable manner, such as uniflow or cross-flow scavenging, as described in previously referenced

[0030] U.S. Patent No. 8,662,029. It will also be appreciated that although described as occurring after the expansion stroke, in some embodiments breathing may occur during the end of the expansion stroke and/or the beginning of the compression stroke. Similarly, in some embodiments, combustion may occur during the end of the compression stroke and/or the beginning of the expansion stroke.

[0031] FIG. 3 illustrates one exemplary port configuration 300 in which the intake ports 180 and exhaust ports 185 are in front of both pistons near BDC. The opening and closing of the exhaust ports 185 and intake ports 180 may be independently controlled. The location of the exhaust ports 185 and intake ports 180 can be chosen such that a range

of compression ratios and/or expansion ratios is possible. The times in a cycle when the exhaust ports **185** and intake ports **180** are activated (opened and closed) can be adjusted during and/or between cycles to vary the compression ratio and/or expansion ratio and/or the amount of combustion product retained in the combustion section **130** at the beginning of a compression stroke. Retaining combustion gases in the combustion section **130** is called residual gas trapping (RGT) and can be utilized to effect combustion timing, peak combustion temperatures, and other combustion and engine performance characteristics. Alternatively, or in addition, exhaust gas recirculation (EGR) can be used to recirculate combustion gasses in order to effect combustion timing, peak combustion temperatures, and other combustion and engine performance characteristics.

[0032] Although operation of a two-stroke cycle is described above, the embodiment of **FIG. 2** may also be operated using a four-stroke piston cycle, which includes an intake stroke, a compression stroke, a power (expansion) stroke, and an exhaust stroke. In some embodiments, any suitable modification may be made to operate using a four-stroke piston cycle. For example, as described in the previously referenced U.S. Patent No. 8,662,029, the location of the ports may be modified to operate the engine using a four-stroke piston cycle.

[0033] In some embodiments, in a four-stroke piston cycle, just as in the two-stroke cycle described above, driver section **160** may provide all of the work necessary for the compression stroke. In some embodiments, the driver section **160** may provide enough work to avoid net electrical energy input during the compression stroke. In some embodiments, the driver section **160** may provide enough work to allow for net electrical energy output during the compression stroke. The compression stroke may continue until combustion occurs, e.g., when the velocities of pistons **125** are at or near zero. Combustion may be followed by a power stroke, during which kinetic energy of the piston assemblies **120** may be stored in driver section **160** and/or converted into electrical energy by LEMs **200** as described above with respect to the two-stroke cycle. At some point at or near the power-stroke BDC, exhaust ports may be opened, and an exhaust stroke may occur until the velocities of pistons **125** are at or near zero, which marks the exhaust stroke TDC for that cycle. As described above, the energy stored in driver section **160** during the expansion stroke may provide the work required to perform the exhaust stroke. At some point prior to reaching exhaust stroke TDC, the combustion section **130** closes the exhaust valves while there is still exhaust in the cylinder. In some embodiments, this trapped exhaust gas may store enough energy to perform the subsequent intake stroke. As with the expansion stroke, the kinetic energy of the piston assemblies **120** may be stored in driver section **160** and/or converted into electrical energy by LEMs **200** during the intake stroke, which occurs until the velocities of the pistons **125** are at zero. In some embodiments, driver section **160** may store enough energy during the intake stroke to perform the subsequent compression stroke. In some embodiments, any suitable amount of energy stored in the driver section in excess of the amount required for a subsequent compression stroke or a subsequent exhaust stroke may be converted into electrical energy by LEMs **200**.

[0034] **FIG. 4** is a cross-sectional drawing illustrating an alternative two-piston, separated gas springs, and separated LEM engine, in accordance with the principles of the disclosure. It will be understood that the illustrated configuration is merely for purposes of example, and that any other suitable configuration of a two-piston, separated gas springs, and separated LEM engine may be used in accordance with the present disclosure. Engine **400** includes a main cylinder **105**, two opposed piston assemblies **120**, and a combustion section **130** located in the center of main cylinder **105**. The illustrated engine **400** has certain physical differences when compared with engine **100**. Specifically, engine **400** includes a pair of outer cylinders **405** that contain additional pistons **125**, and the LEMs **200** are disposed between the main cylinder **105** and the outer cylinders **405**. Each outer cylinder **405** includes a driver section **410** located between the piston **125** and the distal end of the outer cylinder **405** and a driver back section **420** located between the piston **125** and the proximal end of the outer cylinder **405**. Main cylinder **105** includes a pair of combustion back sections **430** disposed between the pistons **125** and the distal ends of the main cylinder **105**. In some embodiments, the driver back section **420** and the combustion back section **430** are maintained at or near atmospheric pressure. In some embodiments, the driver back section **420** and the combustion back section **430** are not maintained at or near atmospheric pressure. In the illustrated configuration, the main cylinder **105** has ports **440** for removal of blow-by gas, injector ports **170**, intake ports **180**, and exhaust ports **185**. Driver gas exchange ports **190** are located in the outer cylinders **405**. Each piston assembly **120** includes two pistons **125** and a piston rod **145**. The piston assemblies are free to move linearly between the main cylinder **105** and the outer cylinders **405** as depicted in **FIG. 4**. It will be understood that the embodiment of **FIG. 4** can operate using a two-stroke piston cycle using, for example, the methodology as set forth above with respect to **FIG. 3**, and a four-stroke piston cycle as described above and in previously referenced U.S. Patent No. 8,662,029.

[0035] The configuration of **FIGS. 2** and **3**, as shown, includes a single unit referred to as the engine **100** and defined by the cylinder **105**, the piston assemblies **120** and the LEMs **200**. Similarly, the configuration of **FIG. 4**, as shown, includes a single unit referred to as the engine **400** and defined by the main cylinder **105**, the piston assemblies **120**, the outer cylinders **405**, and the LEMs **200**. However, multiple units can be placed in parallel, which could collectively be referred to as "the engine." This type of modular arrangement in which engine units operate in parallel may be used to enable the scale of the engine to be increased as needed by the end user. Additionally, not all units need be the same size, operate under the same conditions (e.g., frequency, stoichiometry, or breathing), or operate simultaneously (e.g., one or several units could be deactivated while one or several other units operate). When the units are operated in

parallel, there exists the potential for integration between the engines, such as, but not limited to, gas exchange between the units and/or feedback between the units' respective LEMs 200.

[0036] FIGS. 5-7 illustrate further embodiments featuring integrated internal gas springs in which the gas spring is integrated inside of the piston assembly and the LEM is separated from the combustor cylinder. As illustrated in FIGS. 5-7, the integrated internal gas spring (IIGS) architecture may be similar in length to the integrated gas spring with separated LEM architecture illustrated in FIGS. 2-3. However, the IIGS architecture may eliminate issues with respect to the blow-by gases from the combustion section entering the gas spring, which also occurs in the fully integrated gas spring and LEM architecture.

[0037] FIG. 5 is a cross-sectional drawing illustrating a single-piston, integrated internal gas spring engine, in accordance with some embodiments of the present disclosure. Many components such as the combustion section 130 are similar to the components in previous embodiments (e.g., FIGS. 1 and 2), and are labeled accordingly. The engine 500 comprises a cylinder 105 with piston assembly 520 dimensioned to move within the cylinder 105 in response to reactions within combustion section 130 near the bottom end of the cylinder 105. Piston assembly 520 comprises a piston 530, piston seals 535, and a spring rod 545. The piston assembly 520 is free to move linearly within the cylinder 105. In the illustrated embodiment, the piston rod 545 moves along bearings 560 and is sealed by piston rod seals 555 that are fixed to the cylinder 105. The cylinder 105 includes exhaust/injector ports 570, 580 for intake of air, fuel, exhaust gases, air/fuel mixtures, and/or air/exhaust gases/fuel mixtures, exhaust of combustion products, and/or injectors. Some embodiments do not require all of the ports depicted in FIG. 5. The number and types of ports depends on the engine configuration, injection strategy, and piston cycle (e.g., two- or four-stroke piston cycles).

[0038] In the illustrated embodiment, the engine 500 further comprises an LEM 550 (including stator 210 and magnets 525) for directly converting the kinetic energy of the piston assembly 520 into electrical energy. It will be understood that LEM 550 may be configured to operate substantially the same as LEMs 200 described above with respect to FIGS. 2-4.

[0039] With further reference to FIG. 5, piston 530 comprises a solid front section (combustor side) and a hollow back section (gas spring side). The area inside of the hollow section of the piston assembly 520, between the front face of piston 530 and spring rod 545, comprises a gas that serves as the gas spring 160, which provides at least some of the work required to perform a compression stroke. Piston 530 moves linearly within the combustion section 130 and the stator 210 of the LEM 550. The piston's motion is guided by bearings 560, 565, which may be solid bearings, hydraulic bearings, and/or air bearings. In the illustrated embodiment, the engine 500 includes both external bearings 560 and internal bearings 565. In particular, the external bearings 560 are located between the combustion section 130 and the LEM 550, and the internal bearings 565 are located on the inside of the hollow section of the piston 530. The external bearings 560 are externally fixed and do not move with the piston 530. The internal bearings 565 are fixed to the piston 530 and move with the piston 530 against the spring rod 545.

[0040] With continued reference to FIG. 5, the spring rod 545 serves as one face for the gas spring 160 and is externally fixed. The spring rod 545 has at least one seal 585 located at or near its end, which serves the purpose of keeping gas within the gas spring section 160. Magnets 525 are attached to the back of the piston assembly 520 and move linearly with the piston assembly 520 within the stator 210 of the LEM 550. The piston assembly 520 may have seals to keep gases in the respective sections. The illustrated embodiment includes (i) front seals 535 that are fixed to the piston 530 at or near its front end to keep to gases from being transferred from the combustion section 130, and (ii) back seals 555 that are fixed to the cylinder 105 and keep intake gases and/or blow-by gases from being transferred to the surroundings.

[0041] FIG. 6 is a cross-sectional drawing illustrating an embodiment of a gas spring rod, in accordance with some embodiments of the present disclosure. Specifically, the spring rod 645 includes a central lumen 610 that allows mass to be transferred between the gas spring section 160 to a reservoir section 620 that is in communication with the surroundings. The communication with the surroundings is controlled through a valve 630. The amount of mass in the gas spring 645 may be regulated to control the pressure within the gas spring 645 in accordance with some embodiments of the present disclosure.

[0042] FIG. 7 is a cross-sectional drawing illustrating a two-piston, integrated internal gas springs engine, in accordance with some embodiments of the present disclosure. Most of the elements of the two-piston embodiment are similar to those of the single-piston embodiment of FIG. 5, and like elements are labeled accordingly. In addition, the operating characteristics of the single- and two-piston embodiments are similar as described in previous embodiments, including all the aspects of the linear alternator, breathing, combustion strategies, etc.

[0043] FIG. 8 illustrates the position, force, and power of a free-piston engine, in accordance with some embodiments of the present disclosure. As shown, FIG. 8 illustrates exemplary position 820, force 840, and power 860 diagrams over time for a free-piston engine with a two-stroke piston cycle including a compression stroke and a expansion stroke. With reference to position diagram 820, as labeled in FIG. 8, for reference purposes, the positive direction corresponds to the direction from TDC to BDC. For example, in the free-piston assemblies of FIGS. 2-4, the centerline would correspond to the origin, and the direction away from the centerline would be the positive direction for each free-piston assembly. As can be seen by position diagram 820, the piston assembly starts the compression stroke at BDC and progresses to TDC, at which point the expansion (or power) stroke begins. During the expansion stroke, the piston assembly progresses

back to BDC.

[0044] With reference to force diagram **840**, the force is positive when applied in a direction from TDC to BDC. For example, in the free-piston assemblies of **FIGS. 2-4**, force applied in the direction away from the centerline would be a positive force. As can be seen in force diagram **840**, during the compression stroke, a relatively constant positive force may be applied to the piston assembly, and during the expansion stroke, the force may be negative (in the direction towards the centerline), allowing the LEM to extract energy during both strokes. It will be understood that the force applied need not be constant, and that in some embodiments, a variable force profile may be applied, for example, to produce a relatively constant power output. It will also be understood that in some embodiments, and as depicted herein, forces may not be applied when the piston assembly velocity is relatively low, due to the inefficiency of doing so.

[0045] The power output is the negative product of the force and velocity of the piston assembly. Referring specifically to power diagram **860**, it can be seen that, in the ideal case illustrated, no power need be input to the system in order to perform the compression and expansion strokes of the piston cycle. Rather, as described above, in the ideal case, there is sufficient energy stored in the at least one driver section during the expansion stroke to perform the subsequent compression stroke without additional energy input into the system during the compression stroke.

[0046] While in an ideal scenario, it may be desirable to avoid any power input during the compression and expansion strokes as described with respect to **FIG. 8**, in some embodiments it may be necessary or desirable to provide some power input. Accordingly, **FIG. 9** illustrates the position, force, and power of a free-piston engine, in accordance with some other embodiments of the present disclosure. Similar to **FIG. 8**, **FIG. 9** illustrates exemplary position **920**, force **940**, and power **960** diagrams over time for a free-piston engine with a two-stroke piston cycle including a compression stroke and an expansion stroke. While the position diagram **920** is generally similar to that of position diagram **820** illustrated in **FIG. 8**, it will be understood that the force diagram **940** and the power diagram **960** may differ from those illustrated in **FIG. 8**. With reference to force diagram **940** during the compression stroke, it can be seen at **902** that a force may be applied in the opposite direction as originally applied for a brief period. This is also reflected in power diagram **960**, where a negative power showing power input for the same brief period may be seen at **904**. While this force application and power input may occur for a number of reasons, in some embodiments, this may be done in order to control the speed of the piston assembly or otherwise ensure that the piston assembly reaches the appropriate or desired TDC position before the subsequent expansion stroke. For example, a force may be applied to increase the speed of the piston assembly. Similarly, with further reference to force diagram **940** during the expansion stroke, it can be seen at **906** that a force may be applied in the opposite direction as the rest of the expansion stroke for a brief period, which is also reflected in power diagram **960**, where a negative power showing power input for the same brief period may be seen at **908**. As described above, this applied force and input power may occur for a number of reasons, but in some embodiments, force may be applied in this way and power input in order to control the speed of the piston assembly or otherwise ensure that the piston assembly reaches the appropriate or desired BDC position before the subsequent compression stroke. For example, a force may be applied to increase the speed of the piston assembly as described above.

[0047] Although the provision of input power during compression stroke and/or expansion stroke described with respect to **FIG. 9** is not necessarily ideal operation, it will be understood that the net electrical energy output over each stroke is still greater than zero (*i.e.*, there is no net electrical energy input over each stroke). This is evident from power diagram **960**, in which it can be seen that the integral over each stroke, represented by the area of the curve above zero subtracted by the area of the curve below zero, is substantially greater than zero. Accordingly, the amount of electrical energy output by the system over each stroke is greater than the electrical energy input to control the piston assembly position as described above. As used herein, the "net electrical energy" refers to the electrical energy transfer into or out of the LEM such as that described above with respect to **FIGS. 2-4**. In some embodiments, the LEM may include a stator coupled to power electronics (including, *e.g.*, a DC bus, IGBTs, capacitors, and/or any other suitable components), batteries, and/or a grid-tie inverter. Accordingly, in some embodiments, while some electrical energy may be input into the LEM via power electronics, batteries, and/or a grid-tie inverter coupled to the LEM, the net electrical energy over a given stroke as described above would be output from the LEM to the power electronics, batteries, and/or grid-tie inverter.

[0048] While **FIGS. 8** and **14** illustrate operation of the free-piston engine with no net electrical input over a given stroke, it is understood that the principles of the present disclosure can be applied to any suitable free-piston engine, including a free-piston engine that operates with net electrical input during a stroke, such as during a compression stroke (*e.g.*, during start up).

[0049] As stated, the embodiment described above with respect to **FIGS. 2-4** includes a two-piston, single-combustion section, two-stroke internal combustion engine **100**. Described below, and illustrated in the corresponding figures, is a control system applicable to a free-piston combustion engine generally. Accordingly, as described above, the control system is applicable to other free-piston combustion engine architectures, such as those described in the previously referenced

[0050] U.S. Patent No. 8,662,029. As would be appreciated by those of ordinary skill in the art, various modifications and alternative configurations may be utilized, and other changes may be made, without departing from the scope of

the disclosure. For example, in addition to the two-piston architectures described above with respect to **FIGS. 2-4**, the control system described herein is applicable to, for example, single-piston architectures. Similarly, in addition to the two-stroke engine described above with respect to **FIG. 3**, the control system described herein is also applicable to, for example, four-stroke engines.

[0051] **FIG. 10** is a block diagram of an illustrative piston engine system **1000** having control system **1010** for a piston engine **1040**, in accordance with some embodiments of the present disclosure. Piston engine **1040** may be, for example, any suitable free-piston engine as described above with respect to **FIGS. 2-7**. Control system **1010** may communicate with one or more sensors **1030** coupled to piston engine **1040**. Control system **1010** may be configured to communicate with auxiliary systems **1020**, which may be used to adjust operating aspects or properties of piston engine **1040**. In some embodiments, more than one piston engine may be controlled by control system **1010**. For example, control system **1010** may be configured to communicate with auxiliary systems and sensors corresponding to any number of piston engines. In some embodiments, control system **1010** may be configured to interact with a user via user interface system **1050**.

[0052] Control system **1010** may include processing equipment **1012**, communications interface **1014**, sensor interface **1016**, control interface **1018**, any other suitable components or modules, or any combination thereof. Control system **1010** may be implemented at least partially in one or more integrated circuits, ASIC, FPGA, microcontroller, DSP, computers, terminals, control stations, handheld devices, modules, any other suitable devices, or any combination thereof. In some embodiments, the components of control system **1010** may be communicatively coupled via individual communications links or a communications bus **1011**, as shown in **FIG. 10**. Processing equipment **1012** may include any suitable processing circuitry, such as one or more processors (e.g., a central processing unit), cache, random access memory (RAM), read only memory (ROM), any other suitable hardware components or any combination thereof that may be configured (e.g., using software, or hard-wired) to process information regarding piston engine **1040**, as received by sensor interface **1016** from sensor(s) **1030**. Sensor interface **1016** may include a power supply for supplying power to sensor(s) **1030**, a signal conditioner, a signal pre-processor, any other suitable components, or any combination thereof. For example, sensor interface **1016** may include a filter, an amplifier, a sampler, and an analog to digital converter for conditioning and pre-processing signals from sensor(s) **1030**. Sensor interface **1016** may communicate with sensor(s) **1030** via communicative coupling **1019**, which may be a wired connection (e.g., using IEEE 802.3 ethernet, or universal serial bus interface), wireless coupling (e.g., using IEEE 802.11 "Wi-Fi", or Bluetooth), optical coupling, inductive coupling, any other suitable coupling, or any combination thereof. Control system **1010**, and more particularly processing equipment **1012**, may be configured to provide control of piston engine **1040** over relevant time scales. For example, a change in one or more temperatures may be controllable in response to one or more detected engine operating characteristics, and the control may be provided on a time scale relevant to operation of the piston engine (e.g., fast enough response to prevent overheating and/or component failure, to adequately provide apex control as described below, to allow for shutdown in the case of a diagnostic event, and/or for adequate load tracking).

[0053] Sensor(s) **1030** may include any suitable type of sensor, which may be configured to sense any suitable property or aspect of piston engine **1040**. In some embodiments, sensor(s) may include one or more sensors configured to sense an aspect and/or property of a system of auxiliary systems **1020**. In some embodiments, sensor(s) **1030** may include a temperature sensor (e.g., a thermocouple, resistance temperature detector, thermistor, or optical temperature sensor) configured to sense the temperature of a component of piston engine **1040**, a fluid introduced to or recovered from piston engine **1040**, or both. In some embodiments, sensor(s) **1030** may include one or more pressure sensors (e.g., piezoelectric pressure transducers, strain-based pressure transducers, or gas ionization sensors) configured to sense a pressure within a section of piston engine **1040** (e.g., a combustion section, or gas driver section), of a fluid introduced to or recovered from piston engine **1040**, or both. In some embodiments, sensor(s) **1030** may include one or more force sensors (e.g., piezoelectric force transducers or strain-based force transducers) configured to sense a force within piston engine **1040** such as a tensile, compressive or shear force (e.g., which may indicate a friction force or other relevant force information, pressure information, or acceleration information). In some embodiments, sensor(s) **1030** may include one or more current and/or voltage sensors (e.g., an ammeter and/or voltmeter coupled to a LEM of piston engine **1040**) configured to sense a voltage, current, power output and/or input (e.g., current multiplied by voltage), any other suitable electrical property of piston engine **1040** and/or auxiliary systems **1020**, or any combination thereof. In some embodiments, sensor(s) **1030** may include one or more sensors configured to sense the position of the piston assembly and/or any other components of the engine, the speed of the piston assembly and/or any other components of the engine, the acceleration of the piston assembly and/or any other components of the engine, the rate of flow, oxygen or nitrogen oxide emission levels, other emission levels, any other suitable property of piston engine **1040** and/or auxiliary systems **1020**, or any combination thereof.

[0054] Control interface **1018** may include a wired connection, wireless coupling, optical coupling, inductive coupling, any other suitable coupling, or any combination thereof, for communicating with one or more of auxiliary systems **1020**. In some embodiments, control interface **1018** may include a digital to analog converter to provide an analog control signal to any or all of auxiliary systems **1020**.

[0055] Auxiliary systems **1020** may include a cooling system **1022**, a pressure control system **1024**, a gas driver control system **1026**, and/or any other suitable control system **1028**. Cooling/heating system **1022** may include a pump, fluid reservoir, pressure regulator, bypass, radiator, fluid conduits, electric power circuitry (e.g., for electric heaters), any other suitable components, or any combination thereof to provide cooling, heating, or both to piston engine **1040**. Pressure control system **1024** may include a pump, compressor, fluid reservoir, pressure regulator, fluid conduits, any other suitable components, or any combination thereof to supply (and optionally receive) a pressure controlled fluid to piston engine **1040**. Gas driver control system **1026** may include a compressor, gas reservoir, pressure regulator, fluid conduits, any other suitable components, or any combination thereof to supply (and optionally receive) a driver gas to piston engine **1040**. In some embodiments, gas driver control system may include any suitable components to control any of the gas spring components described above with respect to **FIGS. 2-7**. In some embodiments, other system **1028** may include a valving system such as, for example, a cam-operated system, a solenoid system, or any other electromechanical device or electric machine to supply oxidizer and/or fuel to piston engine **1040**. Valving may also be used to regulate exhaust flow out of the engine, such as in an unported engine having, for example, a single piston assembly arrangement or dual piston assembly arrangement. Exhaust valves may be controlled with voice coils (e.g., linear motors) to allow unidirectional scavenging.

[0056] User interface **1015** may include a wired connection, wireless coupling, optical coupling, inductive coupling, any other suitable coupling, or any combination thereof, for communicating with one or more of user interface systems **1050**. User interface systems **1050** may include display **1052**, input device **1054**, mouse **1056**, audio device **1058**, a remote interface accessed via website, mobile application, or other internet service, any other suitable user interface devices, or any combination thereof. In some embodiments, a remote interface may be remote from the engine but in proximity to the site of the engine. In other embodiments, a remote interface may be remote from both the engine and the site of the engine. Display **1052** may include a display screen such as, for example, a cathode ray tube screen, a liquid crystal display screen, a light emitting diode display screen, a plasma display screen, any other suitable display screen that may provide graphics, text, images or other visuals to a user, or any combination of screens thereof. In some embodiments, display **1052** may include a touchscreen, which may provide tactile interaction with a user by, for example, offering one or more soft commands on a display screen. Display **1052** may display any suitable information regarding piston engine **1040** (e.g., a time series of a property of piston engine **1040**), control system **1010**, auxiliary systems **1020**, user interface system **1050**, any other suitable information, or any combination thereof. Input device **1054** may include a QWERTY keyboard, a numeric keypad, any other suitable collection of hard command buttons, or any combination thereof. Mouse **1056** may include any suitable pointing device that may control a cursor or icon on a graphical user interface displayed on a display screen. Mouse **1056** may include a handheld device (e.g., capable of moving in two or three dimensions), a touchpad, any other suitable pointing device, or any combination thereof. Audio device **1058** may include a microphone, a speaker, headphones, any other suitable device for providing and/or receiving audio signals, or any combination thereof. For example, audio device **1058** may include a microphone, and processing equipment **1012** may process audio commands received via user interface **1015** caused by a user speaking into the microphone.

[0057] In some embodiments, control system **1010** may be configured to receive one or more user inputs to provide control. For example, in some embodiments, control system **1010** may override control settings based on sensor feedback, and base a control signal to auxiliary system **1020** on one or more user inputs to user interface system **1050**. In a further example, a user may input a set-point value for one or more control variables (e.g., temperatures, pressures, flow rates, work inputs/outputs, or other variables) and control system **1010** may execute a control algorithm based on the set-point value.

[0058] In some embodiments, operating characteristics (e.g., one or more desired property values of piston engine **1040** or auxiliary systems **1020**) may be pre-defined by a manufacturer, user, or both. For example, particular operating characteristics may be stored in memory of processing equipment **1012**, and may be accessed to provide one or more control signals. In some embodiments, one or more of the operating characteristics may be changed by a user. Control system **1010** may be used to maintain, adjust, or otherwise manage those operating characteristics. For example, control system **1010** may be used to alter operation based on environmental conditions such as temperature and pressure.

[0059] In some embodiments, control system **1010** computes a position-force trajectory for the one or more piston assemblies in a free-piston engine based at least in part on a desired engine performance (e.g., a desired apex position) and a current position of one or more piston assemblies. Based on the calculated position-force trajectory, control system **1010** effects the displacement of the one or more piston assemblies by applying particular forces to the one or more piston assemblies over a specified time or position intervals. The calculation of each position-force trajectory by control system **1010** is computed without regard to a deviation from a previously determined trajectory (position-force, time-position, or any other suitable trajectory). Control system **1010** may calculate a position-force trajectory when a particular trigger is activated (e.g., in response to a particular event), repeatedly over an engine stroke or cycle, after changes to the operating state of the engine, or any combination thereof. In some embodiments, control system **1010** may also calculate a position-force trajectory without regard to the timing of a desired engine performance. In some instances, control system **1010** may calculate a position-force trajectory based on the operating state of the engine. In some

embodiments, control system **1010** may estimate a current operating parameter of the engine based on a preceding force that was calculated as part of a previous position-force trajectory or based on a preceding force that was applied to the one or more piston assemblies. In certain instances, control system **1010** may calculate a position-force trajectory using a closed-form solution, a numerically iterative solution, or a combination of both. In embodiments with multiple piston assemblies, control system **1010** may, in addition to calculating a position-force trajectory for each respective piston assembly, also calculate synchronization forces for the multiple piston assemblies and cause certain forces to be applied to the multiple piston assemblies based on the synchronization calculations to synchronize the movements of the multiple piston assemblies as desired. In some embodiments, the control system **1010** may employ a hybrid control strategy that switches between a position-force trajectory control technique and another control technique (e.g., a control technique that relies on the calculation of deviation from a previously determined trajectory) depending on the operating state of the engine.

[0060] The following is a discussion of some illustrative embodiments implemented in accordance with the concepts described above. These embodiments generally relate to single- and dual-piston free-piston internal combustion engines with driver sections, such as those illustrated in **FIGS. 2-7** and discussed above. In these embodiments, control system **1010** is used to cause displacement of respective piston assemblies based on a desired engine performance. It will be understood that implementations and concepts discussed with reference to these specific embodiments are generally applicable to other embodiments as well. This discussion is provided for purposes of illustration and is not intended to limit the applicability of the disclosed implementations and concepts to only these embodiments.

[0061] **FIG. 11** shows exemplary position-velocity and position-force trajectories (**1110** and **1120**, respectively) of a piston assembly in a free-piston engine over a compression stroke and an expansion stroke. The force values shown in **1120** correspond to the force values calculated by the control system **1010** and applied to the piston assembly by exerting an electromagnetic force on the piston assembly via a LEM. The profiles illustrated in **FIG. 11** are idealized, simplified, or both for purposes of clarity and ease of illustration. It will be understood that actual profiles may be different. Electromagnetic forces are referred to herein as LEM forces, LEM force values, motor forces, motor force values, forces, or force values. With reference to **FIG. 11** and the proceeding trajectory figures, the positive direction corresponds to the direction from TDC to BDC (e.g., a positive velocity corresponds to the piston assembly is moving from TDC to BDC and a positive force corresponds to a force being applied in the direction toward BDC). Additionally, with reference to **FIG. 11** and the proceeding trajectory figures, the zero position point corresponds to the center line for an opposed-piston free-piston engine (e.g., **Figs. 2-4** and **FIG. 7**) or the combustion section end (i.e., the head of the combustion section) for a single-piston free-piston engine (e.g., **FIG. 5**). As shown in **FIG. 11**, the piston assembly cycles between BDC and TDC (its apices) while the LEM applies a force in the opposite direction of the motion of the piston assemblies, thereby producing net electrical energy output over both strokes. Producing net electrical energy output over both strokes requires that a driver section is sized such that it can store enough energy from an expansion stroke to provide more than enough energy required to perform the subsequent compression stroke. While this paradigm is generally assumed in the following discussion, it will be understood that the control techniques disclosed herein can be applied to free-piston engines in which the driver section is sized such that net electrical energy input is required during the compression stroke and to free-piston engines in which there is no driver section and all of the energy required to perform a compression stroke is provided by a LEM. The single motor force values for each stroke shown in **1120** are an idealized representation of how a free-piston engine could operate. The following is a discussion of specific embodiments in which control system **1010** may be used to control the displacement of a piston assembly in a free-piston engine to achieve a desired engine performance.

[0062] **FIG. 12** shows a flow chart **1200** of illustrative steps for control system **1010** to control the displacement of the one or more piston assemblies along a propagation path in a free-piston engine in accordance with some embodiments of the present disclosure. As illustrated, control system **1010** first determines, at step **1202**, a current position of the one or more piston assemblies in a free-piston engine. Next, control system **1010** calculates, at step **1204**, a position-force trajectory based on a desired engine performance and the current position of the one or more piston assemblies. Lastly, control system **1010** effects the displacement of the one or more piston assemblies by applying the one or more force values calculated in step **1204** to the one or more piston assemblies. The sequential steps **1202**, **1204**, and **1206** are repeated until control system **1010** sends a command to cease. The command to cease may be sent for any suitable reason, including, for example, control system **1010** having determined to switch to a different control technique, to turn off the engine, that a mechanical or electronic safety switch tripped, for any other suitable reason, or for any combination thereof. The sequential steps **1202**, **1204**, and **1206** can repeat based on the activation of a particular trigger or repeat throughout an engine stroke or cycle. For example, sequential steps **1202**, **1204**, and **1206** can repeat in response to a particular event, at a particular threshold crossing, any other suitable trigger, or any combination thereof. In another example, sequential steps **1202**, **1204**, and **1206** can repeat at particular time intervals (e.g., 1 kHz, 10 kHz, etc.) or at particular discrete position intervals (e.g., every 1 millimeter, every 1 micron, etc.). This particular control technique, as illustrated by flow chart **1200**, is referred to herein as a position-force trajectory control technique.

[0063] Control system **1010** determines a current position of the one or more piston assemblies at step **1202** using

suitable sensor(s) **1030**. Suitable sensors **1030** for determining position of the one or more piston assemblies include magnetic encoders, optical encoders, optical grating encoders, laser-based encoders. The current position can be any position between BDC and TDC, inclusive. While, in the case of a linear free-piston engine, a current position of the one or more piston assemblies can be represented as a single dimension along a single axis of propagation per piston assembly, it will be understood that the teachings of the present disclosure can be applied to a free-piston engine in which a piston assembly is able to move in more than one dimension and in which a current position can be represented multidimensionally.

[0064] At step **1206**, control system **1010** sends one or more commands to the free-piston engine and/or its auxiliaries to effect the displacement of the one or more piston assemblies by applying the one or more force values calculated in step **1204** to the one or more piston assemblies. The forces may be applied to the one or more piston assemblies by, for example, exerting an electromagnetic force onto the one or more piston assembly via a LEM. The following discussion is directed toward applying the forces through a LEM, but it will be understood that the application of force to the one or more piston assemblies could be applied through other techniques, such as, for example, by adjusting properties of the driver section (e.g., adjusting the spring stiffness or spring constant of the driver section). In some embodiments, application of motor force can be implemented using techniques as described in commonly assigned U.S. Patent No. 8,624,542, issued on January 7, 2014.

[0065] The force values effected on the one or more piston assemblies in step **1206** are based on the position-force trajectory previously calculated in step **1204**. It will be understood that reference to a force being "effected" on a piston assembly refers to control system **1010** causing the mechanism that imparts a force onto the piston assembly to impart the force as indicated by control system **1010** (including a positive force, a negative force, or a force of zero). At step **1204**, control system calculates a position-force trajectory for the one or more piston assemblies based at least in part on a desired engine performance (e.g., a desired apex position) and the current piston of the one or more piston assemblies determined in step **1202**. The calculation of a position-force trajectory by control system **1010** is computed without regard to a deviation from a previously determined trajectory (position-force, time-position, or any other suitable trajectory). For example, instead of using a trajectory that was calculated at the beginning of a stroke (i.e., a previously calculated trajectory) and then compensating for deviations from this previously calculated trajectory during the course of propagation, an entirely new trajectory is calculated every time sequential steps **1202**, **1204**, and **1206** are repeated. This type of resolution allows for changes in and to the operating state of the free-piston engine to be accounted for with each new position-force trajectory calculation. Control system **1010** may calculate a position-force trajectory based also on a current or past operating state of the engine. For example, control system **1010** may calculate a position-force trajectory based on any suitable properties of the one or more piston assemblies (e.g., velocities, accelerations, dimensions, mechanical properties), any suitable properties of the combustion section gas (e.g., pressure, temperature, density, specific heat, dimensions), any suitable properties of the driver section (e.g., gas properties if a gas spring, mechanical properties if a mechanical spring, dimensions), any suitable properties of the LEM (e.g., motor force constants, motor force limits, motor current limits, motor resistance), any suitable properties of the engine performance (e.g., efficiency, power output, air flow, fuel flow, exhaust flow, fuel composition, exhaust composition, temperatures, pressures), any other suitable calculated, measured, or estimated values or indicators of the operating characteristics, performance, parameters, and environment of the engine, or any combination thereof.

[0066] FIG. 13 shows a position-velocity trajectory and position-force trajectory (**1310** and **1320**, respectively) illustrating one embodiment of the position-force trajectory control technique disclosed herein. In this embodiment, the desired engine conditions (on which the calculation of position-force trajectories are based) are the desired apex positions

of the piston assembly ($x_{TDC}^{Desired}$ and $x_{BDC}^{Desired}$). That is, the control objective is to effect the displacement of the piston assembly such that it has zero velocity at the desired TDC and BDC positions. The actual apex positions of the piston assembly (x_{TDC} and x_{BDC}) are shown, for illustrative purposes, in FIG. 13 as being different than the desired positions of the piston assembly. It will be understood, however, that the difference between the desired and actual apex positions of a piston assembly can be zero, positive, negative, or any combination thereof, and can vary depending on the specific implementation of a position-force trajectory control technique. In this embodiment, a new position-force trajectory is calculated at a fixed time interval as illustrated by the force values shown in the position-force trajectory plot **1320** (i.e., at higher velocities the force values are applied to the piston assembly over a longer distance, and at lower velocities the force values are applied to the piston assembly over a shorter distance). That is, the sequential steps **1202**, **1204**, and **1206** in flow chart **1200** in FIG. 12 are repeated at a fixed time interval (e.g., 1, 5, 100 kHz). All of the force values in the position-force trajectory plot **1320** are shown, for illustrative purposes, in FIG. 13 as being in the opposite direction of the motion of the piston assemblies (i.e., the LEM is always converting kinetic energy of the piston assembly into electrical energy). It will be understood, however, that each force value can be any suitable force value, including a positive force value (i.e., encouraging displacement of a piston assembly during an expansion stroke and discouraging displacement of a piston assembly during a compression stroke), a negative force value (i.e., encouraging

displacement of a piston assembly during an compression stroke and discouraging displacement of a piston assembly during a expansion stroke), or a zero or neutral force value (*i.e.*, allowing the piston assembly displacement to continue using its current momentum without applying any force).

[0067] In this embodiment, referring to FIG. 13, the first position-force trajectory of a compression stroke is calculated at BDC, as illustrated by the force value F_1 in the position-force trajectory plot 1320. Control system 1010 calculates this first force value (in the position-force trajectory step 1204 of flow chart 1200 in FIG. 12) based at least in part on the current position of the piston assembly (determined in step 1202) and the desired apex position of the piston assembly

($x_{TDC}^{Desired}$), and then applies this force to the piston assembly via a LEM of the engine (in step 1206) until a new position of the piston assembly is determined and new position-force trajectory is calculated, which occurs, in this embodiment, based on a prescribed time interval. These sequential steps are repeated until the piston assembly apices at TDC (x_{TDC}), at which point control system 1010 then repeats the sequential steps based on a new desired apex

position at BDC ($x_{BDC}^{Desired}$). The desired apex positions may remain constant across cycles, remain constant within a stroke, change across cycles, change within a stroke, or any combination thereof.

[0068] In some embodiments, control system 1010 may rely the First Law of Thermodynamics (*i.e.*, conservation of energy) to calculate a position-force trajectory at each step 1204. For example, for a single-piston free-piston engine, a position-force trajectory can be calculated by recognizing that, over an idealized stroke of the engine (*i.e.*, no losses from heat transfer, gas blow-by, or friction), the work from/to the LEM, the work from/to the combustion section gas, the kinetic energy of the piston assembly, and the work from/to the driver section must sum to zero. This can be captured, for example, in equation 1, where W_{LEM} is the work from/to the LEM, W_c is the work from/to the combustion section gas, KE_p is the kinetic energy of the piston assembly, and W_d is the work from/to the driver section.

$$W_{LEM} + W_c + KE_p + W_d = 0 \quad (1)$$

The work from/to the LEM can be calculated by integrating the motor force (F_{LEM}) over the change in position (x) of the piston assembly from a current position of the piston assembly (x^c) to a desired target position of the piston assembly (x^d) (*e.g.*, a desired apex position). Since each force value is applied to the piston assembly by the LEM until a new force value is calculated and then subsequently applied, the motor force can be modeled as being constant between a current position of the piston assembly and a desired target position of the piston assembly. This simplifies the calculation of the work from/to the LEM to just the motor force multiplied by the difference between the desired target position and the current position, as shown in equation 4, where x^d can be either a TDC or BDC desired target position.

$$W_{LEM} = \int_{x^c}^{x^d} F_{LEM} dx = F_{LEM} \int_{x^c}^{x^d} dx = F_{LEM}(x^d - x^c) \quad (4)$$

The work from/to the combustion section gas can be calculated by integrating the pressure of combustion section gas over the change in volume of the combustion section from a the combustion section volume at a current position of the

piston assembly (V_c^c) to the combustion section volume at a desired target position of the piston assembly (V_c^d). In this example, for a desired TDC and BDC target positions, the work from/to the combustion section can be calculated according to equation 2, where V_c is the volume of the combustion section, p_c is the combustion section gas pressure

as a function of the volume of the combustion section, and V_c^d can be based on either a TDC or BDC desired target position.

$$W_c = - \int_{V_c^c}^{V_c^d} p_c dV_c \quad (2)$$

The kinetic energy of the piston assembly is equal to the one half the product of the mass of the piston assembly (m_p) and the square of the current velocity of the piston assembly ($\dot{x}^c$), as shown in equation 3.

$$KE_p = \frac{1}{2} m_p \dot{x}^c{}^2 \quad (3)$$

The work from/to the driver section depends on the type of driver section. If the driver section comprises a gas spring, then the work from/to the gas spring can be calculated similarly to the calculation of the work from/to the combustion section gas. If the driver, comprises a mechanical spring, then the work from/to the mechanical spring may be calculated based on Hooke's Law. If the driver section comprises both a gas spring and a mechanical spring, then the work from/to the driver section can be calculated using a combination of the two models. In this example, for illustrative purpose, the driver section comprises a gas spring, and the work from/to the gas spring (driver section) can be calculated using equation 5, where W_s is the work from/to the gas spring, V_s is the volume of the gas spring, p_s is the gas spring gas pressure as a function of the volume of the gas spring, V_s^c is the volume of the gas spring at a current position of the piston assembly, and V_s^d is the volume of the gas spring at the desired target position of the piston assembly which can be based on either a TDC or BDC desired target position.

$$W_d = W_s = - \int_{V_s^c}^{V_s^d} p_s dV_s \quad (5)$$

Having models for calculating the work and energy values in equation 1, a motor force value of a position-force trajectory can be calculated by substituting equations 2-5 into equation 1, as shown in equation 6.

$$F_{LEM} = \left(\int_{V_c^c}^{V_c^d} p_c dV_c + \int_{V_s^c}^{V_s^d} p_s dV_s - \frac{1}{2} m_p \dot{x}^2 \right) / (x^d - x^c) \quad (6)$$

As can be seen in equation 6, this model for calculating a position-force trajectory has a shrinking horizon as the current position of the piston assembly approaches the desired target position of the piston assembly (*i.e.*, the denominator in equation 6 approaches zero). Practical limits can be set by or input to control system 1010 on the minimum horizon (*i.e.*, the minimum difference between the current position of the piston assembly and the desired target position of the piston assembly) to avoid division by zero, which may, in some embodiments, limit the effective authority of control system 1010 near a desired target position. If the cross-sectional areas of interface between the piston assembly and the combustion section gas and the gas spring gas can be modeled as being constant, the combustion section gas work and the gas spring gas work in equation 6 can be calculated based on the change in piston assembly position from a current position to a desired target position since the volume of the respective sections is an affine function of the position of the piston assembly. This substitution is shown in equation 7, where $p_c(x)$ is the combustion section gas pressure as a function of the position of the piston assembly, $p_s(x)$ is the gas spring gas pressure as a function of the position of the piston assembly, A_c is the cross-sectional area of interface between the piston assembly and the combustion section gas, and A_s is the cross-sectional area of interface between the piston assembly and the gas spring gas.

$$F_{LEM} = \left(A_c \int_{x^c}^{x^d} p_c(x) dx - A_s \int_{x^c}^{x^d} p_s(x) dx - \frac{1}{2} m_p \dot{x}^2 \right) / (x^d - x^c) \quad (7)$$

[0069] As shown in equations 6 and 7, each position-force trajectory is calculated based at least in part on the current position of the piston assembly and the desired apex position (*i.e.*, desired target position) of the piston assembly, without regard to a deviation from a previously determined trajectory, without regard to the time in which a new position-force trajectory will be calculated, and without regard to the time in which the piston assembly reaches the desired apex position. Repeatedly calculating a position-force trajectory using this model over a stroke of an engine cycle allows for changes in and to the operating state of the free-piston engine (rapid or slow, intended or unintended) to be accounted for in each new position-force trajectory calculation, thereby providing a control technique for a free-piston engine that is capable of rejecting disturbances in the operating state of the engine. The control technique is capable of rejecting disturbances due to, for example, combustion variability, combustion misfires, changes in fuel energy content, changes in gas temperatures or pressures, loss of LEM phases, changes in or to the driver section spring constant, or any other suitable disturbance, or any combination thereof. Equations 6 and 7 were derived assuming that there were no energy losses within the engine, such as, for example, from heat transfer, gas blow-by, or friction. However, it will be understood that energy losses can be included in the position-force trajectory control technique disclosed herein. For example, heat transfer losses in a gaseous section of an engine can be modeled as a function of gas temperature (which can be modeled as a function of position or volume), heat transfer losses in a LEM can be modeled as a function of electrical current and resistance, gas blow-by losses in a gaseous section of an engine can be modeled as a function of gas

pressure (which can be modeled as a function of position or volume), and friction losses can be modeled as a function of contact forces, material properties, position, and/or velocity.

[0070] Solving equation 6 requires integration of pressure over a change in volume for, in this example, both the combustion section gas and gas spring gas. These integrals can be computed using a numerically iterative solution (e.g., an ordinary differential equation solver) based on thermodynamic property models, heat transfer models, gas blow-by models, friction models, or any other suitable model, or any combination thereof. These integrals can also be computed using a closed-form solution based on thermodynamic models that may incorporate effects from heat transfer, gas blow-by, friction, and other losses in the system. Using a closed-form solution to calculate a position-force trajectory saves computation time compared to a numerically iterative solution. This can allow the control system **1010** to calculate a new position-force trajectory in shorter time intervals (*i.e.*, at a faster frequency), which can better account for disturbances in the operating state of the engine. For example, the compression and expansion of the gases in the combustion section and gas spring can be modeled as being reversible. The reversible work for the compression and expansion of a gas can be calculated using equation 8, where p_1 is the pressure of the gas at state 1, V_1 is the volume of the gas at state 1, V_2 is the volume of the gas at state 2, and k is the ratio of specific heats.

$$W_{rev,1 \rightarrow 2} = \int_{V_1}^{V_2} p dV = \frac{p_1 V_1}{k-1} \left(\left(\frac{V_1}{V_2} \right)^{k-1} - 1 \right) \quad (8)$$

Modeling the compression and expansion of the combustion section gas and gas spring gas as being isentropic, can yield a closed-form solution for calculating a position-force trajectory, as shown in equation 9, where k_c is the ratio of specific heats for the combustion section gas and k_s is the ratio of specific heats for the gas spring gas.

$$F_{LEM} = \left(\frac{p_c^c V_c^c}{k_c-1} \left(\left(\frac{V_c^c}{V_c^d} \right)^{k_c-1} - 1 \right) + \frac{p_s^c V_s^c}{k_s-1} \left(\left(\frac{V_s^c}{V_s^d} \right)^{k_s-1} - 1 \right) - \frac{1}{2} m_p \dot{x}^c \right) / (x^d - x^c) \quad (9)$$

As shown in equation 9, different ratios of specific heats can be used for the combustion section gas and the gas spring gas (e.g., to account for differences in composition). Different ratios of specific heats can also be used for a compression stroke and an expansion stroke (e.g., to account for the changes in composition of the combustion section gas), for specific position intervals within a stroke (e.g., to account for changes during engine breathing while ports are exposed), for each calculation of a position-force trajectory (e.g., to account for changes in gas temperature), for any other suitable purpose or reason, or any combination thereof. A closed-form solution can also be derived by modeling the gas compression and expansion as being a polytropic process, as shown in equation 10, where n_c is the polytropic exponent for the combustion section gas and n_s is the polytropic exponent for the gas spring gas.

$$F_{LEM} = \left(\frac{p_c^c V_c^c}{n_c-1} \left(\left(\frac{V_c^c}{V_c^d} \right)^{n_c-1} - 1 \right) + \frac{p_s^c V_s^c}{n_s-1} \left(\left(\frac{V_s^c}{V_s^d} \right)^{n_s-1} - 1 \right) - \frac{1}{2} m_p \dot{x}^c \right) / (x^d - x^c) \quad (10)$$

Modeling the compression and expansion of gases as being a polytropic process allows for the effects of heat transfer, gas blow-by, friction, other losses, or any combination thereof, to be accounted for while maintaining a closed-form solution for calculating a position-force trajectory. The polytropic exponents for the combustion section gas and the gas spring gas can be based on modeled or empirically determined engine performance data or information. Different polytropic exponents can be used for a compression stroke and an expansion stroke, for specific position intervals within a stroke, for each calculation of a position-force trajectory, for any other suitable purpose or reason, or for any combination thereof.

[0071] In order for control system **1010** to solve equations 9 or 10, the pressure of the gases in the combustion section and gas spring must be measured or estimated, or both, at each current position of the piston assembly. The pressure of the gases at a current position of the piston assembly can be measured using any suitable sensor(s) **1030** such as piezoelectric pressure transducers, strain-based pressure transducers, gas ionization sensors, any other suitable pressure sensor, or any combination thereof. The pressure of the gases at a current position of the piston assembly can also be estimated. In general, relying on estimates of pressure (as opposed to measurements of pressure) can save cost and lead to higher reliability engine operation because it avoids the need for expensive and often unreliable pressure sensors. For example, the compression and expansion of the gases can be modeled as being isentropic or polytropic using equations 11 or 12, respectively, where $\hat{p}^c$ is the estimated gas pressure at a current position of the piston assembly,

p^p is the measured or estimated gas pressure at a previously determined position of the piston assembly, and V^p is the measured or estimated volume of the gas at the same previously determined position of the piston assembly. Equations 11 and 12 are applicable to estimating the current gas pressures in any section of an engine, including a combustion section and driver section.

$$\hat{p}^c = p^p \left(\frac{V^p}{V^c} \right)^k \quad (11)$$

$$\hat{p}^c = p^p \left(\frac{V^p}{V^c} \right)^n \quad (12)$$

In another example, for a single-piston free-piston engine with a gas spring driver section, a force balance model can be applied to the translator to estimate a current gas pressure of the combustion section based on a measured or estimated current gas pressure of the gas spring, a previously applied/calculated motor force value, the mass of the piston assembly, and a current measured or estimated acceleration of the piston assembly. This force balance model is shown in equation 13, where $\hat{p}_c^c$ is the estimated gas pressure in the combustion section at the current position of the piston assembly, $\ddot{x}^c$ is a current acceleration of the piston assembly, F_{LEM}^p is a previously applied/calculated motor force, and p_s^c is the measured or estimated current gas pressure in the gas spring.

$$\hat{p}_c^c = (m_p \ddot{x}^c - F_{LEM}^p + p_s^c A_s) / A_c \quad (13)$$

A force balance model may also be used to estimate a previous gas pressure of the combustion section based on previously measured or estimated other values, which can then be used to calculate a current gas pressure of the combustion section through, for example, equations 11 or 12. This force balance model is equation 14, where $\hat{p}_c^p$ is the estimated gas pressure of a combustion section at a previous position of the piston assembly, $\ddot{x}^p$ is the previously determined acceleration of the piston assembly, and p_s^p is the previously determined gas pressure of the gas spring.

$$\hat{p}_c^p = (m_p \ddot{x}^p - F_{LEM}^p + p_s^p A_s) / A_c \quad (14)$$

It will be understood that force balance models (similar to those used to derive equations 13 and 14) can also be used to estimate the current or previous gas pressures in other section of an engine, such as, for example, a driver section.

[0072] In some embodiments, control system 1010 may estimate a current gas pressure in a section of a free-piston engine by integrating energy balances over a stroke of an engine cycle from a fixed previous position to a current position of a free-piston assembly, where a fixed previous position may be, for example, an apex position, a port opening or closing position, a combustion event, any other suitable position, or any combination thereof. For example, for a single-piston free-piston engine with a gas spring driver section, a current gas pressure can be estimated by using equation 15, which models the energy balance of a free-piston assembly from a fixed previous position to a current position, where $W_{LEM}^{o \rightarrow c}$ is the work from/to the LEM from the fixed previous position to the current position, $W_c^{o \rightarrow c}$ is the work from/to the combustion section gas from the fixed previous position to the current position, and $W_s^{o \rightarrow c}$ is the work from/to the gas spring section gas from the fixed previous position to the current position.

$$W_c^{o \rightarrow c} + W_s^{o \rightarrow c} + W_{LEM}^{o \rightarrow c} + KE_p = 0 \quad (15)$$

The compression and expansion of the gases in the combustion section and gas spring section can be modeled as being reversible and/or polytropic to yield closed-form solutions for the work from/to the respective sections. Modeling the compression and expansion of the gases in the combustion section and gas spring section as being polytropic, for this example, the work from/to the combustion section and from/to the gas spring section from a fixed previous position

and current position can be calculated using equations 16 and 17, respectively, where p_c^o is the measured or estimated combustion section gas pressure at the fixed previous position, V_c^o is the combustion section volume at the fixed previous position, p_s^o is the measured or estimated gas spring section gas pressure at the fixed previous position, and V_s^o is the gas spring section volume at the fixed previous position.

$$W_c^{o \rightarrow c} = \frac{p_c^o V_c^o}{n_c - 1} \left(\left(\frac{V_c^c}{V_c^o} \right)^{n_c - 1} - 1 \right) = - \frac{p_c^c V_c^c}{n_c - 1} \left(\left(\frac{V_c^c}{V_c^o} \right)^{n_c - 1} - 1 \right) \quad (16)$$

$$W_s^{o \rightarrow c} = \frac{p_s^o V_s^o}{n_s - 1} \left(\left(\frac{V_s^c}{V_s^o} \right)^{n_s - 1} - 1 \right) = - \frac{p_s^c V_s^c}{n_s - 1} \left(\left(\frac{V_s^c}{V_s^o} \right)^{n_s - 1} - 1 \right) \quad (17)$$

The work from/to the LEM can be calculated using equation 18, which updates the amount of work from/to the LEM with each calculation step, where x^{ip} is the position of the piston assembly at the immediately preceding calculation step, F_{LEM}^{ip} is the LEM force determined at the immediately preceding calculation step (and then applied to the piston assembly from its position at the immediately preceding calculation step to its current position), and $W_{LEM}^{o \rightarrow ip}$ is the amount of work from/to the LEM from the fixed previous position to the position of the piston assembly at the immediately preceding calculation step.

$$W_{LEM}^{o \rightarrow c} = F_{LEM}^{ip} (x^c - x^{ip}) + W_{LEM}^{o \rightarrow ip} \quad (18)$$

The kinetic energy of the piston assembly at the current position can be calculated using equation 3. Equations 16-18 and 3 can be substituted into equation 15 to estimate a current gas pressure in the combustion section or gas spring section using a closed-form solution. For example, equation 19 shows a closed-form solution for estimating a current pressure of the combustion section gas.

$$\hat{p}_c^c = \frac{\frac{p_s^o V_s^o}{n_s - 1} \left(\left(\frac{V_s^c}{V_s^o} \right)^{n_s - 1} - 1 \right) + (F_{LEM}^{ip} (x^c - x^{ip}) + W_{LEM}^{o \rightarrow ip}) + \frac{1}{2} m_p \dot{x}^c{}^2}{\frac{V_c^c}{n_c - 1} \left(\left(\frac{V_c^c}{V_c^o} \right)^{n_c - 1} - 1 \right)} \quad (19)$$

Equations 6, 7, 9, and 10, or any other suitable First Law-based analysis used to derive similar equations (e.g., to include losses within the engine), may also be used, separately or in combination, to estimate a current or previous gas pressure in a section of a free-piston engine using similar techniques as those used to derive equations 11-14 and 19 (i.e., through the use of current and previously determined pressures, forces, volumes, positions, velocities, and accelerations). Additionally, equations 11-14 and 19 may be used in combination with each other and/or with other suitable estimation models to estimate a current or previous gas pressure in a section a free-piston engine using similar techniques as those used to derive equations 11-14 and 19 (i.e., through the use of current and previously determined pressures, forces, volumes, positions, velocities, and accelerations).

[0073] Using previously calculated values (e.g., force, acceleration, pressure, velocity, position) to estimate a current value (e.g., a current gas pressure) may require the use of a smoothing filter such as an infinite impulse response (IIR) filter or finite impulse response (FIR) filter with suitable coefficients to the values of interest, or a dynamic estimator such as a Luenberger observer or Kalman filter. The pressure of gases at a current or previous position of the piston assembly can be estimated using thermodynamic relation models (e.g., equations 11 or 12), force balance models (e.g., equations 13 or 14), or First Law analysis (e.g., equations 6, 7, 9, 10, or 19), or any combination thereof. For example, the pressure of the gases at a current or previous position of the piston assembly can be estimated using two models, with one of the models being used as a primary estimate and the other model being used to improve the primary estimate using an estimation technique, such as an Kalman filter, Luenberger observer, or model-predictive estimation. In another example, the pressure of the gases at a current or previous position of the piston assembly can be estimated based on a minimization of error between the estimates from any two models. This minimization can weight the two models and include other

costs such as, for example, acceleration estimates given several position measurements, deviation from previous pressure measurements or estimates, deviation from pressure measurements or estimates from prior cycles or strokes, computation time, information on noise or disturbance statistics, any other suitable cost, or any combination thereof. In some embodiments, estimations of the gas pressures at a current or previous position of the piston assembly can be improved upon by measurements of pressure from any otherwise unsuitable sensor, which may provide inadequate, noisy, or slow measurements.

[0074] When the absolute velocity of a piston assembly is low and its absolute acceleration is high, the efficiency of a LEM may be low and the ability of a LEM to effect the displacement of the piston assembly may be limited. In order to avoid a LEM applying forces to the piston assembly when its efficiency is low and control authority is limited, in some embodiments, control system **1010** may reduce or eliminate the magnitude of force applied to a piston assembly based on specified operating parameters of a free-piston engine. Specified operating parameters may include position, velocity, or acceleration of a piston assembly, temperature of the stator or translator of the LEM, gas pressure in a section of the engine, any other suitable parameter, or any combination thereof. For example, control system **1010** may cut-off the ability of the LEM to apply forces to a piston assembly based on the position of the piston assembly as shown in **FIG. 14**, which shows position-velocity trajectory **1410** and position-force trajectory **1420**. In this example, control system **1010** calculates a position-force trajectory in accordance with the present disclosure, but when the position of the piston assembly is outside of the cut-off positions, control system **1010** determines to not apply the force values calculated in the position-force trajectory calculation step **1204** to the piston assembly. In some embodiments, control system **1010** may determine to apply a different amount of force to a piston assembly than the force values calculated in the position-force trajectory calculation step **1204** based on specified operating conditions of a free-piston engine. For example, control system **1010** may apply a force-reduction function to the force values calculated in the position-force trajectory calculation step **1204** based on a position of the piston assembly (e.g., outside of the cut-off positions) in order to avoid abrupt changes in the operating state of the engine. In some embodiments, control system **1010** may determine to both not calculate a position-force trajectory and not apply a force to a piston assembly based on specified operating conditions of a free-piston engine.

[0075] While the various models for calculating a position-force trajectory and estimating gas pressure (*i.e.*, equations 1-19) have been directed towards a single-piston free-piston engine, it will be understood that the same models can be extended and applied to free-piston engines with multiple piston assemblies, such as, but not limited to, opposed-piston free-piston engines with respective driver sections, respective LEMs, and a shared combustion section (e.g., as illustrated in **FIGS. 2-4** and **FIG. 7**). For example, the same First Law analysis used to derive equation 1 can be applied to each piston assembly of an opposed-piston free-piston engine with respective driver sections, respective LEMs, and a shared combustion section. This yields energy balance equations 20a and 20b, where $W_{LEM,1}$ and $W_{LEM,2}$ is the work from/to the two LEMs, W_c is the work from/to the combustion section gas, $KE_{p,1}$ and $KE_{p,2}$ is the kinetic energy of the two piston assemblies, and $W_{d,1}$ and $W_{d,2}$ is the work from/to the two driver sections. Equations 20a and 20b can be used by control system **1010** to calculate a position-force trajectory for each respective piston assembly using the same or similar models as those used to derive equations 6, 7, 9, and 10.

$$W_{LEM,1} + W_c + KE_{p,1} + W_{d,1} = 0 \quad (20a)$$

$$W_{LEM,2} + W_c + KE_{p,2} + W_{d,2} = 0 \quad (20b)$$

In similar manner in which equation 1 was extended to a free-piston engine with multiple piston assemblies (e.g., equations 20 a and 20b), it will be readily apparent that the same force balance models used to derive equations 13 and 14, and the same First Law analysis used to derive equation 15 can be extended to free-piston engines with multiple piston assemblies for estimating gas pressure in a section of the engine.

[0076] A consideration that arises in the control of free-piston engines with opposed piston assemblies, is the synchronization of the piston assemblies. In some opposed-piston free-piston engines, it can be desired that the apices (at both TDC and BDC) of the two piston assemblies be at least substantially synchronized in order to maintain system stability. In other opposed-piston free-piston engines, some level of nonsynchronization can be desired for engine performance purposes, such as, for example, engine breathing, gas exchange, or any other suitable engine operating condition. In some embodiments of an opposed-piston free-piston engine, control system **1010** may regulate a difference between the positions of the respective piston assembly. As used herein, the term "regulate" refers to controlling to a reference, such as, for example, zero. Control system **1010** may employ any suitable control technique for regulation, such as proportional-integral-derivative (PID) control, optimal control, robust control, linear-quadratic regulator control, model-predictive control, adaptive control, any other suitable technique, or any combination thereof. In some embodiments, control system **1010** may use PID control to regulate and synchronize the positions of piston assemblies. For

example, control system **1010** may use PID control to determine control inputs (e.g., forces values to be applied to the piston assemblies by respective LEMs) to regulate a difference in position between the piston assemblies relative to their center of motion. Opposite forces may be added to each piston assembly to synchronize each substantially equally and minimize the disturbance on apex positions. This may be done continuously to substantially balance net forces and, therefore, maintain sufficient synchronization. In some embodiments, control system **1010** may use a specified Poincare map at the zero-velocity positions of the piston assemblies (*i.e.*, at the respective apices). For example, control system **1010** can split a stroke into two halves and apply additional motor force in one direction during the first half of the stroke and then apply additional motor force in the opposite direction during the second half of the stroke. Control system **1010** can determine prior to an expansion stroke that a first piston assembly is going to be late to BDC (e.g., using any suitable expected phasing of the two piston assemblies, based on timing of a previous stroke, based on any other suitable technique, or any combination thereof), and apply additional motor force to this first piston assembly during the first half of the expansion stroke in the direction of motion (*i.e.*, encouraging displacement) and then apply additional motor force to this first piston assembly during the second half of the expansion stroke in the opposite direction of motion during (*i.e.*, discouraging displacement). Conversely for the second piston assembly, control system **1010** can apply additional motor force to this second piston assembly in the opposite direction of motion during the first half of the expansion stroke (*i.e.*, discouraging displacement) and then apply additional motor force to this second piston assembly in the direction of motion during the second half of the expansion stroke (*i.e.*, encouraging displacement). In some embodiments, control system **1010** may determine synchronization forces based on a desired timing of a desired engine performance. For example, control system **1010** may determine synchronization forces to be applied to one or both piston assemblies such that the apices of the respective piston assemblies occur within a sufficiently small time difference.

[0077] In some embodiments, control system **1010** may use a repetitive adaptive control technique. Repetitive adaptive control can be advantageous when the operating state, condition, performance, and/or parameters of a free-piston engine are relatively steady and the cycle-to-cycle variation is limited. In some embodiments, control system **1010** may use a repetitive adaptive control technique that determines a position-force trajectory at each step **1204** for a current engine cycle based on the position-force trajectory from a previous engine cycle. In some embodiments, control system **1010** may use a repetitive adaptive control technique that drives force values toward a known and desirable propagation path (e.g., to enforce a smoother or more continuous force profile). For example, control system **1010** may first approximate, based on information from a previous cycle (*e.g.*, force values, engine performance, *etc.*), a position-force trajectory as a series of discrete force values over an engine cycle. Control system **1010** may then cause the discrete force values to be applied to the piston assembly over each stroke of the engine cycle, and at the end of each cycle, control system **1010** may adjust the discrete force values based on engine operating characteristics, measurements, performance, and/or conditions. Control system **1010** may alter all or some of the discrete force values prior to a subsequent cycle if, for example, a piston assembly does not sufficiently achieve a desired target position for a given stroke. For example, if a piston apexes short of the desired target TDC on a previous cycle, control system **1010** may, on the subsequent cycle, reduce the magnitude of the some or all of the discrete force values. In embodiments with opposed-piston free-piston engines with a shared (or common) combustion section, control system **1010** may alter the discrete force values in one or more portions of a stroke for one or both of the piston assemblies, dependently or independently, during the subsequent cycle. For example, if on a current engine cycle an exhaust piston assembly reached its apex at TDC after the intake piston assembly reached its apex at TDC, control system **1010** can, on the subsequent cycle, adjust the discrete force values applied to the exhaust piston assembly and not adjust the discrete force values applied to the intake piston assembly in order to achieve sufficient synchronization at TDC. This can be achieved by, for example, control system **1010** reducing the magnitude of the discrete force values applied to the exhaust piston assembly over the first half of the stroke, thereby allowing the midpoint velocity of the piston to increase, and then increasing the magnitude of the discrete force values applied to the exhaust piston assembly over the second half of the stroke, thereby achieving sufficient synchronization at TDC. In some embodiments, control system **1010** may use a repetitive adaptive control technique that is based on calculating a deviation from a previously determined trajectory (position-force, position-velocity, time-position, or any suitable trajectory).

[0078] In some embodiments, control system **1010** may use a hybrid control technique that is capable of switching between multiple control techniques. A hybrid control technique can be advantageous for controlling a free-piston engine across a wide range of operating conditions, controlling a free-piston engine when sufficiently fast and large disturbances in engine operation may occur (e.g., combustion misfire, mechanical failures, gas quality changes, or any other suitable changes), and controlling a free-piston engine under steady or stable operating conditions (e.g., at steady and continuous power output). For example, control system **1010** can employ a position-force trajectory control technique during engine start up and then switch to a repetitive adaptive control technique when the engine operation becomes sufficiently stable or steady. Control system **1010** can then switch back to a position-force trajectory control technique if a sufficiently large disturbance is detected or if a new engine operating condition is desired (e.g., more or less power output, engine shut down). **FIG. 15** illustrates one possible implementation of a hybrid control technique. Control system **1010** uses a position-force trajectory control technique at **1502**. If control system **1010** determines that conditions become sufficiently steady

based on any suitable criteria (e.g., absence of misfires, stable power output, stable efficiencies, thermal equilibrium, or other suitable conditions), control system **1010** switches to a repetitive adaptive control technique at **1504**. If control system **1010** determines that operating conditions have or will become sufficiently unsteady based on any suitable criteria, control system **1010** switches back to a position-force trajectory control technique at **1502**.

[0079] For ease of reference, the figures may show multiple components labeled with identical reference numerals. It will be understood that this does not necessarily indicate that the multiple components identically labeled are identical to one another. For example, the pistons labeled **125** may have different sizes, geometries, materials, any other suitable characteristic, or any combination thereof.

Claims

1. A method performed by a programmed computer system for controlling displacement of a free-piston assembly in a free-piston engine based on a target apex position, the method comprising:

- a) determining a current position of the free-piston assembly using an encoder, wherein the current position is any position between BDC and TDC, inclusive;
- b) determining a position-force trajectory for displacing the free-piston assembly based on a value indicative of an amount of work to be performed on the free-piston assembly from the current position to the target apex position without regard to a previously determined position-force trajectory;
- c) effecting displacement of the free-piston assembly based on the position-force trajectory; and
- d) repeating a) through c) during a stroke until the programmed computer system determines to cease or the free piston assembly reaches an actual apex position.

2. The method of claim 1, wherein element b) further comprises one of:

- calculating a velocity of the free-piston assembly, wherein determining the position force trajectory further comprises determining the position-force trajectory based on the velocity of the free-piston assembly; and
- determining one or more pressure estimates in one or more respective sections of the free-piston engine, wherein determining the position-force trajectory further comprises determining the position-force trajectory based on the one or more pressure estimates.

3. The method of claim 1, wherein element b) further comprises performing one or more pressure measurements in a section of the free-piston engine and wherein determining the position-force trajectory further comprises determining the position-force trajectory based on the one or more pressure measurements.

4. The method of claim 1, wherein:

- the position-force trajectory is determined using a closed-form solution; or
- the position-force trajectory is determined without regard to a timing of the desired engine performance.

5. The method of claim 1, wherein:

- determining a position-force trajectory for displacing the free-piston assembly based on the desired engine performance comprises determining the position-force trajectory such that the free-piston assembly reaches a desired target position with a specified velocity.

6. The method of claim 1, wherein the free-piston assembly is a first free-piston assembly and the position-force trajectory is a first position-force trajectory, and wherein the free-piston engine comprises a second free-piston assembly opposed to the first free-piston assembly, and wherein element a) further comprises determining a current position of the second free-piston assembly, and wherein element b) further comprises determining a second position-force trajectory for displacing the second free-piston assembly based on the current position of the second free-piston assembly and on the desired engine performance and without regard to a previously determined second position-force trajectory, and wherein element c) further comprises effecting displacement of the second free-piston assembly based on the second position-force trajectory.

7. The method of claim 6, wherein element b) further comprises calculating synchronization forces for the first free-piston assembly and for the second free-piston assembly, respectively, and wherein element c) further comprises effecting displacement of the first free-piston assembly and of the second free-piston assembly based on the re-

spective synchronization forces.

8. The method of claim 1, wherein the programmed computer system determines to cease at step d) based on detecting that conditions are sufficiently steady, the method further comprising e) switching to a repetitive adaptive control technique for controlling displacement of the free-piston assembly.

9. The method of claim 1, wherein determining the position-force trajectory comprises: repeatedly determining one or more force values for displacing the free-piston assembly based on the desired engine performance and without regard to a deviation from a previously determined trajectory and without regard to a timing of the desired engine performance.

10. The method of claim 9, wherein repeatedly determining the one or more force values comprises, for each repetition:

measuring one or more measurement values indicative of a state of the free-piston engine at a respective repetition; and
determining the one or more force values based on the respective one or more measurement values and on the desired engine performance.

11. The method of claim 10, wherein the one or more measurement values comprises at least one of free-piston assembly position, free-piston assembly velocity, free-piston assembly acceleration, combustion section gas pressure, gas spring gas pressure, driver section force, piston assembly compressive force, piston assembly axial deflection, air flow, fuel flow, exhaust oxygen concentration, and any combination thereof.

12. The method of claim 9, wherein repeatedly determining the one or more force values comprises one of:

for each repetition: estimating one or more estimated values indicative of a state of the free-piston engine at a respective repetition and determining the one or more force values based on the respective one or more estimated values and on the desired engine performance; and
using a closed-form solution.

13. The method of claim 9, wherein the free-piston assembly is a first free-piston assembly and wherein the free-piston engine comprises a second free-piston assembly opposed to the first free-piston assembly, and wherein the method further comprises synchronizing movement of the first free-piston assembly with movement of the second free piston-assembly.

14. The method of claim 9, further comprising:

detecting that conditions are sufficiently steady;
determining to cease determining the one or more force values based on detecting that the conditions are sufficiently steady; and
switching to a repetitive adaptive control technique for controlling displacement of the free-piston assembly.

Patentansprüche

1. Ein Verfahren, das von einem programmierten Computersystem durchgeführt wird, um die Verschiebung einer Freikolbenanordnung in einem Freikolbenmotor basierend auf einer Soll-Scheitelposition zu steuern, wobei das Verfahren Folgendes umfasst:

- a) Bestimmen einer aktuellen Position der Freikolbenanordnung unter Verwendung eines Codierers, wobei die aktuelle Position jede Position zwischen BDC und TDC einschließlich ist;
- b) Bestimmen einer Positions-Kraft-Trajektorie zum Verschieben der Freikolbenanordnung basierend auf einem Wert, der einen Arbeitsbetrag angibt, der an der Freikolbenanordnung von der aktuellen Position zu der Soll-Scheitelposition ohne Berücksichtigung einer zuvor ermittelten Positions-Kraft-Trajektorie auszuführen ist;
- c) Bewirken einer Verschiebung der Freikolbenanordnung basierend auf der Positions-Kraft-Trajektorie; und
- d) Wiederholen von a) bis c) während eines Takts, bis das programmierte Computersystem bestimmt, es einzustellen oder die Freikolbenanordnung eine Ist-Scheitelposition erreicht.

2. Verfahren nach Anspruch 1, wobei Element b) ferner eines von Folgendem umfasst:

Berechnen einer Geschwindigkeit der Freikolbenanordnung, wobei das Bestimmen der Positions-Kraft-Trajektorie ferner das Bestimmen der Positions-Kraft-Trajektorie basierend auf der Geschwindigkeit der Freikolbenanordnung umfasst; und

Bestimmen einer oder mehrerer Druckschätzungen in einem oder mehreren entsprechenden Abschnitten des Freikolbenmotors, wobei das Bestimmen der Positions-Kraft-Trajektorie ferner das Bestimmen der Positions-Kraft-Trajektorie basierend auf der einen oder den mehreren Druckschätzungen umfasst.

3. Verfahren nach Anspruch 1, wobei Element b) ferner das Durchführen einer oder mehrerer Druckmessungen in einem Abschnitt des Freikolbenmotors umfasst und wobei das Bestimmen der Positions-Kraft-Trajektorie ferner das Bestimmen der Positions-Kraft-Trajektorie basierend auf dem einen oder den mehreren Druckmessungen umfasst.

4. Verfahren nach Anspruch 1, wobei:
die Positions-Kraft-Trajektorie wird unter Verwendung einer Lösung in geschlossener Form bestimmt; oder die Positions-Kraft-Trajektorie ohne Berücksichtigung eines Zeitpunkts der gewünschten Motorleistung bestimmt wird.

5. Verfahren nach Anspruch 1, wobei:
das Bestimmen einer Positions-Kraft-Trajektorie zum Verschieben der Freikolbenanordnung basierend auf der gewünschten Motorleistung umfasst das Bestimmen der Positions-Kraft-Trajektorie derart, dass die Freikolbenanordnung eine gewünschte Soll-Position mit einer spezifizierten Geschwindigkeit erreicht.

6. Verfahren nach Anspruch 1, wobei die Freikolbenanordnung eine erste Freikolbenanordnung ist und die Positions-Kraft-Trajektorie eine erste Positions-Kraft-Trajektorie ist, und wobei der Freikolbenmotor eine zweite Freikolbenanordnung gegenüber der ersten Freikolbenanordnung aufweist und wobei Element a) ferner das Bestimmen einer aktuellen Position der zweiten Freikolbenanordnung umfasst und wobei Element b) ferner das Bestimmen einer zweiten Positions-Kraft-Trajektorie zum Verschieben der zweiten Freikolbenanordnung basierend auf der aktuellen Position der zweiten Freikolbenanordnung und der gewünschten Motorleistung und ohne Berücksichtigung einer zuvor bestimmten zweiten Positions-Kraft-Trajektorie umfasst, und wobei Element c) ferner das Bewirken einer Verschiebung der zweiten Freikolbenanordnung basierend auf der zweiten Positions-Kraft-Trajektorie umfasst.

7. Verfahren nach Anspruch 6, wobei Element b) ferner das Berechnen von Synchronisationskräften für die erste Freikolbenanordnung bzw. für die zweite Freikolbenanordnung umfasst und wobei Element c) ferner das Bewirken einer Verschiebung der ersten Freikolbenanordnung und der zweiten Freikolbenanordnung anhand der jeweiligen Synchronisationskräfte umfasst.

8. Verfahren nach Anspruch 1, wobei das programmierte Computersystem bestimmt, bei Schritt d) auf der Grundlage des Erfassens, dass die Bedingungen ausreichend stabil sind, einzustellen, wobei das Verfahren ferner umfasst:
e) Umschalten auf eine sich wiederholende adaptive Steuertechnik zum Steuern der Verschiebung der Freikolbenanordnung.

9. Verfahren nach Anspruch 1, wobei das Bestimmen der Positions-Kraft-Trajektorie umfasst:
wiederholtes Bestimmen eines oder mehrerer Kraftwerte zum Verschieben der Freikolbenanordnung basierend auf der gewünschten Motorleistung und ohne Berücksichtigung einer Abweichung von einer zuvor bestimmten Trajektorie und ohne Berücksichtigung eines Zeitpunkts der gewünschten Motorleistung.

10. Verfahren nach Anspruch 9, wobei das wiederholte Bestimmen des einen oder der mehreren Kraftwerte für jede Wiederholung Folgendes umfasst:

Messen eines oder mehrerer Messwerte, die einen Zustand des Freikolbenmotors bei einer jeweiligen Wiederholung anzeigen; und

Bestimmen des einen oder der mehreren Kraftwerte auf der Grundlage des jeweiligen einen oder der mehreren Messwerte und der gewünschten Motorleistung.

11. Verfahren nach Anspruch 10, wobei der eine oder die mehreren Messwerte mindestens eines von Freikolbenanordnungsposition, Freikolbenanordnungsgeschwindigkeit, Freikolbenanordnungsbeschleunigung, Verbrennungsabschnitt-Gasdruck, Gasfeder-Gasdruck, Antriebsabschnittskraft, Druckkraft der Kolbenanordnung, axiale Ablen-

kung der Kolbenanordnung, Luftstrom, Kraftstoffstrom, Abgassauerstoffkonzentration und jede Kombination davon umfassen.

- 5 12. Verfahren nach Anspruch 9, wobei das wiederholte Bestimmen des einen oder der mehreren Kraftwerte einen der Folgenden umfasst:

für jede Wiederholung: Schätzen eines oder mehrerer geschätzter Werte, die einen Zustand des Freikolbenmotors bei einer jeweiligen Wiederholung anzeigen, und Bestimmen des einen oder der mehreren Kraftwerte auf der Grundlage des jeweiligen einen oder der mehreren geschätzten Werte und der gewünschten Motorleistung; und
10 unter Verwendung einer Lösung in geschlossener Form.

13. Verfahren nach Anspruch 9, wobei die Freikolbenanordnung eine erste Freikolbenanordnung ist und wobei der Freikolbenmotor eine zweite Freikolbenanordnung umfasst, die der ersten Freikolbenanordnung gegenüberliegt, und wobei das Verfahren ferner das Synchronisieren der Bewegung der ersten Freikolbenanordnung mit Bewegung der zweiten Freikolbenanordnung umfasst.
15

14. Verfahren nach Anspruch 9, ferner umfassend:

20 Erkennen, dass die Bedingungen ausreichend stabil sind;
Bestimmen, das Bestimmen des einen oder der mehreren Kraftwerte einzustellen, basierend auf dem Erfassen, dass die Bedingungen ausreichend stabil sind; und
Umschalten auf eine sich wiederholende adaptive Steuertechnik zum Steuern der Verschiebung der Freikolbenanordnung.
25

Revendications

- 30 1. Procédé réalisé par un système informatique programmé pour commander le déplacement d'un ensemble piston libre dans un moteur à piston libre sur la base d'une position de sommet cible, le procédé comprenant:

a) la détermination d'une position actuelle de l'ensemble piston libre à l'aide d'un codeur, la position actuelle étant une quelconque position entre le point mort bas (PMB) et le point mort haut (PMH), inclus;
b) la détermination d'une trajectoire position-force pour déplacer l'ensemble piston libre sur la base d'une valeur indicative d'une quantité de travail à réaliser sur l'ensemble piston libre de la position actuelle à la position de
35 sommet cible sans tenir compte d'une trajectoire position-force précédemment déterminée;
c) la réalisation d'un déplacement de l'ensemble piston libre sur la base de la trajectoire position-force; et
d) la répétition de a) à c) pendant une course jusqu'à ce que le système informatique programmé détermine d'arrêter ou que l'ensemble piston libre atteigne une position de sommet actuelle.
40

2. Procédé selon la revendication 1, dans lequel l'élément b) comprend en outre l'un parmi:

le calcul d'une vitesse de l'ensemble piston libre, dans lequel la détermination de la trajectoire position-force comprend en outre la détermination de la trajectoire position-force sur la base de la vitesse de l'ensemble piston libre; et
45 la détermination d'une ou plusieurs estimations de pression dans une ou plusieurs sections respectives du moteur à piston libre, dans lequel la détermination de la trajectoire position-force comprend en outre la détermination de la trajectoire position-force sur la base des une ou plusieurs estimations de pression.

3. Procédé selon la revendication 1, dans lequel l'élément b) comprend en outre la réalisation d'une ou plusieurs mesures de pression dans une section du moteur à piston libre et dans lequel la détermination de la trajectoire position-force comprend en outre la détermination de la trajectoire position-force sur la base des une ou plusieurs mesures de pression.
50

4. Procédé selon la revendication 1, dans lequel:
la trajectoire position-force est déterminée à l'aide d'une solution à forme fermée ; ou la trajectoire position-force est déterminée sans tenir compte d'un cadencement des performances moteur souhaitées.
55

5. Procédé selon la revendication 1, dans lequel:
la détermination d'une trajectoire position-force pour déplacer l'ensemble piston libre sur la base des performances moteur souhaitées comprend la détermination de la trajectoire position-force de sorte que l'ensemble piston libre atteigne une position cible souhaitée avec une vitesse spécifiée.
6. Procédé selon la revendication 1, dans lequel l'ensemble piston libre est un premier ensemble piston libre et la trajectoire position-force est une première trajectoire position-force, et dans lequel le moteur à piston libre comprend un second ensemble piston libre opposé au premier ensemble piston libre, et dans lequel l'élément a) comprend en outre la détermination d'une position actuelle du second ensemble piston libre, et dans lequel l'élément b) comprend en outre la détermination d'une seconde trajectoire position-force pour déplacer le second ensemble piston libre sur la base de la position actuelle du second ensemble piston libre et des performances moteur souhaitées et sans tenir compte d'une seconde trajectoire position-force précédemment déterminée, et dans lequel l'élément c) comprend en outre la réalisation d'un déplacement du second ensemble piston libre sur la base de la seconde trajectoire position-force.
7. Procédé selon la revendication 6, dans lequel l'élément b) comprend en outre le calcul de forces de synchronisation pour le premier ensemble piston libre et pour le second ensemble piston libre, respectivement, et dans lequel l'élément c) comprend en outre la réalisation d'un déplacement du premier ensemble piston libre et du second ensemble piston libre sur la base des forces de synchronisation respectives.
8. Procédé selon la revendication 1, dans lequel le système informatique programmé détermine d'arrêter l'étape d) sur la base de la détection que des conditions sont suffisamment stables, le procédé comprenant en outre e) le passage à une technique de commande adaptative répétitive pour commander le déplacement de l'ensemble piston libre.
9. Procédé selon la revendication 1, dans lequel la détermination de la trajectoire position-force comprend:
la détermination répétée d'une ou plusieurs valeurs de force pour déplacer l'ensemble piston libre sur la base des performances moteur souhaitées et sans tenir compte d'un écart par rapport à une trajectoire précédemment déterminée et sans tenir compte d'un cadencement des performances moteur souhaitées.
10. Procédé selon la revendication 9, dans lequel la détermination répétée des une ou plusieurs valeurs de force comprend, pour chaque répétition:
la mesure d'une ou plusieurs valeurs de mesure indicatives d'un état du moteur à piston libre à une répétition respective; et
la détermination des une ou plusieurs valeurs de force sur la base des une ou plusieurs valeurs de mesure respectives et des performances moteur souhaitées.
11. Procédé selon la revendication 10, dans lequel les une ou plusieurs valeurs de mesure comprennent au moins l'un parmi une position d'ensemble piston libre, une vitesse d'ensemble piston libre, une accélération d'ensemble piston libre, une pression gazeuse de section de combustion, une pression gazeuse de ressort à gaz, une force de section d'entraînement, une force de compression d'ensemble piston, une déviation axiale d'ensemble piston, un débit d'air, un débit de carburant, une concentration en oxygène d'échappement, et toute combinaison de ceux-ci.
12. Procédé selon la revendication 9, dans lequel la détermination répétée des une ou plusieurs valeurs de force comprend l'une parmi:
pour chaque répétition: l'estimation d'une ou plusieurs valeurs estimées indicatives d'un état du moteur à piston libre à une répétition respective et la détermination des une ou plusieurs valeurs de force sur la base des une ou plusieurs valeurs estimées respectives et des performances moteur souhaitées; et
l'utilisation d'une solution à forme fermée.
13. Procédé selon la revendication 9, dans lequel l'ensemble piston libre est un premier ensemble piston libre et dans lequel le moteur à piston libre comprend un second ensemble piston libre opposé au premier ensemble piston libre, et dans lequel le procédé comprend en outre la synchronisation d'un mouvement du premier ensemble piston libre avec un mouvement du second ensemble piston libre.
14. Procédé selon la revendication 9, comprenant en outre:

EP 3 436 680 B1

la détection que des conditions sont suffisamment stables;
la détermination de l'arrêt de la détermination des une ou plusieurs valeurs de force sur la base de la détection
que les conditions sont suffisamment stables; et
le passage à une technique de commande adaptative répétitive pour commander un déplacement de l'ensemble
piston libre.

5

10

15

20

25

30

35

40

45

50

55

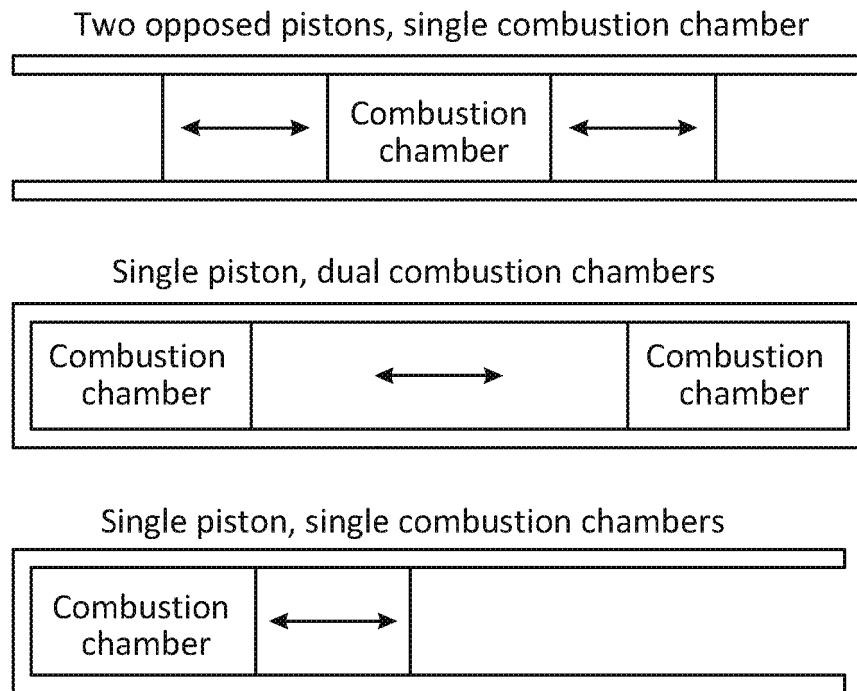


FIG. 1

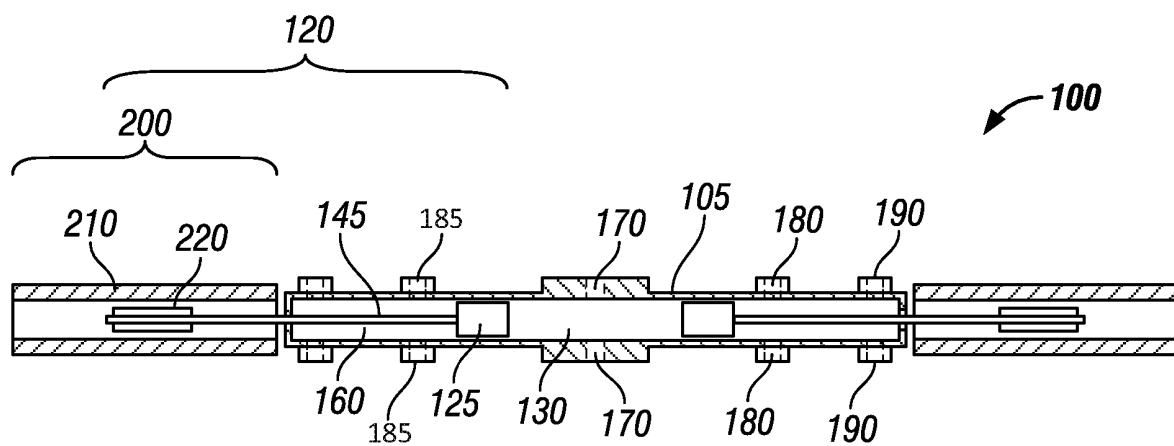


FIG. 2

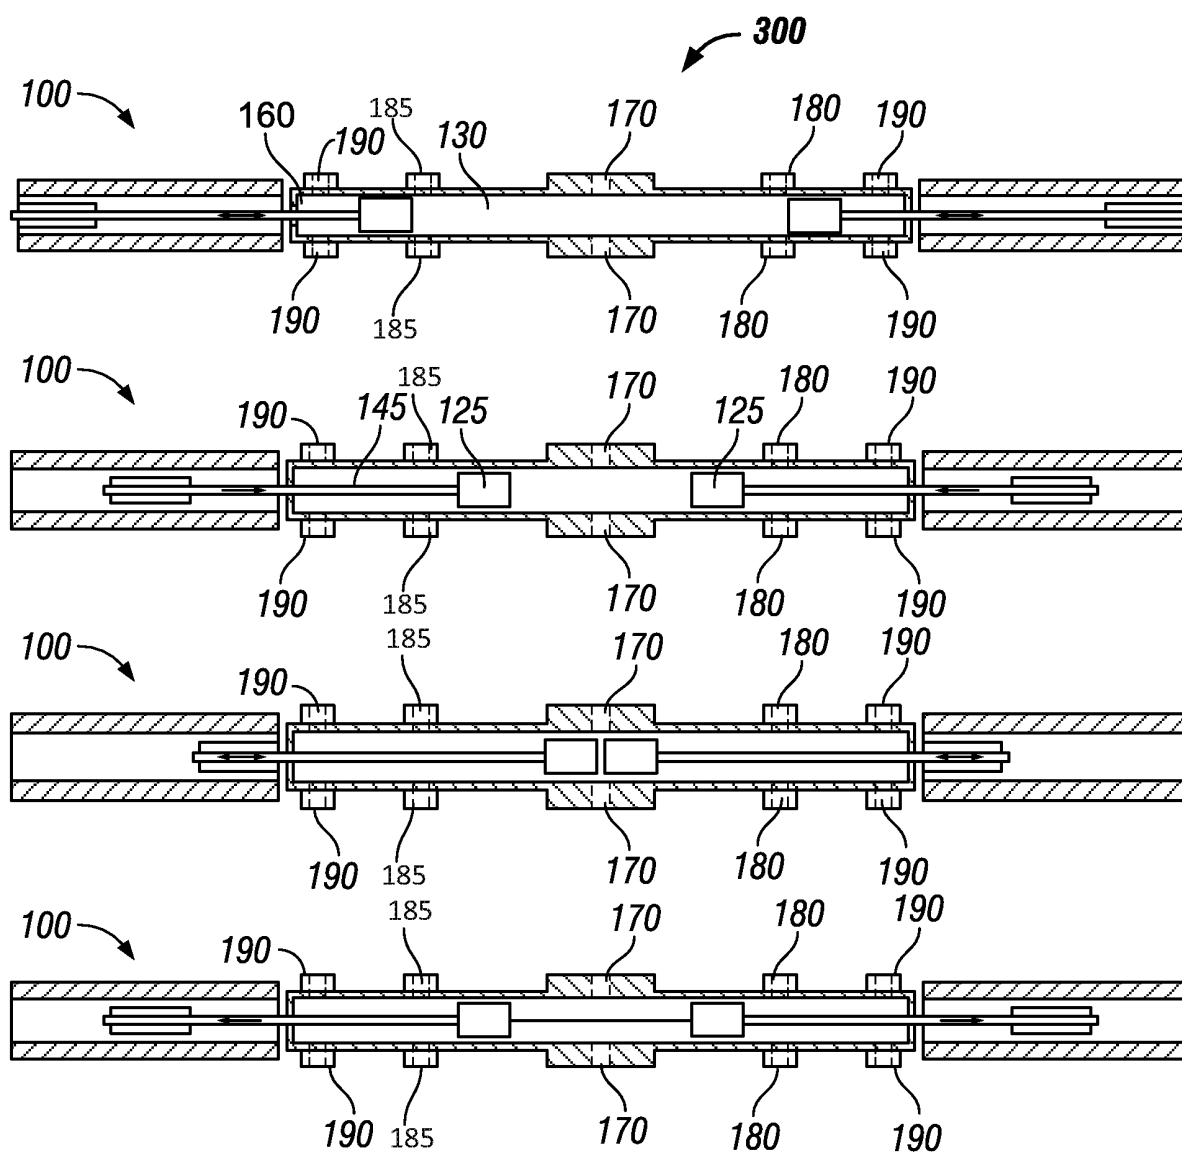


FIG. 3

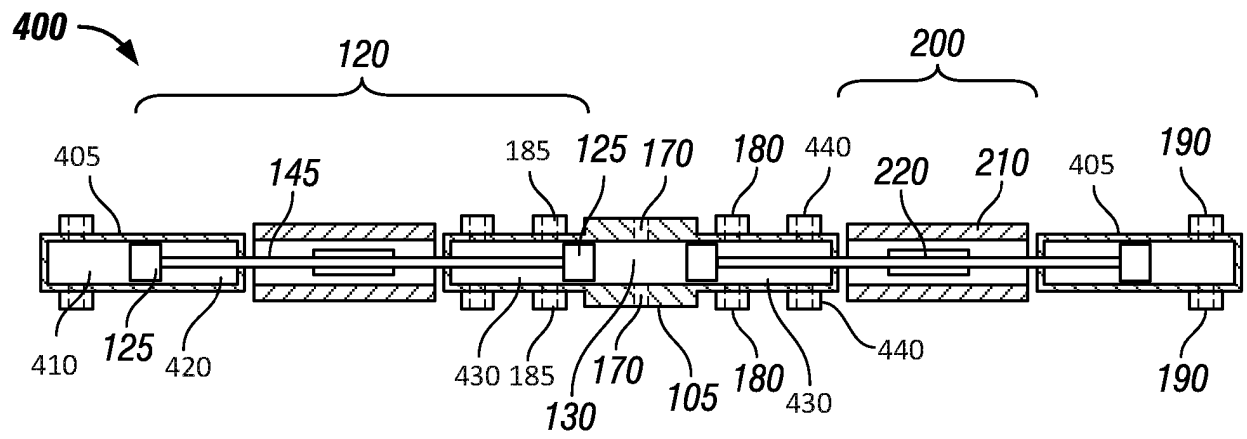


FIG. 4

500 

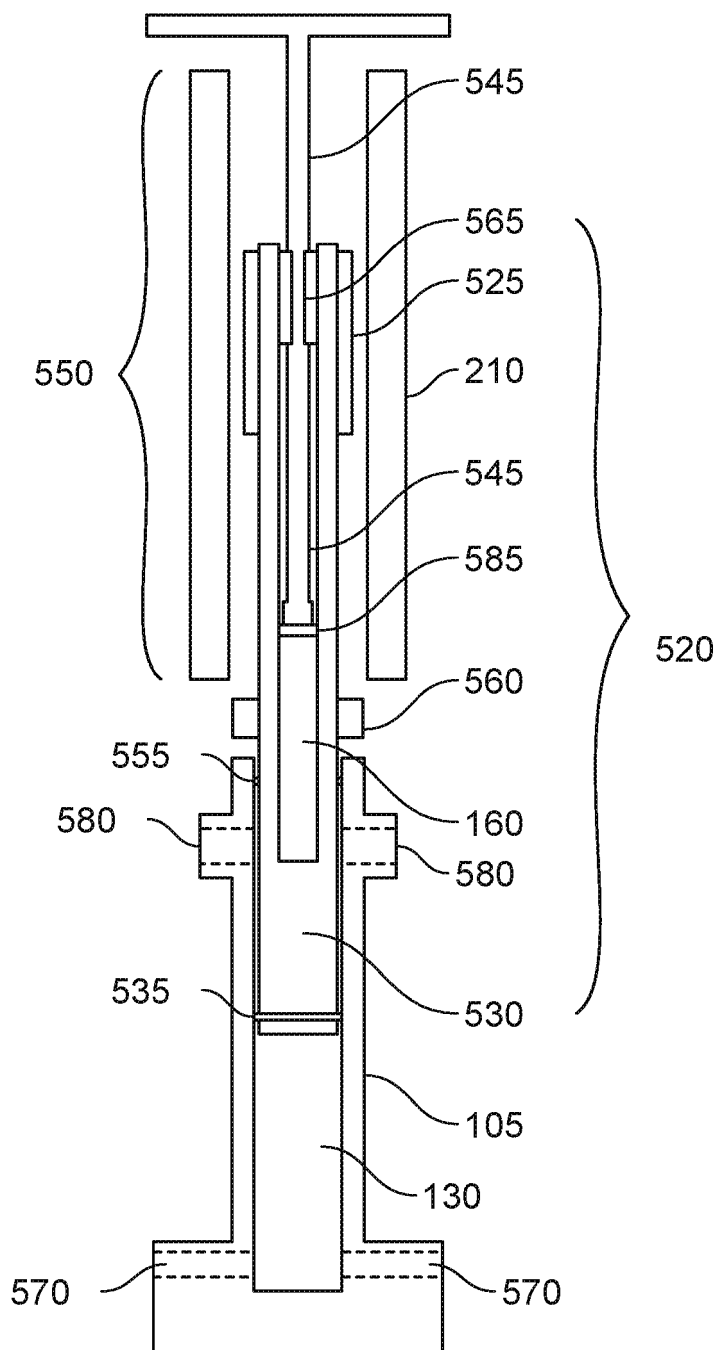
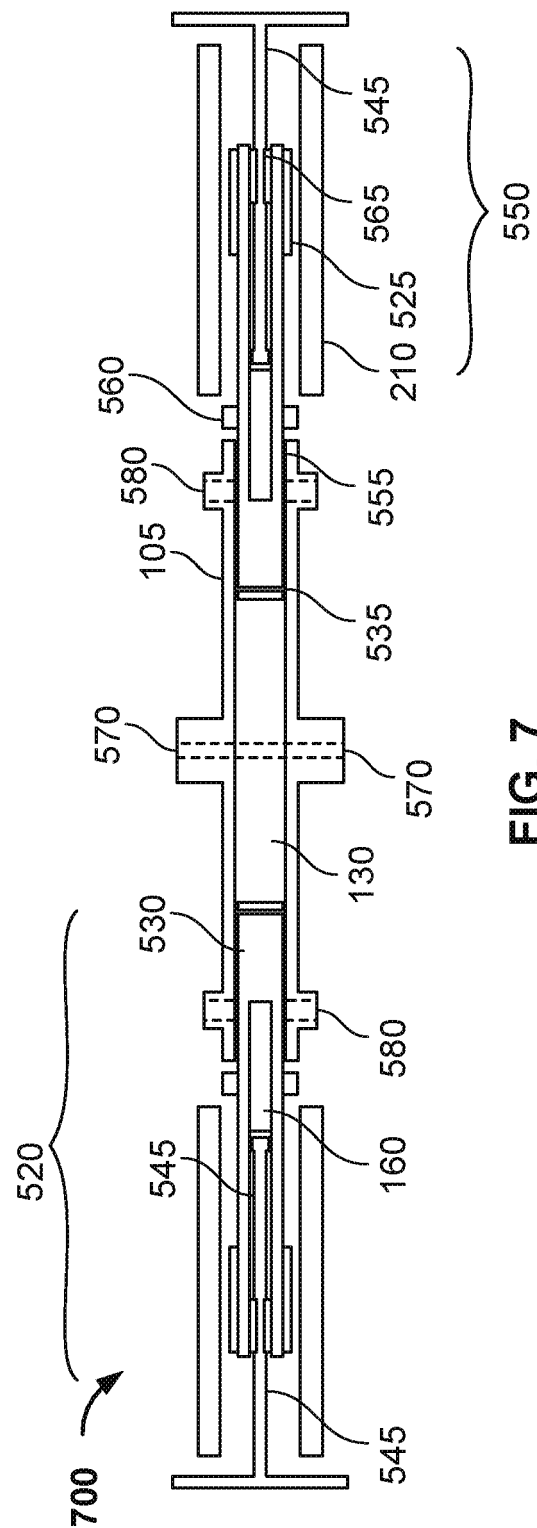
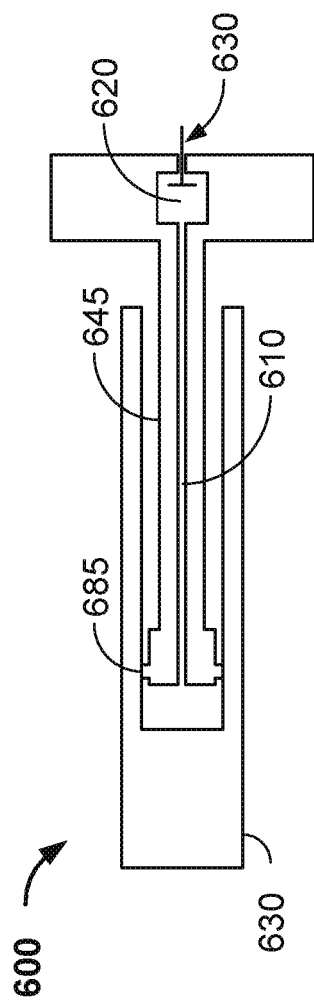


FIG. 5



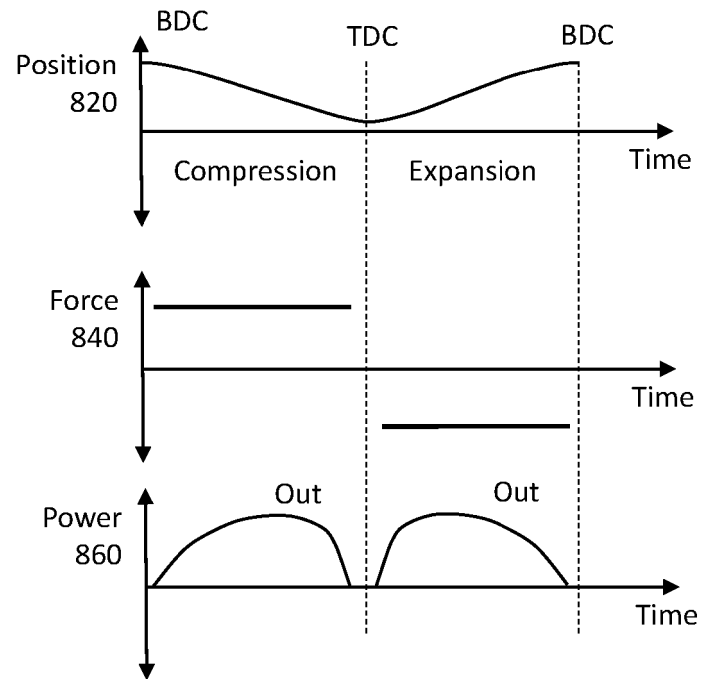


FIG. 8

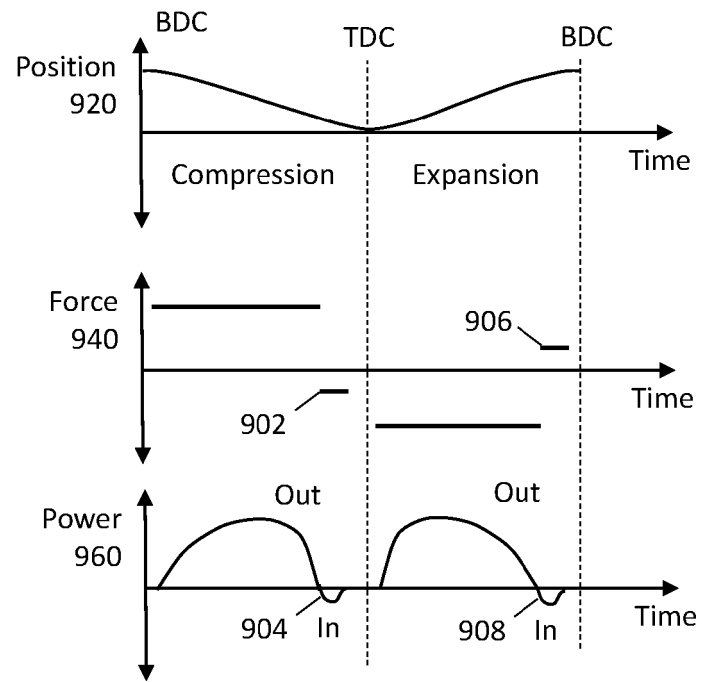


FIG. 9

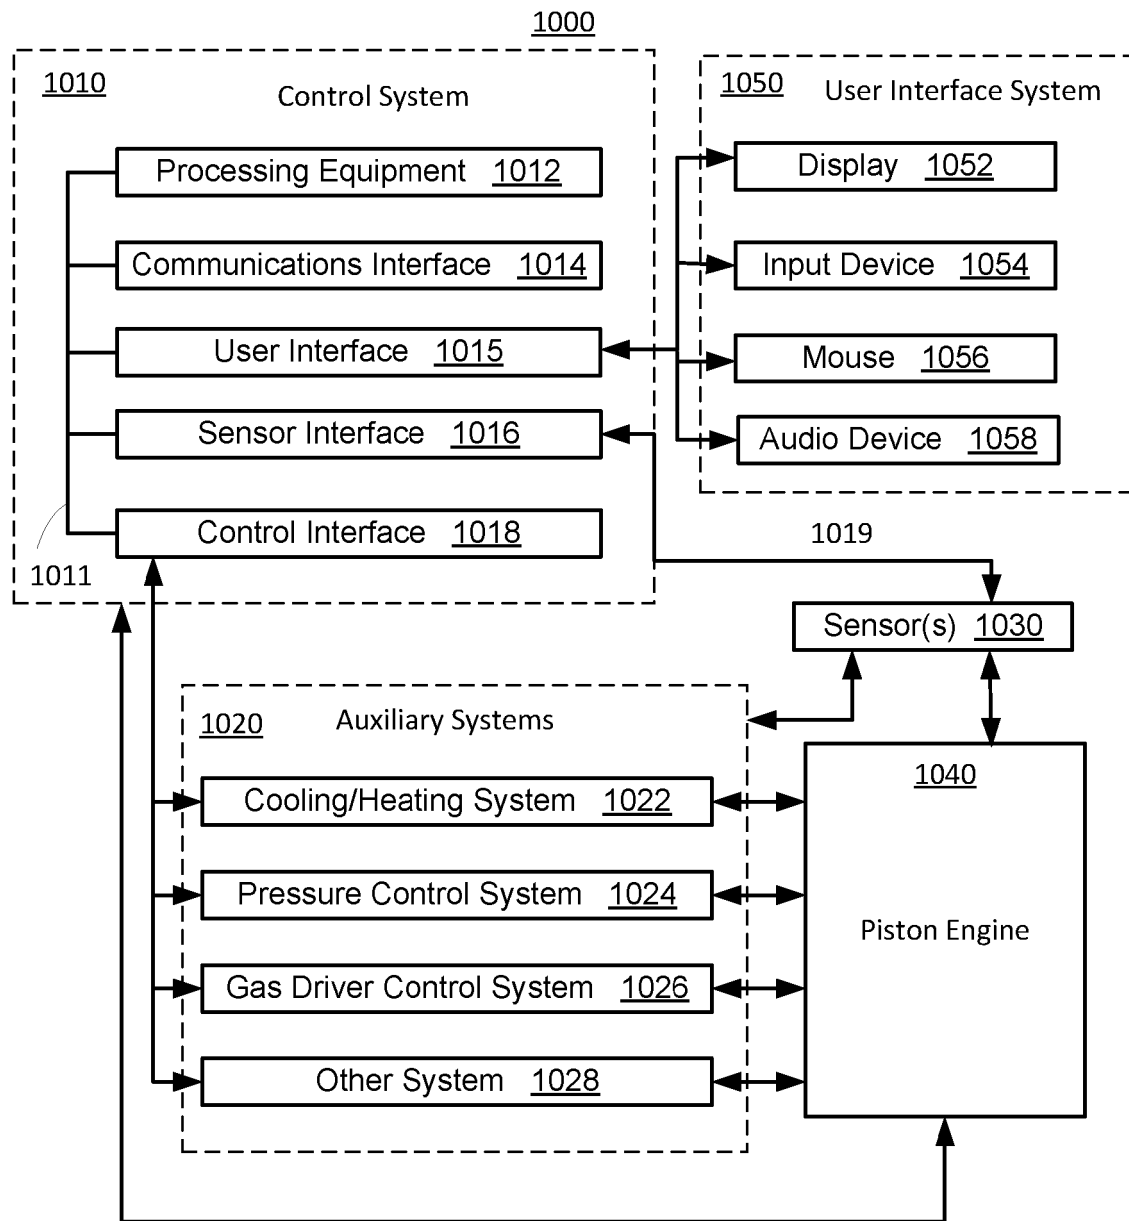


FIG. 10

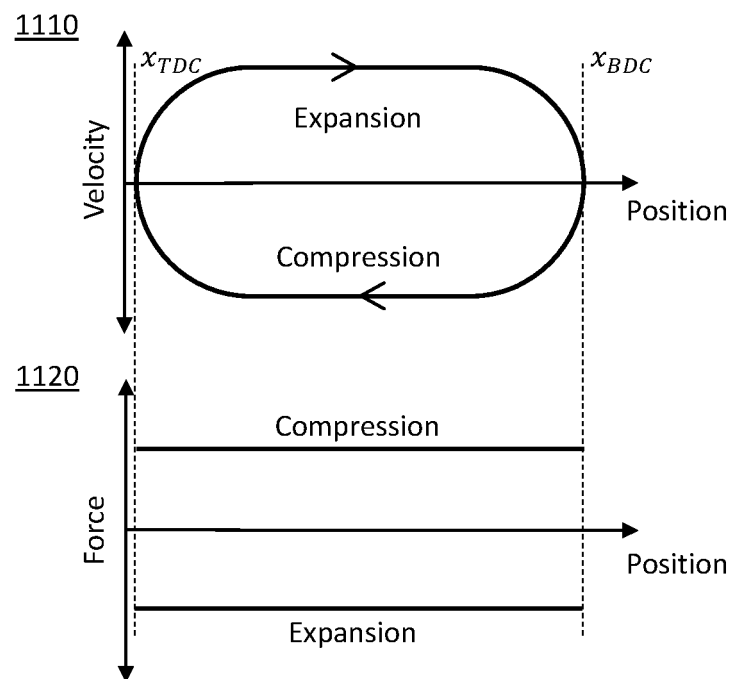


FIG. 11

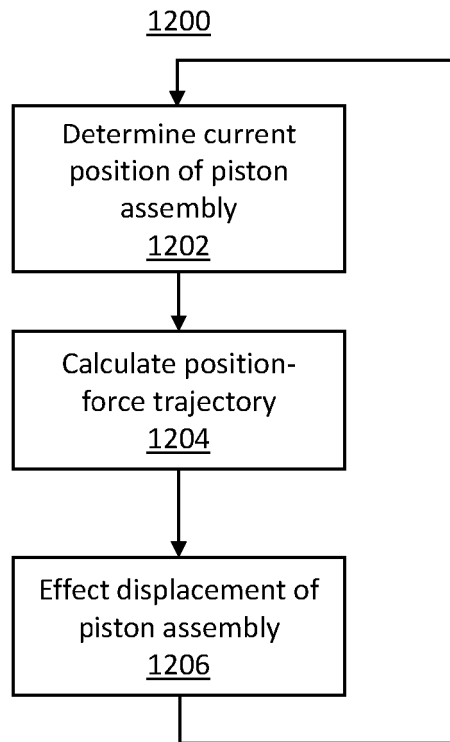


FIG. 12

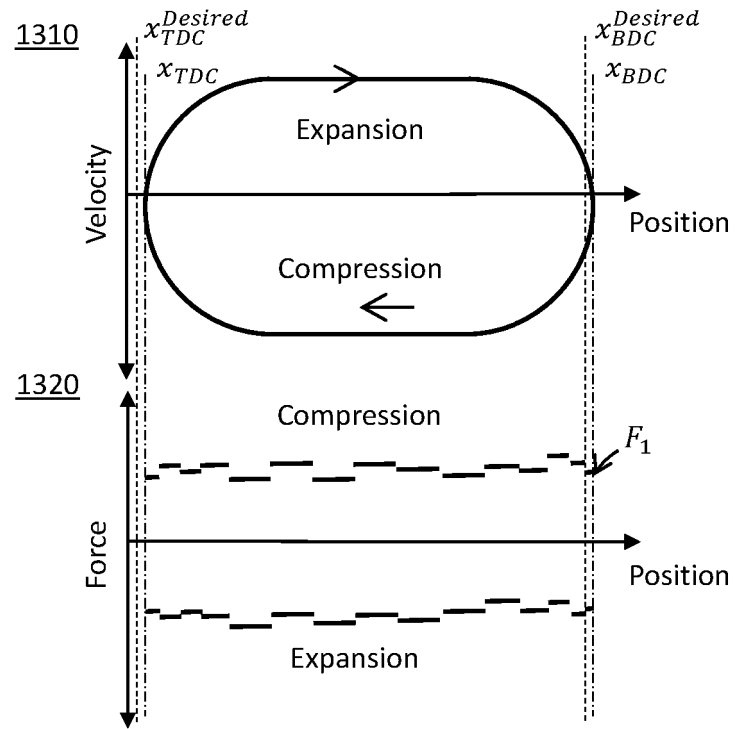


FIG. 13

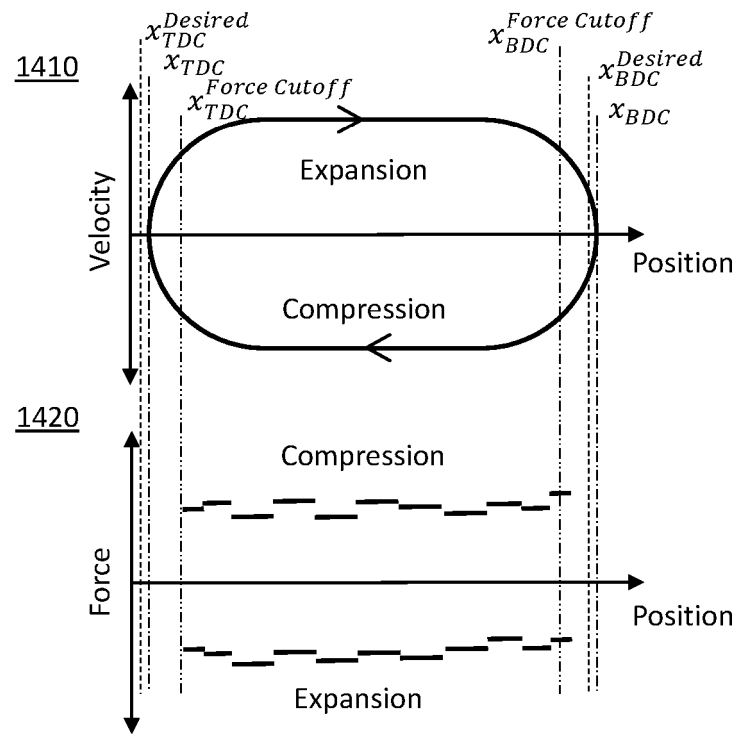


FIG. 14

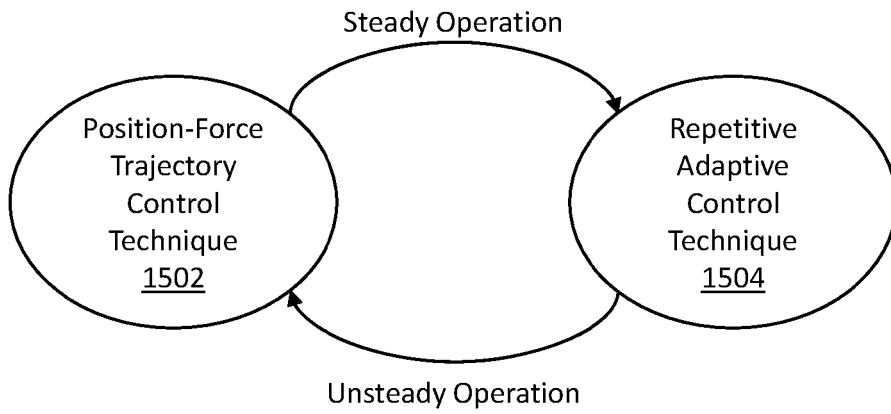


FIG. 15

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2005100764 A1 [0004]
- US 8662029 B [0016] [0017] [0030] [0032] [0034] [0050]
- US 8624542 B [0064]