

(19)



(11)

EP 3 437 752 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
06.02.2019 Bulletin 2019/06

(51) Int Cl.:
B21D 37/14 (2006.01)

(21) Application number: **18183151.2**

(22) Date of filing: **12.07.2018**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(71) Applicant: **Hydromec S.r.l.**
25064 Gussago (Brescia) (IT)

(72) Inventor: **MESCHINI, Francesco**
I-25064 Gussago, BRESCIA (IT)

(74) Representative: **Gualeni, Nadia**
Jacobacci & Partners S.p.A.
Piazza della Vittoria, 11
25122 Brescia (IT)

(30) Priority: **01.08.2017 IT 201700088418**

(54) MULTISTATION CAROUSEL FOR CHANGING A TOOL AND DIE OF A PRESS

(57) A multistation carousel (1) for changing a tool (A) wherein is placed a die of a press, comprises a supporting structure and a rotating table (3) divided into at least three segments (31) each of which corresponds to a station (21, 23, 25, 27). In particular, the multistation carousel (1) comprises a loading/unloading station (21) of the tool (A) from the press, a standby station (27) and

a die changing station (23). Such carousel not only allows a tool and a die of a press to be changed quickly and automatically, but rather, being equipped with different types of stations, it allows the simultaneous execution of several different operations on different tools, all loaded on the carousel itself.

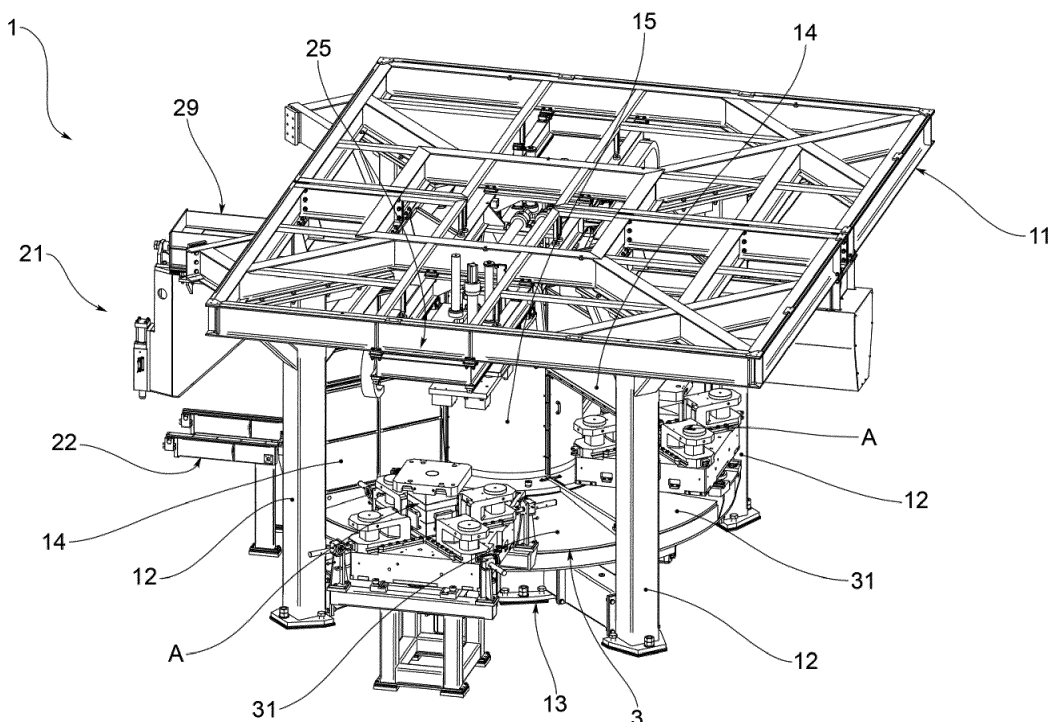


FIG.1

EP 3 437 752 A1

Description

[0001] The object of the present invention is a multistation carousel for changing the tool of a press.

[0002] In this sector, the use of tool change tables with a single station, arranged for the horizontal loading of a tool onto a press, is known. These tables have a special mechanism for transferring the tool to be loaded and unloaded in and out of the press. When using a single-station tool change table, the tool must first be removed from the press and then removed from the table with a bridge crane or forklift truck. A new tool is then placed on the table top and pushed into the press. The time required to perform a complete tool change depends on the size and weight of the tool: the larger and heavier the tool, the longer the time required. For example, a four-ton tool may be changed in about 20 minutes.

[0003] The tool change operation alone is therefore rather long and complex and requires the manual work of experienced operators.

[0004] One of the main needs felt in the sector is to be able to handle tools as quickly as possible, in order to reduce the set-up time of the press.

[0005] The object of the present invention is to resolve the problems of the prior art while taking into account the requirements of the sector.

[0006] Such object is achieved by a multistation carousel, which allows the tool of a press to be changed quickly and automatically. In addition, the carousel is equipped with different types of stations, namely a station for loading/unloading the tool from the press, at least one die changing station and at least one pressing simulation or standby station, so as to allow the simultaneous execution of several different operations on different tools, all loaded onto the carousel itself.

[0007] Such object is achieved by a multistation carousel for changing a tool of a press in accordance with claim 1. The dependent claims describe preferred embodiments of the invention.

[0008] Further features and advantages of the invention will become clearer in light of the detailed description of a preferred but not exclusive embodiment, illustrated by way of non-limiting example with the aid of the accompanying figures, wherein:

- figure 1 shows an axonometric view of a multistation carousel for tool changing according to the present invention, in an example embodiment with four stations, whereon three tools are loaded;
- figure 2 shows a view from above of the multistation carousel shown in figure 1;
- figure 3 shows a side section view of the multistation carousel shown in figure 1, showing the station for loading/unloading the tool from the press (left) and a standby station (right);
- figure 4 shows a side section view of the multistation carousel shown in figure 1, wherein a pressing simulation station (left) and a die changing station (right)

are visible.

[0009] With reference to the figures cited above, a multistation carousel for changing a tool in accordance with the present invention has been collectively indicated at 1. The carousel 1 is therefore a circular conveyor suitable for changing the dies of a press or for changing the tool of a press.

[0010] Such figure 1 shows an example embodiment of the multistation carousel 1 with four stations 2, three of which accommodate a tool A.

[0011] The carousel 1 is equipped with a load-bearing structure comprising an upper frame 11 supported by pillars 12.

[0012] Below the upper frame 11 is housed a turntable 3 supported by a lower frame 13 that rests directly on the ground.

[0013] The turntable 3 is rotated by rotation means 31, which are housed underneath it on the lower frame 13.

The rotation means 31 comprise at least one slewing ring and a toothed pinion-crown assembly driven by a gear motor which controls the rotation. In addition, stopping means located below the turntable 3 are provided to stop the rotation of the same at the stations 2.

[0014] The turntable 3 is divided into a plurality of equal segments 31, each of which corresponds to one station 2.

[0015] Preferably, moreover, between the upper frame 11 and the turntable 3 there are 14 movable walls, for example sliding walls, adapted to separate the turntable 3 into segments 31 to define the operating area of each station 2.

[0016] Preferably, the frame also comprises a central column 15, which extends from the upper frame 11 to the turntable 3, which is hollow internally and adapted to house mechanical components and/or electrical cables for handling the moving parts of the carousel 1.

[0017] The multistation carousel 1 comprises at least three stations 2, i.e. the turntable 3 is divided into at least three segments 31.

[0018] The carousel 1 comprises a station 21 for loading/unloading the tool from the press, i.e. one of the segments 32 of the turntable 3 is equipped in such a way as to allow the extraction or insertion of a tool (or of a die) from a press.

[0019] The station 21 is therefore intended to face the exit of the press whereon the tool change is to be carried out.

[0020] The loading/unloading station 21 comprises, adjacent to the turntable 2, an outer frame 22 whereon the tool is guided. The station 21 also comprises a suspension frame 29, equipped with guides and a hydraulic cylinder, suitable for the translation of the tool A. The station 21 then pushes/extracts the tool from the press onto the floor-mounted outer frame 22 and from there onto the turntable 2 via the suspension frame 29.

[0021] The turntable 1 comprises at least one die changing station 23, i.e. one of the segments 32 of the turntable 3 is equipped in such a way as to allow the

removal of the die extracted from the press from the carousel 1 (and in particular from the tool A), the placement on the carousel 1 of a new die in the tool A to be inserted in the press, and the reheating of the die.

[0022] The die changing station 23 is therefore equipped with a mechanical arm 24 to allow the replacement of the die.

[0023] In addition, the carousel 1 comprises at least one work station 25 or standby station 27, i.e. one of the segments 32 of the turntable 3 is equipped in such a way as to allow further activities on the tool A extracted from the press or on the new tool to be inserted into the press.

[0024] The standby station 27 does not require any special equipment, as it is only used as a depot for a tool A awaiting a successive step.

[0025] The work station 25 is, on the other hand, equipped with additional equipment to enable special activities to be carried out on the tool A, such as maintenance, lubrication and pressing simulation.

[0026] The work station 25 is equipped with at least one handling device 26, adapted to allow the radial handling of the tool inside the station 25. Preferably, the handling device 26 is fixed to the upper frame 11. For example, the handling device 26 is a pusher driven by hydraulic cylinders.

[0027] Preferably, the handling device 26 also allows the vertical handling of the tool A. For example, the device 26 is equipped with a vertical ram, driven by a hydraulic cylinder and equipped with automatic locks, to lift the upper die half (or tool half) and allow the operator to simulate a pressing step, complete also with lubrication points.

[0028] Preferably, the work station 25 comprises, adjacent to the turntable 2, an outer frame 28 whereon the tool A is placed, to allow the operator to perform the required activities on the tool.

[0029] Preferably, the multistation carousel 1 is equipped with control and safety systems for the correct and safe operation of the different steps and operations.

[0030] In an example not shown, the multistation carousel 1 comprises three stations:

- a station 21 for loading/unloading the tool A from the press, equipped with an external frame 22 whereon the tool is slid;
- a standby station 27;
- a die changing station 23 equipped with a mechanical arm 24 suitable to allow the replacement of the die.

[0031] Preferably, the standby station 27 and/or the changing station 23 is also further equipped as a pressing simulation station 25, i.e. it comprises a handling device 26 (radial and preferably also vertical) of the tool A and an external frame 28 for supporting the tool during the required work activities.

[0032] In a further example, shown in the attached figures, the multistation carousel 1 comprises four stations:

- a station 21 for loading/unloading the tool A from the press, equipped with an external frame 22 on which the tool is slid;
- a pressing simulation station 25, equipped with a handling device 26 (radial and preferably also vertical) of the tool A and an outer frame 28;
- a standby station 27;
- a die changing station 23 equipped with a mechanical arm 24 suitable to allow the replacement of the die.

[0033] Preferably, the standby station 27 and/or the die changing station 23 is also further equipped as a pressing simulation station 25, i.e. it comprises a die handling device 26 (radial and preferably also vertical) and an external frame 28 for supporting the tool during the required work activities. In the example shown in the figures, only the changing station 23 is also further equipped as pressing simulation station 25.

[0034] Innovatively, a multistation carousel 1 in accordance with the present invention allows the tool and die of a press to be changed quickly and automatically.

[0035] Advantageously, moreover, a multistation carousel 1 in accordance with the present invention, being provided with different types of stations (loading/unloading of the tool from the press, die changing, pressing simulation, standby) allows the simultaneous execution of several different operations on different tools, all loaded on the carousel itself.

[0036] Obviously, one skilled in the art may make modifications to the multistation carousel described above, all contained within the scope of protection as defined by the following claims.

Claims

1. A multistation carousel (1) for changing a tool (A) wherein a die of a press is placed, comprising
 - a support structure provided with an upper frame (11) supported by pillars (12), and a lower frame (13) which rests directly on the ground;
 - a turntable (3), located below the upper frame (11) and supported by the lower frame (13), rotated by rotation means (31) housed in the lower frame (13), said turntable (3) being divided into at least three segments (31) each of which corresponds to a station (21, 23, 25, 27), in particular:
 - a loading/unloading station (21) of the tool (A) from the press;
 - a standby station (27);
 - a die changing station (23).
2. A multistation carousel (1) according to claim 1, wherein the standby station (27) and/or the changing station (23) is further equipped as a pressing simulation station (25).

lation station (25).

3. A multistation carousel (1), according to claim 1, wherein the turntable (3) is divided into four segments (31) each of which corresponds to a station, in particular:

- a loading/unloading station (21) of the tool (A) from the press;
- a pressing simulation station (25),
- a standby station (27);
- a die changing station (23).

4. A multistation carousel (1) according to claim 3, wherein the standby station (27) and/or the changing station (23) is further equipped also as a pressing simulation station (25).

5. A multistation carousel (1), according to any one of the preceding claims, wherein the loading/unloading station (21) comprises:

- an outer frame (22) adjacent to the turntable (2), whereon the tool (A) is slid during entry/exit from the station (21);
- a suspended frame (29) above the turntable (2), adapted to move the tool (A) in/out of the station (21).

6. A multistation carousel (1), according to any one of the preceding claims, wherein the die changing station (23) is provided with a mechanical arm (24) for replacing the die.

7. A multistation carousel (1), according to any one of the preceding claims, wherein the work station (25) is equipped with:

- an outer frame (28) adjacent to the turntable (2) for supporting the tool (A) during processing;
- a handling device (26) attached to the upper frame (11) to permit the radial and/or vertical handling of the tool (A) .

8. A multistation carousel (1), according to any one of the preceding claims, wherein the rotating means (31) of the turntable (3) comprise at least one slewing ring and a toothed pinion-crown assembly driven by a gear motor that controls the rotation.

9. A multistation carousel (1), according to any one of the preceding claims, comprising stopping means, positioned below the turntable (3), to stop the rotation of the turntable (3) at the desired station.

10. A multistation carousel (1), according to any one of the preceding claims, wherein moving walls (14) are arranged between the upper frame (11) and the turn-

table (3) to separate the turntable (3) into segments (31) and to define an operating area for each station (2).

11. A multistation carousel (1), according to any one of the preceding claims, wherein the support structure comprises a central column (15) extending from the upper frame (11) to the turntable (3), internally hollow, to accommodate mechanical components and/or electrical wiring.

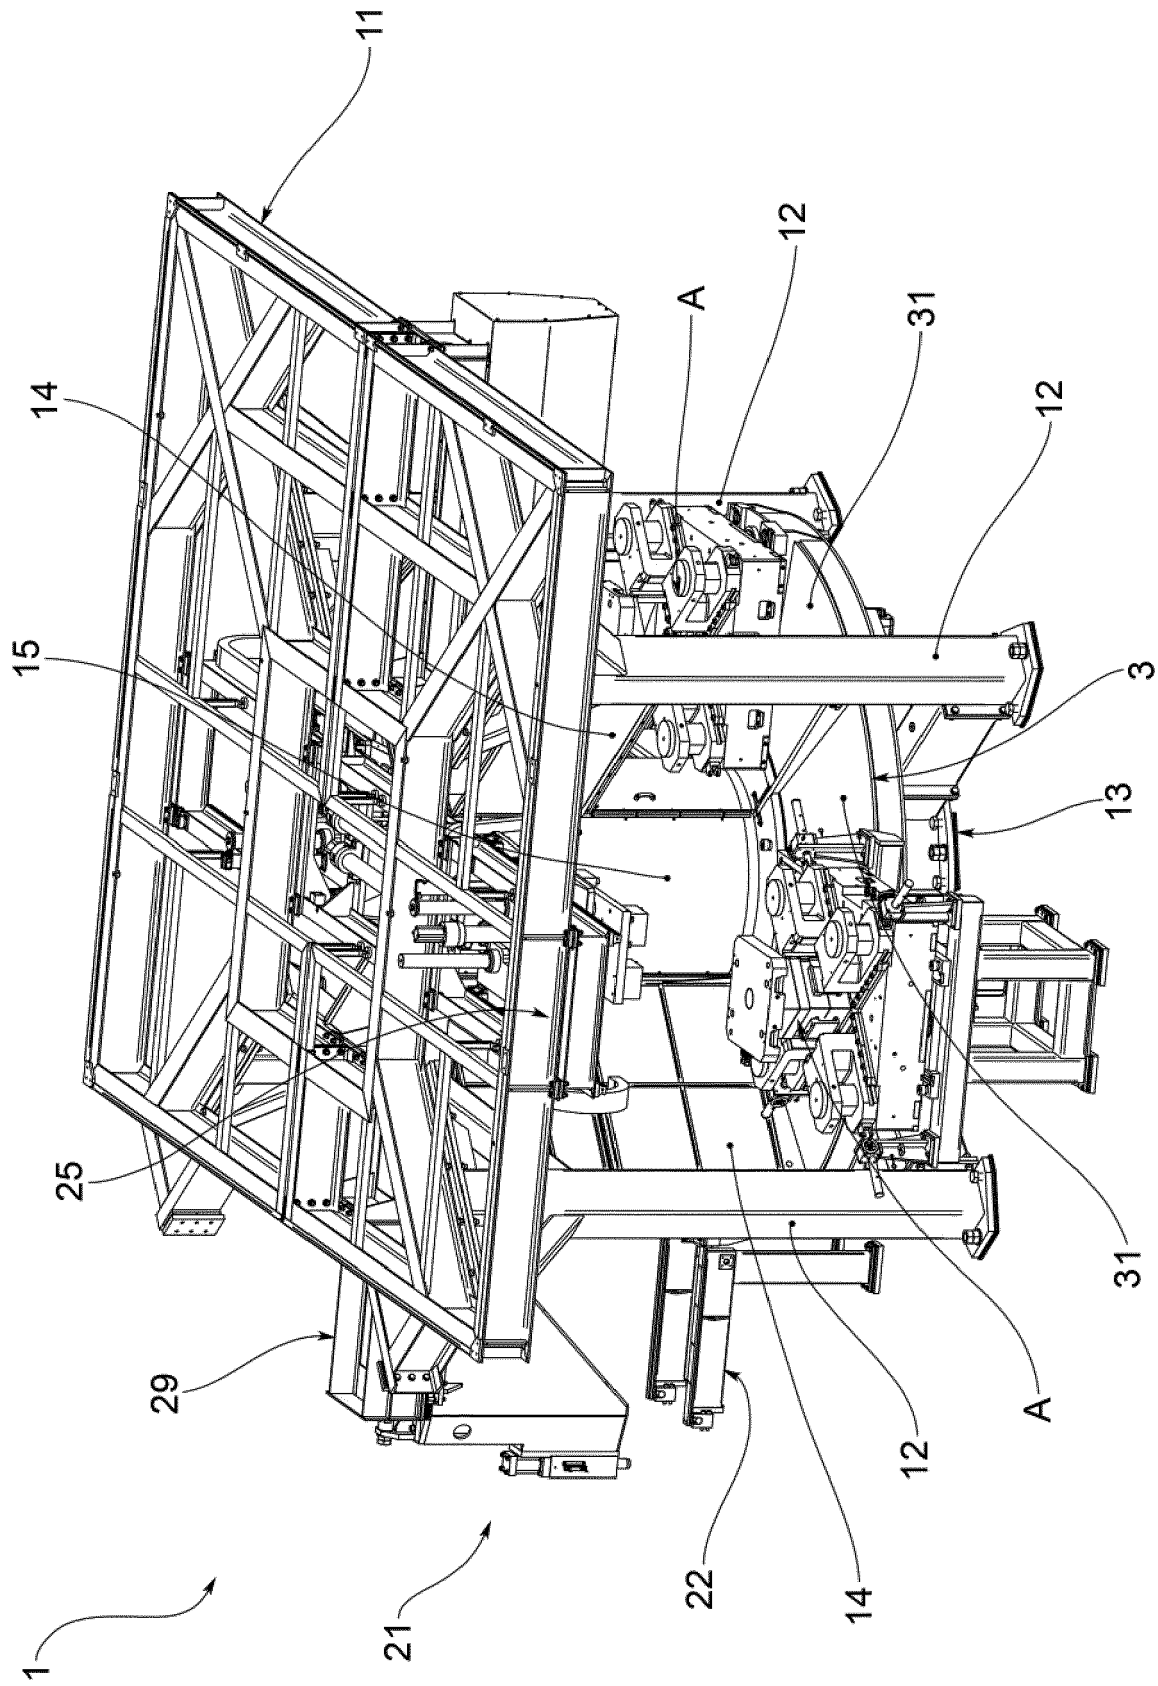


FIG.1

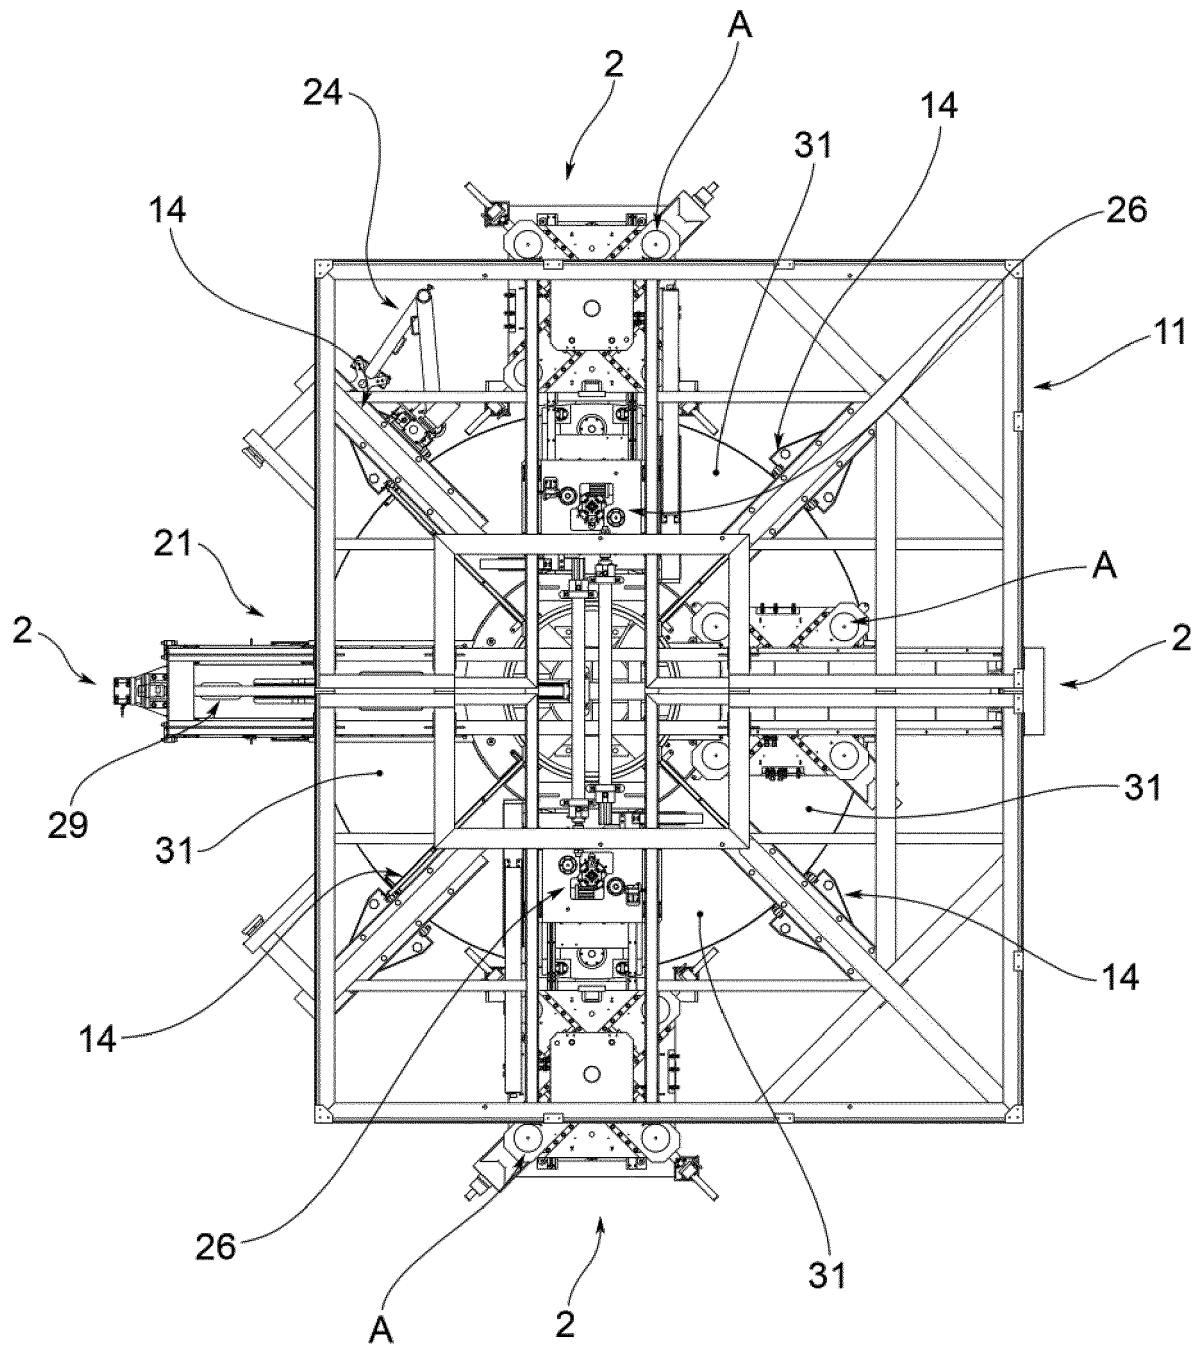
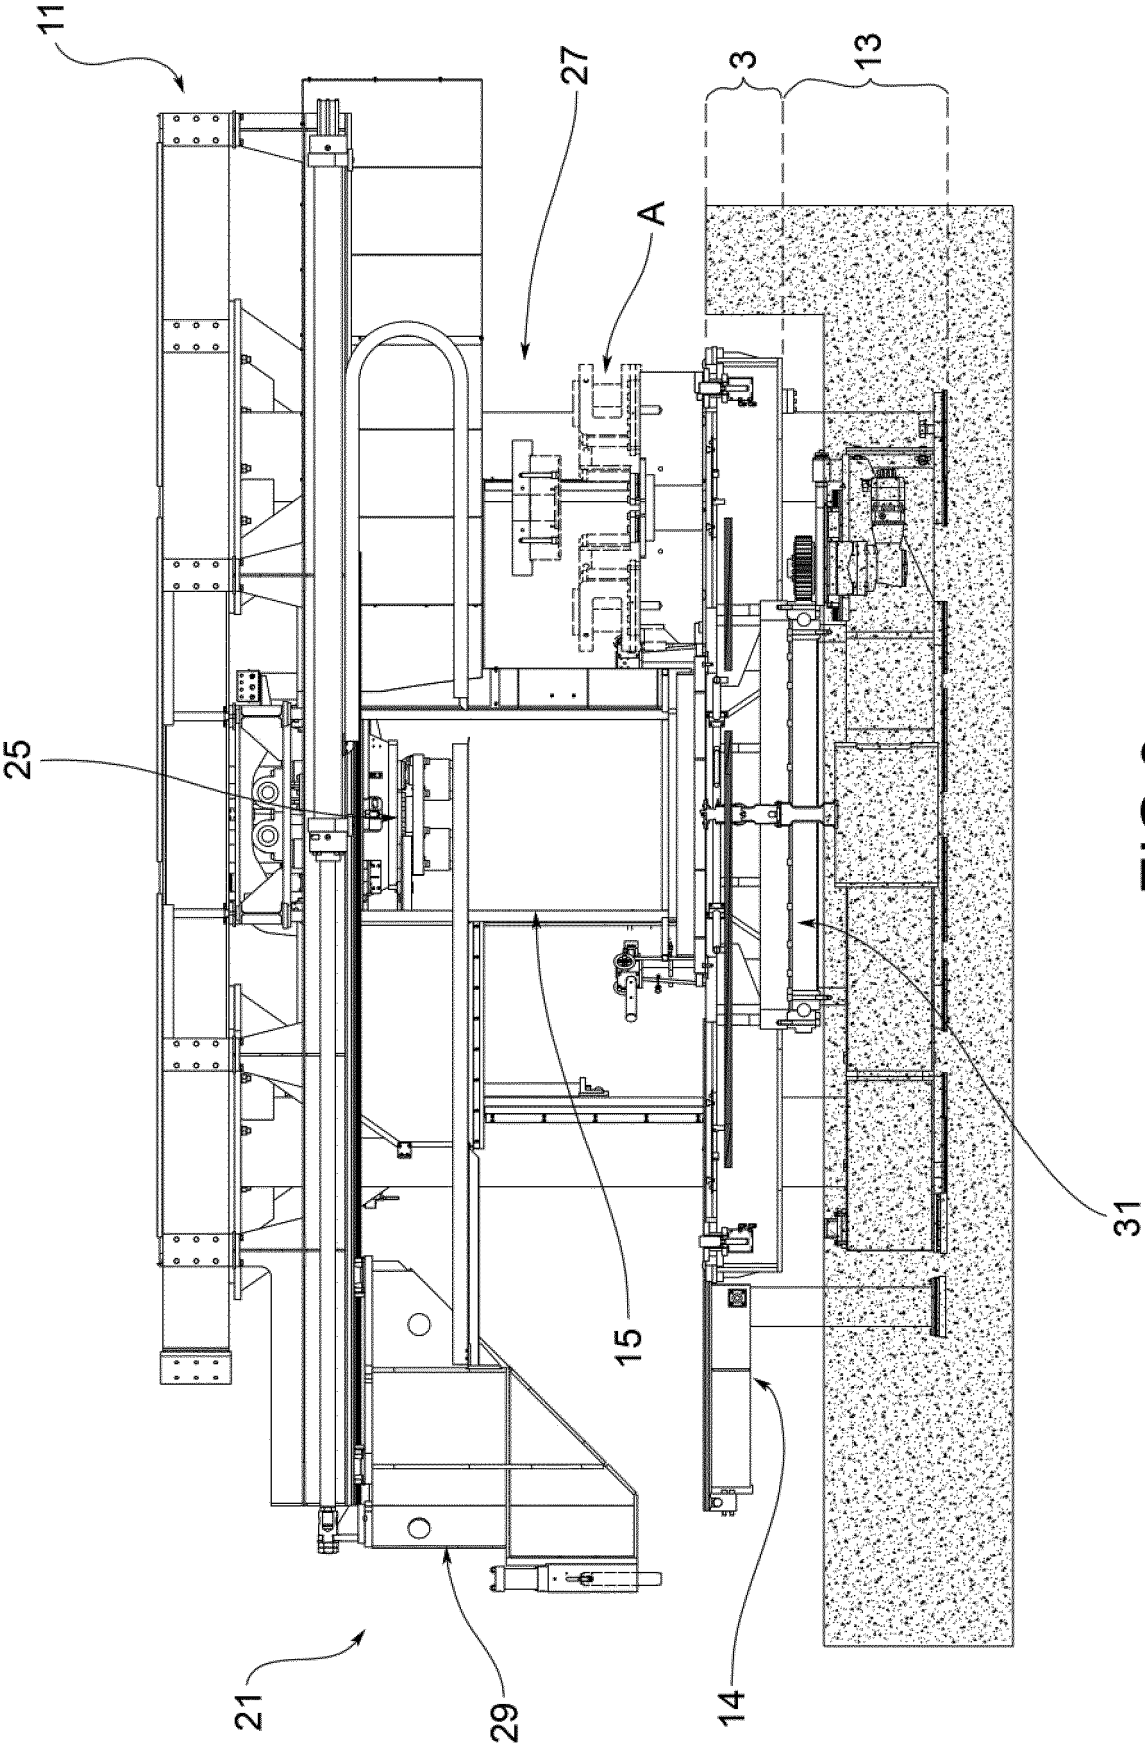


FIG.2



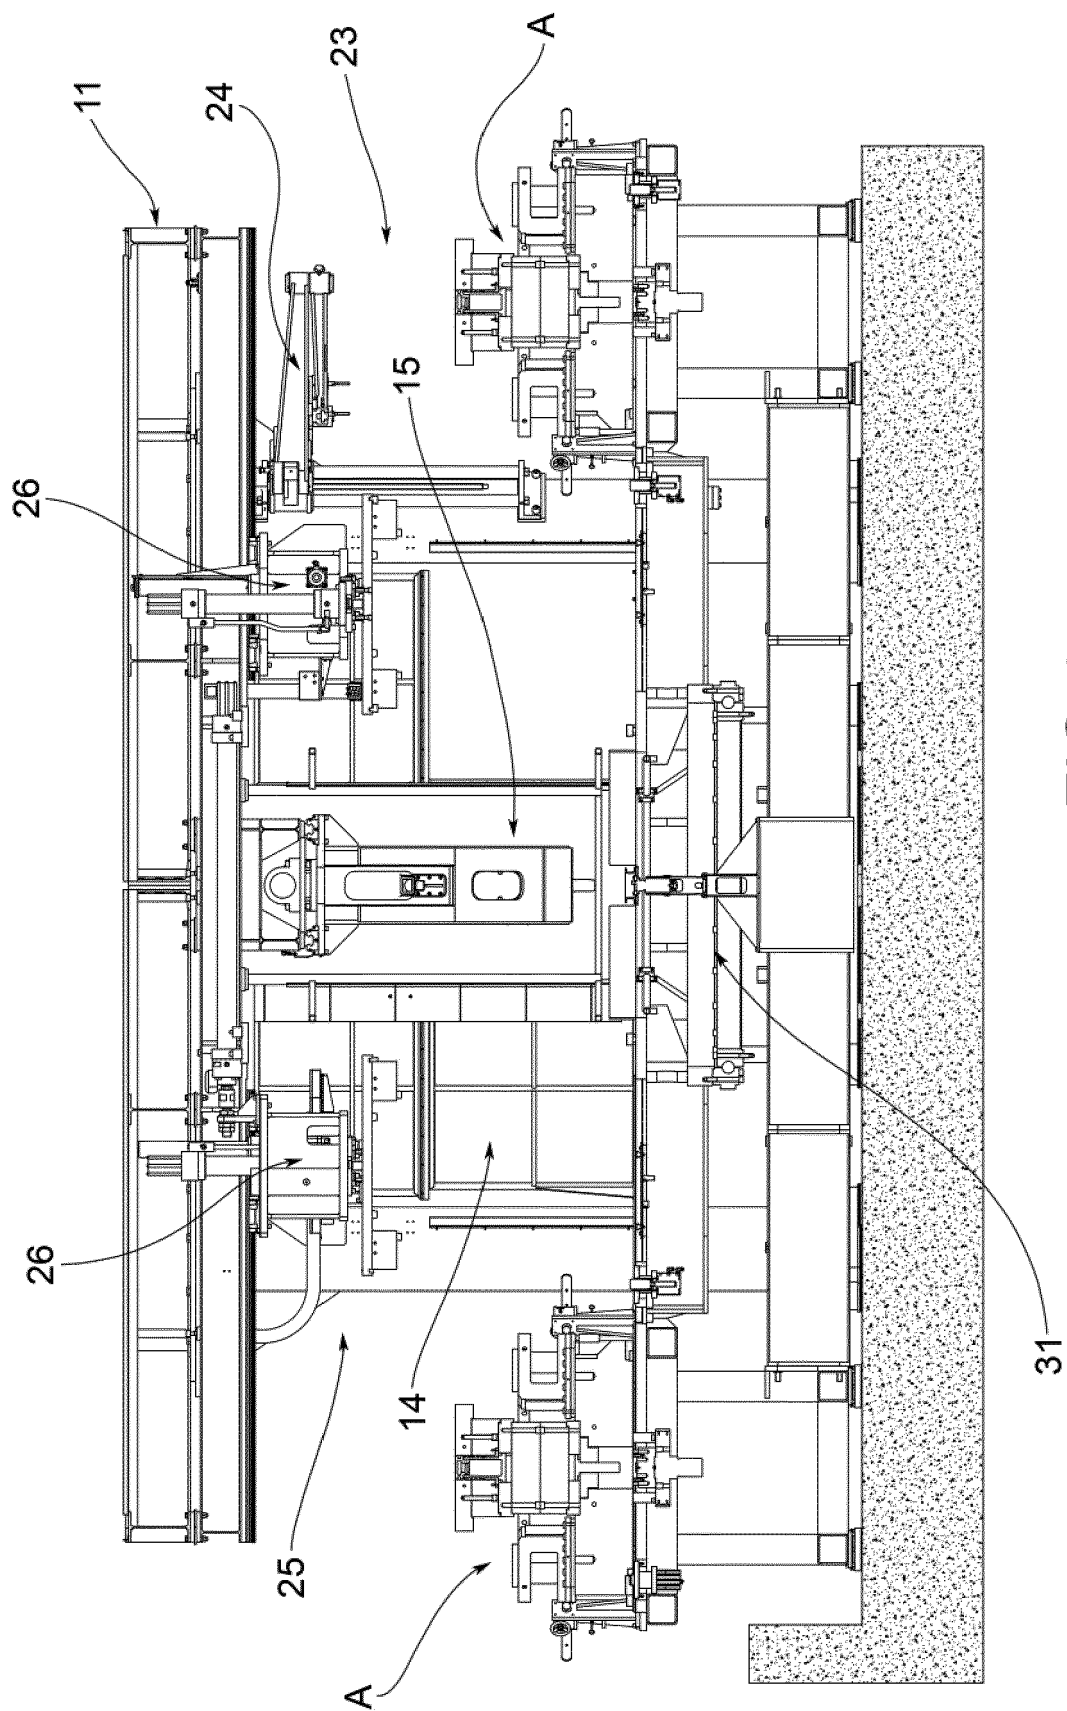


FIG. 4



EUROPEAN SEARCH REPORT

Application Number
EP 18 18 3151

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	EP 2 946 846 A1 (FELDER KG [AT]) 25 November 2015 (2015-11-25) * paragraph [0021] - paragraph [0025]; figures *	1-11	INV. B21D37/14
A	EP 2 886 219 A1 (AMADA CO LTD [JP]) 24 June 2015 (2015-06-24) * abstract; claim 1; figures *	1	
A	US 2013/310237 A1 (KOJIMA YOICHIRO [JP] ET AL) 21 November 2013 (2013-11-21) * paragraph [0018] - paragraph [0034]; figures *	1	
A	JP H07 290167 A (NANIWA SEISAKUSHO KK) 7 November 1995 (1995-11-07) * abstract; figures *	1	
A	US 5 882 285 A (SETO YOSHIHARU [US] ET AL) 16 March 1999 (1999-03-16) * column 6, line 46 - column 7, line 28; figures 2,4 *	1	
			TECHNICAL FIELDS SEARCHED (IPC)
			B21D
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 11 December 2018	Examiner Cano Palmero, A
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 18 18 3151

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

11-12-2018

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2946846 A1	25-11-2015	CN 106660094 A	10-05-2017
		EP 2946846 A1	25-11-2015
		EP 2946847 A1	25-11-2015
		ES 2582566 T3	13-09-2016
		JP 2017516664 A	22-06-2017
		KR 20170013312 A	06-02-2017
		PL 2946846 T3	28-02-2018
		US 2017144206 A1	25-05-2017
		WO 2015176083 A1	26-11-2015
EP 2886219 A1	24-06-2015	EP 2886219 A1	24-06-2015
		JP 5965245 B2	03-08-2016
		JP 2014036980 A	27-02-2014
		US 2015202676 A1	23-07-2015
		US 2018015525 A1	18-01-2018
		WO 2014027582 A1	20-02-2014
US 2013310237 A1	21-11-2013	CN 103476518 A	25-12-2013
		JP WO2012073335 A1	19-05-2014
		TW 201221345 A	01-06-2012
		US 2013310237 A1	21-11-2013
		WO 2012073335 A1	07-06-2012
JP H07290167 A	07-11-1995	NONE	
US 5882285 A	16-03-1999	DE 19843889 A1	08-04-1999
		JP H11129042 A	18-05-1999
		US 5882285 A	16-03-1999