



(11) **EP 3 439 447 A1**

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
06.02.2019 Bulletin 2019/06

(51) Int Cl.:
H05K 9/00 ^(2006.01) **B32B 7/02** ^(2019.01)
B32B 27/18 ^(2006.01)

(21) Application number: **17773845.7**

(86) International application number:
PCT/JP2017/006301

(22) Date of filing: **21.02.2017**

(87) International publication number:
WO 2017/169297 (05.10.2017 Gazette 2017/40)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(72) Inventors:
• **TAKAHASHI, Akio**
Kizugawa-shi
Kyoto 619-0216 (JP)
• **TERADA, Tsunehiko**
Kizugawa-shi
Kyoto 619-0216 (JP)

(30) Priority: **31.03.2016 JP 2016072293**

(74) Representative: **Zimmermann, Tankred Klaus et al**
Schoppe, Zimmermann, Stöckeler
Zinkler, Schenk & Partner mbB
Patentanwälte
Radlkoferstrasse 2
81373 München (DE)


(71) Applicant: **Tatsuta Electric Wire & Cable Co., Ltd.**
Higashiosaka-shi, Osaka 578-8585 (JP)

(54) **ELECTROMAGNETIC-WAVE SHIELD FILM**

(57) Provided is an electromagnetic wave shielding film capable of reducing a space formed between the electromagnetic wave shielding film and an electronic component on a wiring substrate and to increase an electromagnetic wave shielding effect. An electromagnetic wave shielding film 1 includes a conductive layer 3 having stretchability and a property of hardly returning to an original state thereof when once stretched, and an adhesion

layer 4 formed on one surface of the conductive layer 3 and having insulating properties. The conductive layer 3 is made of a conductive composition, including a resin having stretchability and a property of hardly returning to an original state thereof when once stretched and a conductive filler filled with the resin. The resin has a tensile permanent set of 2.5% or more and 90% or less.

FIG. 1

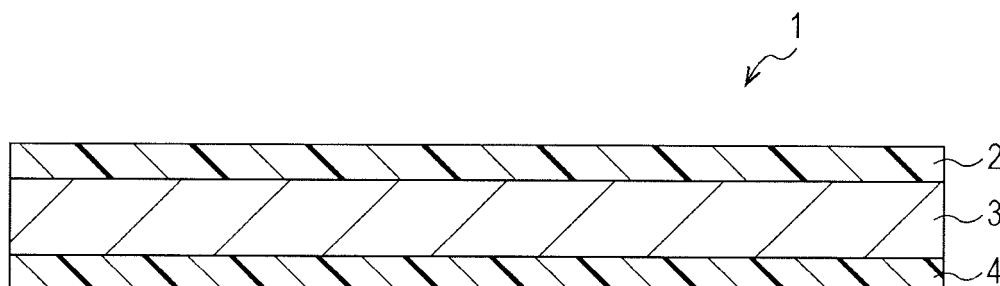

Description

TECHNICAL FIELD

5 [0001] The present invention relates to an electromagnetic wave shielding film.

BACKGROUND ART

10 [0002] An electromagnetic wave shielding material including a pressure sensitive adhesive, a conductive nonwoven fabric layer formed on the pressure sensitive adhesive, and an insulating layer formed on the conductive nonwoven fabric layer has been proposed. The conductive nonwoven fabric is a nonwoven fabric knitted with fibers coated with a metal thin film.

CITATION LIST

15

PATENT LITERATURE

[0003] PATENT LITERATURE 1: JP-A-2000-036686

20

SUMMARY OF THE INVENTION

PROBLEMS TO BE SOLVED BY THE INVENTION

25 [0004] The above-described conventional electromagnetic wave shielding material is provided, for example, on a mounting surface side of a wiring substrate (printed circuit board) so as to cover an electronic component mounted on the printed circuit board. A plurality of electronic components is mounted on the mounting surface of the wiring substrate. Therefore, the surface of the wiring substrate on which the electronic components are mounted has irregularities. The conventional electromagnetic wave shielding material includes a conductive nonwoven fabric layer. Thus, the electromagnetic wave shielding material has almost no stretchability. Therefore, when the electromagnetic wave shielding material is provided on the surface of the wiring substrate on which the electronic components are mounted, a space is easily formed between the electronic components and the electromagnetic wave shielding material. As a result, electromagnetic wave leakage occurs and electromagnetic wave shielding effect is deteriorated.

30

[0005] An object of the present invention is to provide an electromagnetic wave shielding film capable of reducing a space formed between the electromagnetic wave shielding film and an electronic component on a wiring substrate, and to, therefore, increase an electromagnetic wave shielding effect as a result.

35

SOLUTION TO THE PROBLEMS

40 [0006] The invention described in claim 1 is an electromagnetic wave shielding film including a conductive layer having stretchability, and an adhesion layer formed on one surface of the conductive layer and having insulating properties, wherein the conductive layer includes a conductive composition comprising a resin having stretchability and a conductive filler filled with the resin, and the resin has a tensile permanent set of 2.5% or more and 90% or less.

[0007] In this configuration, the electromagnetic wave shielding film includes the conductive layer having stretchability. The conductive layer includes the resin having stretchability and having a tensile permanent set of 2.5% or more and 90% or less. Therefore, the electromagnetic wave shielding film has stretchability and has a property of hardly returning to an original state thereof when once stretched.

45

[0008] The electromagnetic wave shielding film is applied to, for example, a wiring substrate having an electronic component mounted thereon. In this case, the electromagnetic wave shielding film is mounted on the wiring substrate so that its surface on the adhesive layer side faces the mounting surface of the wiring substrate and it covers the electronic component. Thus, the electromagnetic wave shielding film is temporarily fixed to the wiring substrate. Thereafter, the electromagnetic wave shielding film is lightly pressed against the mounting surface side of the wiring substrate. The electromagnetic wave shielding film has stretchability and has the property of hardly returning to the original state when once stretched. Therefore, the electromagnetic wave shielding film is stretched, to be deformed along an outer surface of the electronic component on the wiring substrate. The electromagnetic wave shielding film maintains this state. Thus, it is possible to reduce the space formed between the electromagnetic wave shielding film and the electronic component on the wiring substrate. Therefore, it is possible to increase the electromagnetic wave shielding effect.

50

55

[0009] The invention described in claim 2 is the electromagnetic wave shielding film according to claim 1, wherein the resin has a breaking strength of 20MPa or more and 80MPa or less and an elongation at break of 300% or more and

700% or less.

[0010] The invention described in claim 3 is the electromagnetic wave shielding film according to claim 1 or 2, further comprising an insulating layer formed on a surface opposite to the adhesion layer side of the conductive layer.

[0011] The invention described in claim 4 is the electromagnetic wave shielding film according to any one of claims 1 to 3, wherein the conductive filler is dendritic.

[0012] The invention described in claim 5 is the electromagnetic wave shielding film according to claim 4, wherein the conductive filler is silver powder.

[0013] The invention described in claim 6 is the electromagnetic wave shielding film according to claim 4, wherein the conductive filler is copper powder.

[0014] The invention described in claim 7 is the electromagnetic wave shielding film according to claim 4, wherein the conductive filler is silver-coated copper powder made of copper powder coated with silver.

[0015] The invention described in claim 8 is the electromagnetic wave shielding film according to any one of claims 1 to 3, wherein the conductive filler has a coil shape.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016]

Fig. 1 is a schematic cross-sectional view showing a configuration of an electromagnetic wave shielding film according to an embodiment of the present invention.

Fig. 2A is a schematic cross-sectional view showing a process of producing the electromagnetic wave shielding film of Fig. 1. Fig. 2B is a schematic cross-sectional view showing a process following Fig. 2A.

Figs. 3A and 3B are schematic cross-sectional views for explaining a method of using the electromagnetic wave shielding film of Fig. 1.

Fig. 4 is a schematic cross-sectional view showing an example of a method of grounding a conductive layer of the electromagnetic wave shielding film.

DESCRIPTION OF THE EMBODIMENTS

[1] Configuration of electromagnetic wave shielding film

[0017] Fig. 1 is a schematic cross-sectional view showing a configuration of an electromagnetic wave shielding film according to an embodiment of the present invention.

[0018] An electromagnetic wave shielding film 1 includes an insulating layer (a protective layer) 2 having electrical insulation properties, a conductive layer 3, and an adhesive layer 4. The conductive layer 3 is formed on one surface of the insulating layer 2, has stretchability, and has a property of hardly returning to an original state thereof when once stretched. The adhesive layer 4 is formed on a surface opposite to the insulating layer 2 side of the conductive layer 3 and has insulating properties. The electromagnetic wave shielding film 1 is sheet-like. To have stretchability means to have a property of stretching easily.

[0019] The insulating layer 2 has a thickness of about 5 to 50 μm . The conductive layer 3 has a thickness of about 10 to 100 μm . The pressure sensitive adhesive 4 has a thickness of about 10 to 150 μm .

[2] Adhesion layer

[0020] As the adhesion layer 4, for example, an adhesive layer, a hot melt adhesion layer, or the like can be used.

[0021] Examples of material of adhesive used for the pressure sensitive adhesive as the adhesion layer 4 include a rubber-based, an acrylic-based, a polyester-based, a silicone-based, and a urethane-based adhesive.

[0022] Examples of material of hot melt adhesive used for the hot melt adhesion layer as the adhesion layer 4 include thermoplastic resins such as polyester-based, polyurethane-based, polyamide-based, olefin-based and ethylene vinyl acetate-based. The hot melt adhesive in the present invention preferably has a melting point of 130°C or less, a durometer hardness of 95A or less, and an elongation at break of 300% or more. The hot melt adhesive of the present invention more preferably has the melting point of 120°C or less, the durometer hardness of 85A or less, and the elongation at break of 500% or more. More specifically, a polyurethane thermoplastic resin such as "SHM 101-PUR" manufactured by Sheedom Co., Ltd. can be used as the hot melt adhesive.

[3] Conductive layer

[0023] The conductive layer 3 is made of a conductive composition, including a resin (hereinafter referred to as a

"conductive layer resin") having stretchability and having a property of hardly returning to an original state thereof when once stretched and a conductive filler filled with the resin.

[0024] A tensile permanent set of the conductive layer resin is preferably 2.5% or more and 90% or less, and more preferably 20% or more and 80% or less. The reason for this is as follows. The electromagnetic wave shielding film 1 is arranged along an outer surface shape of electronic components and the like. For this purpose, the conductive layer 3 preferably has stretchability and has a property of hardly returning to an original state thereof when once stretched and has a property of slightly returning after once stretched. Here, when the tensile permanent set of the conductive layer resin is less than 2.5%, it is difficult for the conductive layer 3 to exhibit the property of hardly returning to the original state when once stretched. In addition, when the tensile permanent set of the conductive layer resin exceeds 90%, the conductive layer 3 easily exhibit the property of hardly returning to the original state when once stretched, but it is difficult for the conductive layer 3 to exhibit the property of slightly returning after once stretched.

[0025] The conductive layer resin preferably has a breaking strength of 20MPa or more and 80MPa or less. The conductive layer resin preferably has an elongation at break of 300% or more and 700% or less. The conductive layer resin preferably has Shore A strength of 20 or more and 50 or less.

[3-1] Conductive layer resin

[0026] The conductive layer resin includes an elastomer and a thermoplastic resin. Examples of the elastomer used as the conductive layer resin include resins having elasticity such as a styrene-based elastomer, an olefin-based elastomer, a polyester-based elastomer, a polyurethane-based elastomer, a polyamide-based elastomer, a silicone-based elastomer and the like. The polyurethane-based elastomer includes a hard segment and a soft segment. Examples of soft segments include carbonates, esters, and ethers. Preferred physical properties are the breaking strength of 20 to 80MPa, the elongation at break of 300 to 700%, and the permanent tensile strain of 2.5 to 90%. More preferable physical properties are the breaking strength of 30 to 70MPa, the elongation at break of 400 to 600%, and the tensile permanent set of 20 to 80%.

[0027] Specifically, NE - 8880, MAU - 9022, NE - 310, NE - 302 HV, CU - 8448 or the like manufactured by Dainichiseika Color & Chemicals Mfg. Co., Ltd. can be used. As the polyurethane-based elastomer, PANDEX 372E manufactured by DIC Corporation can be used. The elastomer may contain a single resin or a plurality of kinds of resins. From a viewpoint of improving manufacturability (processability), flexibility and the like, the elastomer may contain additives such as a plasticizer, a processing aid, a crosslinking agent, a vulcanization accelerator, a vulcanization aid, an antioxidant, a softener, or a colorant.

[0028] Table 1 shows the physical properties of Comparative Example and Examples of the conductive layer resin.

[Table 1]

Physical properties	Comparative Example	Example 1	Example 2	Example 3
Viscosity (dPa·s/20°C)	240	275	230	150
Breaking strength (MPa)	76	69	54	30
Elongation at break (%)	340	440	460	550
Permanent strain (%)	Breaking	2.6	30	71

[0029] The conductive layer resin of Comparative Example includes the urethane elastomer. The conductive layer resin of Examples 1, 2 and 3 include the urethane elastomer.

[0030] The breaking strength [MPa] is a tensile stress just before breaking. Elongation at break [%] is elongation just before breaking. A method of measuring the breaking strength and the elongation at break is based on JIS K 6251: 2010 (Vulcanized rubber and thermoplastic rubber - Determination of tensile properties). The measuring method will be described in detail below. A method of measuring the tensile permanent set [%] is based on JIS K 6273: 2006 (Vulcanized rubber and thermoplastic rubber - Determination of tensile permanent set, elongation rate and creep rate). The measuring method will be described in detail below.

[0031] The method of measuring the breaking strength and the elongation at break will be described. A test piece having a length of 20 mm, a width of 15 mm, and a thickness of $40 \pm 5 \mu\text{m}$ is prepared in advance for each of Comparative Example, Example 1, Example 2 and Example 3. The test piece is attached to a tensile strain retainer. Then, the test piece is pulled until the test piece is broken at a speed of 200 mm/min. A load and an elongation rate just before the test piece breaks are respectively determined as the breaking strength and the elongation at break.

[0032] The method of measuring the tensile permanent set will be described.

[0033] The test piece having a length of 20 mm, a width of 15 mm, and a thickness of $40 \pm 5 \mu\text{m}$ is prepared in

advance for each of Comparative Example, Example 1, Example 2 and Example 3.

[0034] The test piece is attached to the tensile strain retainer. Then, the test piece is stretched to a length (60 mm) corresponding to the elongation rate of 200% at the speed of 200 mm/min. The test piece is held for 10 minutes in a state of being stretched to 60 mm. Thereafter, the test piece is detached from the tensile strain retainer. Then, the test piece is allowed to stand for 30 minutes with a pulling force released. When the 30 minutes have elapsed, a length of the test piece (length of the test piece after shrinkage) is measured.

[0035] When the length of the initial test piece is L0, the length of the test piece after elongation is L1, and the length of the test piece after shrinkage is L2, a tensile permanent set TS is expressed by the following equation (1).

$$TS = \{(L2 - L0)/(L1 - L0)\} \times 100 \quad \text{--- (1)}$$

[0036] The conductive layer resin of Examples 1, 2, and 3 exhibited a property that it was easy to stretch when pulled and hard to return to the original state when once stretched. In contrast, the conductive layer resin of Comparative Example exhibited a property that it was hard to stretch and easy to break when stretched.

[0037] From such a fact, in order to have stretchability and obtain a property of hardly returning to the original state when once stretched, it can be inferred that the tensile permanent set of the conductive layer resin is preferably 2.5% or more and 90% or less, and more preferably 20% or more and 80% or less. Further, it is inferred that the breaking strength of the conductive layer resin is preferably 20MPa or more and 80MPa or less. Further, it can be inferred that the elongation at break of the conductive layer resin is preferably 300% or more and 700% or less.

[3-2] Conductive filler

[0038] A shape of the conductive filler may be dendrite, coil, bulk, sphere, flake, needle, fiber, or the like. The dendrite shape refers to a shape of a rod-like main branch having a rod-like bifurcated branch extending in two-dimensional direction or three-dimensional direction. Further, the dendrite shape includes a shape having the bifurcated branch bent in the middle and a shape having a rod-like bifurcated branch further extending from the middle of the bifurcated branch.

[0039] The dendritic conductive filler will be described in detail. The dendritic conductive filler may be, for example, dendritic copper powder or silver powder. Or, the conductive filler may be silver-coated copper powder made of dendritic copper powder coated with silver. Further, the conductive filler may be gold-coated copper powder made of dendritic copper powder coated with gold. When the conductive filler is made of dendritic silver-coated copper powder, the conductive filler has a resistance value close to that of the conductive filler made of silver although it is relatively inexpensive. That is, the conductive filler having excellent conductivity and migration resistance can be realized. Further, when the conductive filler is made of dendritic copper powder, it is possible to realize the conductive filler having a low resistance value although it is inexpensive.

[0040] When the conductive filler is made of dendritic silver-coated copper powder, the polyurethane-based elastomer is preferably used as the elastomer. In this case, the polyurethane-based elastomer has a volume resistivity of 10^{10-13} Qcm lower by about two digits than other elastomers. Further, the polyurethane-based elastomer has a high affinity to the conductive filler containing silver. Therefore, it is possible to stretch the conductive composition satisfactorily.

[0041] A lower limit of an average particle size of the conductive filler is 1 μm , preferably 2 μm . When the lower limit is 1 μm or more, the conductive fillers tend to come into contact with each other. Therefore, the conductive composition has excellent conductivity. An upper limit of the average particle size of the conductive filler is 20 μm , preferably 10 μm . When the upper limit is 20 μm or less, the thickness of the conductive layer made of conductive composition can be reduced.

[0042] With the conductive filler having a coil shape (including a helix shape and a spiral shape), when the elastomer is stretched, the conductive filler is stretched as when the coil is pulled. Therefore, even when the elastomer is stretched, it is possible to suppress the conductive composition from increasing in the resistance value. Thus, it is possible to provide the conductive composition having stretchability and capable of suppressing an increase in the resistance value when stretched.

[0043] A filling rate of the conductive filler in the conductive composition (conductive layer 3) is preferably 60 mass% or more and 90 mass% or less.

[3-3] Conductive paste

[0044] A conductive paste used for forming the conductive layer 3 can be produced, for example, as follows. For example, the dendritic silver-coated copper powder having an average particle size of 5 μm was blended to the conductive layer resin so that the filling rate of the silver-coated copper powder (filling rate of the conductive filler in the conductive

composition) is a predetermined mass% (for example, 80 mass%). Next, for example, 40 parts by mass of a mixed solvent of isopropyl alcohol and toluene (a weight ratio of isopropyl alcohol to toluene is, for example, 5:5) is added to 100 parts by mass of the conductive layer resin. Next, stirring by a planetary stirrer was performed. Thus, a solution (the conductive paste) containing the conductive layer resin, the silver-coated copper powder and an organic solvent was obtained. It goes without saying that dendritic conductive fillers such as dendritic silver powder, or coil-shaped conductive fillers or the like can be used instead of the dendritic silver-coated copper powder.

[4] Insulating layer

[0045] As the insulating layer 2, for example, the elastomer used as the above-described conductive layer resin filled with carbon black can be used. Similarly, the insulating layer 2 may contain the additives such as the plasticizer, the processing aid, the crosslinking agent, the vulcanization accelerator, the vulcanization aid, the antioxidant, the softener, or the colorant.

[5] Method for producing electromagnetic wave shielding film

[0046] Figs. 2A and 2B are process diagrams showing a method for producing the electromagnetic wave shielding film 1.

[0047] First, as shown in Fig. 2A, the conductive layer 3 is formed on the one surface of the insulating layer 2. Specifically, the conductive paste which is a material of the conductive layer 3 is applied to the one surface of the insulating layer 2. Next, heat drying is performed. Subsequently, as shown in Fig. 2B, the adhesion layer 4 is formed on the surface opposite to the insulating layer 2 of the conductive layer 3. Thus, the electromagnetic wave shielding film 1 is obtained.

[6] Explanation of method of using electromagnetic wave shielding film

[0048] Figs. 3A and 3B are schematic cross-sectional views for explaining a method of using the electromagnetic wave shielding film.

[0049] A plurality of kinds of electronic components 11 to 14 is mounted on a mounting surface side of a wiring substrate 10 (see FIG. 3A). Heights of these electronic components 11 to 14 are not uniform. As shown in Fig. 3A, the electromagnetic wave shielding film 1 is mounted on the wiring substrate 10 so that a surface thereof on the adhesion layer 4 side faces the mounting surface of the wiring substrate 10 and the electromagnetic wave shielding film 1 covers the electronic components 11 to 14. Thus, the electromagnetic wave shielding film 1 is fixed to the wiring substrate 10.

[0050] Thereafter, the electromagnetic wave shielding film 1 is lightly pressed against the mounting surface side of the wiring substrate 10 by a jig made of flexible rubber or the like. Then, since the electromagnetic wave shielding film 1 has the conductive layer 3, having the stretchability and having the property of hardly returning to the original state when once stretched, the electromagnetic wave shielding film 1 is stretched as shown in Fig. 3B. Then, the electromagnetic wave shielding film 1 is deformed along outer surfaces (upper surfaces and side surfaces) of the electronic components 11 to 14 on the wiring substrate 10. Then, the electromagnetic wave shielding film 1 maintains this state. Thus, it is possible to reduce a space formed between the electromagnetic wave shielding film 1 and the electronic components 11 to 14 on the wiring substrate 10. As a result, it is possible to increase the electromagnetic wave shielding effect.

[0051] As shown in Fig. 4, a through-hole 2a extending from a surface of the insulating layer 2 to the conductive layer 3 may be formed, and a pad 5 electrically connected to the conductive layer 3 may be formed on the insulating layer 2. The pad 5 can be connected to a ground via a wiring 6. A position of the pad 5 may be arbitrary. The position may be an upper portion covered with the electromagnetic wave shielding film 1 on the electronic component. Further, the ground need not be a ground dedicated wiring. Furthermore, the ground may be a housing of an electronic device.

[0052] In the above-described embodiment, the electromagnetic wave shielding film 1 includes the insulating layer 2, the conductive layer 3 formed on the one surface of the insulating layer 2 and having stretchability and the property of hardly returning to the original state when once stretched, and the insulating adhesion layer 4 formed on the surface opposite to the insulating layer 2 side of the conductive layer 3. However, the insulating layer 2 may not be formed.

[0053] In addition, it is possible to make various design changes within the scope of matters described in claims.

[0054] The present international application is a priority claimed application based on Japanese Patent Application No. 2016-072293 filed on Mar. 31, 2016. The entire contents of Japanese Patent Application No. 2016-072293 are incorporated into the present international application.

[0055] The above descriptions of a specific embodiment of the present invention have been presented for the purpose of exemplification. They are not intended to be exhaustive or to limit the present invention to the described embodiment. It will be apparent to those skilled in the art that numerous variations or modifications can be made in light of the above description.

LIST OF REFERENCE NUMERALS

[0056]

- 5 1: Electromagnetic wave shielding film
 2: Insulating layer
 3: Conductive layer
 4: Adhesion layer

10

Claims

1. An electromagnetic wave shielding film comprising:

15 a conductive layer having stretchability; and
 an adhesion layer formed on one surface of the conductive layer and having insulating properties, wherein
 the conductive layer includes a conductive composition comprising a resin having stretchability and a conductive
 filler filled with the resin, and
 the resin has a tensile permanent set of 2.5% or more and 90% or less.

20

2. The electromagnetic wave shielding film according to claim 1, wherein
 the resin has a breaking strength of 20MPa or more and 80MPa or less and an elongation at break of 300% or more
 and 700% or less.

25

3. The electromagnetic wave shielding film according to claim 1 or 2, further comprising an insulating layer formed on
 a surface opposite to the adhesion layer side of the conductive layer.

4. The electromagnetic wave shielding film according to any one of claims 1 to 3, wherein
 the conductive filler is dendritic.

30

5. The electromagnetic wave shielding film according to claim 4, wherein
 the conductive filler is silver powder.

35

6. The electromagnetic wave shielding film according to claim 4, wherein
 the conductive filler is copper powder.

7. The electromagnetic wave shielding film according to claim 4, wherein
 the conductive filler is silver-coated copper powder made of copper powder coated with silver.

40

8. The electromagnetic wave shielding film according to any one of claims 1 to 3, wherein
 the conductive filler has a coil shape.

45

50

55

FIG. 1

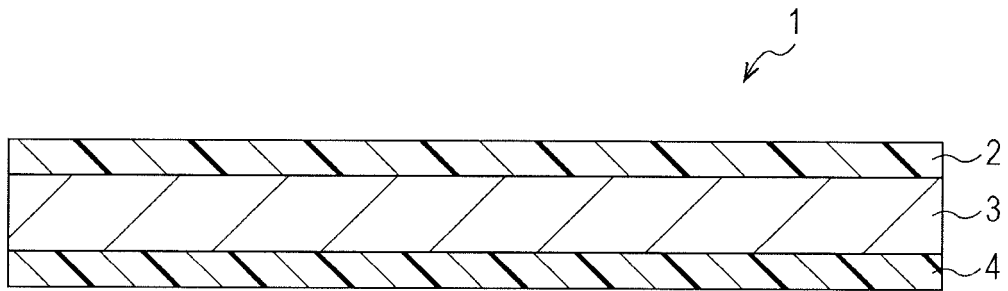


FIG. 2A



FIG. 2B

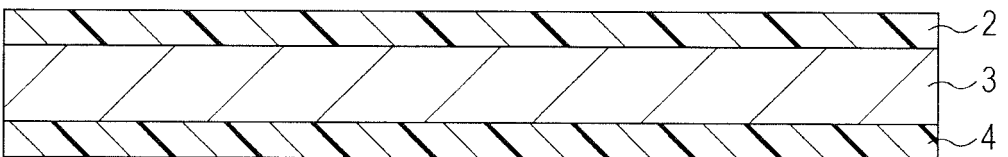


FIG. 3A

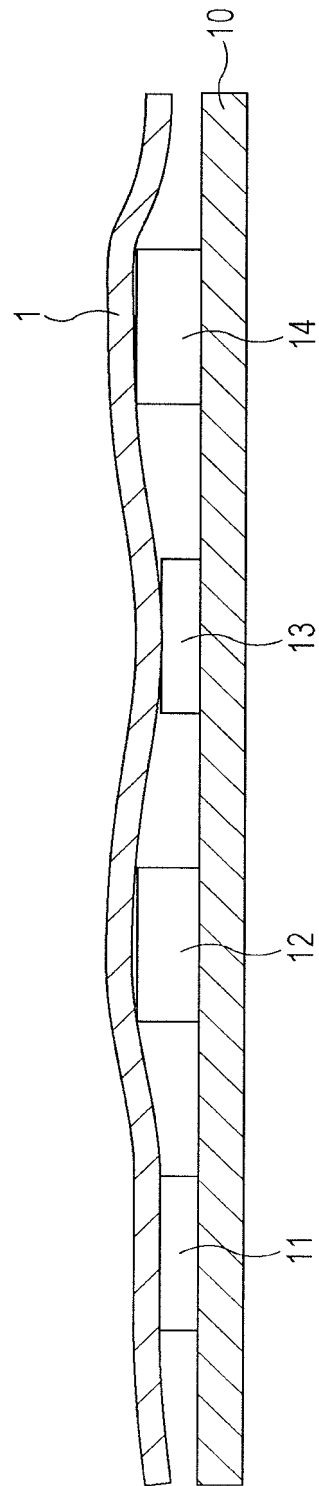


FIG. 3B


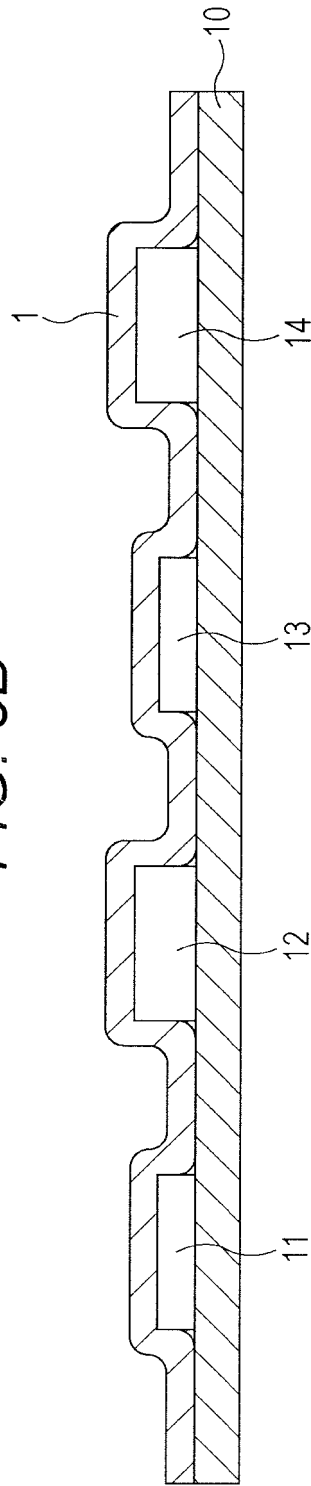


FIG. 4

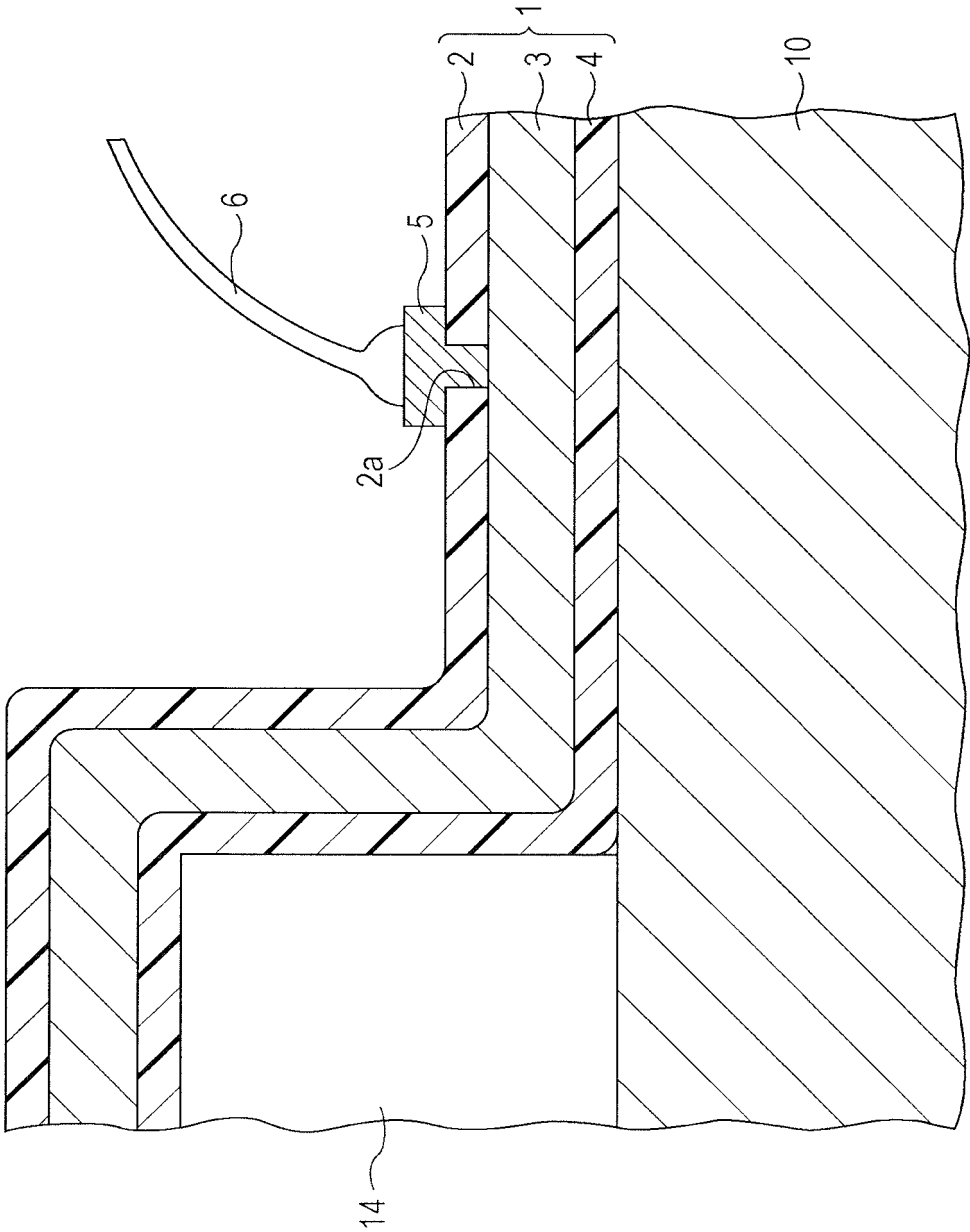

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2017/006301

A. CLASSIFICATION OF SUBJECT MATTER

H05K9/00(2006.01)i, B32B7/02(2006.01)i, B32B27/18(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H05K9/00, B32B7/02, B32B27/18

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho 1922-1996 Jitsuyo Shinan Toroku Koho 1996-2017

Kokai Jitsuyo Shinan Koho 1971-2017 Toroku Jitsuyo Shinan Koho 1994-2017

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2016/017644 A1 (Tatsuta Electric Wire & Cable Co., Ltd.), 04 February 2016 (04.02.2016), paragraphs [0034] to [0047], [0086], [0089]; fig. 10, 11 & TW 201620999 A	1-8
A	JP 2004-176005 A (Kinugawa Rubber Industrial Co., Ltd.), 24 June 2004 (24.06.2004), entire text; fig. 1 to 3 (Family: none)	1-8
A	JP 2009-138141 A (Hitachi Cable Ltd.), 25 June 2009 (25.06.2009), entire text; fig. 1 (Family: none)	1-8

☒ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T"

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&"

document member of the same patent family

Date of the actual completion of the international search
02 May 2017 (02.05.17)Date of mailing of the international search report
16 May 2017 (16.05.17)Name and mailing address of the ISA/
Japan Patent Office
3-4-3, Kasumigaseki, Chiyoda-ku,
Tokyo 100-8915, Japan

Authorized officer

Telephone No.

Form PCT/ISA/210 (second sheet) (January 2015)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2017/006301

5	C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
	Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
10	A	JP 2008-27973 A (Three Bond Co., Ltd.), 07 February 2008 (07.02.2008), entire text (Family: none)	1-8
15			
20			
25			
30			
35			
40			
45			
50			
55			

Form PCT/ISA/210 (continuation of second sheet) (January 2015)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2000036686 A [0003]
- JP 2016072293 A [0054]