



(12) **CORRECTED EUROPEAN PATENT APPLICATION**

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 30

(51) Int Cl.:
B41J 29/38 ^(2006.01) **B41J 29/393** ^(2006.01)

(48) Corrigendum issued on:
15.05.2019 Bulletin 2019/20

(43) Date of publication:
06.03.2019 Bulletin 2019/10

(21) Application number: **18188305.9**

(22) Date of filing: **09.08.2018**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(71) Applicant: **CANON KABUSHIKI KAISHA**
Ohta-ku
Tokyo 146-8501 (JP)

(72) Inventors:
• **OGUSHI, Takuhiro**
Tokyo, 146-8501 (JP)
• **EZUMI, Yosuke**
Tokyo, 146-8501 (JP)

(74) Representative: **WESER & Kollegen**
Radeckestraße 43
81245 München (DE)

(30) Priority: **24.08.2017 JP 2017161499**

(54) **PRINTING APPARATUS AND CONTROL METHOD OF PRINTING APPARATUS**

(57) The printing apparatus of the present invention is a printing apparatus including: a power source switch (111) that switches a power source to on or off; a control circuit (112) configured to control supply or shutoff of power from the power source; and a measurement unit (113) configured to measure a predetermined set time after the power source switch is switched to off, and the predetermined set time is set in accordance with process-

ing being performed, and the control circuit performs control, in a case where the power source switch is switched to off, so as to shut off supply of power from the power source in accordance with completion of termination preparation of the processing being performed or completion of measurement of the predetermined set time in the measurement unit.

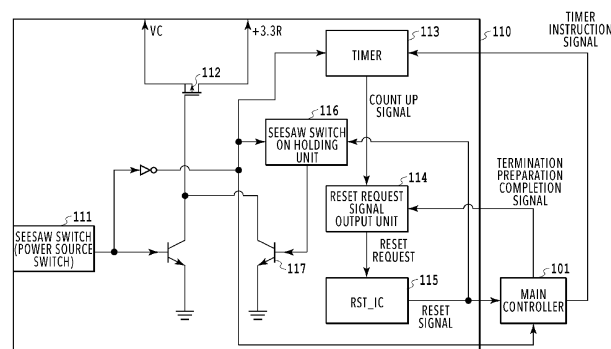


FIG.10