



(11) **EP 3 464 462 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

- (15) Correction information:  
**Corrected version no 1 (W1 B1)**  
**Corrections, see**  
**Description Paragraph(s) 2, 8, 11, 14, 34, 35,**  
**59, 65, 68, 74, 75, 76, 77, 78, 79,**  
**82, 83, 84, 91, 92, 112, 113**  
**Claims EN 1, 6**
- (48) Corrigendum issued on:  
**05.10.2022 Bulletin 2022/40**
- (45) Date of publication and mention of the grant of the patent:  
**20.04.2022 Bulletin 2022/16**
- (21) Application number: **17730299.9**
- (22) Date of filing: **30.05.2017**
- (51) International Patent Classification (IPC):  
**C08L 23/16<sup>(2006.01)</sup> C08F 4/659<sup>(2006.01)</sup>**  
**C08K 3/04<sup>(2006.01)</sup> C08K 5/01<sup>(2006.01)</sup>**  
**C08K 3/26<sup>(2006.01)</sup>**
- (52) Cooperative Patent Classification (CPC):  
(C-Sets available)  
**C08L 23/16; C08K 3/04; C08K 5/01; C08F 4/65908;**  
**C08K 2003/265; C08L 2203/14; C08L 2205/025**
- (86) International application number:  
**PCT/US2017/035020**
- (87) International publication number:  
**WO 2017/210201 (07.12.2017 Gazette 2017/49)**
- (Cont.)

(54) **ETHYLENE/ALPHA-OLEFIN/DIENE INTERPOLYMERS COMPOSITIONS**

ZUSAMMENSETZUNGEN MIT ETHYLEN-/ALPHA-OLEFIN/DIEN-INTERPOLYMERN  
COMPOSITIONS D'INTERPOLYMÈRES D'ÉTHYLÈNE/ALPHA-OLÉFINE/DIÈNE

- (84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB**  
**GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO**  
**PL PT RO RS SE SI SK SM TR**
- (30) Priority: **30.05.2016 PCT/CN2016/083876**
- (43) Date of publication of application:  
**10.04.2019 Bulletin 2019/15**
- (73) Proprietor: **Dow Global Technologies LLC**  
**Midland, MI 48674 (US)**
- (72) Inventors:  
• **HAN, Tao**  
**Shanghai 201203 (CN)**  
• **LIPISHAN, Colin**  
**Lake Jackson, TX 77566 (US)**  
• **HATTORI, Isao**  
**Yokohama-shi 221-0024 (JP)**
- (74) Representative: **Boult Wade Tennant LLP**  
**Salisbury Square House**  
**8 Salisbury Square**  
**London EC4Y 8AP (GB)**
- (56) References cited:  
**WO-A1-2014/084892 US-A- 5 677 382**  
**US-A- 5 973 017 US-A1- 2012 116 021**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 3 464 462 B9**

(52) Cooperative Patent Classification (CPC): (Cont.)

C-Sets

**C08F 210/16, C08F 4/64193;**

**C08L 23/16, C08L 23/16, C08K 5/01, C08K 3/04,**

**C08K 2003/265;**

C08F 210/16, C08F 210/06, C08F 236/20,

C08F 2500/17

**Description**

REFERENCE TO RELATED APPLICATIONS

5 **[0001]** This application claims the benefit of International Application PCT/CN16/083876, filed May 30, 2016, and incorporated herein by reference.

BACKGROUND

10 **[0002]** This invention relates to rubber compositions for producing foamed sponge profiles which contain at least two ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymes.

**[0003]** Conventional EPDM-based compositions for foamed applications are described in the following references: US5973017, US20140336290, US20120059123, US20110160323, WO2007/136494, WO2007/136496, WO2007/136497, WO2014/084892, WO2013/096573, WO2014/084893, WO2016/003878, WO2016/003879 and  
15 WO2016/003880. However, there is a need for new compositions that have excellent foamability, and which generate excellent foamed products with smooth surface appearance. These needs have been met by the following invention.

**[0004]** US 5,677, 382 A relates to an ethylene-  $\alpha$ -olefin-non-conjugated diene copolymer rubber composition.

**[0005]** US2012/116021A1 relates to polymer compositions methods of making the same and articles made therefrom.

20 **[0006]** WO 2014/084892 A1 relates to a composition comprising a first composition that comprises an ethylene/ $\alpha$ -olefin/nonconjugated polyene interpolymes.

**[0007]** US 5 973 017A relates to a foamed rubber blend comprising an EPDM is polymer blend.

SUMMARY OF INVENTION

25 **[0008]** The invention provides a composition comprising at least one oil, and a first composition comprising the following:

- A) a first composition A comprising an ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymes A,
- B) an ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymes B; and

30 wherein the weight ratio of component A to component B is from 1/1 to 20/1;

wherein the weight average molecular weight (Mw) of the ethylene/ $\alpha$ -olefin/non-conjugated diene B is greater than the weight average molecular weight (Mw) of the first composition A;

35 wherein the composition has a Mooney Viscosity (ML1+4, 100°C) from 20 to 100; and wherein the first composition meets the following Equation A:  $4.50 < [(Mz/Mn)_{(first\ comp.)}]/(TD0.1)_{(first\ comp.)}] < 8.00$  (Eqn. A), wherein  $TD0.1_{(first\ comp.)}$  is the tan delta of the first composition at 0.1 rad/sec and 190°C..

BRIEF DESCRIPTION OF THE DRAWINGS

40 **[0009]**

Figure 1 is an optical micrograph of the morphology of a sponge formed by comparative composition F-b.

Figure 2 is an optical micrograph of the morphology of a sponge formed by inventive composition F-3.

45 DETAILED RESCRIPTION

**[0010]** It has been discovered that the inventive compositions can be used to form foams with excellent closed cell morphology and nice skin surface. The inventive compositions, containing both First Composition A and EPDM-B, show very high Mooney relaxation area. Higher Mooney relaxation area means the rubber composition has higher melt elasticity,  
50 better carbon black incorporation during mixing, improved dimension stability during extrusion, better bubble stability during foaming. All which provide excellent closed cell morphology and nice skin surface.

**[0011]** As discussed above, the invention provides a 1. A composition comprising at least one oil, and a first composition comprising the following:

- 55 A) a first composition A comprising an ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymes A,
- B) an ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymes B; and

wherein the weight ratio of component A to component B is from 1/1 to 20/1;

wherein the Mw of the ethylene/ $\alpha$ -olefin/non-conjugated diene B is greater than the Mw of the first composition A; wherein the composition has a Mooney Viscosity (ML1+4, 100°C) from 20 to 100; and wherein the first composition meets the following Equation A:  $4.50 < [(Mz/Mn)_{(first\ comp.)}]/(TD0.1_{(first\ comp.)})] < 8.00$  (Eqn. A), wherein  $TD0.1_{(first\ comp.)}$  is the tan delta of the first composition at 0.1 rad/sec and 190°C.

5 **[0012]** The inventive composition may comprise a combination of two or more embodiments described herein.

**[0013]** The first composition may comprise a combination of two or more embodiments described herein.

10 **[0014]** The first composition A may comprise a combination of two or more embodiments described herein. The ethylene/ $\alpha$ -olefin/non-conjugated diene A may comprise a combination of two or more embodiments described herein. The ethylene/ $\alpha$ -olefin/non-conjugated diene B may comprise a combination of two or more embodiments described herein.

15 **[0015]** In one embodiment, or in combination with any one or more embodiments described herein, the first composition comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of first composition A and the ethylene/alpha-olefin/non-conjugated diene interpolymers B, based on the weight of the first composition. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of the ethylene/alpha-olefin/non-conjugated diene interpolymers A and a second ethylene/alpha-olefin/non-conjugated diene interpolymers, based on the weight of the first composition A. In another embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the ethylene/alpha-olefin/non-conjugated diene interpolymers A, based on the weight of the first composition A. In one embodiment, the alpha-olefin of interpolymers B is the same alpha-olefin of interpolymers A.

20 **[0016]** In one embodiment, or in combination with any one or more embodiments described herein, the weight ratio of component A to component B is from 2/1 to 20/1, or from 3/1 to 20/1, or from 4/1 to 20/1, or from 5/1 to 20/1, or from 6/1 to 20/1, or from 7/1 to 20/1, or from 8/1 to 20/1, or from 9/1 to 20/1. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of first composition A and the ethylene/alpha-olefin/non-conjugated diene interpolymers B, based on the weight of the first composition. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of the ethylene/alpha-olefin/non-conjugated diene interpolymers A and a second ethylene/alpha-olefin/non-conjugated diene interpolymers, based on the weight of the first composition A. In another embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the ethylene/alpha-olefin/non-conjugated diene interpolymers A, based on the weight of the first composition A. In one embodiment, the alpha-olefin of interpolymers B is the same alpha-olefin of interpolymers A.

25 **[0017]** In one embodiment, or in combination with any one or more embodiments described herein, the weight ratio of component A to component B is from 1/1 to 19/1, or from 2/1 to 19/1, or from 3/1 to 19/1, or from 4/1 to 19/1, or from 5/1 to 19/1, or from 6/1 to 19/1, or from 7/1 to 19/1, or from 8/1 to 19/1, or from 9/1 to 19/1. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of first composition A and the ethylene/alpha-olefin/non-conjugated diene interpolymers B, based on the weight of the first composition. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of the ethylene/alpha-olefin/non-conjugated diene interpolymers A and a second ethylene/alpha-olefin/non-conjugated diene interpolymers, based on the weight of the first composition A. In another embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the ethylene/alpha-olefin/non-conjugated diene interpolymers A, based on the weight of the first composition A. In one embodiment, the alpha-olefin of interpolymers B is the same alpha-olefin of interpolymers A.

30 **[0018]** In one embodiment, or in combination with any one or more embodiments described herein, the composition has a Mooney Viscosity (ML1+4, 100°C) from 30 to 80, or from 30 to 75, or from 30 to 65, or from 30 to 60. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of first composition A and the ethylene/alpha-olefin/non-conjugated diene interpolymers B, based on the weight of the first composition. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of the ethylene/alpha-olefin/non-conjugated diene interpolymers A and a second ethylene/alpha-olefin/non-conjugated diene interpolymers, based on the weight of the first composition A. In another embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the ethylene/alpha-olefin/non-conjugated diene interpolymers A, based on the weight of the first composition A. In one embodiment, the alpha-olefin of interpolymers B is

the same alpha-olefin of interpolymer A.

**[0019]** In one embodiment, or in combination with any one or more embodiments described herein, the composition has a Mooney Viscosity (ML1+4, 100°C) from 20 to 80, or from 20 to 60, or from 20 to 50, or from 20 to 40. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of first composition A and the ethylene/alpha-olefin/non-conjugated diene interpolymer B, based on the weight of the first composition. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of the ethylene/alpha-olefin/non-conjugated diene interpolymer A and a second ethylene/alpha-olefin/non-conjugated diene interpolymer, based on the weight of the first composition A. In another embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the ethylene/alpha-olefin/non-conjugated diene interpolymer A, based on the weight of the first composition A. In one embodiment, the alpha-olefin of interpolymer B is the same alpha-olefin of interpolymer A.

**[0020]** The first composition meets the following Equation A:

$$4.50 < [(Mz/Mn)_{(first\ comp.)}]/(TD0.1_{(first\ comp.)})] < 8.00 \quad (\text{Eqn. A}),$$

wherein  $TD0.1_{(first\ comp.)}$  is the tan delta of the first composition at 0.1 rad/sec and 190°C. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of first composition A and the ethylene/alpha-olefin/non-conjugated diene interpolymer B, based on the weight of the first composition. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of the ethylene/alpha-olefin/non-conjugated diene interpolymer A and a second ethylene/alpha-olefin/non-conjugated diene interpolymer, based on the weight of the first composition A. In another embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the ethylene/alpha-olefin/non-conjugated diene interpolymer A, based on the weight of the first composition A. Mz, and Mn are determined from conventional GPC. In one embodiment, the alpha-olefin of interpolymer B is the same alpha-olefin of interpolymer A.

**[0021]** In one embodiment, the first composition meets the following Equation A1:  $4.60 \leq [(Mz/Mn)_{(first\ comp.)}]/(TD0.1_{(first\ comp.)})] \leq 8.00$ , or  $4.70 \leq [(Mz/Mn)_{(first\ comp.)}]/(TD0.1_{(first\ comp.)})] \leq 8.00$ , or  $4.75 \leq [(Mz/Mn)_{(first\ comp.)}]/(TD0.1_{(first\ comp.)})] \leq 8.00$ . Tan delta at 190°C. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of first composition A and the ethylene/alpha-olefin/non-conjugated diene interpolymer B, based on the weight of the first composition. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of the ethylene/alpha-olefin/non-conjugated diene interpolymer A and a second ethylene/alpha-olefin/non-conjugated diene interpolymer, based on the weight of the first composition A. In another embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the ethylene/alpha-olefin/non-conjugated diene interpolymer A, based on the weight of the first composition A. Mz, and Mn are determined from conventional GPC. In one embodiment, the alpha-olefin of interpolymer B is the same alpha-olefin of interpolymer A.

**[0022]** In one embodiment, the first composition meets the following Equation B:  $[(Mz_{(first\ comp.)})]/(TD0.1_{(first\ comp.)})]/(Mw/Mn)_{(first\ comp.)} \geq 100,000$  g/mol, or  $\geq 105,000$  g/mol, or  $\geq 110,000$  g/mol, or  $\geq 115,000$  g/mol, or  $\geq 120,000$  g/mol, or  $\geq 125,000$  g/mol (Eqn. B), where  $TD0.1_{(first\ comp.)}$  is the tan delta of the first composition at 0.1 rad/sec and 190°C. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of first composition A and the ethylene/alpha-olefin/non-conjugated diene interpolymer B, based on the weight of the first composition. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of the ethylene/alpha-olefin/non-conjugated diene interpolymer A and a second ethylene/alpha-olefin/non-conjugated diene interpolymer, based on the weight of the first composition A. In another embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the ethylene/alpha-olefin/non-conjugated diene interpolymer A, based on the weight of the first composition A. Mz, Mw and Mn are determined from conventional GPC. In one embodiment, the alpha-olefin of interpolymer B is the same alpha-olefin of interpolymer A.

**[0023]** In one embodiment, the first composition meets the following Equation C:  $[(Mz_{(first\ comp.)})]/(TD0.1_{(first\ comp.)})]/(Mw/Mn)_{(first\ comp.)} \leq 400,000$  g/mol, or  $\leq 350,000$  g/mol, or  $\leq 300,000$  g/mol, or  $\leq$

250,000 g/mol, or  $\leq 200,000$  g/mol (Eqn. C), where  $TD0.1_{(first\ comp.)}$  is the tan delta of the first composition at 0.1 rad/sec and 190°C. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of first composition A and the ethylene/alpha-olefin/non-conjugated diene interpolymers B, based on the weight of the first composition. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of the ethylene/alpha-olefin/non-conjugated diene interpolymers A and a second ethylene/alpha-olefin/non-conjugated diene interpolymers, based on the weight of the first composition A. In another embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the ethylene/alpha-olefin/non-conjugated diene interpolymers A, based on the weight of the first composition A. Mz, Mw and Mn are determined from conventional GPC. In one embodiment, the alpha-olefin of interpolymers B is the same alpha-olefin of interpolymers A.

**[0024]** In one embodiment, the first composition meets the following Equation D:  $(Mz_{(first\ comp.)})/(TD0.1_{(first\ comp.)}) \geq 300,000$  g/mol, or  $\geq 320,000$  g/mol, or  $\geq 340,000$  g/mol, or  $\geq 360,000$  g/mol, or  $\geq 380,000$  g/mol, or  $\geq 400,000$  g/mol (Eqn. D), where  $TD0.1_{(first\ comp.)}$  is the tan delta of the first composition at 0.1 rad/sec and 190°C. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of first composition A and the ethylene/alpha-olefin/non-conjugated diene interpolymers B, based on the weight of the first composition. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of the ethylene/alpha-olefin/non-conjugated diene interpolymers A and a second ethylene/alpha-olefin/non-conjugated diene interpolymers, based on the weight of the first composition A. In another embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the ethylene/alpha-olefin/non-conjugated diene interpolymers A, based on the weight of the first composition A. Mz is determined from conventional GPC. In one embodiment, the alpha-olefin of interpolymers B is the same alpha-olefin of interpolymers A.

**[0025]** In one embodiment, the first composition meets the following Equation E:  $[(Mz_{(first\ comp.)})/(TD0.1_{(first\ comp.)})] \leq 660,000$  g/mol, or  $\leq 640,000$  g/mol, or  $\leq 620,000$  g/mol, or  $\leq 600,000$  g/mol, or  $\leq 580,000$  g/mol, or  $\leq 560,000$  g/mol (Eqn. E), where  $TD0.1_{(first\ comp.)}$  is the tan delta of the first composition A at 0.1 rad/sec and 190°C. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of first composition A and the ethylene/alpha-olefin/non-conjugated diene interpolymers B, based on the weight of the first composition. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of the ethylene/alpha-olefin/non-conjugated diene interpolymers A and a second ethylene/alpha-olefin/non-conjugated diene interpolymers, based on the weight of the first composition A. In another embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the ethylene/alpha-olefin/non-conjugated diene interpolymers A, based on the weight of the first composition A. In one embodiment, the alpha-olefin of interpolymers B is the same alpha-olefin of interpolymers A.

**[0026]** In one embodiment, or in combination with any one or more embodiments described herein, the composition comprises  $\geq 30$  wt%, or  $\geq 35$  wt%, or  $\geq 40$  wt%, or  $\geq 45$  wt%, or  $\geq 50$  wt%, of the oil and the first composition, based on the weight of the composition. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of first composition A and the ethylene/alpha-olefin/non-conjugated diene interpolymers B, based on the weight of the first composition. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of the ethylene/alpha-olefin/non-conjugated diene interpolymers A and a second ethylene/alpha-olefin/non-conjugated diene interpolymers, based on the weight of the first composition A. In another embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the ethylene/alpha-olefin/non-conjugated diene interpolymers A, based on the weight of the first composition A. In one embodiment, the alpha-olefin of interpolymers B is the same alpha-olefin of interpolymers A.

**[0027]** Oils include, but are not limited to, petroleum oils, such as paraffinic, aromatic and naphthenic oils; polyalkylbenzene oils; and organic acid monoesters.

**[0028]** In one embodiment, or in combination with any one or more embodiments described herein, the weight ratio of the first composition to the oil is from 0.8/1 to 1.5/1, or from 0.9/1 to 1.4/1, or from 0.9/1 to 1.3/1. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of first composition A and the ethylene/alpha-olefin/non-conjugated diene interpolymers B, based on the weight of the first composition. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of the ethylene/alpha-olefin/non-conjugated diene interpolymers A and a second ethyl-

ene/alpha-olefin/non-conjugated diene interpolymers, based on the weight of the first composition A. In another embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the ethylene/alpha-olefin/non-conjugated diene interpolymers A, based on the weight of the first composition A.

5 **[0029]** In one embodiment, or in combination with any one or more embodiments described herein, the first composition has V0.1 (at 190°C) from 140,000 to 420,000, or from 150,000 to 400,000, or from 160,000 to 380,000 Pa-sec. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of first composition A and the ethylene/alpha-olefin/non-conjugated diene interpolymers B, based on the weight of the first composition. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of the ethylene/alpha-olefin/non-conjugated diene interpolymers A and a second ethylene/alpha-olefin/non-conjugated diene interpolymers, based on the weight of the first composition A. In another embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the ethylene/alpha-olefin/non-conjugated diene interpolymers A, based on the weight of the first composition A.

10 **[0030]** In one embodiment, or in combination with any one or more embodiments described herein, the ethylene/alpha-olefin/non-conjugated diene interpolymers B has a Mw from 340,000 to 550,000 g/mole, or from 360,000 to 500,000 g/mole, or from 380,000 g/mole to 450,000 g/mole; and wherein the first composition A has a Mw from 150,000 to 320,000 g/mole, or from 180,000 to 310,000 g/mole, or from 200,000 g/mole to 300,000 g/mole. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of first composition A and the ethylene/alpha-olefin/non-conjugated diene interpolymers B, based on the weight of the first composition. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of the ethylene/alpha-olefin/non-conjugated diene interpolymers A and a second ethylene/alpha-olefin/non-conjugated diene interpolymers, based on the weight of the first composition A. In another embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the ethylene/alpha-olefin/non-conjugated diene interpolymers A, based on the weight of the first composition A.

15 **[0031]** In one embodiment, or in combination with any one or more embodiments described herein, the composition has a MLRA value  $\geq 200$ , or  $\geq 220$ . In a further embodiment, or in combination with any one or more embodiments described herein, the first composition comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of first composition A and the ethylene/alpha-olefin/non-conjugated diene interpolymers B, based on the weight of the first composition. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of the ethylene/alpha-olefin/non-conjugated diene interpolymers A and a second ethylene/alpha-olefin/non-conjugated diene interpolymers, based on the weight of the first composition A. In another embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the ethylene/alpha-olefin/non-conjugated diene interpolymers A, based on the weight of the first composition A.

20 **[0032]** In one embodiment, or in combination with any one or more embodiments described herein, the ethylene/alpha-olefin/non-conjugated diene interpolymers A is an EPDM. In a further embodiment, the diene is ENB.

25 **[0033]** In one embodiment, or in combination with any one or more embodiments described herein, the ethylene/alpha-olefin/non-conjugated diene interpolymers B is an EPDM. In a further embodiment, the diene is ENB.

30 **[0034]** In one embodiment, or in combination with any one or more embodiments described herein, component A and component B further differ in one or more of the following properties: Mn, MWD, V0.1, V100, V0.1/V100, density and/or Mooney Viscosity. In a further embodiment, each ethylene/alpha-olefin/non-conjugated diene interpolymers is an EPDM. In a further embodiment, the diene is ENB.

35 **[0035]** In one embodiment, an inventive composition further comprises a thermoplastic polymer. Polymers, include, but not limited to, propylene-based polymers, ethylene-base polymers, and olefin multi-block interpolymers. Suitable ethylene-base polymers include, but are not limited to, high density polyethylene (HDPE), linear low density polyethylene (LLDPE), very low density polyethylene (VLDPE), ultra low density polyethylene (ULDPE), homogeneously branched linear ethylene/alpha-olefin interpolymers, and homogeneously branched substantially linear ethylene/alpha-olefin interpolymers (that is homogeneously branched long chain branched ethylene/alpha-olefin interpolymers).

40 **[0036]** In one embodiment, or in combination with any one or more embodiments described herein, the composition comprises less than 1.0 wt%, further less than 0.5 wt%, further less than 0.1 wt% of a propylene-based polymer, based on the weight of the composition.

45 **[0037]** In one embodiment, or in combination with any one or more embodiments described herein, the composition does not contain a coupling agent, for example, an azide compound or a peroxide.

50 **[0038]** An inventive composition may comprise one or more additional additives. Suitable additives include, but are

not limited to, fillers, antioxidants, UV stabilizers, flame retardants, colorants or pigments, crosslinking agents, and combinations thereof.

**[0039]** In one embodiment, the composition further comprises a crosslinking agent. Cross-linking agents include, but are not limited to, sulfur-containing compounds, such as elemental sulfur, 4,4'-dithiodimorpholine, thiuram di- and polysulfides, alkylphenol disulfides, and 2-morpholino-dithiobenzothiazole; and peroxides, such as di-tertbutyl peroxide, tertbutylcumyl peroxide, dicumyl peroxide, 2,5-dimethyl-2,5-di-(tertbutylperoxy) hexane, di-(tertbutyl-peroxyisopropyl) benzene, tertbutyl peroxybenzoate and 1,1-di-(tertbutylperoxy)-3,3,5-trimethylcyclohexane.

**[0040]** The invention also provides a crosslinked composition formed from an inventive composition of one or more embodiments described herein.

**[0041]** In one embodiment, an inventive composition further comprises a filler. Suitable fillers include, but are not limited to, clay, CaCO<sub>3</sub>, talc, carbon black, and mineral fibers.

**[0042]** In one embodiment, the composition further comprises a curing package containing sulfur, one or more accelerators, carbon black, zinc oxide, oil, one or more blowing agents, one or more activators, and one or more stabilizers.

**[0043]** Blowing agents can be added to produce sponge products. Different and additional cross-linking agents and activators, accelerators and coagents such as sulfur, sulfur donor, sulphenamide, mercapto, guanidine, carbamate, morpholine, thiazol, sulfonamide, peroxides, multifunctional acrylate, triallylcyanurate can be used.

**[0044]** In one embodiment, the composition comprises greater than, or equal to, 70 weight percent, or greater than, or equal to, 75 weight percent, or greater than, or equal to, 80 weight percent, of the first composition, based on the weight of the composition. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of first composition A and the ethylene/alpha-olefin/non-conjugated diene interpolymers B, based on the weight of the first composition. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of the ethylene/alpha-olefin/non-conjugated diene interpolymers A and a second ethylene/alpha-olefin/non-conjugated diene interpolymers, based on the weight of the first composition A. In another embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the ethylene/alpha-olefin/non-conjugated diene interpolymers A, based on the weight of the first composition A. In one embodiment, the alpha-olefin of interpolymers B is the same alpha-olefin of interpolymers A.

**[0045]** The invention also provides an article comprising at least one component formed from the composition of one embodiment, or a combination of two or more embodiments described herein. In a further embodiment, the article is a foam.

### ***First Composition***

**[0046]** In one embodiment, or in combination with any one or more embodiments described herein, the first composition has a weight average molecular weight (M<sub>w</sub>) greater than, or equal to, 140,000 g/mole, or greater than, or equal to, 160,000 g/mole, or greater than, or equal to, 180,000 g/mole, or greater than, or equal to, 200,000 g/mole.

**[0047]** In one embodiment, or in combination with any one or more embodiments described herein, the first composition has a weight average molecular weight (M<sub>w</sub>) less than, or equal to, 400,000 g/mole, or less than, or equal to, 380,000 g/mole, or less than, or equal to, 350,000 g/mole, or less than, or equal to, 320,000 g/mole.

**[0048]** In one embodiment, or in combination with any one or more embodiments described herein, the first composition has a z average molecular weight (M<sub>z</sub>) greater than, or equal to, 400,000 g/mole, or greater than, or equal to, 450,000 g/mole, or greater than, or equal to, 500,000 g/mole, or greater than, or equal to, 540,000 g/mole. In one embodiment, or in combination with any one or more embodiments described herein, the first composition has a z average molecular weight (M<sub>z</sub>) less than, or equal to, 750,000 g/mole, or less than, or equal to, 730,000 g/mole, or less than, or equal to, 700,000 g/mole, or less than, or equal to, 680,000 g/mole.

**[0049]** In one embodiment, or in combination with any one or more embodiments described herein, the first composition has a number average molecular weight (M<sub>n</sub>) greater than, or equal to, 45,000 g/mole, or greater than, or equal to, 50,000 g/mole, or greater than, or equal to, 55,000 g/mole, or greater than, or equal to, 60,000 g/mole. In one embodiment, or in combination with any one or more embodiments described herein, the first composition has a number average molecular weight (M<sub>n</sub>) less than, or equal to, 150,000 g/mole, or less than, or equal to, 120,000 g/mole, or less than, or equal to, 100,000 g/mole, or less than, or equal to, 95,000 g/mole.

**[0050]** In one embodiment, or in combination with any one or more embodiments described herein, the first composition has a MWD less than, or equal to, 4.50, further less than, or equal to, 4.00, further less than, or equal to, 3.50. In one embodiment, or in combination with any one or more embodiments described herein, the first composition has a MWD greater than, or equal to, 2.80, or greater than, or equal to, 3.10, or greater than, or equal to, 3.30.

**[0051]** In one embodiment, or in combination with any one or more embodiments described herein, the first composition has a tan delta (0.1 rad/sec, 190°C) from 0.90 to 1.80, or from 1.00 to 1.70, or from 1.10 to 1.60.

**[0052]** In one embodiment, or in combination with any one or more embodiments described herein, the first composition has a viscosity at 0.1 rad/sec, 190°C, greater than, or equal to, 120,000 Pa·s, or greater than, or equal to, 140,000 Pa·s, or greater than, or equal to, 160,000 Pa·s. The viscosity at 0.1 rad/sec, 190°C is that of the composition without filler and without oil. In one embodiment, or in combination with any one or more embodiments described herein, the first composition has a viscosity at 0.1 rad/sec, 190°C, less than, or equal to, 450,000 Pa·s, or less than, or equal to, 400,000 Pa·s, or less than, or equal to, 370,000 Pa·s, or less than, or equal to, 180,000 Pa·s. The viscosity at 0.1 rad/sec, 190°C is that of the composition without filler and without oil.

**[0053]** In one embodiment, or in combination with any one or more embodiments described herein, the first composition has a rheology ratio ( $V_{0.1}/V_{100}$  at 190°C) greater than, or equal to, 30, or greater than, or equal to, 35, or greater than, or equal to, 40. Each viscosity is that of the composition without filler and without oil.

**[0054]** In one embodiment, the ratio of the Mw of the first composition to the Mw of the first composition A is from 0.60 to 1.70, or from 0.70 to 1.60, or from 0.80 to 1.50. In a further embodiment, each ethylene/ $\alpha$ -olefin/diene interpolymer (is an EPDM. In a further embodiment, the diene is ENB.

**[0055]** In one embodiment, the ratio of the MWD of the first composition to the MWD of the first composition A is from 0.90 to 1.50, or from 0.95 to 1.30, or from 1.00 to 1.10. In a further embodiment, each ethylene/ $\alpha$ -olefin/diene interpolymer (is an EPDM. In a further embodiment, the diene is ENB.

**[0056]** In one embodiment, the ratio of the tan delta (0.1 rad/s, 190°C) of the first composition to the tan delta (0.1 rad/s, 190°C) of the first composition A is from 0.95 to 1.70, or from 1.00 to 1.60, or from 1.05 to 1.50. In one embodiment, the ratio of the viscosity (0.1 rad/s, 190°C) of the first composition to the viscosity (0.1 rad/s, 190°C) of the first composition A is from 1.00 to 2.35, or from 1.05 to 2.30, or from 1.10 to 2.25. In one embodiment, each ethylene/ $\alpha$ -olefin/diene interpolymer (is an EPDM. In a further embodiment, the diene is ENB.

**[0057]** In one embodiment, or in combination with any one or more embodiments described herein, the first composition comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of first composition A and the ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymer B, based on the weight of the first composition. In a further embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of the ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymer A and a second ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymer, based on the weight of the first composition A. In another embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymer A, based on the weight of the first composition A.

**[0058]** The first composition may comprise a combination of two or more embodiments as described herein.

#### *Ethylene/ $\alpha$ -Olefin/Non-conjugated Polyenes Interpolymers*

**[0059]** Each ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymer, for the first composition described herein, comprise, independently, in polymerize form, ethylene, an  $\alpha$ -olefin, and a non-conjugated diene. Suitable examples of  $\alpha$ -olefins include the C3-C20  $\alpha$ -olefins, further C3-C10  $\alpha$ -olefins, and preferably propylene. Suitable examples of non-conjugated polyenes include the C4-C40 non-conjugated dienes. In one embodiment, the  $\alpha$ -olefin of interpolymer B is the same  $\alpha$ -olefin of interpolymer A.

**[0060]** For each interpolymer, independently, the  $\alpha$ -olefin may be either an aliphatic or an aromatic compound. The  $\alpha$ -olefin is preferably a C3-C20 aliphatic compound, preferably a C3-C16 aliphatic compound, and more preferably a C3-C10 aliphatic compound. Preferred C3-C10 aliphatic  $\alpha$ -olefins are selected from the group consisting of propylene, 1-butene, 1-hexene and 1-octene, and more preferably propylene. In a further embodiment, the interpolymer is an ethylene/propylene/diene (EPDM) terpolymer. In a further embodiment, the diene is 5-ethylidene-2-norbornene (ENB). In one embodiment, the  $\alpha$ -olefin of interpolymer B is the same  $\alpha$ -olefin of interpolymer A.

**[0061]** For each interpolymer, independently, illustrative non-conjugated dienes include straight chain acyclic dienes, such as 1,4-hexadiene and 1,5-heptadiene; branched chain acyclic dienes, such as 5-methyl-1,4-hexadiene, 2-methyl-1,5-hexadiene, 6-methyl-1,5-heptadiene, 7-methyl-1,6-octadiene, 3,7-dimethyl-1,6-octadiene, 3,7-dimethyl-1,7-octadiene, 5,7-dimethyl-1,7-octadiene, 1,9-decadiene, and mixed isomers of dihydromyrcene; single ring alicyclic dienes such as 1,4-cyclohexadiene, 1,5-cyclooctadiene and 1,5-cyclododecadiene; multi-ring alicyclic fused and bridged ring dienes, such as tetrahydroindene, methyl tetrahydroindene; alkenyl, alkylidene, cycloalkenyl and cycloalkylidene norbornenes such as 5-methylene-2-norbornene (MNB), 5-ethylidene-2-norbornene (ENB), 5-vinyl-2-norbornene, 5-propenyl-2-norbornene, 5-isopropylidene-2-norbornene, 5-(4-cyclopentenyl)-2-norbornene, and 5-cyclohexylidene-2-norbornene. The polyene is preferably a non-conjugated diene selected from the group consisting of ENB, dicyclopentadiene, 1,4-hexadiene, 7-methyl-1,6-octadiene, and preferably, ENB, dicyclopentadiene and 1,4-hexadiene, more preferably ENB and dicyclopentadiene, and even more preferably ENB.

**[0062]** In one embodiment, or in combination with any one or more embodiments described herein, the ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymer A comprises a majority amount of polymerized ethylene, based on the weight

of the interpolymer. In a further embodiment, the interpolymer is an EPDM. In a further embodiment, the diene is ENB.

**[0063]** In one embodiment, or in combination with any one or more embodiments described herein, the ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymer B comprises a majority amount of polymerized ethylene, based on the weight of the interpolymer. In a further embodiment, the interpolymer is an EPDM. In a further embodiment, the diene is ENB.

In one embodiment, the alpha-olefin of interpolymer B is the same alpha-olefin of interpolymer A.

**[0064]** In one embodiment, or in combination with any one or more embodiments described herein, both ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymers A and B, independently, comprise a majority amount of polymerized ethylene, based on the weight of the interpolymer. In a further embodiment, each interpolymer is an EPDM. In a further embodiment, the diene is ENB. In one embodiment, the alpha-olefin of interpolymer B is the same alpha-olefin of interpolymer A.

**[0065]** In one embodiment, or in combination with any one or more embodiments described herein, the ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymer A is an EPDM. In a further embodiment, the diene is ENB. In one embodiment, or in combination with any one or more embodiments described herein, the ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymer B is an EPDM. In a further embodiment, the diene is ENB. In one embodiment, the alpha-olefin of interpolymer B is the same alpha-olefin of interpolymer A.

**[0066]** In one embodiment, or in combination with any one or more embodiments described herein, the ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymers B comprises from 62 to 72 wt% of C2, and from 3.0 to 5.5 wt% ENB.

**[0067]** In one embodiment, or in combination with any one or more embodiments described herein, the ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymer B has a molecular weight distribution (Mw/Mn) from 1.80 to 3.50, or from 1.90 to 3.20, or from 2.00 to 3.00, or from 2.00 to 2.80, or from 2.10 to 2.60. In a further embodiment, the interpolymer is an EPDM. In a further embodiment, the diene is ENB.

**[0068]** In one embodiment, or in combination with any one or more embodiments described herein, the ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymer B has a Mooney viscosity, ML1+4 at 125°C, greater than, or equal to, 70, further greater than, or equal to, 75, further greater than, or equal to 80. In a further embodiment, the interpolymer is an EPDM. In a further embodiment, the diene is ENB. Mooney viscosity is that of the neat interpolymer. The neat interpolymer refers to the interpolymer without filler and without oil. In one embodiment, or in combination with any one or more embodiments described herein, the ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymer B has a Mooney viscosity, ML1+4 at 125°C, less than 180, or less than, or equal to, 170, or less than, or equal to, 160. In a further embodiment, the interpolymer is an EPDM. In a further embodiment, the diene is ENB. Mooney viscosity is that of the neat interpolymer. The neat interpolymer refers to the interpolymer without filler and without oil. In one embodiment, the alpha-olefin of interpolymer B is the same alpha-olefin of interpolymer A.

**[0069]** In one embodiment, or in combination with any one or more embodiments described herein, the ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymer B has density from 0.850 to 0.890 g/cc, or from 0.852 to 0.880 g/cc, or from 0.855 to 0.870 g/cc, or 0.855 to 0.867 g/cc (1 cc = 1 cm<sup>3</sup>). In a further embodiment, the interpolymer is an EPDM. In a further embodiment, the diene is ENB. In one embodiment, the alpha-olefin of interpolymer B is the same alpha-olefin of interpolymer A.

**[0070]** In one embodiment, or in combination with any one or more embodiments described herein, the ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymer B has a viscosity at 0.1 rad/sec, 190°C, from 400,000 to 700,000 Pa•s, or from 450,000 to 650,000 Pa•s, or from 500,000 to 600,000 Pa•s. In a further embodiment, the interpolymer is an EPDM. In a further embodiment, the diene is ENB. In one embodiment, the alpha-olefin of interpolymer B is the same alpha-olefin of interpolymer A.

**[0071]** In one embodiment, or in combination with any one or more embodiments described herein, the ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymer B has a tan delta at 0.1 rad/sec, 190°C, from 1.80 to 2.40 Pa•s, or from 1.85 to 2.30, or from 1.90 to 2.20. In a further embodiment, the interpolymer is an EPDM. In a further embodiment, the diene is ENB. In one embodiment, the alpha-olefin of interpolymer B is the same alpha-olefin of interpolymer A.

**[0072]** The ethylene/ $\alpha$ -olefin/diene interpolymer B may comprise a combination of two or more embodiments as described herein.

**[0073]** The ethylene/ $\alpha$ -olefin/diene interpolymer A may comprise a combination of two or more embodiments as described herein.

#### *First Composition A*

**[0074]** In one embodiment the first composition A comprises the ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymer A and a second ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymer. In a further embodiment, each interpolymer is an EPDM. In a further embodiment, the diene is ENB. In one embodiment, each interpolymer has the same alpha-olefin.

**[0075]** In one embodiment, or in combination with any one or more embodiments described herein, the first composition A has a weight average molecular weight (Mw) greater than, or equal to, 100,000 g/mole, or greater than, or equal to, 120,000 g/mole, or greater than, or equal to, 140,000 g/mole, or greater than, or equal to, 160,000 g/mole. In a further embodiment, each ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymer is an EPDM. In a further embodiment, the diene

is ENB. In one embodiment, or in combination with any one or more embodiments described herein, the first composition A has a weight average molecular weight ( $M_w$ ) less than, or equal to, 400,000 g/mole, or less than, or equal to, 350,000 g/mole, or less than, or equal to, 300,000 g/mole, or less than, or equal to, 280,000 g/mole. In a further embodiment, each ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymers is an EPDM. In a further embodiment, the diene is ENB.

**[0076]** In one embodiment, or in combination with any one or more embodiments described herein, the first composition A has a MWD less than, or equal to, 4.50, further less than, or equal to, 4.00, further less than, or equal to, 3.50. In a further embodiment, each ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymers is an EPDM. In a further embodiment, the diene is ENB. In one embodiment, or in combination with any one or more embodiments described herein, the first composition A has a MWD greater than, or equal to, 2.40, or greater than, or equal to, 2.60, or greater than, or equal to, 2.80. In a further embodiment, each ethylene/ $\alpha$ -olefin/non-conjugated polyene interpolymers is an EPDM. In a further embodiment, the diene is ENB.

**[0077]** In one embodiment, or in combination with any one or more embodiments described herein, the first composition A has a tan delta (0.1 rad/sec, 190°C) from 0.80 to 1.40, or from 0.90 to 1.30, or from 1.00 to 1.20. In a further embodiment, each ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymers is an EPDM. In a further embodiment, the diene is ENB.

**[0078]** In one embodiment, or in combination with any one or more embodiments described herein, the first composition A has a viscosity at 0.1 rad/sec, 190°C, greater than, or equal to, 100,000 Pa•s, or greater than, or equal to, 120,000 Pa•s, or greater than, or equal to, 140,000 Pa•s. In a further embodiment, each ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymers is an EPDM. In a further embodiment, the diene is ENB. The viscosity at 0.1 rad/sec, 190°C is that of the composition without filler and without oil. In one embodiment, or in combination with any one or more embodiments described herein, the first composition A has a viscosity at 0.1 rad/sec, 190°C, less than, or equal to, 300,000 Pa•s, or less than, or equal to, 250,000 Pa•s, or less than, or equal to, 200,000 Pa•s, or less than, or equal to, 180,000 Pa•s. In a further embodiment, each ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymers is an EPDM. In a further embodiment, the diene is ENB. The viscosity at 0.1 rad/sec, 190°C is that of the composition without filler and without oil.

**[0079]** In one embodiment, or in combination with any one or more embodiments described herein, the first composition A has a rheology ratio ( $V_{0.1}/V_{100}$  at 190°C) greater than, or equal to, 30, or greater than, or equal to, 35, or greater than, or equal to, 40. In a further embodiment, each ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymers is an EPDM. In a further embodiment, the diene is ENB. Each viscosity is that of the composition without filler and without oil. In one embodiment, or in combination with any one or more embodiments described herein, the first composition A has a rheology ratio ( $V_{0.1}/V_{100}$  at 190°C) less than, or equal to, 60.0, or less than, or equal to, 55.0, or less than, or equal to, 50.0. In a further embodiment, each ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymers is an EPDM. In a further embodiment, the diene is ENB. Each viscosity is that of the composition without filler and without oil.

**[0080]** In one embodiment, the first composition A has density from 0.845 to 0.890 g/cc, or from 0.848 to 0.880 g/cc, or from 0.870 to 0.860 g/cc, or from 0.852 to 0.860 g/cc (1 cc = 1 cm<sup>3</sup>). In a further embodiment, each ethylene/ $\alpha$ -olefin/diene interpolymers is an EPDM. In a further embodiment, the diene is ENB.

**[0081]** In one embodiment, the ratio of the  $M_w$  of the ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymers B to the  $M_w$  of the first composition A is from 1.20 to 2.50, or from 1.40 to 2.30, or from 1.60 to 2.10. In a further embodiment, each ethylene/ $\alpha$ -olefin/diene interpolymers (is an EPDM. In a further embodiment, the diene is ENB.

**[0082]** In one embodiment, the ratio of the MWD of the ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymers B to the MWD of the first composition A is from 0.55 to 0.95, or from 0.60 to 0.90, or from 0.65 to 0.80. In a further embodiment, each ethylene/ $\alpha$ -olefin/diene interpolymers is an EPDM. In a further embodiment, the diene is ENB.

**[0083]** In one embodiment, the ratio of the tan delta (0.1 rad/s, 190°C) of the ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymers B to the tan delta (0.1 rad/s, 190°C) of the first composition A is from 1.40 to 2.40, or from 1.60 to 2.20, or from 1.80 to 2.00. In a further embodiment, each ethylene/ $\alpha$ -olefin/diene interpolymers (is an EPDM. In a further embodiment, each diene is ENB.

**[0084]** In one embodiment, the ratio of the viscosity (0.1 rad/s, 190°C) of the ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymers B to the viscosity (0.1 rad/s, 190°C) of the first composition A is from 3.10 to 3.80, or from 3.20 to 3.70, or from 3.30 to 3.60. In one embodiment, each ethylene/ $\alpha$ -olefin/diene interpolymers is an EPDM. In a further embodiment, each diene is ENB.

**[0085]** In one embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the sum of the ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymers A and a second ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymers, based on the weight of the first composition A. In another embodiment, or in combination with any one or more embodiments described herein, the first composition A comprises  $\geq 95$  wt%, or  $\geq 96$  wt% or  $\geq 97$  wt%, or  $\geq 98\%$ , or  $\geq 99$  wt% of the ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymers A, based on the weight of the first composition A. In a further embodiment, each ethylene/ $\alpha$ -olefin/diene interpolymers is an EPDM. In a further embodiment, the diene is ENB.

**[0086]** The first composition A may comprise a combination of two or more embodiments as described herein.

**Applications**

**[0087]** The invention also provides an article comprising at least one component formed from an inventive composition of one or more embodiments described herein. Articles include, but are not limited to, foams, sheets, molded goods, and extruded parts. Additional articles include automotive parts, weather strips, belts, hoses, wire and cable jacketing, flooring materials, gaskets, tires, computer parts, building materials and footwear components. A skilled artisan can readily augment this list without undue experimentation. In one embodiment, the article is an automotive part.

**[0088]** An inventive article may comprise a combination of two or more embodiments described herein.

## DEFINITIONS

**[0089]** Unless stated to the contrary, implicit from the context, or customary in the art, all parts and percents are based on weight, and all test methods are current as of the filing date of this disclosure.

**[0090]** The term "composition," as used herein, includes the material(s), which comprise the composition, as well as reaction products and decomposition products formed from the materials of the composition. Any reaction product or decomposition product is typically present in trace or residual amounts.

**[0091]** The term "first composition," as used herein, includes the material(s), which comprise the first composition, as well as reaction products and decomposition products formed from the materials of the first composition. Any reaction product or decomposition product is typically present in trace or residual amounts. The first composition may contain, for example, one ethylene/ $\alpha$ -olefin/non-conjugated polyene interpolymers, or may contain one such interpolymers and one or more additives. The first composition may contain two or more different ethylene/ $\alpha$ -olefin/non-conjugated polyene interpolymers, or may contain such interpolymers and one or more additives.

**[0092]** The term "first composition A," as used herein, includes the material(s), which comprise the first composition A, as well as reaction products and decomposition products formed from the materials of the first composition A. Any reaction product or decomposition product is typically present in trace or residual amounts. The first composition A may contain, for example, one ethylene/ $\alpha$ -olefin/non-conjugated polyene interpolymers, or may contain one such interpolymers and one or more additives. The first composition A may contain two or more different ethylene/ $\alpha$ -olefin/non-conjugated polyene interpolymers, or may contain such interpolymers and one or more additives.

**[0093]** The term "polymer," as used herein, refers to a polymeric compound prepared by polymerizing monomers, whether of the same or a different type. The generic term polymer thus embraces the term homopolymer (employed to refer to polymers prepared from only one type of monomer, with the understanding that trace amounts of impurities can be incorporated into the polymer structure) and the term interpolymers as defined hereinafter. Trace amounts of impurities, such as catalyst residues, can be incorporated into and/or within the polymer.

**[0094]** The term "interpolymers," as used herein, refers to polymers prepared by the polymerization of at least two different types of monomers. The term interpolymers thus includes the term copolymer (employed to refer to polymers prepared from two different types of monomers) and polymers prepared from more than two different types of monomers.

**[0095]** The term "ethylene-based polymer," as used herein, refers to a polymer that comprises, in polymerized form, 50 wt% or a majority wt% of ethylene (based on the weight of the polymer), and optionally may comprise one or more comonomers.

**[0096]** The term "ethylene-based interpolymers," as used herein, refers to a polymer that comprises, in polymerized form, a 50 wt% or a majority wt% of ethylene (based on the weight of the interpolymers), and at least one comonomer.

**[0097]** The term "ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymers," as used herein, refers to a polymer that comprises, in polymerized form, ethylene, an  $\alpha$ -olefin, and a non-conjugated diene. In one embodiment, the "ethylene/ $\alpha$ -olefin/non-conjugated polyene interpolymers" comprises a majority wt% of ethylene (based on the weight of the interpolymers).

**[0098]** The term "ethylene/propylene/non-conjugated diene terpolymers," as used herein, refers to a polymer that comprises, in polymerized form, ethylene, an  $\alpha$ -olefin, and a non-conjugated diene, as the only monomer types. In one embodiment, the "terpolymers" comprises a majority wt% of ethylene (based on the weight of the terpolymers).

**[0099]** The term, "ethylene/ $\alpha$ -olefin copolymer," as used herein, refers to a copolymer that comprises, in polymerized form, 50 wt% or a majority wt% of ethylene monomer (based on the weight of the copolymer), and an  $\alpha$ -olefin, as the only two monomer types.

**[0100]** The term, "propylene-based polymer," as used herein, refers to a polymer that comprises, in polymerized form, a majority wt% of propylene monomer (based on the weight of the polymer), and optionally may comprise one or more comonomers.

**[0101]** The terms "comprising," "including," "having," and their derivatives, are not intended to exclude the presence of any additional component, step or procedure, whether or not the same is specifically disclosed. In order to avoid any doubt, all compositions claimed through use of the term "comprising" may include any additional additive, adjuvant, or compound, whether polymeric or otherwise, unless stated to the contrary. In contrast, the term, "consisting essentially

of excludes from the scope of any succeeding recitation any other component, step or procedure, excepting those that are not essential to operability. The term "consisting of" excludes any component, step or procedure not specifically delineated or listed.

5 TEST METHODS

*Density*

10 **[0102]** Samples that are measured for density are prepared according to ASTM D-1928. Measurements are made within one hour of sample pressing using ASTM D-792, Method B.

**Conventional Gel Permeation Chromatography (conv. GPC)**

15 **[0103]** A GPC-IR high temperature chromatographic system from, PolymerChAR (Valencia, Spain), was equipped with a Precision Detectors (Amherst, MA), 2-angle laser light scattering detector Model 2040, an IR5 infra-red detector and a 4-capillary viscometer, both from PolymerChAR. Data collection was performed using PolymerChAR Instrument-Control software and data collection interface. The system was equipped with an on-line, solvent degas device and pumping system from Agilent Technologies (Santa Clara, CA).

20 **[0104]** Injection temperature was controlled at 150 degrees Celsius. The columns used were three 10-micron "Mixed-B" columns from Polymer Laboratories (Shropshire, UK). The solvent used was 1,2,4 trichlorobenzene. The samples were prepared at a concentration of "0.1 grams of polymer in 50 milliliters of solvent." The chromatographic solvent and the sample preparation solvent each contained "200 ppm of butylated hydroxytoluene (BHT)." Both solvent sources were nitrogen sparged. Ethylene-based polymer samples were stirred gently at 160 degrees Celsius for three hours. The injection volume was 200 microliters, and the flow rate was one milliliters/minute. The GPC column set was calibrated  
25 by running 21 "narrow molecular weight distribution" polystyrene standards. The molecular weight (MW) of the standards ranges from 580 to 8,400,000 g/mole, and the standards were contained in six "cocktail" mixtures. Each standard mixture had at least a decade of separation between individual molecular weights. The standard mixtures were purchased from Polymer Laboratories. The polystyrene standards were prepared at "0.025 g in 50 mL of solvent" for molecular weights equal to, or greater than, 1,000,000 g/mole, and at "0.050 g in 50 mL of solvent" for molecular weights less than 1,000,000  
30 g/mole.

**[0105]** The polystyrene standards were dissolved at 80°C, with gentle agitation, for 30 minutes. The narrow standards mixtures were run first, and in order of decreasing "highest molecular weight component," to minimize degradation. The polystyrene standard peak molecular weights were converted to polyethylene molecular weight using Equation 1 (as described in Williams and Ward, J. Polym. Sci., Polym. Letters, 6, 621 (1968));  
35

$$M_{\text{polyethylene}} = A \times (M_{\text{polystyrene}})^B \quad (\text{Eqn. 1}),$$

where M is the molecular weight, A is equal to 0.4316 and B is equal to 1.0.

40 **[0106]** Number-average molecular weight (Mn(conv gpc)), weight average molecular weight (Mw(conv gpc), and z-average molecular weight (Mz(conv gpc)) were calculated according to Equations 2-4 below.

$$45 \quad Mn(\text{conv gpc}) = \frac{\sum_{i=RV \text{ integration start}}^{i=RV \text{ integration end}} (IR_{\text{measurement channel}_i})}{\sum_{i=RV \text{ integration start}}^{i=RV \text{ integration end}} (IR_{\text{measurement channel}_i} / \text{Log}M_{PE_i})} \quad (\text{Eqn. 2}).$$

$$50 \quad Mw(\text{conv gpc}) = \frac{\sum_{i=RV \text{ integration start}}^{i=RV \text{ integration end}} (\text{Log}M_{PE_i} IR_{\text{measurement channel}_i})}{\sum_{i=RV \text{ integration start}}^{i=RV \text{ integration end}} (IR_{\text{measurement channel}_i})} \quad (\text{Eqn. 3}).$$

$$55 \quad Mz(\text{conv gpc}) = \frac{\sum_{i=RV \text{ integration start}}^{i=RV \text{ integration end}} (\text{Log}M_{PE_i}^2 IR_{\text{measurement channel}_i})}{\sum_{i=RV \text{ integration start}}^{i=RV \text{ integration end}} (\text{Log}M_{PE_i} IR_{\text{measurement channel}_i})} \quad (\text{Eqn. 4}).$$

**[0107]** In Equations 2-4, the RV is column retention volume (linearly-spaced), collected at "1 point per second," the IR is the baseline-subtracted IR detector signal, in Volts, from the IR5 measurement channel of the GPC instrument,

and  $\text{Log}M_{PE}$  is derived from the polyethylene-equivalent MW determined from Equation 1. Data calculation were performed using "GPC One software (version 2.013H)" from PolymerChAR.

#### Dynamic Mechanical Spectroscopy (DMS)

**[0108]** Small angle oscillatory shear (melt DMS) was performed using a TA Instruments ARES, equipped with "25 mm parallel plates," under a nitrogen purge. The time between sample loading, and the beginning of the test, was set to five minutes for all samples. The experiments were performed at 190°C, over a frequency range of 0.1 to 100 rad/s. The strain amplitude was adjusted, based upon the response of the samples, from 1 to 3%. The stress response was analyzed in terms of amplitude and phase, from which, the storage modulus ( $G'$ ), loss modulus ( $G''$ ), dynamic viscosity  $\eta^*$ ,  $\tan \delta$ , and phase angle were determined. The viscosities  $V_{0.1}$  at 190°C and  $V_{100}$  at 190°C, and rheology ratio ( $V_{0.1}/V_{100}$  at 190°C; also referred to as "RR") were recorded. Specimens for Dynamic Mechanical Spectroscopy were "25 mm diameter x 3.3 mm thick" compression molded discs, formed at 180°C, and 10 MPa molding pressure, for five minutes, and then quenched between chilled platens (15-20°C) for two minutes.

#### 13C NMR Method for EPDM Composition Analysis

**[0109]** The samples were prepared by adding approximately "2.6 g of a 50/50 mixture of tetrachloroethane-d2/orthodichlorobenzene containing 0.025M in chromium acetylacetonate (relaxation agent)" to "0.2g sample" in a "10 mm" NMR tube. The samples were dissolved and homogenized by heating the tube and its contents to 150°C. The data were collected using a Bruker 400 MHz spectrometer, equipped with a Bruker Dual DUL high-temperature CryoProbe. The data was acquired using 160 scans per data file, a 6 second pulse repetition delay, with a sample temperature of 120°C. The acquisition was carried out using a spectral width of 25,000Hz and a file size of 32K data points.

**[0110]** NMR spectral analyses of the composition of the examples were carried out using the following analysis method. Quantitation of monomers present in EPDM can be calculated using the following equations (1A through 9A).

**[0111]** The calculation of moles ethylene normalizes the spectral range from 55.0 - 5.0 ppm to 1000 integral units. The contribution under the normalized integral area only accounts for 7 of the ENB carbons. The ENB diene peaks at 111 and 147 ppm are excluded from the calculation due to concerns that double bonds may react at high temperatures.

$$\text{Equation 1A} \quad \text{molesEth} = \frac{(1000 - 3 * \text{molesP} - 7 * \text{molesENB})}{2} .$$

$$\text{Equation 2A} \quad \text{molesENB} = \text{CH3}(13.6 - 14.7 \text{ ppm}) .$$

$$\text{Equation 3A} \quad \text{molesP} = \text{CH3}(19.5 - 22.0 \text{ ppm}) .$$

$$\text{Equation 4A} \quad \text{mole\% ethylene} = \frac{100 * \text{molesE}}{\text{molesE} + \text{molesP} + \text{molesENB}} .$$

$$\text{Equation 5A} \quad \text{mole\% propylene} = \frac{100 * \text{molesP}}{\text{molesE} + \text{molesP} + \text{molesENB}} .$$

$$\text{Equation 6A} \quad \text{mole\% ENB} = \frac{100 * \text{molesENB}}{\text{molesE} + \text{molesP} + \text{molesENB}} .$$

$$\text{Equation 7A} \quad \text{Wt\% ethylene} = \frac{100 * \text{mole\%E} * 28}{\text{mole\%E} * 28 + \text{mole\%P} * 42 + \text{mole\%ENB} * 120} .$$

$$\text{Equation 8A} \quad \text{Wt\% propylene} = \frac{100 * \text{mole\%P} * 42}{\text{mole\%E} * 28 + \text{mole\%P} * 42 + \text{mole\%ENB} * 120} .$$

$$\text{Equation 9A} \quad \text{Wt\%ENB} = \frac{100 * \text{mole\%ENB} * 120}{\text{mole\%E} * 28 + \text{mole\%P} * 42 + \text{mole\%ENB} * 120}$$

5 **[0112]** Further NMR spectral analysis of some inventive interpolymers displays a peak area, from 21.3 ppm to 21.8 ppm (% PP Tacticity Marker), greater than 3.0% (further greater than 4.0%) of the total integral area from 19.5 ppm to 22.0 ppm. Spectral data are referenced to the EEE backbone at 30 ppm. Peak responses in this region have been typically related to differences in propylene tacticity incorporated into the polymer. A similar analysis can be done for another type of ethylene/ $\alpha$ -olefin/non-conjugated polyene interpolymers.

10 **[0113]** Further NMR spectral analysis of some inventive EPDMs displayed a peak area (corresponding to CH<sub>3</sub> of the aliphatic chain end) from chemical shift region 14.0 to 14.3 ppm, which when the total integrated area (chemical shift region 1 to 55 ppm) is set to a value of 1000, integrates to a peak area greater than 0.5 (> 0.5 chain ends per 1000 carbons, ACE). Similar spectral analysis of the comparative EPDMs showed less than 0.5 ACE or non detected of the total integral area from 10 to 55 ppm. Spectral data were referenced to the EEE backbone at 30 ppm. Peak responses in this region typically are related to differences in chain ends that have been incorporated into the EPDM. A similar analysis can be done for another type of ethylene/ $\alpha$ -olefin/non-conjugated polyene interpolymers.

#### Mooney Viscosity

20 **[0114]** Mooney Viscosity (ML1+4 at 100°C, or 125°C) and Mooney Stress Relaxation were measured in accordance with ASTM 1646, with a one minute preheat time and a four minute rotor operation time, using the Large rotor. The instrument is an Alpha Technologies Mooney Viscometer 2000.

25 **[0115]** The viscosity of each formulated compositions was measured using an uncured blanket (see experimental section), so that the viscosity of the uncured composition could be examined. Samples were conditioned for 24 hours at room temperature, prior to testing. Mooney relaxation area was determined by suddenly stopping the rotor at the end of the Mooney viscosity test, and observing the torque as it decays. The collection of data started one second after stopping the rotor, and continued, until 100 seconds had passed, since the rotor was stopped. The area under the torque-time curve ("MLRA") is indicative of the amount of stored elastic energy in the polymer.

#### Mooney Scorch

30 **[0116]** Scorch properties of each composition was measured in accordance to ASTM D-1646, using an Alpha Technologies Mooney Viscometer 2000. Mooney viscometer was set at 125°C. The Mooney scorch values were reported for a small rotor, and represented the time to rise "x Mooney units" above the minimum viscosity (e.g. t<sub>5</sub> is a "five Mooney unit" increase in viscosity). The total test time was 30 minutes, with a 1 minute preheat time. The viscosity of each composition was measured from uncured blanket, cured in the viscometer, so that the scorch properties could be examined. Samples were conditioned for at least 24 hours at room temperature, prior to testing.

#### RPA Analysis

40 **[0117]** Curing characteristics of each formulation were measured in accordance to ASTM D-6204, using an Alpha Technologies Rheometer RPA 2000P. The rheology of each formulated composition was measured from samples of uncured blanket, which was then cured during the RPA analysis. Samples were conditioned for at least 24 hours, at room temperature, prior to testing. The RPA test was carried out at 160°C and 180°C, over a 25 minutes. The RPA die oscillating frequency was set at 100 cycle per minute (CPM), shear strain was set at 7%. The viscoelastic properties, such as minimum torque (ML), maximum torque (MH), tan delta at minimum torque, tan delta at maximum torque, and time to reach a certain percentage of the torque at the end of the test or the maximum torque, whichever is higher (for example, t<sub>c95</sub> corresponds to the time in minutes to reach the 95% of the torque at the end of the test or the maximum torque, whichever is higher), were measured during the cure cycle.

#### EXPERIMENTAL

55 **[0118]** The following examples illustrate the present invention, but are not intended to limit the scope of the invention. Materials are shown in Table 1.

**EP 3 464 462 B9**

Table 1: Brand name and suppliers of ingredients and raw materials

Component	Brand name	Characteristic	Supplier
ZnO	RHENOGRAN® ZNO-85	activator	Rheinchemie
Stearic acid	STEARIC ACID	activator	National pharm
PEG 4000	CARBOWAX	process aid	DOW
Carbon black N-550	SPHERON 5000A	filler	Cabot
Carbon black N-774	SPHERON 6400A	filler	Cabot
CaCO <sub>3</sub>	OMYACARB	filler	Omva
Paraffinic oil	HYDROBRITE 550	plasticizer	Sonneborn
CaO	RHENOGRAN® CAO-80	desiccant	Rheinchemie
MBTS-80	RHENOGRAN® MBTS-75	accelerator	Rheinchemie
ZBEC-70	RHENOGRAN® ZBEC-70	accelerator	Rheinchemie
TBzTD-70	RHENOGRAN® TBZTD-70	accelerator	Rheinchemie
Geniplex-70	GENIPLIX-70	accelerator	Rheinchemie
S-80	RHENOGRAN® S-80	curative	Rheinchemie
OBSH	CELOGEN OT (OBSH)	Foaming agent	CelChem

*Continuous Polymerizations*

**[0119]** In general terms, it is desirable to produce the inventive polymer under the conditions as explained in U.S. Pat. No. 5,977,251 and 6,545,088, and the references therein. The polymer products were produced in a solution polymerization process.

**[0120]** Ethylene was introduced in a mixture of a solvent of ISOPAR E (a mixture of C8 - C10 saturated hydrocarbons available from ExxonMobil), propylene and 5-ethylidene-2-norbornene (ENB), forming the reactor feed stream. Catalyst is fed to the reactor separately and activated *in-situ* using co-catalyst 1 and co-catalyst 2. The outlet of the reactor was consequently a mixture of polymer, solvent, and reduced levels of the initial monomer streams. The molecular weight of the polymer may be controlled by adjusting reactor temperature, monomer conversion and/or the addition of a chain terminating agent, such as hydrogen. The polymerization reactions were performed under steady state conditions, that is, constant reactant concentration and continual input of solvent, monomers, and catalyst, and withdrawal of unreacted monomers, solvent and polymer. The reactor system was cooled and pressured to prevent formation of a vapor phase.

**[0121]** After polymerization, a small amount of water was introduced into the reactor exit stream as a catalyst kill, and the reactor exit stream was introduced into a flash vessel, in which the solids concentration was increased by at least 100 percent. A portion of the unreacted monomers, that is, ENB, ethylene, and propylene, and the unused diluent were then collected, and recycled back to the reactor feeds as appropriate.

**[0122]** The first composition was prepared using a first CSTR reactor (76.1 liter [20.1 gal]) and a second loop reactor (115.8[30.6 gal]). The example designated with "R1" was a sampled aliquot from the first reactor, and represents the polymer composition that was fed to the second reactor. The aliquot (polymer and solvent sample) was collected and subsequently dried, *in-vacuo*, to recover the polymer. The EPDM B was prepared using a CSTR reactor (76.1 liter [20.1 gal]). Polymer was collected from the single operation, and passed through the back-end operation and pelletized. Polymerization conditions are shown in Tables 1A, 1B, 2A and 2B. Polymer properties are shown in Tables 3.

*Simulated Study (GPC and Rheology)*

**[0123]** A GPC simulation on several first compositions was performed, using a weight fraction distribution. In this distribution model, both of the chromatographic GPC peaks use a Flory-Schulz distribution with a polydispersity of 2, which has been convoluted (and thus broadened in polydispersity) with a differential normal distribution function of width in log(M) units. The convergence of the two peaks was performed using the "Solver Add-In" that is part of Microsoft Excel™ version 14, based on minimizing the sum of squares of the residuals between the model distribution (based on 2 broadened Flory-Schultz Distributions) and the measured MWD via GPC. It is important to note that the distributions calculated by GPC for the subject samples are that of "Conventional GPC," which are equivalent to polyethylene-

homopolymer analogs (molecular weight of the longest contiguous backbone chain) of the subject copolymers (which may comprise the absolute molecular weight including branches). Thus LCB and SCB are not accounted for in the measured or modeled distributions. Variables that were iterated were weight fraction of the peak, the molecular weight target of the Flory Distribution, and a width parameter representing the convolution of Flory-Schultz distributions about a normal distribution. It should be noted that with a width parameter of 0, there is no convolution and the distribution is that of a Flory-Schulz.

**[0124]** Simulated rheology parameters were obtained from a linear interpolation between the V0.1 and TD0.1 properties of representative A and B components, using the following equations:  $V_{0.1} = X_A V_{0.1A} + X_B V_{0.1B}$ , where  $V_{0.1}$  is the viscosity (0.1 rad/s, 190°C) of the first comp.,  $X_A$  is the weight fraction of the first comp. A,  $V_{0.1A}$  is the viscosity (0.1 rad/s, 190°C) of the first comp. A,  $X_B$  is the weight fraction of the EPDM B,  $V_{0.1B}$  is the viscosity (0.1 rad/s, 190°C) of EPDM B; and

$TD_{0.1} = X_A TD_{0.1A} + X_B TD_{0.1B}$ , where  $TD_{0.1}$  is the tan delta (0.1 rad/s, 190°C) of the first comp.,  $X_A$  is the weight fraction of the first comp. A,  $TD_{0.1A}$  is the tan delta (0.1 rad/s, 190°C) of the first comp. A,  $X_B$  is the weight fraction of the EPDM B,  $TD_{0.1B}$  is the tan delta (0.1 rad/s, 190°C) of EPDM B. The properties of first composition A (100%) and EPDM B (100%) are measured properties.

**[0125]** It has been discovered that a first composition with the right weight ratio of A/B, meets the relationship of Equation A ( $4.50 < [(Mz/Mn)_{(first\ comp.)}]/(TD_{0.1})_{(first\ comp.)} < 8.0$ ), has a good balance of high, medium and low molecular weight polymer fractions, and provides an excellent balance of high melt elasticity, high cure rate, and good processibility. The first composition, when formulated with oil, filler, blowing agents etc., form sponges (foams) with excellent properties as discussed below.

**[0126]** The comparative first composition with weight ratios (A/B) less than 1 and weight ratios greater than 20, do not meet the desired Eqn A, and thus do not have balance of high, medium and low molecular weight polymer fractions, for an excellent balance of high melt elasticity, high cure rate, and good processibility.

**[0127]** Final compositions are shown in Table 5. A standard "up-side down" mix was used, with CaCO<sub>3</sub>, carbon black, oil, stearic acid and EPDM added initially in a Banbury mixer, at a rotor speed of 30 rpm and ambient temperature and atmosphere. The ZnO and other curatives were added in the sweep (at 65°C). The intermediate composition was dropped at 100°C. Mixing of this composition was completed on a 6 inch, two roll mill at ambient conditions, and the composition was "sheeted out" in the form of a blanket. After cooling, this sheeted composition was re-introduced back in the Banbury mixer. After fluxing, the foaming agent (i.e., Celogen OT) was added, and the composition was dropped at 70°C. After milling, the entire composition was cut in strips, in preparation for extrusion and further testing.

### ***Sponge Foaming***

**[0128]** The milled composition sheets, with thickness of 3 mm, were cut into strip shaped samples (dimensions of each sample was 5 mm by 20 mm), and foamed in hot air oven for four minutes, at various temperatures (160/165/170/180/200°C).

5  
10  
15  
20  
25  
30  
35  
40  
45  
50  
55

Table 1A: First Composition A (CSTR (Rx1) followed by Loop Reactor (Rx2))

First Comp. A	H2 (mol %) <sup>A</sup>		C2 Cone. [g/L]		Catalyst Efficiency* [lb_poly/lb_metal]*10E6 Catalyst A		Catalyst Flow* [lb/hr] Catalyst A*		Catalyst Solution Cone. (ppm)		Cocat-1** Flow [lb/hr] (kg/hr)		Cocat-1 Solution Cone. [ppm]		Cocat-2*** Flow [lb/hr] (kg/hr)		Cocat-2 Solution Cone. [ppm]		Production Rate [lb/hr] (kg/hr)	
	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2
	0.17	2.00	10.29	6.09	0.70	1.02	[0.33]	[0.48]	49.90	49.90	[0.36]	[0.53]	599.60	599.60	[0.23]	[0.31]	390.60	390.60	[11.65]	[23.54]
					Cat A	Cat A	Cat A	Cat A			0.16	0.24			(0.10)	(0.14)			5.28	10.67

\* Catalyst A: [[2',2''-[1,3-propanediylbis(oxy-kO)]bis[3,6-bis(1,1-dimethylethyl)-9H-carbazol-9-yl]-5'-fluoro-5-(1,1,3,3-tetramethylbutyl)[1,1'-biphenyl]-2-olato-kO]](2-)-haf-nium dimethyl \*\* Cocatalyst-1 was a mixture of methyl di(C14-18 alkyl) ammonium salts of tetrakis(pentafluorophenyl)borate, prepared by reaction of a long chain trialkylamine (ARMEEN M2HT, available from Akzo-Nobel, Inc.), HCl and Li[B(C6F5)4], substantially as disclosed in USP5,919,988 (Ex. 2). Cocatalyst-1 was purchased from Boulder Scientific, and used without further purification. \*\*\* Cocatalyst-2 (modified methylalumoxane (MMAO)) was purchased from Akzo Nobel, and used without further purification. A: The mole% H2 is relative to the total reactant monomer feed to produce the polymer (C2, C3, ENB).

5  
10  
15  
20  
25  
30  
35  
40  
45  
50  
55

Table 1B: EPDM B (CSTR Rx1)

	H2 (mol %)		C2 Cone. [g/L]		Catalyst Efficiency* [lb_poly/lb_metal] *10E6 Catalyst B		Catalyst Flow* [lb/hr] Catalyst B		Catalyst Solution Cone. (ppm)		Cocat-1** Flow [lb/hr] (kg/hr)		Cocat-1 Solution Cone. [ppm]		Cocat-2*** Flow [lb/hr] (kg/hr)		Cocat-2 Solution Cone. [ppm]		Production Rate [lb/hr] (kg/hr)	
	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2
EPDM B	0.02	NA	17.67	NA	5.29 Cat B	NA	[0.36] 0.16 Cat B	NA	8.91	NA	[0.82] 0.37	NA	99.01	NA	[0.96] 0.44	NA	48.83	NA	[17.12] 7.76	NA

\* Catalyst B: [[6',6''-(2R,4S)-pentane-2,4-diylbis(oxy)]bis(3-(3,6-di-tert-butyl-9H-carbazol-9-yl)-3-fluoro-5-(2,4,4-trimethylpentan-2-yl)-[1,1'-biphenyl]-2-ol)] (2-)-zirconium dimethyl. \*\* Cocatalyst-1 was a mixture of methyl-di(C14-18 alkyl)ammonium salts of tetrakis(pentafluorophenyl)borate, prepared by reaction of a long chain trialkylamine (ARMEEN M2HT, available from Akzo-Nobel, Inc.), HCl and Li[B(C6F5)4], substantially as disclosed in USP 5,919,988 (Ex. 2). Cocatalyst-1 was purchased from Boulder Scientific, and used without further purification. \*\*\* Cocatalyst-2 (modified methylalumoxane (MMAO)) was purchased from Akzo Nobel, and used without further purification. NA: Not Applicable.  
A: The mole% H2 is relative to the total reactant monomer feed to produce the polymer (C2, C3, ENB).

5  
10  
15  
20  
25  
30  
35  
40  
45  
50  
55

Table 2A: First Composition A (CSTR (Rx1) followed by Loop Reactor (Rx2))

	Reactor Temp. [degC]		Pressure [psig] MPa		Solvent Feed [lb/hr] (kg/hr)		Ethylene Feed [lb/hr] (kg/hr)		Propylene Feed [lb/hr] (kg/hr)		ENB Feed [lb/hr] (kg/hr)		% C2 Conversion		Reactor Configuration	
	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2
First Comp A	94.26	148.38	[647.17] 4.46	[653.66] 4.51	[133.27] 60.45	[38.77] 17.58	[9.39] 4.26	[10.41] 4.72	[7.51] 3.41	[21.98] 9.97	[2.68] 1.22	[3.76] 1.71	72.13	80.48	CSTR	LOOP

5  
10  
15  
20  
25  
30  
35  
40  
45  
50  
55

Table 2B: EPDM B (CSTR)

	Reactor Temp. [degC]		Pressure [psig] MPa		Solvent Feed [lb/hr] (kg/hr)		Ethylene Feed [lb/hr] (kg/hr)		Propylene Feed [lb/hr] (kg/hr)		ENB Feed [lb/hr] (kg/hr)		% C2 Conversion		Reactor Configuration	
	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2	Rx1	Rx2
EPDM B	111.20	NA	[648.07] 4.47	NA	[148.38] 67.30	NA	[14.68] 6.66	NA	[18.55] 8.41	NA	[4.16] 1.89	NA	62.10	NA	CSTR	NA
NA: Not Applicable.																

5  
10  
15  
20  
25  
30  
35  
40  
45  
50  
55

Table 3: First Composition A and EPDM B (with oil and without oil)

EPDM	Mooney Viscosity ML1+4, 125°C, MU	Oil wt%	Ethylene wt%	ENB wt%	Mw, g/mol	Mz, g/mol	V0.1 rad/s, Pa·s	V100 rad/s, Pa·s	V0.1/V100	TanDelta @ 0.1 rad/s	MWD
First Comp. A	20	28	57	8.5	241000	576,737	28022	1196	43	1.60	3.15
EPDM-B	50	50	65	5.1	415849	708,796	566730	17710	32	2.07	2.20
Neat polymer properties*											
First Comp. A	NR	0	57	8.5	241000	576,737	159600	3765	42.5	1.05	3.15
EPDM-B	98	0	65	5.1	415849	708,796	566730	NR-	NR-	2.07	2.20

Mooney Viscosity of neat polymers are calculated from tested number oil-included rubber samples using equation:  $Oil - included\ polymer\ viscosity = Neat\ polymer\ viscosity \times polymer\ volume\ percentage^{3,4}$ .

\*The neat polymers from reactor samples without oil.  
 Densities of First Composition A and EPDM B are 0.855 and 0.865 g/cc, respectively g/cc (each neat polymer).  
 NR: Values not reported by measurement

Table 4: First Composition GPC and Rheology Properties

First Comp. A	EPDM B	A/B Ratio	Mn	Mw	Mz	Mw/Mn	Mz/Mn	V0.1 at 190°C, Pa·s no oil	TD0.1 at 190°C, no oil	Mz/ TD0.1 g/mol	[(Mz/TD0.1)]/ (Mw/Mn) Eqn. B g/mol	(Mz/Mn)/(TD0.1) Eqn. A
100	0		61831	207395	548684	3.354	8.8739	159600	1.06	517626	154322	8.37
96.2	3.8	25.0	63307	214277	599630	3.385	8.8399	174848.8	1.10	510539	150836	8.06
95.2	4.8	20.0	63669	215917	562135	3.391	8.8290	179480	1.10	508829	150042	7.99
95	5	19.0	63764	216344	562780	3.393	8.8260	179424	1.11	508383	149838	7.97
90	10	9.0	65824	225305	575774	3.423	8.7472	199247	1.15	498937	145767	7.58
80	20	4.0	70381	243265	598934	3.456	8.5098	238894	1.25	479915	138849	6.82
70	30	2.3	75633	261276	618962	3.455	8.1838	278541	1.34	461224	133512	6.10
60	40	1.5	81749	279338	636453	3.417	7.7854	318188	1.44	443213	129708	5.42
50	50	1.0	88964	297451	651861	3.343	7.3272	357835	1.53	426053	127428	4.79
40	60	0.7	97603	315615	665536	3.234	6.8188	397482	1.62	409813	126734	4.20
30	70	0.4	108133	333830	677755	3.087	6.2678	437129	1.72	394502	127786	3.65
20	80	0.3	121251	352097	688739	2.904	5.6803	476776	1.81	380099	130894	3.13
10	90	0.1	138046	370416	698667	2.683	5.0611	516423	1.91	366562	136609	2.66
5	95	0.1	148341	379595	703280	2.559	4.7410	536246.5	1.95	360103	140724	2.43
0	100	0.0	160314	388788	707683	2.425	4.4143	556070	2.00	353841	145904	2.21

Table 5 Inventive and Comparative Formulations (Parts)

	<i>Comparative formulation F- a</i>	Inventive example F- 1	Inventive example F- 2	<i>Comparative formulation F- b</i>	Inventive example F- 3	Inventive example F- 4
First Comp.A	100.0	89.9	95.0	100.0	89.9	95.0
EPDM-B		10	5		10	5
Oil included in EPDM A*	39.0	35.1	37.0	39.0	35.1	37.0
Oil included in EPDM B*	0	10	5	0	10	5
FEF Black N550				60	60	60
SRF Black N774	140	140	140	60	60	60
CaCO <sub>3</sub>	55	55	55	40	40	40
HYDROBRITE 550**	61	55	58	36	30	33.04
ZnO-80	6.25	6.25	6.25	6.25	6.25	6.25
Stearic Acid	2	2	2	1.5	1.5	1.5
CaO-80	6.25	6.25	6.25	6.25	6.25	6.25
PEG-4000	3	3	3	3	3	3
Sulphur-80	1.875	1.875	1.875	1.25	1.25	1.25
MBTS-75	1.5	1.5	1.5	1.5	1.5	1.5
ZBEC-70	0.715	0.715	0.715	0.715	0.715	0.715
TBzTD-70	1.15	1.15	1.15	1.15	1.15	1.15
RHENOGRAN Geniplex-70	1	1	1	1	1	1
Celogen OT (OBSh)	3.0	3.0	3.0	3.0	3.0	3.0
Total (parts)	421.7	421.7	421.7	360.6	360.6	360.7
Neat polymer ratio EPDM-A/EPDM-B	100/0	9.0	19.0	100/0	9.0	19.0
Polymer content wt%	23.7%	23.7%	23.7%	27.7%	27.7%	27.7%
Total oil content (wt%)	24%	24%	24%	21%	21%	21%
<p>* Oil included in EPDM-A and B is PARALUX 6001. **Oil added is HYDROBRITE 550.            Compositions containing 23.7 wt% polymer content (based on wt composition) are considered "low rubber content formulations, and compositions containing 27.7 wt% polymer content (based on wt of composition) are considered high rubber content formulations.</p>						

### Sponge Cell Morphology and Surface Quality

**[0129]** Sponge cell morphology was analyzed using an optical microscope equipped with a digital camera. The inventive examples (Example F-1, F-2, F-3, F-4) made with a blend of EPDM-A and EPDM-B show higher Mooney relaxation area (MLRA) than the pure EPDM (F-a, F-b) comparative, as shown in Table 6. Higher Mooney relaxation area means the rubber composition has higher melt elasticity, and therefore better carbon black incorporation during mixing, improved dimension stability during extrusion, and better bubble stability during foaming. Thus, such compositions can be used to produce excellent closed cell morphology and nice skin surface.

Table 6: Compound Mooney Viscosity and Stress Relaxation Area

	<i>Comparative formulation F-a</i>	Inventive example F-1	Inventive example F-2	<i>Comparative formulation F-b</i>	Inventive example F-3	Inventive example F-4
ML1+4, 100°C	28.79	34.53	28.61	27.02	44.30	39.83
MLRA	226.90	260.95	228.09	156.07	338.33	269.44
MLRA/ML	7.90	7.61	7.97	5.78	7.64	6.76
A (intercept)	7.62	9.51	7.09	7.56	14.10	12.55
K (slope)	-0.38	-0.40	-0.36	-0.49	-0.44	-0.48

### Curing and Foaming Characteristics

**[0130]** A Rubber Processing Analyzer-2000P (RPA) from Alpha Technology was used to analyze the compounds curing properties, curing and forming curves, and rheological properties. Curing and forming curves were determined at 180°C, the oscillation frequency was set at 100 CPM (1.67 Hz); and the oscillating angle was 0.5 degree (7% strain). The chamber filler factor was set at 0.62. As shown in Table 7, blending EPDM-B into First Composition A increases the ML, and results in a high curing density, as indicated by a high MH-ML value. It has been discovered that the EPDM-B improves the composition's elasticity, both before curing, during curing and after curing, and therefore provides improved bubble stabilization during sponge foaming process, reduces bubble burst, and provides better surface smoothness. Comparing the pressure and the curing density building up rate, the inventive examples have synchronized pressure-torque building up rate for a good balanced foaming and curing, and generate a foam with a closed cell structure and smooth surface. See, for example, Figures 1 and 2.

**[0131]** Compared with the comparative compositions, the inventive compositions have comparable or smaller foam density, when foamed at various temperatures such as from 160 to 200°C, as seen in Table 8.

**[0132]** It has been discovered that the inventive compositions containing the first composition A and the EPDM-B provides a unique distribution of molecular weight fractions and overall MWD, which provides excellent processability and foamability for the production of foamed sponge, with smooth surface and excellent aesthetics. It has also been discovered that the inventive compositions show high Mooney relaxation, which, in turn, provides higher melt elasticity, better carbon black incorporation during mixing, improved dimension stability during extrusion, and better bubble stability during foaming, to produce excellent closed cell morphology and smooth skin surface.

**[0133]** First composition A has high diene level and high long chain branching level, as indicated by high V0.1/V100 value (e.g., 42.5) and low tan delta (e.g., 1.05). It has been discovered that its high diene level (e.g., 8.5%) enables a fast cure rate, well balanced with a steady decomposition rate and gas generation rate of the blowing agents. It has been discovered that its high long chain branching level high provides good melt elasticity for high shape retention and good bubble stability during extrusion foaming. Its low oil-extended Mooney viscosity (e.g., 20 MU) and relatively broad molecular weight distribution (e.g., 3.1-3.4) provide for excellent mixing, compounding and extrusion performance. The low ethylene content (e.g., 57 wt%) offers great elasticity and compression set resistance of the end sponge formulation. EPDM-B has medium diene level (e.g., 5.1wt%), an ultra high Mw (415-416K g/mol), and narrow molecular weight distribution (e.g., 2.2-2.4); it also has a linear chain structure with low levels of long chain branching, as indicated by a high tan delta (e.g., 2.0-2.1). Its high ethylene content (e.g., 65 wt%) offers good tensile strength, elongation, and ultimate physical properties. It has been discovered that the ultra high Mooney viscosity of EPDM-B, in combination with the first composition A, provides improved melt strength and elasticity, and therefore better shape retention, dimension stability and bubble stability, during extrusion foaming, to produce excellent closed cell morphology and nice skin surface.

Table 7: Curing Characteristics Tested using RPA at 180°C

Rheometer (RPA), 180°C, 0.5 degree arc	<i>Comp. F-a</i>	Inv. F-1	Inv. F-2	<i>Comp. F-b</i>	Inv. F-3	Inv. F-4
ML (dNm)	0.57	0.98	0.55	0.69	1.25	1.11
MH (dNm)	10.40	13.30	12.15	12.20	10.76	14.03
MH-ML (dNm)	9.83	12.32	11.60	11.51	9.51	12.92
ts2 (min)	0.54	0.57	0.57	0.54	0.35	0.43

(continued)

Rheometer (RPA), 180°C, 0.5 degree arc	Comp. F-a	Inv. F-1	Inv. F-2	Comp. F-b	Inv. F-3	Inv. F-4
t10 (min)	0.76	0.82	0.88	0.80	1.00	0.74
t90 (min)	3.68	3.42	2.78	2.20	3.21	2.22
t95 (min)	5.49	4.89	3.86	2.92	4.40	3.22

Table 8: Foam Densities of the Sponged Foamed at Various Temperatures

	Comp. F-a	Inv. F-1	Inv. F-2	Comp. F-b	Inv. F-3	Inv. F-4
160°C-Foam density (g/cc)	0.982	0.99	0.972	1.131	1.037	0.813
165°C-Foam density (g/cc)	0.846	1.103	0.859	1.05	0.902	0.772
170°C-Foam density (p/cc)	0.734	0.697	0.766	0.948	0.792	0.729
180°C-Foam density (g/cc)	0.717	0.68	0.743	0.741	0.783	0.725
200°C-Foam density (g/cc)	0.707	0.678	0.732	0.696	0.714	0.724

**Additional Comparative Compositions**

[0134] Additional comparative compositions are listed in Table 9. The first composition inventive examples have the characteristic of having polymer chains that are high in molecular weight and having branching, to have balanced elasticity for the claimed application use. The inventive compositions have a good balanced of elasticity required by rubber compounds for good shape retention, dimension stability and bubble stability, during extrusion foaming, to produce excellent closed cell morphology and smooth skin surface. The comparative compositions in Table 9 do not have the proper balance of such parameters, and lack the balanced elasticity, and would produce poorer quality foams.

Table 9: First Composition GPC and Rheology Properties

First Composition	Mn (g/mol)	Mz (g/mol)	Mw/Mn	TD0.1 at 190°C, no oil	Mz/TD0.1	[(Mz/TD0.1)]/(Mw/Mn) Eqn. B	(Mz/Mn)/(TD0.1) Eqn. A
KELTAN 4903	69630	868400	3.59	0.74	1173514	323,884	16.85
NORDEL IP5565	54090	434100	3.33	1.55	280065	84,104	5.18

**Claims**

1. A composition comprising at least one oil, and a first composition comprising the following:

- A) a first composition A comprising an ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymers A,
- B) an ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymers B; and

wherein the weight ratio of component A to component B is from 1/1 to 20/1;

wherein the weight average molecular weight (Mw) of the ethylene/ $\alpha$ -olefin/non-conjugated diene B is greater than the weight average molecular weight (Mw) of the first composition A; wherein the composition has a Mooney Viscosity (ML1+4, 100°C) from 20 to 100; and wherein the first composition meets the following Equation A:  $4.50 < [(Mz/Mn)_{(first\ comp.)}]/(TD0.1_{(first\ comp.)}) < 8.00$  (Eqn. A), wherein  $TD0.1_{(first\ comp.)}$  is the tan delta of the first composition at 0.1 rad/sec and 190°C.

2. The composition of claim 1, wherein the first composition meets the following Equation B:

$$[(Mz_{(\text{first comp.})})/(TD0,1_{(\text{first comp.})})]/(Mw/Mn)_{(\text{first comp.})} \geq 100,000 \text{ g/mol} \quad (\text{Eqn. B}),$$

wherein  $TD0,1_{(\text{first comp.})}$  is the tan delta of the first composition at 0.1 rad/sec and 190°C.

5

3. The composition of any one of the previous claims, wherein the first composition comprises  $\geq 95$  wt% of components A and B, based on the weight of the first composition.
4. The composition of any one of the previous claims, wherein the composition comprises  $\geq 95$  wt% of the oil and the first composition, based on the weight of the composition.
5. The composition of any one of the previous claims, wherein weight ratio of the first composition to the at least one oil is from 0.80 to 1.20.
6. The composition of any one of the previous claims, wherein the ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymer B has a Mw from 350,000 g/mole to 500,000 g/mole; and wherein the first composition A has a Mw from 150,000 g/mole to 320,000 g/mole.
7. The composition of any one of the previous claims, wherein the first composition A further comprises a second ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymer, and wherein the second ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymer differs from the first ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymer in one or more of the following properties,  $Mw_{\text{conv}}$ ,  $Mn_{\text{conv}}$ ,  $MWD_{\text{conv}}$ , MV (ML1+4, 125°C), wt% diene (based on the weight of the interpolymer), and/or wt% ethylene (based on the weight of the interpolymer).
8. The composition of claim 7, wherein the first composition A comprises  $\geq 95$  wt% of the first ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymer and the second ethylene/ $\alpha$ -olefin/non-conjugated diene interpolymer, based on the weight of the first composition A.
9. An article comprising at least one component formed from the composition of any one of the previous claims.

10

15

20

25

30

### Patentansprüche

1. Zusammensetzung, beinhaltend mindestens ein Öl und eine erste Zusammensetzung, beinhaltend das Folgende:

35

A) eine erste Zusammensetzung A, beinhaltend ein Ethylen/ $\alpha$ -Olefin/nichtkonjugiertes-Dien-Interpolymer A, B) ein Ethylen/ $\alpha$ -Olefin/nicht-konjugiertes-Dien-Interpolymer B; und

wobei das Gewichtsverhältnis von Bestandteil A zu Bestandteil B 1 : 1 bis 20 : 1 beträgt;

40

wobei das gewichtsgemittelte Molekulargewicht (Mw) des Ethylen/ $\alpha$ -Olefin/nichtkonjugiertes-Dien-Interpolymers B größer ist als das gewichtsgemittelte Molekulargewicht (Mw) der ersten Zusammensetzung A; wobei die Zusammensetzung eine Mooney-Viskosität (ML1+4, 100 °C) von 20 bis 100 aufweist; und wobei die erste Zusammensetzung die folgende Gleichung A erfüllt:  $4,50 < [(Mz/Mn)_{(\text{erste Zus.})})]/(TD0,1_{(\text{erste Zus.})})] < 8,00$  (Gl. A), wobei  $TD0,1_{(\text{erste Zus.})}$  der tan Delta der ersten Zusammensetzung bei 0,1 rad/s und 190 °C ist.

45

2. Zusammensetzung gemäß Anspruch 1, wobei die erste Zusammensetzung die folgende Gleichung B erfüllt:

50

$$[(Mz_{(\text{erste Zus.})})/(TD0,1_{(\text{erste Zus.})})]/(Mw/Mn)_{(\text{erste Zus.})} \geq 100\,000 \text{ g/mol (Gl. B)},$$

wobei  $TD0,1_{(\text{erste Zus.})}$  der tan Delta der ersten Zusammensetzung bei 0,1 rad/s und 190 °C ist.

3. Zusammensetzung gemäß einem der vorhergehenden Ansprüche, wobei die erste Zusammensetzung bezogen auf das Gewicht der ersten Zusammensetzung zu  $\geq 95$  Gew.-% Bestandteile A und B beinhaltet.
4. Zusammensetzung gemäß einem der vorhergehenden Ansprüche, wobei die Zusammensetzung bezogen auf das Gewicht der Zusammensetzung zu  $\geq 95$  Gew.-% das Öl und die erste Zusammensetzung beinhaltet.

55

## EP 3 464 462 B9

5. Zusammensetzung gemäß einem der vorhergehenden Ansprüche, wobei das Gewichtsverhältnis der ersten Zusammensetzung zu dem mindestens einen Öl 0,80 bis 1,20 beträgt.
- 5 6. Zusammensetzung gemäß einem der vorhergehenden Ansprüche, wobei das Ethylen/ $\alpha$ -Olefin/nicht-konjugiertes-Dien-Interpolymer B ein  $M_w$  von 350 000 g/mol bis 500 000 g/mol aufweist; und wobei die erste Zusammensetzung A ein  $M_w$  von 150 000 g/mol bis 320 000 g/mol aufweist.
- 10 7. Zusammensetzung gemäß einem der vorhergehenden Ansprüche, wobei die erste Zusammensetzung A ferner ein zweites Ethylen/ $\alpha$ -Olefin/nicht-konjugiertes-Dien-Interpolymer beinhaltet und wobei das zweite Ethylen/ $\alpha$ -Olefin/nicht-konjugiertes-Dien-Interpolymer sich von dem ersten Ethylen/ $\alpha$ -Olefin/nicht-konjugiertes-Dien-Interpolymer in einer oder mehreren der folgenden Eigenschaften unterscheidet:  $M_{w,umgew}$ ,  $M_{n,umgew}$ ,  $MWD_{umgew}$ ,  $MV$  (ML1+4, 125 °C), Gew.-% Dien (bezogen auf das Gewicht des Interpolymers) und/oder Gew.-% Ethylen (bezogen auf das Gewicht des Interpolymers).
- 15 8. Zusammensetzung gemäß Anspruch 7, wobei die erste Zusammensetzung A bezogen auf das Gewicht der ersten Zusammensetzung A zu  $\geq 95$  Gew.-% das erste Ethylen/ $\alpha$ -Olefin/nicht-konjugiertes-Dien-Interpolymer und das zweite Ethylen/ $\alpha$ -Olefin/nicht-konjugiertes-Dien-Interpolymer beinhaltet.
- 20 9. Ein Artikel, beinhaltend mindestens einen aus der Zusammensetzung gemäß einem der vorhergehenden Ansprüche gebildeten Bestandteil.

### Revendications

- 25 1. Une composition comprenant au moins une huile, et une première composition comprenant les éléments suivants :
- A) une première composition A comprenant un interpolymère d'éthylène/ $\alpha$ -oléfine/diène non conjugué A,  
B) un interpolymère d'éthylène/ $\alpha$ -oléfine/diène non conjugué B ; et
- 30 dans laquelle le rapport en poids du constituant A au constituant B va de 1/1 à 20/1 ;
- dans laquelle la masse moléculaire moyenne en poids ( $M_w$ ) de l'éthylène/ $\alpha$ -oléfine/diène non conjugué B est supérieure à la masse moléculaire moyenne en poids ( $M_w$ ) de la première composition A ;  
la composition ayant une viscosité Mooney (ML1+4, 100 °C) allant de 20 à 100 ; et dans laquelle la première  
35 composition satisfait l'équation A suivante :
- $$4,50 < [(M_z/M_n)_{(prem. comp.)}]/(TD0,1_{(prem. comp.)})] < 8,00 \text{ (éqn. A), dans laquelle } TD0,1_{(prem. comp.)} \text{ est la tan delta de la première composition à } 0,1 \text{ rad/sec et } 190 \text{ °C.}$$
- 40 2. La composition de la revendication 1, dans laquelle la première composition satisfait l'équation B suivante :
- $$[(M_z)_{(prem. comp.)}]/(TD0,1_{(prem. comp.)})]/(M_w/M_n)_{(prem. comp.)} \geq 100\,000 \text{ g/mol (éqn. B),}$$
- 45 dans laquelle  $TD0,1_{(prem. comp.)}$  est la tan delta de la première composition à 0,1 rad/sec et 190 °C.
- 50 3. La composition de n'importe laquelle des revendications précédentes, dans laquelle la première composition comprend  $\geq 95$  % en poids de constituants A et B, rapporté au poids de la première composition.
4. La composition de n'importe laquelle des revendications précédentes, la composition comprenant  $\geq 95$  % en poids  
50 de l'huile et de la première composition, rapporté au poids de la composition.
5. La composition de n'importe laquelle des revendications précédentes, dans laquelle le rapport en poids de la première composition à l'au moins une huile va de 0,80 à 1,20.
- 55 6. La composition de n'importe laquelle des revendications précédentes, dans laquelle l'interpolymère d'éthylène/ $\alpha$ -oléfine/diène non conjugué B a une  $M_w$  allant de 350 000 g/mol à 500 000 g/mol ; et dans laquelle la première composition A a une  $M_w$  allant de 150 000 g/mol à 320 000 g/mol.

7. La composition de n'importe laquelle des revendications précédentes, dans laquelle la première composition A comprend en outre un deuxième interpolymère d'éthylène/alpha-oléfine/diène non conjugué, et dans laquelle le deuxième interpolymère d'éthylène/alpha-oléfine/diène non conjugué diffère du premier interpolymère d'éthylène/alpha-oléfine/diène non conjugué par l'une ou plusieurs des propriétés suivantes,  $Mw_{conv}$ ,  $Mn_{conv}$ ,  $MWD_{conv}$ , MV (ML1+4, 125 °C), % en poids de diène (rapporté au poids de l'interpolymère), et/ou % en poids d'éthylène (rapporté au poids de l'interpolymère).
8. La composition de la revendication 7, dans laquelle la première composition A comprend  $\geq 95$  % en poids du premier interpolymère d'éthylène/alpha-oléfine/diène non conjugué et du deuxième interpolymère d'éthylène/alpha-oléfine/diène non conjugué, rapporté au poids de la première composition A.
9. Un article comprenant au moins un constituant formé à partir de la composition de n'importe laquelle des revendications précédentes.

15

20

25

30


35

40

45


50

55

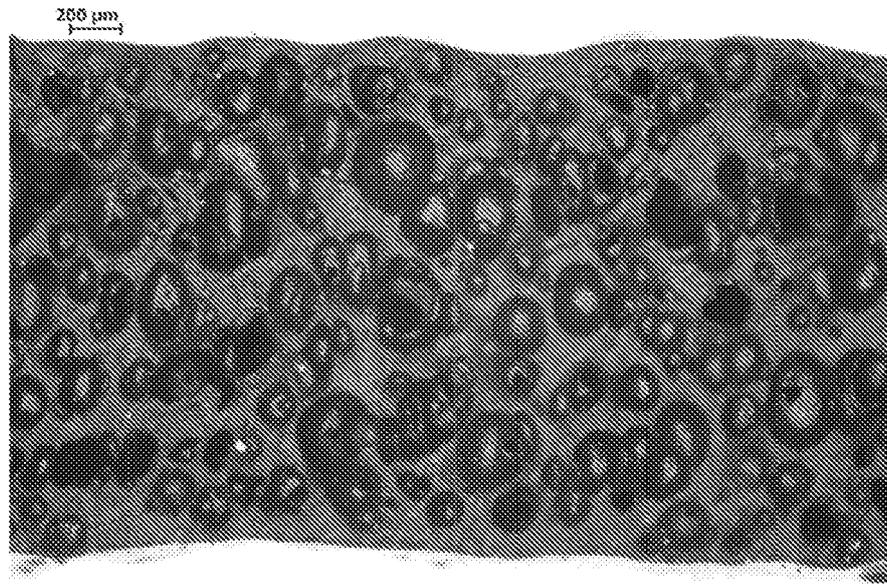

Reference-2, foamed 4 minutes @ 200 C

FIGURE 1

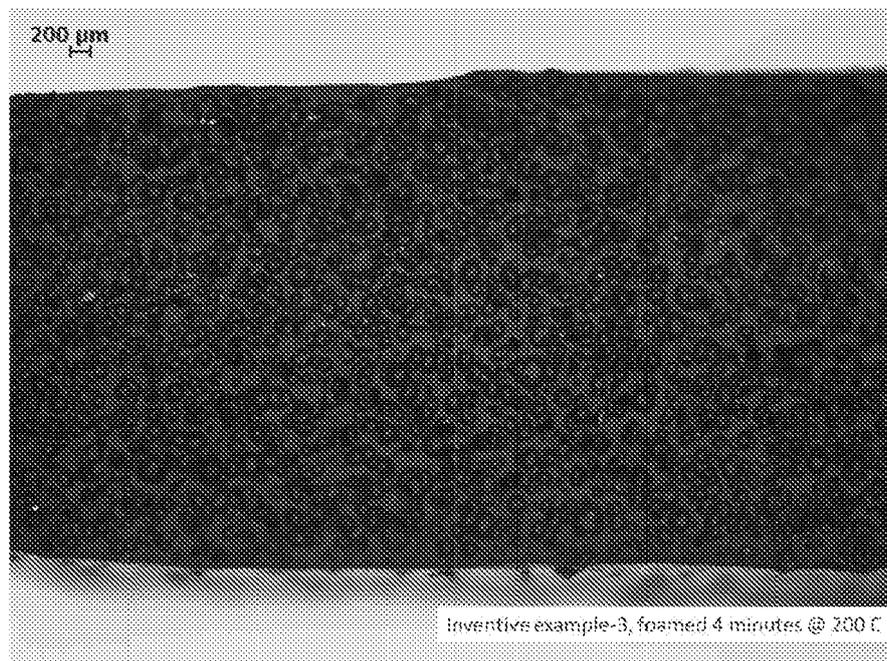

inventive example-3, foamed 4 minutes @ 200 C

FIGURE 2

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- CN 16083876 W [0001]
- US 5973017 A [0003] [0007]
- US 20140336290 A [0003]
- US 20120059123 A [0003]
- US 20110160323 A [0003]
- WO 2007136494 A [0003]
- WO 2007136496 A [0003]
- WO 2007136497 A [0003]
- WO 2014084892 A [0003]
- WO 2013096573 A [0003]
- WO 2014084893 A [0003]
- WO 2016003878 A [0003]
- WO 2016003879 A [0003]
- WO 2016003880 A [0003]
- US 5677382 A [0004]
- US 2012116021 A1 [0005]
- WO 2014084892 A1 [0006]
- US 5977251 A [0119]
- US 6545088 B [0119]
- US 5919988 A [0128]

**Non-patent literature cited in the description**

- **WILLIAMS ; WARD.** *J. Polym. Sci., Polym. Letters*, 1968, vol. 6, 621 [0105]