



(11) **EP 3 467 964 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 30

(51) Int Cl.:
H01R 31/06 (2006.01) **H01R 27/00 (2006.01)**
H01R 24/30 (2011.01) **H01R 24/78 (2011.01)**
H01R 103/00 (2006.01)

(48) Corrigendum issued on:
04.09.2019 Bulletin 2019/36

(43) Date of publication:
10.04.2019 Bulletin 2019/15

(21) Application number: **18198262.0**

(22) Date of filing: **02.10.2018**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(71) Applicant: **Powertech Industrial Co., Ltd.**
New Taipei City (TW)

(72) Inventor: **HSU, Jung-Hui**
242 New Taipei City (TW)

(74) Representative: **Viering, Jentschura & Partner**
mbB
Patent- und Rechtsanwälte
Am Brauhaus 8
01099 Dresden (DE)

(30) Priority: **06.10.2017 TW 106134545**

(54) **RETRACTABLE PLUG DEVICE**

(57) A retractable plug device includes a housing (1) and a plug unit (2). The housing (1) has a first surface (13) and a second surface (14). The first surface (13) has a first opening (16), and the second surface (14) has a second opening (17). The housing (1) has a receiving space (15) therein. The first opening (16) and the second opening (17) are respectively located at two opposite ends of the receiving space (15). The plug unit (2) includes an insulating body (21) and a plug pin (22). The plug pin (22) is pivoted to the insulating body (21) such that the plug pin (22) can be folded and unfolded in a rotatable manner. The plug unit (2) is movably disposed in the receiving space (15) of the housing (1) such that the plug unit (2) can be extended out of the first surface (13) of the housing (1) via the first opening (16), or be retracted into the receiving space (15) of the housing (1) via the first opening (16).

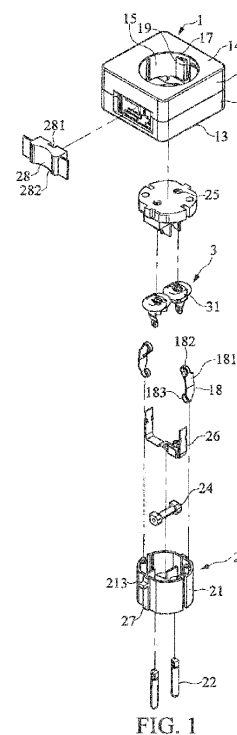


FIG. 1

EP 3 467 964 A8