

(19)



(11)

EP 3 469 891 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
17.04.2019 Bulletin 2019/16

(51) Int Cl.:
A01G 27/00 (2006.01)

(21) Application number: **18199173.8**

(22) Date of filing: **08.10.2018**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
 GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
 PL PT RO RS SE SI SK SM TR**
 Designated Extension States:
BA ME
 Designated Validation States:
KH MA MD TN

(71) Applicant: **CLABER S.p.A.**
33080 Fiume Veneto (PN) (IT)

(72) Inventor: **SPADOTTO, Gian Luigi**
33170 Pordenone (IT)

(74) Representative: **Mittler, Enrico et al**
Mittler & C. S.r.l.
Viale Lombardia, 20
20131 Milano (IT)

(30) Priority: **10.10.2017 IT 201700113892**

(54) **A DEVICE FOR DISPENSING LIQUIDS, IN PARTICULAR WATER FOR IRRIGATING GARDENS AND TERRACES**

(57) A device for dispensing liquids, in particular irrigation water, comprises a liquid tank (1) of displaceable type with a cover (2) for closing said tank (1), an electric pump (7) inserted into the cover (2) for drawing the liquid from the tank (1) and delivering the liquid itself to irrigation pipes extending outwards, and an electronic control unit (13) for setting the liquid delivering times. The electronic control unit (13) comprises a movable selector (15) for

programming the times and durations of the liquid deliveries, a start button (16) for starting the selected program, and a display (17) for viewing the state of the device as a function of the selected program. An external power source (33) is provided, with the possibility of using rechargeable cells (35), which are automatically rechargeable and which can be enabled in case of absence of external power supply.

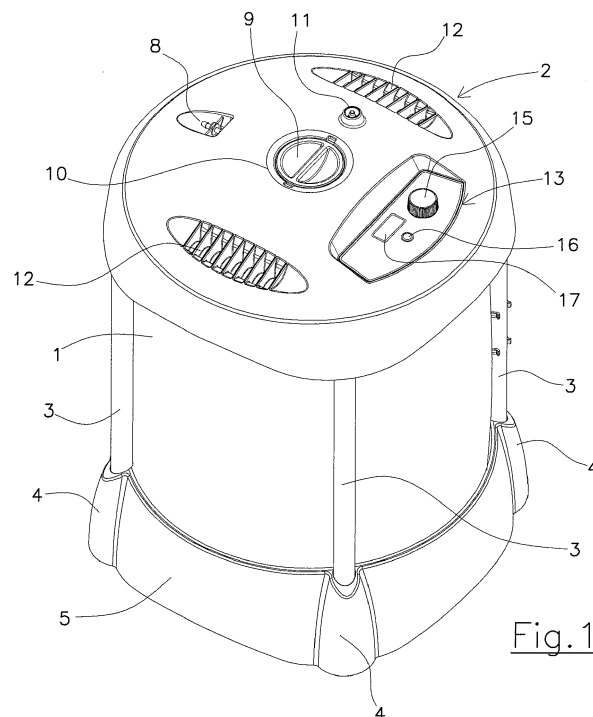


Fig. 1

Description

[0001] The present invention relates to a device for dispensing liquids, in particular water for irrigating gardens and terraces.

[0002] Water dispensing devices of the displaceable type, provided with water containment tank and electrically powered pump for drawing water from the tank and feeding it to appropriately arranged irrigation pipes, are sometimes required for irrigating plants, gardens and terraces.

[0003] Such devices require an electronic programming and control unit for setting the irrigation time until the tank is emptied.

[0004] It is the object of the present invention to provide a displaceable device for dispensing liquids, in particular irrigation water, which is adapted to set various irrigation times and durations and which also allows choosing between external power supply and cell power supply.

[0005] According to the invention, a liquid dispensing device is thus suggested, comprising a liquid tank of displaceable type with a cover for closing said tank, an electric pump inserted into said cover for drawing the liquid from the tank and delivering the liquid to irrigation pipes extending outwards, and an electronic control unit included in said cover for setting the liquid delivering times, said electronic control unit comprising a movable selector for programming start times and duration times of the liquid deliveries, a start button for starting a selected program, a display for viewing the state of the device as a function of the selected program, and first and second electric power supply means which can be alternatively used for electrically supplying the pump and the electronic control unit with constant prefixed electric voltage.

[0006] More precisely, the pump and the electronic control unit may be electrically powered either by means of an external connection, which may be of the type normally used for mobile phones, i.e. by an electric cord with a 230Vac-to-5Vdc adapter interposed between an external power socket and an internal socket of the device, or by rechargeable cells which may be inserted into an appropriate housing of the device and adapted to intervene automatically in case of interruption of the external power supply.

[0007] A possible practical embodiment of the device according to the invention will now be described by way of example with reference to the accompanying drawings, in which:

figure 1 shows a perspective view of a device according to the invention, consisting of a liquid tank and a cover for closing the tank equipped with a pump, an electronic control unit and a liquid delivery spout;

figure 2 shows a top plan view of the same device;

figure 3 shows an axial section view of the device taken along line III in figure 2;

figure 4 shows a cross-section view of the device

taken along line IV-IV in figure 3;

figure 5 shows a bottom view of the cover for closing the tank;

figure 6 shows the detail of the display of the electronic control unit with the various available views; figure 7 shows the functional diagram of the electronic control unit included in the aforesaid device.

[0008] Figures 1-5 show a device consisting of a tank 1 which can be filled with the liquid to be dispensed, in general water for irrigating gardens, terraces, vegetable patches or the like, and a closing cover 2 supported by two inverted U-shaped legs, each consisting of two vertical uprights 3, which end at the bottom inside respective hollow bosses 4 of a base 5 placed around the base of tank 1 (figures 1, 3 and 4), and a connecting crossbar 6 fixed below the cover 2 by means of a clamp 12 (figure 5).

[0009] Cover 2 houses an electric pump 7 which can be controlled to draw liquid from tank 1 and dispense it outside at a spout 8, which can be appropriately connected to an irrigation system (figures 1, 2, 3 and 5).

[0010] Cover 2 also includes an external screw-on cap 9 for closing a conical funnel 10 with mesh bottom 14 intended to fill manually tank 1, a check valve 11 and an electronic control unit 13 for manually programming the operation time of the pump 7 for the desired irrigation.

[0011] The electronic control unit 13 is partially inserted below cover 2 and externally comprises a rotary knob 15 for selecting the irrigation times and durations, a start button 16, and an LCD display 17 for viewing the state of the device according to the selected program (figures 1, 2 and 5).

[0012] For electrically powering it and pump 7, the electronic control unit 13 includes, in cover 2, a socket 52 (figures 2 and 5) which is suitable for the connection to an external electric source through a first jack terminal of an electric cord having a 230Vac/5Vdc adapter at the other terminal and also a double housing 26 (figure 5) which is suitable for inserting two rechargeable cells (not shown) which intervene in the absence of external power supply. A pair of electric wires 27 connects the electronic control unit 13 to the pump 7 for electrically supplying the latter (figure 5).

[0013] As shown in figures 3 and 5, the device comprises a plurality of flexible pipes for hydraulically connecting the various internal parts of the device. In particular, one pipe 18 extends from a filtering device 19 located at the bottom of tank 1 (figures 3 and 4) to a pipe 20 located in cover 2 and connected to the suction end of pump 7, and one pipe 21 extends, again inside cover 2, from the dispensing spout 8 to a first way of a three-way clamp 22, which has a second way connected, by means of a further pipe 23, to a pipe 24 connected to the delivery end of pump 7. Finally, a pipe 25 connects a third way of clamp 22 to the check valve 11.

[0014] The functional diagram of the electronic control unit 13 is shown in figure 7.

[0015] The main component of the electronic control

unit 13 is a microcontroller 28, which is powered by a power supply block 29 controlled by an electric power selector block 30. The electric power selector block 30 also controls a pump supply block 31 for supplying electric power to a driving block 32 used for driving the pump 7 under the control of the microcontroller 28.

[0016] The electric power selector 30 can have as an input source, via the jack socket 52, the connecting electric cord and the 230Vac/5Vdc adapter an external electric source 33 followed by a step-down voltage regulator 34, which sets the input voltage of the selector 30 to a prefixed constant value (preferably 3V), or rechargeable cells 35 with a step-up voltage regulator 36, which regulates the input voltage of the selector 30 to the same aforesaid prefixed constant value (i.e. preferably 3V). The step-up voltage regulator 36 is enabled by an automatic enabling block 37 in the absence of voltage from the external electric source 33. The rechargeable cells 35 receive the charge from a cell charger 38 when the latter is enabled by an enabling unit 39 controlled by the microcontroller 28. A cell charge reading block 40 informs the microcontroller 28 on the charge state of the cells. A voltage sensor 43 is connected to the microcontroller 28 in order to reset it after a total absence of voltage and when voltage itself returns.

[0017] Microcontroller 28, which is provided with an oscillator 41, operates under the control of the rotary knob selector 15 and can be started using the start button 16. In turn, the microcontroller controls the views in display 17 and the backlight 42 of the display itself.

[0018] As shown in figure 6, display 17 has a screen divided into three sectors 44, 45 and 46. Sector 44 shows an indicator 47 of the state of the cells 35 (no cells if lit fixed, flat cells if flashing), an indicator 48 (OFF) showing that no automatic irrigation is programmed and an indicator 49 of the number of selected irrigation days with full tank. Sector 45 shows an indicator 50 of the remaining minutes for the irrigation in progress. Sector 46 shows an indicator 51 of the waiting hours before the beginning of the next automatic programmed irrigation.

[0019] The device described above can thus be used for irrigating plants, gardens, terraces and more.

[0020] The water tank 1 is filled by the user through funnel 10 after unscrewing the plug 9. An irrigation pipe is connected to spout 8.

[0021] An electric cord with 230Vac/5Vdc adapter of the type normally used for mobile phones equipped with jack plug inserted into the socket 52 provided in the cover 2 is used for supplying electric power from an external electric source to the pump 7 and to the electronic control unit 13.

[0022] Since ensuring that the plants or other irrigated objects receive water during prolonged absences of the user may be required, and on the other hand it is possible, if not likely, that due to storms or other events the main house switch may cut off the 230Vac power supply and may not be reactivated for long periods of time, the user can insert two AA size 1.2V rechargeable cells into the

housing 26 of the electronic control unit 13 in order to prevent the plants from not receiving water in the following days. The cells, if present, are recharged by the electronic unit 13 and the recharging is managed by the microcontroller 28, as explained with reference to figure 7. The cells, once recharged, have sufficient energy to ensure irrigation for maximum intended use until the emptying of tank 1. The user can choose whether to install the cells or not.

[0023] At the time of use, starting from the condition with indication OFF of the indicator 48, the user activates the rotary knob 15 so as to select the total days when to perform the irrigation until the emptying of the tank, starting from full tank condition. The selectable days can be, for example, 7, 14, 21 or 28. The selected number is displayed on indicator 49. Once the selection has been made and viewed, the user presses the start button 16 to make the choice operational and start the irrigation. The minutes remaining until the end of the irrigation in progress are displayed by indicator 50.

[0024] Irrigation will be performed every day at the time at which the start button 16 was pressed for a time preset in the microcontroller to ensure that the water in the full tank lasts for all the set days.

[0025] The user can simply press the start button 16 multiple times to start the irrigation at another time. According to the setting of the microcontroller, each pressing of button 16 corresponds to a delay of one hour in the starting time with respect to the current time. The starting time is displayed by the indicator 51 as the number of hours until the next irrigation.

[0026] During the irrigation, the pump 7 draws water from the tank 1 through filter 19 and pipe 18, and feeds it via the pipes 23 and 21 to the irrigation pipe connected to the spout 8.

[0027] The check valve 11 prevents any possible effects of overpressure in the delivery pipes 31 and 21.

[0028] The constant voltage supplied to the selector 30, and therefore to the microcontroller 28 and to the pump 7, allows to keep constant the flow rate of the water delivered by the pump 7 with the amount of water in the container being changing. The amount of water delivered by the pump therefore corresponds in directly proportional way to the electronically controlled operation times of the pump.

Claims

1. Liquid dispensing device comprising a liquid tank (1) of displaceable type with a cover (2) for closure of said tank (1), an electric pump (7) inserted in said cover (2) for drawing the liquid from the tank (1) and delivering the same liquid to irrigation pipes extending outwards and an electronic control unit (13) comprised in said cover (2) for setting the liquid delivering times, said electronic control unit (13) comprising a movable selector (15) for programming start times

and duration times of the liquid delivery, a start button (16) for starting a selected program, a display (17) for visualization of the state of the device as a function of the selected program and first and second electric power supply means (52, 33; 26, 35) usable in alternative for electric power supply of the pump (7) and the electronic control unit (13) with constant prefixed electric voltage.

gation minutes while a programmed irrigation is operating and an indicator (51) of the waiting hours before the next programmed irrigation.

2. Device according to claim 1, **characterized in that** said movable selector (15) consists of a rotary knob. 10

3. Device according to claim 1, **characterized in that** said first electric power supply means (52, 33) comprise an external electric supply source (33) and an electric cable with Vac/Vdc adapter (33) for connection of the external electric supply source (33) to an internal socket (52) of the device, a step-down voltage regulator (34) being provided to maintain the electric voltage supplied by said first electric power supply means (52, 33) at a constant prefixed value, and said second electric power supply means (26, 35) comprise rechargeable cells (35) to be inserted into a housing (26) arranged inside the cover (2), a step-up voltage regulator (36) being provided to maintain the electric voltage supplied by said second electric power supply means (26, 35) at a constant prefixed value. 15
20
25

4. Device according to claim 3, **characterized by** comprising means (37) for automatically enabling the electric power supply through said cells (35) in absence of power supply from said external electric source (33). 30
35

5. Device according to claim 3, **characterized in that** said electronic control unit (13) comprises a microcontroller (48) which commands driving of the pump (7) under the control of said movable selector (15) and said start button (16) and the visualization of the state of the device on said display (17), said microcontroller (48) being provided with electric power supply through an electric power selector (30) which receives an electric supply at prefixed voltage from said external electric source (33) or, in absence of external supply, from said rechargeable cells (35). 40
45

6. Device according to claim 5, **characterized by** comprising means (40) for reading the charge of the cells (35) and communicate the charge to said microcontroller (48) and means (39) for enabling recharging of the cells (35) under the control of said microcontroller (48). 50

7. Device according to claim 1, **characterized in that** said display (17) comprises an indicator (49) of the number of irrigation days programmed in a condition of full tank (1), an indicator (50) of the residual irri- 55

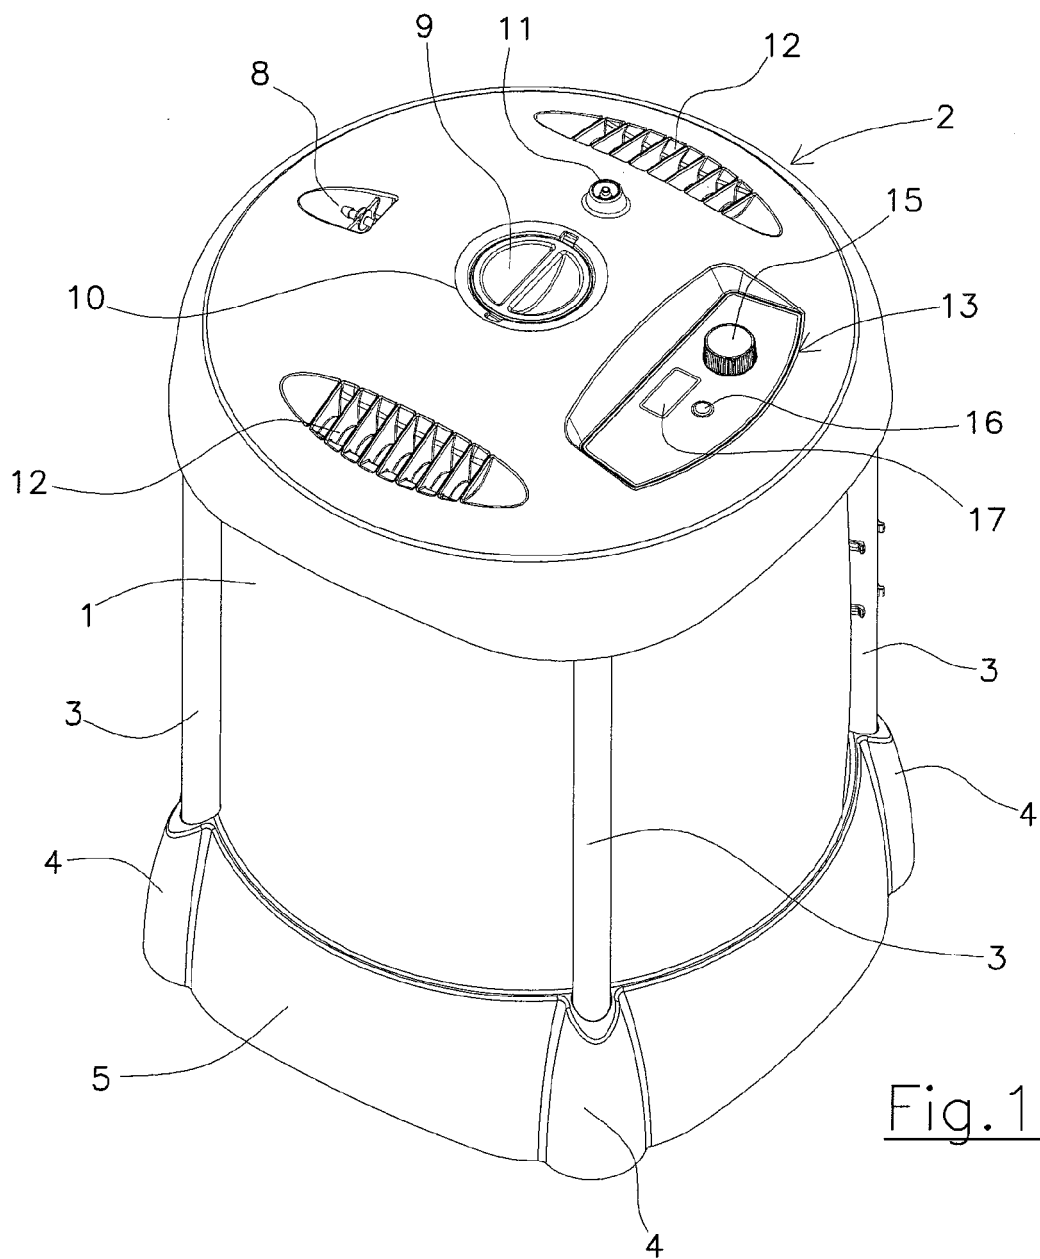


Fig. 1

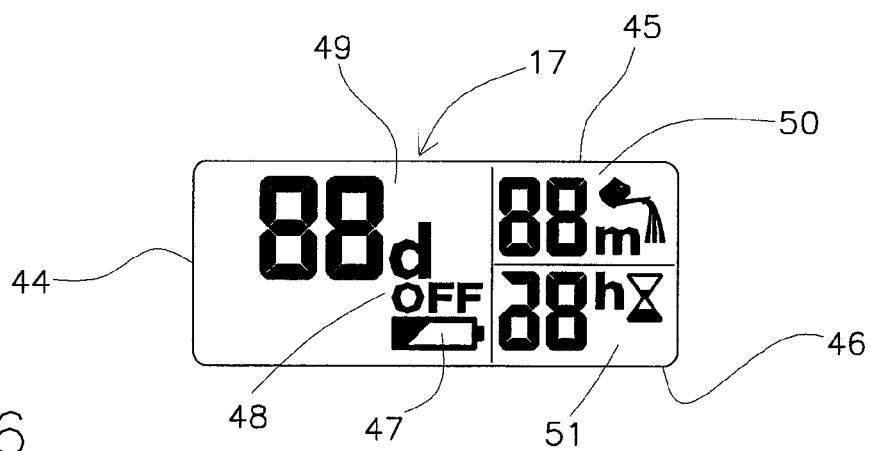


Fig. 6

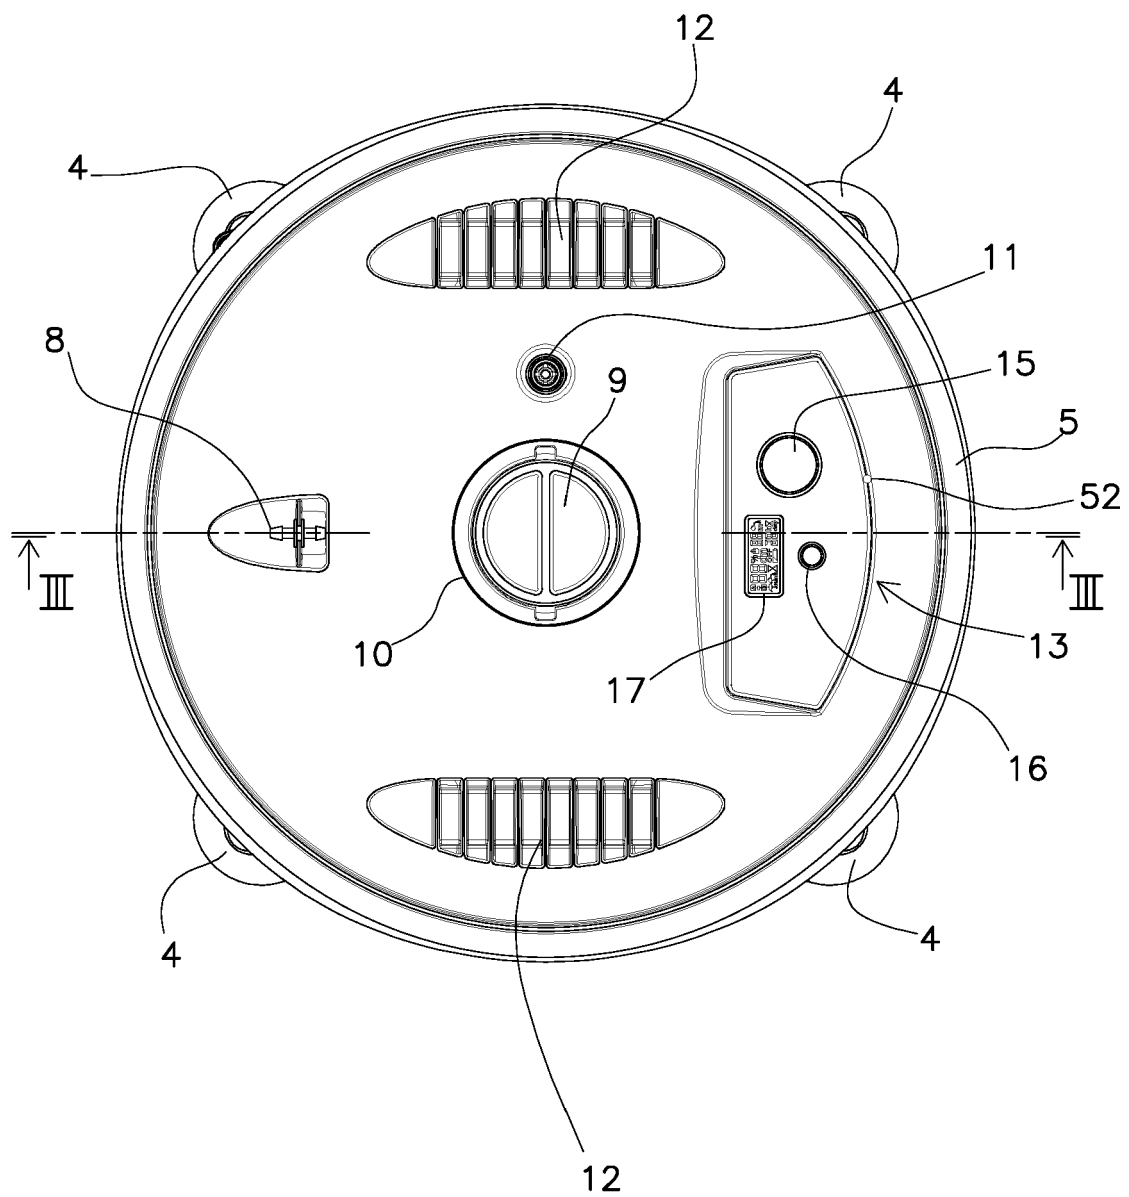


Fig.2

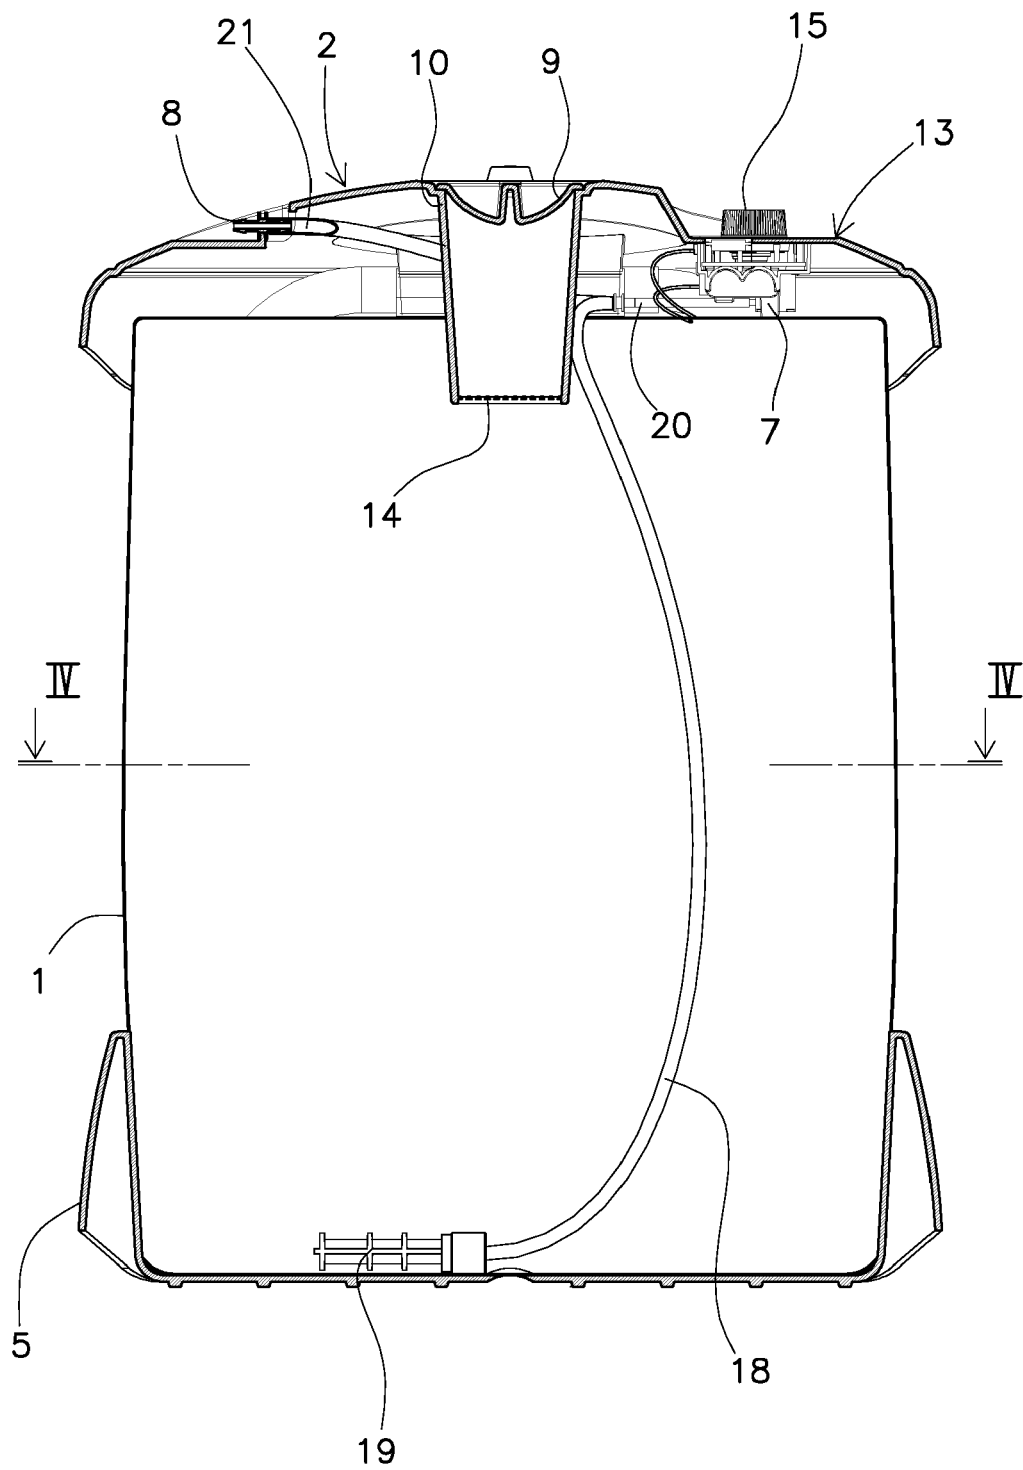


Fig.3

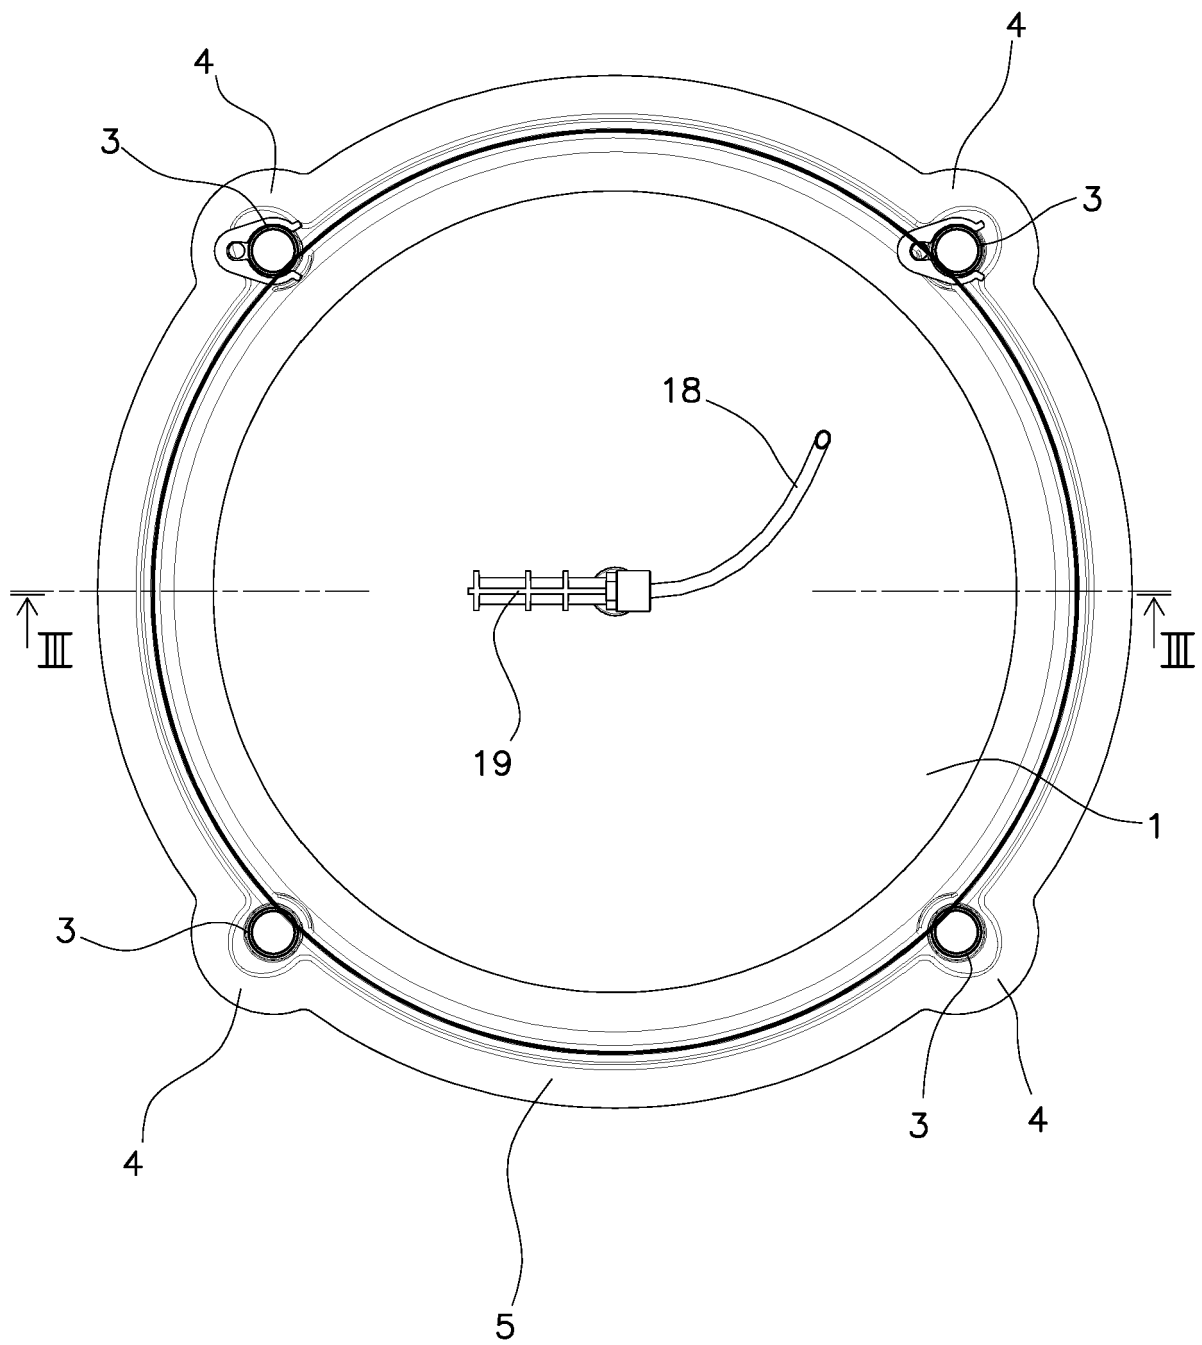


Fig.4

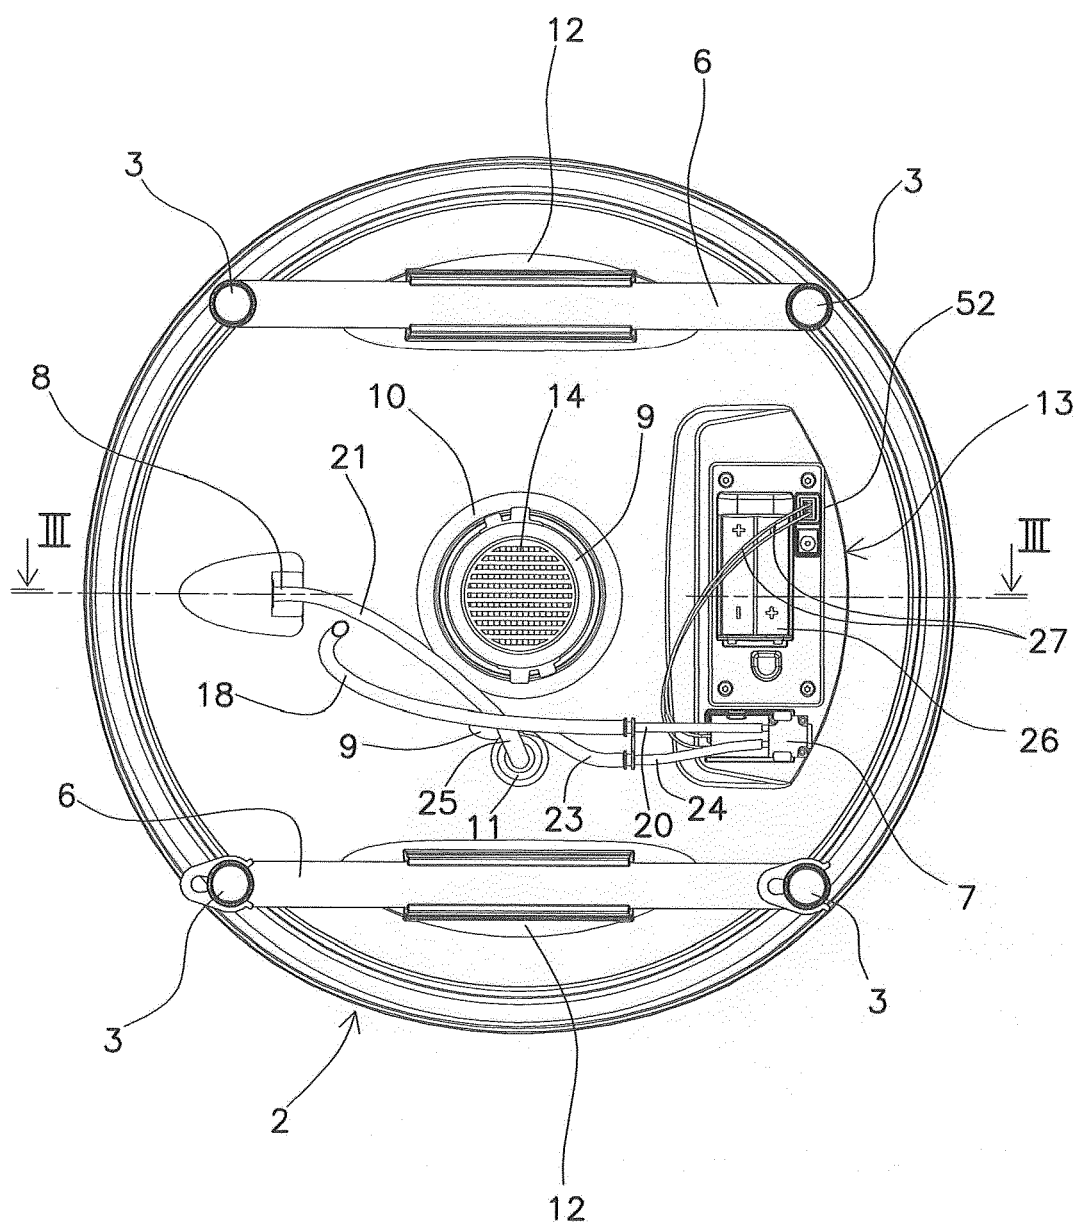


Fig.5

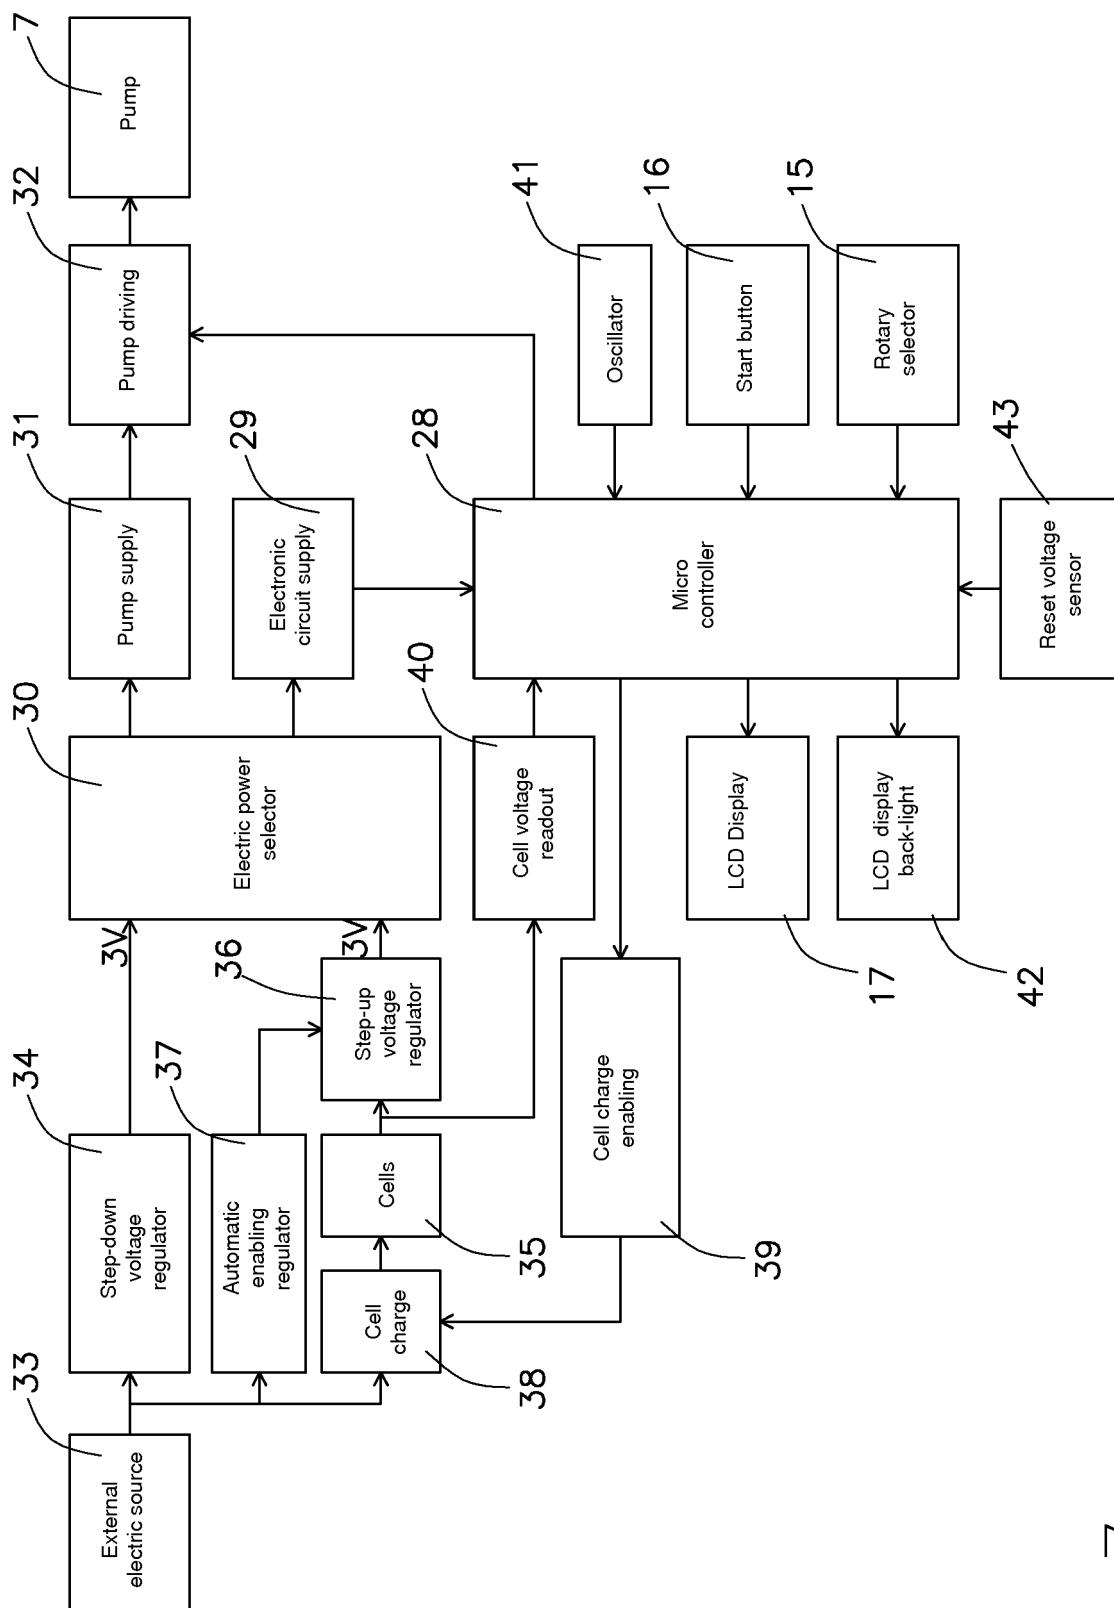


Fig.7



EUROPEAN SEARCH REPORT

Application Number
EP 18 19 9173

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
Y	WO 2004/068935 A2 (ON LINE TRADE & MARKETING P T [IL]; DOTAN SIMON [IL]) 19 August 2004 (2004-08-19) * page 7, paragraph 3 - page 12, paragraph 3; figures 1-9 *	1-7	INV. A01G27/00
Y	EP 2 628 386 A1 (CLABER SPA [IT]) 21 August 2013 (2013-08-21) * paragraph [0017] - paragraph [0039]; figures 1-6 *	1-7	
Y	WO 99/22589 A1 (PRO MARK INC [US]; ERICKSEN KENT C [US]; ELZEY JAMES A [US]; HAYES KIM) 14 May 1999 (1999-05-14) * page 6, line 7 - page 16, line 17; figures 1-6 *	1-7	
Y	US 5 479 338 A (ERICKSEN KENT C [US] ET AL) 26 December 1995 (1995-12-26) * column 7, line 59 - column 17, line 25; figures 1-3 *	1-7	
A	WO 2015/126993 A1 (BROKER ALLIANCE NETWORK INC [US]) 27 August 2015 (2015-08-27) * abstract; figures 1-6 *	1-7	TECHNICAL FIELDS SEARCHED (IPC) A01G
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 27 February 2019	Examiner Vehrer, Zsolt
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 18 19 9173

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

27-02-2019

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2004068935 A2	19-08-2004	CN 1774302 A	17-05-2006
		EP 1594616 A2	16-11-2005
		US 2006255172 A1	16-11-2006
		WO 2004068935 A2	19-08-2004
EP 2628386 A1	21-08-2013	EP 2628386 A1	21-08-2013
		US 2013211604 A1	15-08-2013
WO 9922589 A1	14-05-1999	AU 1293499 A	24-05-1999
		US 5921280 A	13-07-1999
		WO 9922589 A1	14-05-1999
US 5479338 A	26-12-1995	NONE	
WO 2015126993 A1	27-08-2015	CA 2940234 A1	27-08-2015
		US 2015237814 A1	27-08-2015
		WO 2015126993 A1	27-08-2015