



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
08.05.2019 Bulletin 2019/19

(51) Int Cl.:
H01R 13/6593 ^(2011.01) **H01R 13/6474** ^(2011.01)
H01R 24/62 ^(2011.01) **H01R 107/00** ^(2006.01)
H01R 13/6591 ^(2011.01)

(21) Application number: **18201302.9**

(22) Date of filing: **18.10.2018**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

- **CARBONE, Klara, P**
Cortland, Ohio 44410 (US)
- **JONES, Leslie L**
Garrettsville, OHIO 44231 (US)
- **LIPTAK, Nicole L.**
Cortland, OHIO 44410 (US)
- **MESSURI, Dominic, A**
Canfield, Ohio 44406 (US)

(30) Priority: **06.11.2017 US 201715804444**

(71) Applicant: **Aptiv Technologies Limited**
St. Michael (BB)

(72) Inventors:
• **BOYER, Richard, J**
44255, Ohio Mantua (US)

(74) Representative: **Robert, Vincent**
Aptiv Services France SAS
Aptiv EMEA Patent Department
Bâtiment Le Raspail - Paris Nord 2
22, avenue des Nations
CS 65059 Villepinte
95972 Roissy CDG Cedex (FR)

(54) **ELECTRICAL CONNECTION SYSTEM FOR SHIELDED WIRE CABLE**

(57) An electrical connection system configured to terminate electrical conductors (102, 104) and to transmit digital electrical signals having a data transfer rate of 5 Gigabits per second (Gb/s) or higher. The system includes a first parallel mirrored pair of terminals (160, 162) having a planar connection portion (164, 166) and a second pair of parallel mirrored terminals (132, 134) having a cantilever beam portion (136, 140) and a contact points (138, 142) configured to contact the first terminals (160, 162). The cantilever beam portions (136, 140) are generally perpendicular to the planar connection portions (164, 166). The terminals (132, 134, 160, 162) cooperate to provide consistent characteristic impedance. The connection system further includes an electromagnetic shield (172, 174) that longitudinally surrounds the terminals (132, 134, 160, 162). The connection system is suited for terminating wire cables (100) transmitting digital signals using data transfer protocols such as Universal Serial Bus (USB) 3.0 and High Definition Multimedia Interface (HDMI) 1.4.

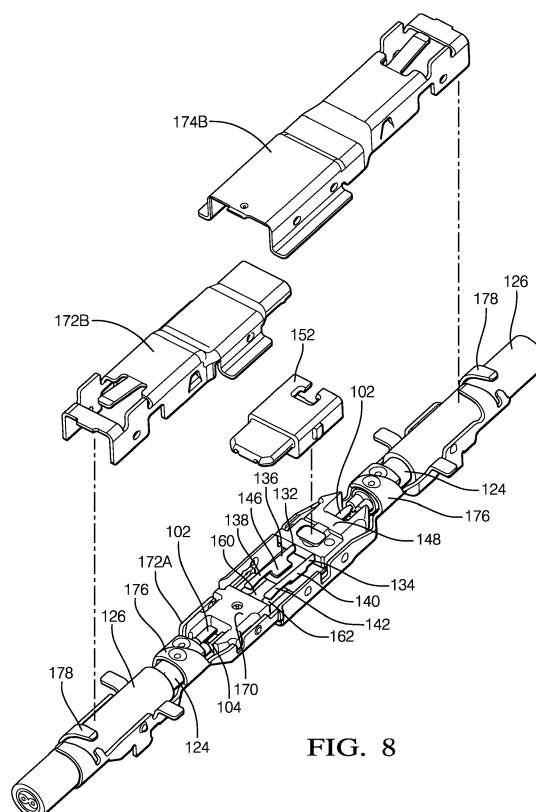


FIG. 8

Description

TECHNICAL FIELD OF INVENTION

[0001] The invention generally relates to an electrical connection system, and more particularly relates to an electrical connection system designed to connect shielded wire cables capable of differentially transmitting digital electrical signals having a data transfer rate of 5 Gigabits per second (Gb/s) or higher further requiring frequency content to 7.5 Gigahertz (GHz).

BACKGROUND OF THE INVENTION

[0002] The increase in digital data processor speeds has led to an increase in data transfer speeds. Transmission media used to connect electronic components to the digital data processors must be constructed to efficiently transmit the high speed digital signals between the various components. Wired media, such as fiber optic cable, coaxial cable, or twisted pair cable may be suitable in applications where the components being connected are in fixed locations and are relatively close proximity, e.g. separated by less than 100 meters. Fiber optic cable provides a transmission medium that can support data rates of up to nearly 100 Gb/s and is practically immune to electromagnetic interference. Coaxial cable typically supports data transfer rates up to 100 Megabits per second (Mb/s) and has good immunity to electromagnetic interference. Twisted pair cable can support data rates of up to about 5 Gb/s, although these cables typically require multiple twisted pairs within the cable dedicated to transmit or receive lines. The conductors of the twisted pair cables offer good resistance to electromagnetic interference which can be improved by including shielding for the twisted pairs within the cable.

[0003] Data transfer protocols such as Universal Serial Bus (USB) 3.0 and High Definition Multimedia Interface (HDMI) 1.4 require data transfer rates at or above 5 Gb/s. Existing coaxial cable cannot economically or reliably be implemented to support data rates near this speed. Both fiber optic and twisted pair cables are capable of transmitting data at these transfer rates, however fiber optic cables are significantly more expensive than twisted pair, making them less attractive for cost sensitive applications that do not require the high data transfer rates and electromagnetic interference immunity.

[0004] Infotainment systems and other electronic systems in automobiles and trucks are beginning to require cables capable of carrying high data rate signals. Automotive grade cables must not only be able to meet environmental requirements (e.g. thermal and moisture resistance), they must also be flexible enough to be routed in a vehicle wiring harness and have a low mass to help meet vehicle fuel economy requirements. Therefore, there is a need for a wire cable with a high data transfer rate that has low mass and is flexible enough to be packaged within a vehicle wiring harness, while meeting cost

targets that cannot currently be met by fiber optic cable. Although the particular application given for this wire cable is automotive, such a wire cable would also likely find other applications, such as aerospace, maritime, industrial control, or other data communications.

[0005] The subject matter discussed in the background section should not be assumed to be prior art merely as a result of its mention in the background section. Similarly, a problem mentioned in the background section or associated with the subject matter of the background section should not be assumed to have been previously recognized in the prior art. The subject matter in the background section merely represents different approaches, which in and of themselves may also be inventions.

BRIEF SUMMARY OF THE INVENTION

[0006] In accordance with one embodiment of this invention, an electrical connection system is provided. The electrical connection system includes a first shielded cable having a first electrical conductor and a second electrical conductor surrounded by a first shield conductor which is surrounded by a first insulating jacket, a second shielded cable having a third electrical conductor and a fourth electrical conductor surrounded by a second shield conductor which is surrounded by a second insulating jacket, a plug connector having a first plug terminal a second plug terminal, and a receptacle connector configured to mate with said plug connector having a first receptacle terminal and a second receptacle terminal configured to receive the first and second plug terminals respectively. The electrical connection system further includes a plug shield longitudinally surrounding the plug connector and electrically isolated from the plug terminals having an upper plug shield and a lower plug shield. The lower plug shield is attached to the first shield conductor by a first pair of shield crimp wings. An extremity of the first pair of shield crimp wings is collocated with an extremity of the first shield conductor. The electrical connection system additionally includes a receptacle shield longitudinally surrounding the receptacle connector and electrically isolated from the receptacle terminals having an upper receptacle shield and a lower receptacle shield. The lower receptacle shield is attached to the second shield conductor by a second pair of shield crimp wings. An extremity of the second pair of shield crimp wings is collocated with an extremity of the second shield conductor.

[0007] The extremity of the first pair of shield crimp wings may be in a range of 1.0 to 1.5 millimeters from the first and second attachment points and the extremity of the second pair of shield crimp wings may be in a range of 1.0 to 1.5 millimeters from the third and fourth attachment points.

[0008] The lower plug shield may be attached to the first insulating jacket by a first pair of jacket crimp wings and the lower plug shield may be attached to the upper plug shield by a first shield attaching feature located in-

intermediate the first pair of shield crimp wings and the first pair of jacket crimp wings. The lower receptacle shield may be attached to the second insulating jacket by a second pair of jacket crimp wings and the lower receptacle shield may be attached to the upper receptacle shield by a second shield attaching feature located intermediate the second pair of shield crimp wings and the second pair of shield crimp wings.

[0009] The upper plug shield may define a first tab in direct and compressive contact with the first pair of shield crimp wings of the lower plug shield and the upper receptacle shield may define a second tab in direct and compressive contact with the second pair of shield crimp wings of the lower receptacle shield. Alternately or in addition, the upper plug shield may define a first pair of opposed tabs in direct and compressive contact with the first pair of shield crimp wings of the lower plug shield and the upper receptacle shield may define a second pair of opposed tabs in direct and compressive contact with the second pair of shield crimp wings of the lower receptacle shield.

[0010] The receptacle shield may be configured to slideably engage the interior of the plug shield. The extremity of the first pair of shield crimp wings may be substantially flush with the extremity of the first shield conductor and the extremity of the second pair of shield crimp wings may be substantially flush with the extremity of the second shield conductor

[0011] The first plug terminal may include a planar first connection portion that is characterized by a generally rectangular cross section and a first attachment portion attached to the first electrical conductor. The second plug terminal may also include a planar second connection portion that is characterized by a generally rectangular cross section and a second attachment portion attached to the second electrical conductor. The first and second plug terminals may form a first mirrored terminal pair having bilateral symmetry about a longitudinal axis. The first receptacle terminal may include a third attachment portion attached to the third electrical conductor and a first cantilever beam portion that is characterized by a generally rectangular cross section defining a convex first contact point depending from the first cantilever beam portion. The first contact point is configured to contact the first connection portion of the first plug terminal. The second receptacle terminal may include a fourth attachment portion attached to the fourth electrical conductor and have a second cantilever beam portion that is characterized by a generally rectangular cross section defining a convex second contact point depending from the second cantilever beam portion. The second contact point is configured to contact the second connection portion of the second plug terminal. The first and second receptacle terminals may form a second mirrored terminal pair having bilateral symmetry about the longitudinal axis. When the plug connector is connected to the receptacle connector, the major width of the first connection portion may be substantially perpendicular to the major

width of the first cantilever beam portion and the major width of the second connection portion may be substantially perpendicular to the major width of the second cantilever beam portion.

[0012] Further features and advantages of the invention will appear more clearly on a reading of the following detailed description of the preferred embodiment of the invention, which is given by way of non-limiting example only and with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

[0013] The present invention will now be described, by way of example with reference to the accompanying drawings, in which:

Fig. 1 is a perspective cut away drawing of a shielded wire cable in accordance with one embodiment;
 Fig. 2 is a cross section drawing of the wire cable of Fig. 1 in accordance with one embodiment;
 Fig. 3 is a chart illustrating the signal rise time and desired cable impedance of several high speed digital transmission standards as measured from 10-90% of signal rise;
 Fig. 4 is a chart illustrating various performance characteristics of the wire cable of Fig. 1 and 2 in accordance with one embodiment;
 Fig. 5 is a graph of the differential insertion loss versus signal frequency of the wire cables of Fig. 1 and 2 in accordance with one embodiment;
 Fig. 6 is an exploded perspective view of a wire cable assembly in accordance with one embodiment;
 Fig. 7 is a perspective view of an electrical connector system of the wire cable assembly of Fig. 6 in accordance with one embodiment;
 Fig. 8 is an exploded perspective view of the electrical connector system of Fig. 7 in accordance with one embodiment;
 Fig. 9 is a top plan view of the electrical connector system of Fig. 7 in accordance with one embodiment;
 Fig. 10A is a cross section end view of a plug connector of the electrical connector system of Fig. 7 in accordance with one embodiment;
 Fig. 10B is a cross section end view of a receptacle connector of the electrical connector system of Fig. 7 in accordance with one embodiment; and
 Fig. 11 is a cross section side view of the electrical connector system of Fig. 7 in accordance with one embodiment.

DETAILED DESCRIPTION OF THE INVENTION

[0014] Presented herein is an electrical connector assembly for a shielded wire cable assembly that is capable of carrying digital signals at rates up to 5 Gigabits per second (Gb/s) (5 billion bits per second) to support both USB 3.0 and HDMI 1.4 performance specifications. The

wire cable assembly includes a wire cable having a pair of conductors (wire pair) and a conductive sheet and braided conductor to isolate the wire pair from electromagnetic interference and determine the characteristic impedance of the cable. The wire pair is encased within dielectric belting that helps to provide a consistent radial distance between the wire pair and the shield. The belting may also help to maintain a consistent twist angle between the wire pair if they are twisted. The consistent radial distance between the wire pair and the shield and the consistent twist angle provides a wire cable with more consistent impedance. The wire cable assembly may also include an electrical receptacle connector having a mirrored pair of plug terminals connected to the wire pair and/or an electrical plug connector having a mirrored pair of receptacle terminals connected to the wire pair that is configured to mate with the plug terminals of the plug connector. The receptacle and plug terminals each have a generally rectangular cross section and when the first and second electrical connectors are mated, the major widths of the receptacle terminals are substantially perpendicular to the major widths of the plug terminals and the contact points between the receptacle and plug terminals are external to the receptacle and plug terminals. Both the receptacle and plug connectors include a shield that longitudinally surrounds the receptacle or plug terminals and is connected to the braided conductor of the wire cable. The wire cable assembly may also include an insulative connector body that contains the receptacle or plug terminals and shield.

[0015] Figs. 1 and 2 illustrate a non-limiting example of a wire cable 100 used in the wire cable assembly. The wire cable 100 includes a central pair of conductors comprising a first inner conductor, hereinafter referred to as the first conductor 102 and a second inner conductor, hereinafter referred to as the second conductor 104. The first and second conductors 102, 104 are formed of a conductive material with superior conductivity, such as unplated copper or silver plated copper. As used herein, copper refers to elemental copper or a copper-based alloy. Further, as used herein, silver refers to elemental silver or a silver-based alloy. The design, construction, and sources of copper and silver plated copper conductors are well known to those skilled in the art. The first and second conductors 102, 104 each comprise a solid wire conductor, such as a bare (non-plated) copper wire or silver plated copper wire having a diameter of about 0.321 millimeters (mm), which is generally equivalent to 28 AWG solid wire. Alternatively, the first and second conductors 102, 104 may be formed of a solid wire having a smaller gauge, such as 30 AWG or 32 AWG. Alternative embodiments of the wire cable may use stranded wire for the first and second conductors 102, 104.

[0016] The central pair of first and second conductors 102, 104 may be longitudinally twisted over a lay length L, for example once every 15.24 mm. Twisting the first and second conductors 102, 104 provides the benefit of reducing low frequency electromagnetic interference of

the signal carried by the central pair. However, the inventors have discovered that satisfactory signal transmission performance may also be provided by a wire cable wherein the first and second conductors 102, 104 are not twisted about one about the other. Not twisting the first and second conductors 102, 104 may provide the benefit of reducing manufacturing cost of the wire cable by eliminating the twisting process. Not twisting the first and second conductors 102, 104 results in reduced differential insertion loss but has the disadvantage of requiring specific limitations in vehicle routing, specifically to non-uniform bending along the length of the cable run.

[0017] Each of the first and second conductors 102, 104 are enclosed within a respective first dielectric insulator and a second dielectric insulator, hereafter referred to as the first and second insulators 108, 110. The first and second insulators 108, 110 are bonded together. The first and second insulators 108, 110 run the entire length of the wire cable 100, except for portions that are removed at the extremities of the cable in order to terminate the wire cable 100. The first and second insulators 108, 110 are formed of a flexible dielectric material, such as polypropylene. The first and second insulators 108, 110 may be characterized as having a thickness of about 0.85 mm.

[0018] Bonding the first insulator 108 to the second insulators 110 helps to maintain a consistent spacing S between the first and second conductors 102, 104. The methods required to manufacture a pair of conductors with bonded insulators are well known to those skilled in the art.

[0019] The first and second conductors 102, 104 and the first and second insulators 108, 110 are completely enclosed within a third dielectric insulator, hereafter referred to as the belting 112, except for portions that are removed at the extremities of the cable in order to terminate the wire cable 100. The first and second insulators 108, 110 and the belting 112 together form a dielectric structure 113.

[0020] The belting 112 is formed of a flexible dielectric material, such as polyethylene. As illustrated in Fig. 2, the belting may be characterized as having a diameter D of 2.22 mm. A release agent 114, such as a talc-based powder, may be applied to an outer surface of the bonded first and second insulators 108, 110 in order to facilitate removal of the belting 112 from the first and second insulators 108, 110 when ends of the first and second insulators 108, 110 are stripped from the first and second conductors 102, 104 to form terminations of the wire cable 100.

[0021] The belting 112 is completely enclosed within a conductive sheet, hereafter referred to as the inner shield 116, except for portions that may be removed at the extremities of the cable in order to terminate the wire cable 100. The inner shield 116 is longitudinally wrapped in a single layer about the belting 112, so that it forms a single seam 118 that runs generally parallel to the central pair of first and second conductors 102, 104. The inner

shield 116 is not spirally wrapped or helically wrapped about the belting 112. The seam edges of the inner shield 116 may overlap, so that the inner shield 116 covers at least 100 percent of an outer surface of the belting 112. The inner shield 116 is formed of a flexible conductive material, such as aluminized biaxially oriented PET film. Biaxially oriented polyethylene terephthalate film is commonly known by the trade name MYLAR and the aluminized biaxially oriented PET film will hereafter be referred to as aluminized MYLAR film. The aluminized MYLAR film has a conductive aluminum coating applied to only one of the major surfaces; the other major surface is non-aluminized and therefore non-conductive. The design, construction, and sources for single-sided aluminized MYLAR films are well known to those skilled in the art. The non-aluminized surface of the inner shield 116 is in contact with an outer surface of the belting 112. The inner shield 116 may be characterized as having a thickness of less than or equal to 0.04 mm.

[0022] The belting 112 provides the advantage of maintaining transmission line characteristics and providing a consistent radial distance between the first and second conductor 102, 104 and the inner shield 116. The belting 112 further provides an advantage of keeping the twist lay length between the first and second conductors 102, 104 consistent. Shielded twisted pair cables found in the prior art typically only have air as a dielectric between the twisted pair and the shield. Both the distance between first and second conductors 102, 104 and the inner shield 116 and the effective twist lay length of the first and second conductors 102, 104 affect the wire cable impedance. Therefore a wire cable with more consistent radial distance between the first and second conductors 102, 104 and the inner shield 116 provides more consistent impedance. A consistent twist lay length of the first and second conductors 102, 104 also provides controlled impedance.

[0023] Alternatively, a wire cable may be envisioned incorporating a single dielectric structure encasing the first and second conductors to maintain a consistent lateral distance between the first and second conductors and a consistent radial distance between the first and second conductors and the inner shield. The dielectric structure may also keep the twist lay length of the first and second conductors consistent.

[0024] As shown in Figs. 1 and 2, the wire cable 100 additionally includes a ground conductor, hereafter referred to as the drain wire 120 that is disposed outside of the inner shield 116. The drain wire 120 extends generally parallel to the first and second conductors 102, 104 and is in intimate contact or at least in electrical communication with the aluminized outer surface of the inner shield 116. The drain wire 120 comprises a solid wire conductor, such as an unplated copper conductor, tin plated copper conductor, or silver plated copper conductor having a cross section of about 0.321 mm², which is generally equivalent to 28 AWG solid wire. Alternatively, the drain wire 120 may be formed of solid wire having a

smaller gauge, such as 30 AWG or 32 AWG. Alternative embodiments of the wire cable may use stranded wire for the drain wire 120. The design, construction, and sources of copper and tin plated copper conductors are well known to those skilled in the art.

[0025] As illustrated in Figs. 1 and 2, the wire cable 100 further includes a braided wire conductor, hereafter referred to as the outer shield 124, enclosing the inner shield 116 and the drain wire 120, except for portions that may be removed at the ends of the cable in order to terminate the wire cable 100. The outer shield 124 is formed of a plurality of woven conductors, such as copper or tin plated copper. As used herein, tin refers to elemental tin or a tin-based alloy. The design, construction, and sources of braided conductors used to provide such an outer shield are well known to those skilled in the art. The outer shield 124 is in intimate contact or at least in electrical communication with both the inner shield 116 and the drain wire 120. The wires forming the outer shield 124 may be in contact with at least 65 percent of an outer surface of the inner shield 116. The outer shield 124 may be characterized as having a thickness less than or equal to 0.30 mm.

[0026] The wire cable 100 shown in Figs. 1 and 2 further includes an outer dielectric insulator, hereafter referred to as the jacket 126. The jacket 126 encloses the outer shield 124, except for portions that may be removed at the extremities of the cable in order to terminate the wire cable 100. The jacket 126 forms an outer insulation layer that provides both electrical insulation and environmental protection for the wire cable 100. The jacket 126 is formed of a flexible dielectric material, such as polyvinyl chloride (PVC). The jacket 126 may be characterized as having a thickness of about 0.2 mm.

[0027] The wire cable 100 is constructed so that the inner shield 116 is tight to the belting 112, the outer shield 124 is tight to the drain wire 120 and the inner shield 116, and the jacket 126 is tight to the outer shield 124 so that the formation of air gaps between these elements is minimized or compacted. This provides the wire cable 100 with controlled magnetic permeability.

[0028] The wire cable 100 may be characterized as having a differential impedance of 95 Ohms.

[0029] Fig. 3 illustrates the requirements for signal rise time (in picoseconds (ps)) and differential impedance (in Ohms (Ω)) for the USB 3.0 and HDMI 1.4 performance specifications. Fig. 3 also illustrates the combined requirements for a wire cable capable of simultaneously meeting both USB 3.0 and HDMI 1.4 standards. The wire cable is expected to meet the combined USB 3.0 and HDMI 1.4 signal rise time and differential impedance requirements shown in Fig. 7.

[0030] Fig. 4 illustrates the differential impedances that are expected for the wire cables 100 over a signal frequency range of 0 to 7500 MHz (7.5 GHz).

[0031] Fig. 5 illustrates the insertion losses that are expected for wire cable 100 with a length of 7 m over the signal frequency range of 0 to 7500 MHz (7.5 GHz).

[0032] Therefore, as shown in Figs. 4 and 5, the wire cable 100 having a length of up to 7 meters are expected to be capable of transmitting non return to zero (NRZ) digital data at a speed of up to 5 Gigabits per second with an insertion loss of less than 20 dB.

[0033] As illustrated in the non-limiting example of Fig. 6, the wire cable assembly includes an electrical connector assembly. The connector assembly includes a receptacle connector 128 and a plug connector 130 configured to accept the receptacle connector 128 as illustrated in Fig. 7.

[0034] As illustrated in Fig. 8, the receptacle connector 128 include two terminals, a first receptacle terminal 132 connected to a first inner conductor 102 and a second receptacle terminal 134 connected to a second inner conductor (not shown due to drawing perspective) of the wire cable 100. The first receptacle terminal 132 includes a first cantilever beam portion 136 that has a generally rectangular cross section and defines a convex first contact point 138 that depends from the first cantilever beam portion 136 near the free end of the first cantilever beam portion 136. The second receptacle terminal 134 also includes a similar second cantilever beam portion 140 having a generally rectangular cross section and defining a convex second contact point 142 depending from the second cantilever beam portion 140 near the free end of the second cantilever beam portion 140. As best shown in Fig. 9, the first and second receptacle terminals 132, 134 each comprise an attachment portion 144 that is configured to receive the end of an inner conductor of the wire cable 100 and provide a surface for attaching the first and second inner conductors 102, 104 to the first and second receptacle terminals 132, 134. The attachment portions 144 are configured to maintain the consistent spacing S between the first and second inner conductors 102, 104. In order to provide improved electromagnetic shielding, the outer shield 124 of the shielded cable 100 extends close to the attachment portion 144. A receptacle terminal holder 148 partially encases the first and second receptacle terminal 132, 134. The receptacle terminal holder 148 maintains the spatial relationship between the first and second receptacle terminals 132, 134 to maintain the consistent spacing S between the first and second inner conductors 102, 104. The first and second receptacle terminals 132, 134 form a mirrored terminal pair that has bilateral symmetry about the longitudinal axis X and are substantially parallel to the longitudinal axis X and each other. In the illustrated embodiment, the distance between the first cantilever beam portion 136 and the second cantilever beam portion 140 is 2.85 mm, center to center. The first and second inner conductors 102, 104 of the wire cable 100 are attached to the attachment portions 144 of the first and second receptacle terminals 132, 134 using an ultrasonic welding process.

[0035] Referring once again to Fig. 8, the plug connector 130 includes two terminals, a first plug terminal 160 connected to a first inner conductor 102 and a second

plug terminal 162 connected to a second inner conductor 104 of the wire cable 100. As best shown in Fig. 9, the first plug terminal 160 includes a first elongate planar portion 164 that has a generally rectangular cross section. The second plug terminal 162 also includes a similar second elongate planar portion 166. The planar portions of the plug terminals 160, 162 are configured to receive and contact the first and second contact points 138, 142 of the first and second receptacle terminals 132, 134. The free ends of the planar portions have a beveled shape to allow the mating first and second receptacle terminals 132, 134 to ride up and over free ends of the first and second planar portions 164, 166 when the plug connector 130 and receptacle connector 128 are mated. The first and second plug terminals 160, 162 each comprise an attachment portion 144 similar to the attachment portions 144 of the first and second receptacle terminals 132, 134 that are configured to receive the ends of the first and second inner conductors 102, 104 and provide a surface for attaching the first and second inner conductors 102, 104 to the first and second plug terminals 160, 162. The attachment portions 144 are configured to maintain the consistent spacing between the first and second inner conductors 102, 104. In order to provide improved electromagnetic shielding, the outer shield 124 of the shielded cable 100 extends close to the attachment portion 144. A plug terminal holder 170 partially encases the first and second plug terminals 160, 162. The plug terminal holder 170 maintains the spatial relationship between the first and second plug terminals 160, 162 to maintain the consistent spacing S between the first and second inner conductors 102, 104. The first and second plug terminals 160, 162 form a mirrored terminal pair that has bilateral symmetry about the longitudinal axis X and are substantially parallel to the longitudinal axis X and each other. In the illustrated embodiment, the distance between the first planar portion and the second planar portion is 2.85 mm, center to center. The inventors have observed through data obtained from computer simulation that the mirrored parallel receptacle terminals 132, 134 and plug terminals 160, 162 have a strong effect on the high speed electrical properties, such as impedance and insertion loss, of the wire cable assembly. The first and second inner conductors 102, 104 of the wire cable 100 are attached to the attachment portions 144 of the first and second plug terminals 160, 162 using an ultrasonic welding process.

[0036] As illustrated in Fig. 8, the first and second plug terminals 160, 162 and the first and second receptacle terminals 132, 134 are oriented in the plug and receptacle connectors 128, 130 so that when the plug and receptacle connectors 128, 130 are mated, the major widths of the first and second receptacle terminals 132, 134 are substantially perpendicular to the major widths of the first and second plug terminals 160, 162. As used herein, substantially perpendicular means that the major widths are $\pm 15^\circ$ of absolutely perpendicular. The inventors have observed that this orientation between the first and

second plug terminals 160, 162 and the first and second receptacle terminals 132, 134 has strong effect on insertion loss. Also, when the plug and receptacle connectors 128, 130 are mated, the first and second receptacle terminals 132, 134 overlap the first and second plug terminals 160, 162. The plug and receptacle connectors 128, 130 are configured so that only the first and second contact points 138, 142 of the first and second receptacle terminals 132, 134 contacts the planar blade portion of the first and second plug terminals 160, 162 and the contact area defined between the first and second receptacle terminals 132, 134 and the first and second plug terminals 160, 162 is less than the area overlapped between the first and second receptacle terminals 132, 134 and the first and second plug terminals 160, 162. Therefore, the contact area, sometimes referred to as the wipe distance, is determined by the area of the first and second contact points 138, 142 and not by the overlap between the terminals. Therefore, the receptacle terminals 132, 134 and the plug terminals 160, 162 provide the benefit of providing a consistent contact area as long as the first and second contact points 138, 142 of the first and second receptacle terminals 132, 134 are fully engaged with the first and second plug terminals 160, 162. Because both the plug and receptacle terminals are a mirrored pair, a first contact area between the first receptacle terminal 132 and the first plug terminal 160 and a second contact area between the second receptacle terminal 134 and the second plug terminal 162 are substantially equal. As used herein, substantially equal means that the contact area difference between the first contact area and the second contact area is less than 0.1 mm^2 . The inventors have observed through data obtained from computer simulation that the contact area between the plug and receptacle terminals and the difference between the first contact area and the second contact area have a strong impact on insertion loss of the wire cable assembly.

[0037] The first and second plug terminals 160, 162 are not received within the first and second receptacle terminals 132, 134, therefore the first contact area is on the exterior of the first plug terminal 160 and the second contact area is on the exterior of the second plug terminal 162 when the plug connector 130 is mated to the receptacle connector 128.

[0038] The first and second receptacle terminals 132, 134 and the first and second plug terminals 160, 162 may be formed from a sheet of copper-based material. The first and second cantilever beam portions 136, 140 and the first and second planar portions 164, 166 may be selectively plated using copper/nickel/silver based plating. The terminals may be plated to a 5 skin thickness. The first and second receptacle terminals 132, 134 and the first and second plug terminals 160, 162 are configured so that the receptacle connector 128 and plug connector 130 exhibit a low insertion normal force of about 0.4 Newton (45 grams). The low normal force provides the benefit of reducing abrasion of the plating during connection/disconnection cycles.

[0039] As illustrated in Fig. 8, the plug connector 130 includes a plug shield 172 that is attached to the outer shield 124 of the wire cable 100. The plug shield 172 is separated from and longitudinally surrounds the first and second plug terminals 160, 162 and plug terminal holder 170. The receptacle connector 128 also includes a receptacle shield 174 that is attached to the outer shield 124 of the wire cable 100 that is separated from and longitudinally surrounds the first and second receptacle terminals 132, 134, receptacle terminal holder 148 and receptacle terminal cover 152. The receptacle shield 174 and the plug shield 172 are configured to slidably contact one another and when mated, to provide electrical continuity between the outer shields 124 of the attached wire cables 100 and to provide electromagnetic shielding to the plug and receptacle connectors 128, 130.

[0040] As shown in Fig. 8, the plug shield 172 is made of two parts, a lower plug shield 172A and an upper plug shield 172B. The lower plug shield 172A includes two pairs of crimping wings: shield crimp wings 176 adjacent an attachment portion of the lower plug shield 172A that is configured to receive the exposed end of the outer shield 124 of the wire cable 100 and jacket crimp wings 178. The shield crimp wings 176 are bypass-type crimp wings that are offset and configured to surround the exposed end of the outer shield 124 of the wire cable 100 when the shield crimp wings 176 are crimped to the wire cable 110. In order to reduce the effective electrical length of the plug shield 172, an extreme end, i.e. extremity, of the shield crimp wings 176 is disposed on an extreme end, i.e. extremity, of the outer shield 124. The extremity of the shield crimp wings 176 is within 1.0 to 1.5 mm of the attachment of the first and second conductors 102, 104 to the attachment portions 144 of the plug terminals 160, 162. The drain wire 120 is electrically coupled to the lower plug shield 172A when the lower plug shield 172A is crimped to the outer shield 124 because the drain wire 120 of the wire cable 100 is sandwiched between the outer shield 124 and the inner shield 116 of the wire cable 110.

[0041] The jacket crimp wings 178 are also bypass type wings that are offset and configured to surround the jacket 126 of the wire cable 100 when the lower plug shield 172A is crimped to the wire cable 110.

[0042] As illustrated in Fig 10A, the upper plug shield 172B includes a pair of flexible tabs 146 located opposite one another that are positioned to directly contact the shield crimp wings 176 and apply a compressive force to the shield crimp wings 176. These flexible tabs 146 provide improved electrical contact between the upper plug shield 172B and the outer shield 124 than is provided when the upper plug shield 172B is connected to the outer shield 124 only through the lower plug shield 172A.

[0043] Referring again to Fig 8, the receptacle shield 174 is similarly made of two parts, a lower receptacle shield 174A and an upper receptacle shield 174B. The lower receptacle shield 174A includes two pairs of crimping wings: shield crimp wings 176 adjacent an attachment

portion of the lower receptacle shield 174A that is configured to receive the exposed end of the outer shield 124 of the wire cable 100 and jacket crimp wings 178. The shield crimp wings 176 are bypass-type crimp wings that are offset and configured to surround the exposed end of the outer shield 124 of the wire cable 100 when the shield crimp wings 176 are crimped to the wire cable 110. In order to reduce the effective electrical length of the receptacle shield 174, an extreme end, i.e. extremity, of the shield crimp wings 176 is disposed on an extreme end, i.e. extremity, of the outer shield 124. The extremity of the shield crimp wings 176 is within 1.0 to 1.5 mm of the attachment of the first and second conductors 102, 104 to the attachment portions 144 of the receptacle terminals 132, 134. The drain wire 120 is electrically coupled to the lower receptacle shield 174A when the lower receptacle shield 174A is crimped to the outer shield 124 because the drain wire 120 of the wire cable 100 is sandwiched between the outer shield 124 and the inner shield 116 of the wire cable 110.

[0044] The insulation crimp wings are also bypass type wings that are offset and configured to surround the jacket 126 of the wire cable 100 when the lower receptacle shield 174A is crimped to the wire cable 100.

[0045] As illustrated in Fig 10B, the upper receptacle shield 174B similarly includes a pair of flexible tabs 146 located opposite one another that are positioned to directly contact the shield crimp wings 176 and apply a compressive force to the shield crimp wings 176. These flexible tabs 146 provide improved electrical contact between the upper receptacle shield 174B and the outer shield 124 than is provided when the upper receptacle shield 174B is connected to the outer shield 124 only through the lower receptacle shield 174A.

[0046] While the exterior of the plug shield 172 of the illustrated example is configured to slideably engage the interior of the receptacle shield 174, alternative embodiments may be envisioned wherein the exterior of the receptacle shield 174 slideably engages the interior of the plug shield 172.

[0047] The receptacle shield 174 and the plug shield 172 may be formed from a sheet of copper-based material. The receptacle shield 174 and the plug shield 172 may be plated using copper/nickel/silver or tin based plating. The first and upper receptacle shield 174A, 174B and the first and upper plug shield 172A, 172B may be formed by stamping processes well known to those skilled in the art.

[0048] While the examples of the plug connector 130 and receptacle connector 128 illustrated herein are connected to a wire cable, other embodiments of the plug connector and receptacle connector may be envisioned that are connected to conductive traces on a circuit board.

[0049] To meet the requirements of application in an automotive environment, such as vibration and disconnect resistance, the wire cable assembly may further include a receptacle connector body 190 and a plug connector body 192 as illustrated in Fig. 6. The receptacle

connector body 190 and the plug connector body 192 are formed of a dielectric material, such as a polyester material.

[0050] Accordingly, a connector assembly is provided. The connector assembly is suited for terminating wire cables 100 and is capable of transmitting digital data signals with data rates of 3.5 Gb/s or higher without modulation or encoding. The connector assembly provides the benefit of improved electromagnetic shielding of the plug terminals 160, 162 and receptacle terminals 132, 134 due to the decreased effective lengths of the plug shield 172 and receptacle shield 174 provided by the location of the shield crimp wings 176 in close proximity to the attachment portions 144 of the terminals. The connector assembly also provides the benefit of improved electrical connections between the upper plug and receptacle shields 172B, 174B and the outer shields 124 of the wire cables 100.

[0051] While this invention has been described in terms of the preferred embodiments thereof, it is not intended to be so limited, but rather only to the extent set forth in the claims that follow. For example, the above-described embodiments (and/or aspects thereof) may be used in combination with each other. In addition, many modifications may be made to adapt a particular situation or material to the teachings of the invention without departing from its scope. Dimensions, types of materials, orientations of the various components, and the number and positions of the various components described herein are intended to define parameters of certain embodiments, and are by no means limiting and are merely prototypical embodiments.

[0052] Many other embodiments and modifications within the spirit and scope of the claims will be apparent to those of skill in the art upon reviewing the above description. The scope of the invention should, therefore, be determined with reference to the following claims, along with the full scope of equivalents to which such claims are entitled.

[0053] In the following claims, the terms "including" and "in which" are used as the plain-English equivalents of the respective terms "comprising" and "wherein." Moreover, the use of the terms first, second, etc. does not denote any order of importance, but rather the terms first, second, etc. are used to distinguish one element from another. Furthermore, the use of the terms a, an, etc. do not denote a limitation of quantity, but rather denote the presence of at least one of the referenced items. Additionally, directional terms such as upper, lower, etc. do not denote any particular orientation, but rather the terms upper, lower, etc. are used to distinguish one element from another and locational establish a relationship between the various elements.

[0054] Further, the limitations of the following claims are not written in means-plus-function format and are not intended to be interpreted based on 35 USC § 112(f), unless and until such claim limitations expressly use the phrase "means for" followed by a statement of function

void of further structure.

Claims

1. An electrical connection system, comprising:

a first shielded cable (100) having a first electrical conductor and a second electrical conductor surrounded by a first shield conductor which is surrounded by a first insulating jacket (126);
 a second shielded cable (100) having a third electrical conductor and a fourth electrical conductor surrounded by a second shield conductor which is surrounded by a second insulating jacket (126);
 a plug connector (130) having a first plug terminal (160) a second plug terminal (162);
 a receptacle connector (128) configured to mate with said plug connector (130) having a first receptacle terminal (132) and a second receptacle terminal (134) configured to receive the first and second plug terminals (160, 162) respectively;
 a plug shield (172) longitudinally surrounding the plug connector (130) and electrically isolated from the plug terminals (160) having an upper plug shield (172B) and a lower plug shield (172A), wherein the lower plug shield (172A) is attached to the first shield conductor by a first pair of shield crimp wings (176) and wherein an extremity of the first pair of shield crimp wings (176) is collocated with an extremity of the first shield conductor; and
 a receptacle shield (174) longitudinally surrounding the receptacle connector (128) and electrically isolated from the receptacle terminals (132) having an upper receptacle shield (174B) and a lower receptacle shield (174A), wherein the lower receptacle shield (174A) is attached to the second shield conductor by a second pair of shield crimp wings (176) and wherein an extremity of the second pair of shield crimp wings (176) is collocated with an extremity of the second shield conductor.

2. The electrical connection system according to claim 1, wherein the extremity of the first pair of shield crimp wings (176) is in a range of 1.0 to 1.5 millimeters from the first and second attachment points and wherein the extremity of the second pair of shield crimp wings (176) is in a range of 1.0 to 1.5 millimeters from the third and fourth attachment points.

3. The electrical connection system according to claim 1 or 2, wherein the lower plug shield (172A) is attached to the first insulating jacket (126) by a first pair of jacket crimp wings (178) and the lower plug shield (172A) is attached to the upper plug shield

(172B) by a first shield attaching feature located intermediate the first pair of shield crimp wings (176) and the first pair of jacket crimp wings (178) and wherein the lower receptacle shield (174A) is attached to the second insulating jacket (126) by a second pair of jacket crimp wings (178) and the lower receptacle shield (174A) is attached to the upper receptacle shield (174B) by a second shield attaching feature located intermediate the second pair of shield crimp wings (176) and the second pair of jacket crimp wings (178).

4. The electrical connection system according to any one of claims 1 to 3, wherein the upper plug shield (172B) defines a first tab in direct and compressive contact with the first pair of shield crimp wings (176) of the lower plug shield (172A) and wherein the upper receptacle shield (174B) defines a second tab in direct and compressive contact with the second pair of shield crimp wings (176) of the lower receptacle shield (174A).

5. The electrical connection system according to any one of claims 1 to 4, wherein the upper plug shield (172B) defines a first pair of opposed tabs in direct and compressive contact with the first pair of shield crimp wings (176) of the lower plug shield (172A) and wherein the upper receptacle shield (174B) defines a second pair of opposed tabs in direct and compressive contact with the second pair of shield crimp wings (176) of the lower receptacle shield (174A).

6. The electrical connection system according to any one of claims 1 to 5, wherein the plug shield (172) is configured to slideably engage the interior of the receptacle shield (174).

7. The electrical connection system according to any one of claims 1 to 6, wherein the extremity of the first pair of shield crimp wings (176) is substantially flush with the extremity of the first shield conductor and wherein the extremity of the second pair of shield crimp wings (176) is substantially flush with the extremity of the second shield conductor.

8. The electrical connection system according to any one of claims 1 to 7, wherein the first plug terminal (160) includes a planar first connection portion **characterized by** a generally rectangular cross section and a first attachment portion (144) attached to the first electrical conductor and wherein the second plug terminal (162) includes a planar second connection portion **characterized by** a generally rectangular cross section and a second attachment portion (144) attached to the second electrical conductor, wherein the first and second plug terminals (160, 162) form a first mirrored terminal pair having bilat-

eral symmetry about a longitudinal axis; wherein the first receptacle terminal (132) includes a third attachment portion (144) attached to the third electrical conductor and a first cantilever beam portion (136) **characterized by** a generally rectangular cross section defining a convex first contact point (138) depending from the first cantilever beam portion (136), said first contact point configured to contact the first connection portion of the first plug terminal (160), wherein the second receptacle terminal (134) includes a fourth attachment portion (144) attached to the fourth electrical conductor and having a second cantilever beam portion (140) **characterized by** a generally rectangular cross section defining a convex second contact point (142) depending from the second cantilever beam portion (140), said second contact point configured to contact the second connection portion of the second plug terminal (162), wherein the first and second receptacle terminals (132, 134) form a second mirrored terminal pair having bilateral symmetry about the longitudinal axis and wherein when the plug connector (130) is connected to the receptacle connector (128), the major width of the first connection portion is substantially perpendicular to the major width of the first cantilever beam portion (136) and the major width of the second connection portion is substantially perpendicular to the major width of the second cantilever beam portion (140).

5

10

15

20

25

30

35

40

45

50

55

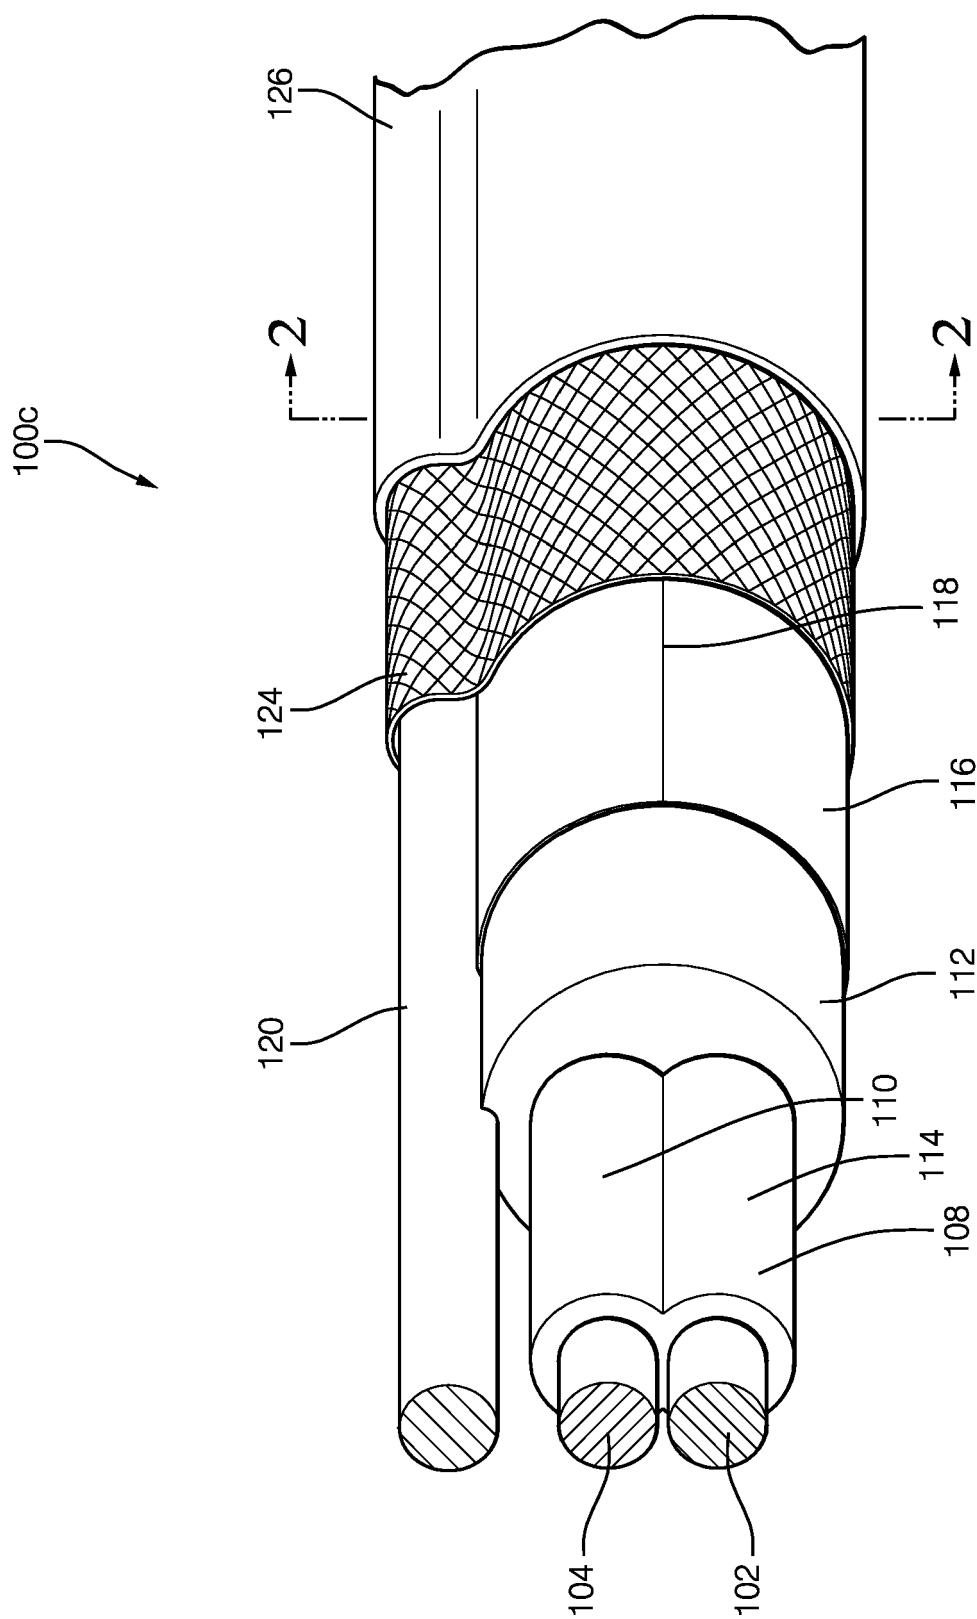


FIG. 1

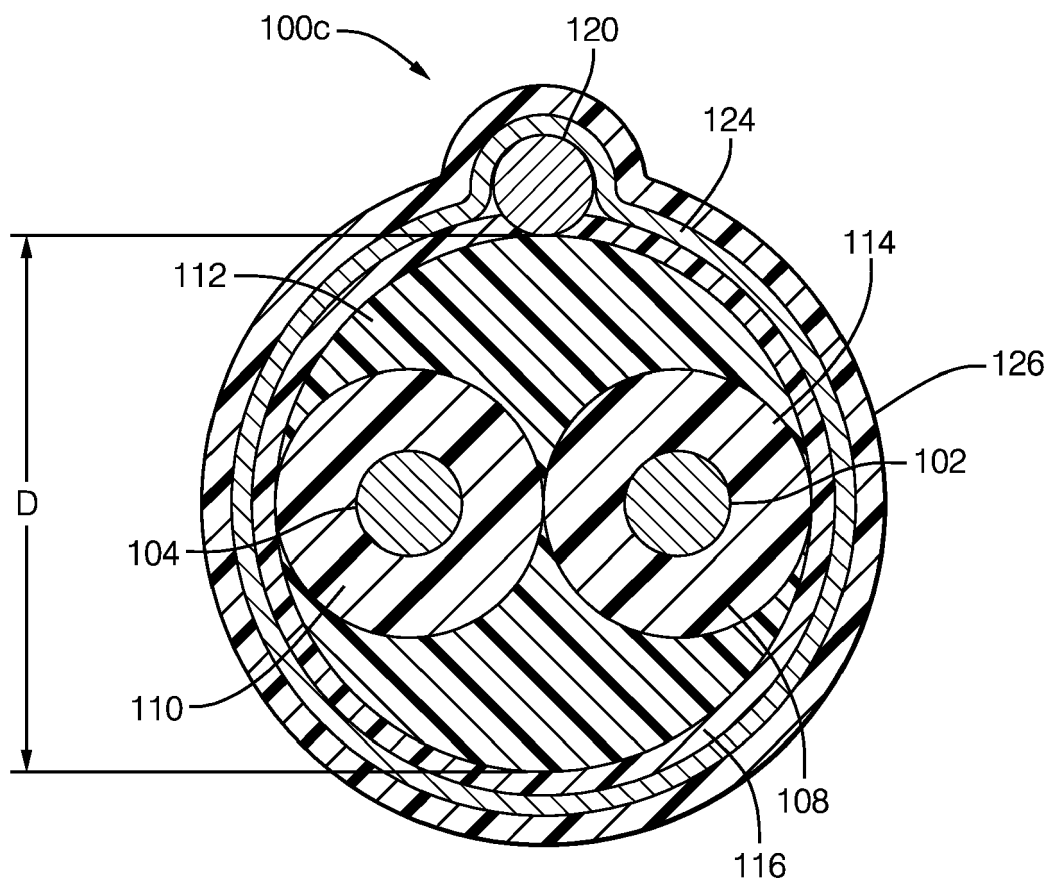


FIG. 2

STANDARD	RISE TIME	NOMINAL IMPEDANCE	MINIMUM IMPEDANCE	MAXIMUM IMPEDANCE
HDMI 1.4	200 ps	100 Ω	85 Ω	115 Ω
USB 3.0	50 ps	90 Ω	76.5 Ω	105 Ω
COMBINED	50 ps	95 Ω	85 Ω	105 Ω

FIG. 3

DIELECTRIC STRENGTH	0.5 KILOVOLTS/MINUTE	
MAXIMUM DC RESISTANCE AT 20° C	350 Ω /km	
IMPEDANCE (TDR)	95 Ω	
INTERPAIR SKEW	< 15 ps/METER	
ATTENUATION/7 METERS	$\leq$ 1.5 DECIBELS(dB)	@ < 100 MEGAHERTZ (MHz)
	$\leq$ 5 dB	@ < 100 MHz - 1250 MHz
	$\leq$ 7.5 dB	@ < 1250 MHz - 2500 MHz
	$\leq$ 25 dB	@ < 2500 MHz - 7500 MHz
BENDING RADIUS	$\leq$ 31 mm	

FIG. 4

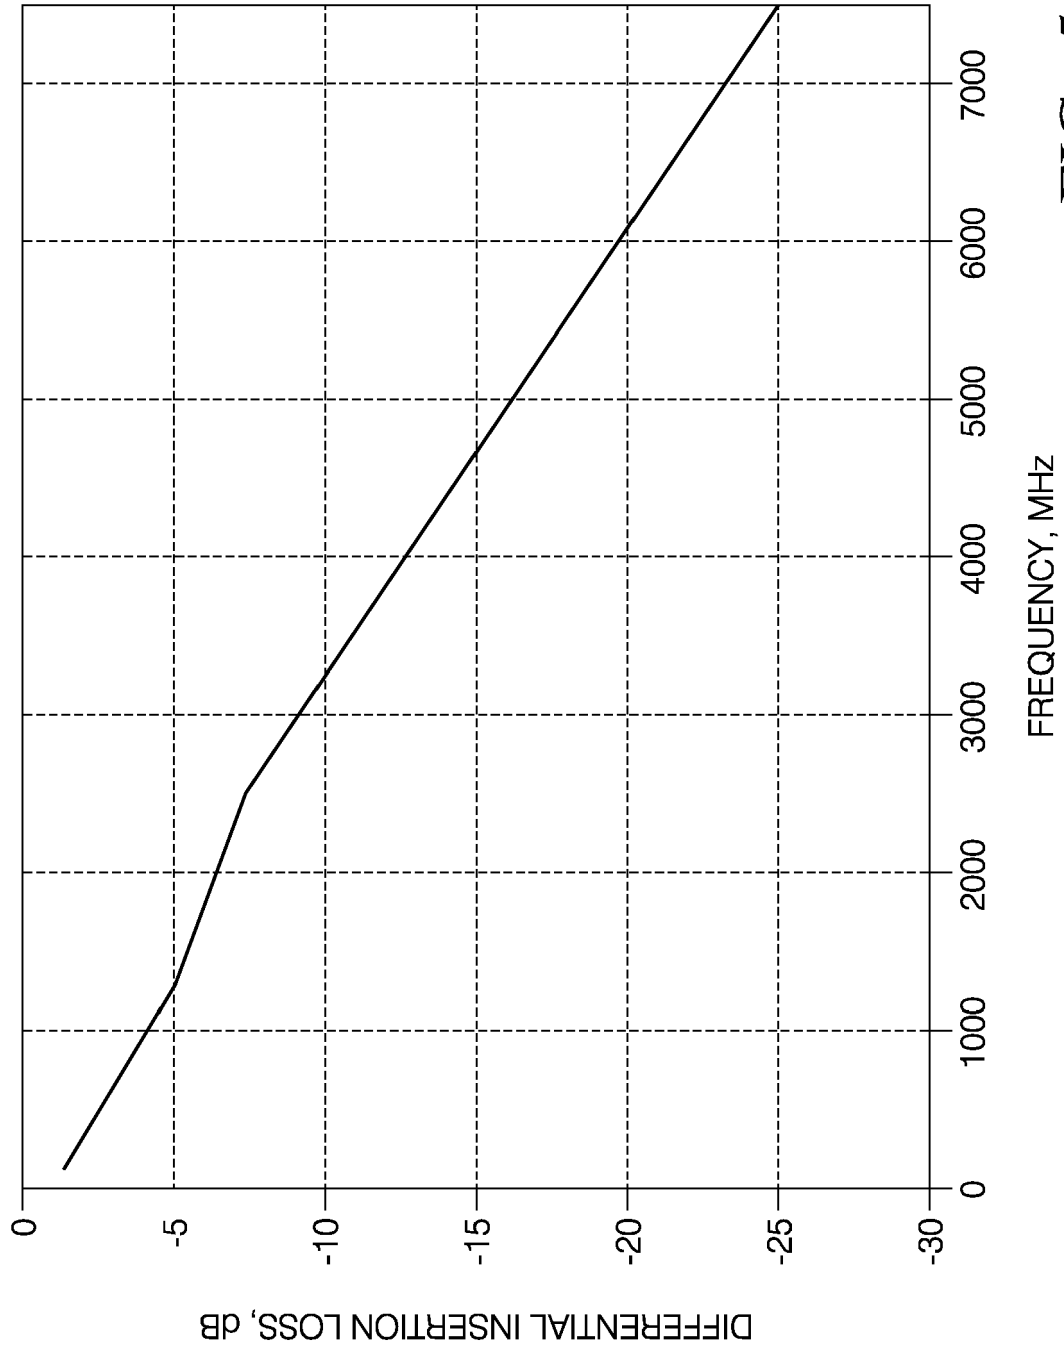


FIG. 5

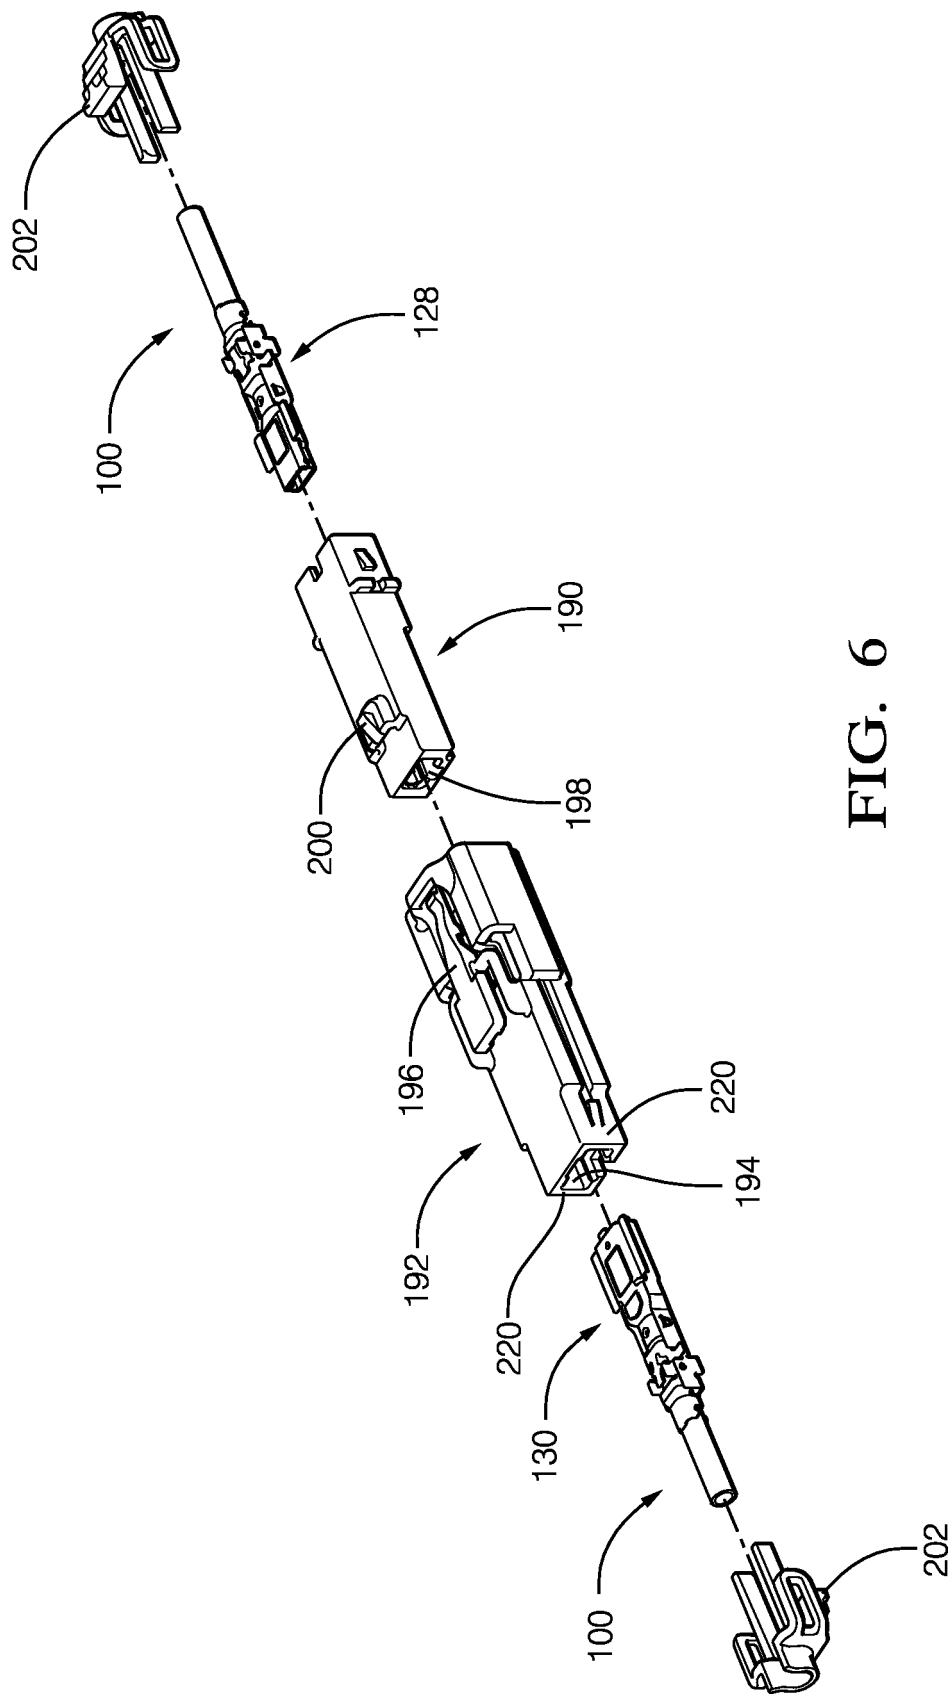
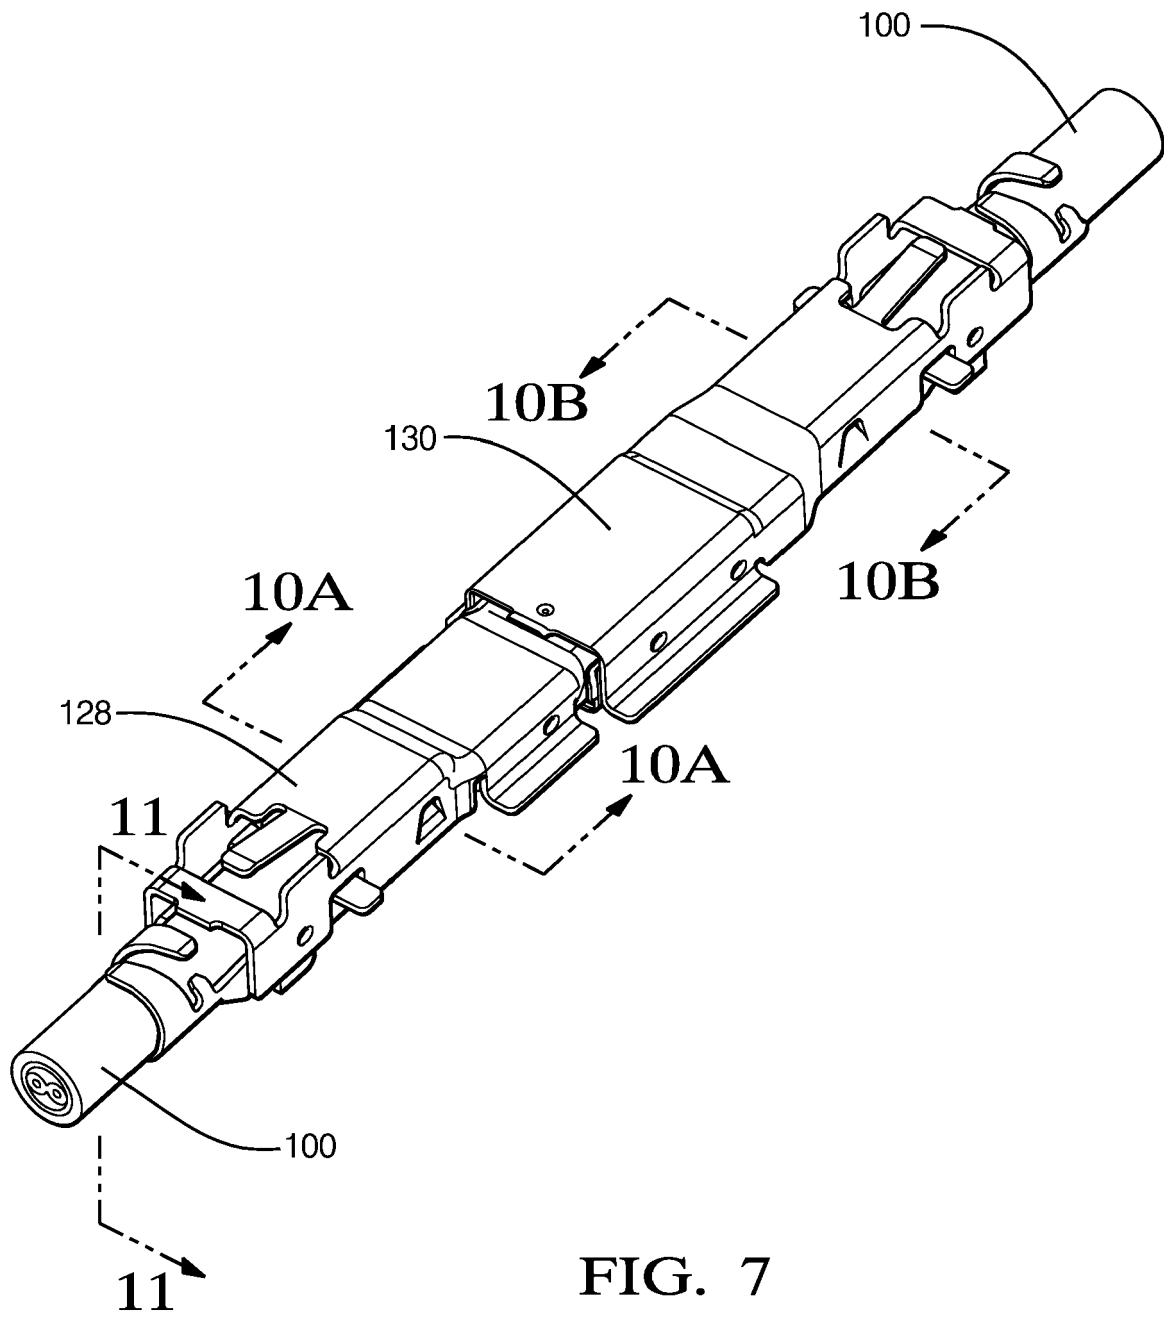


FIG. 6



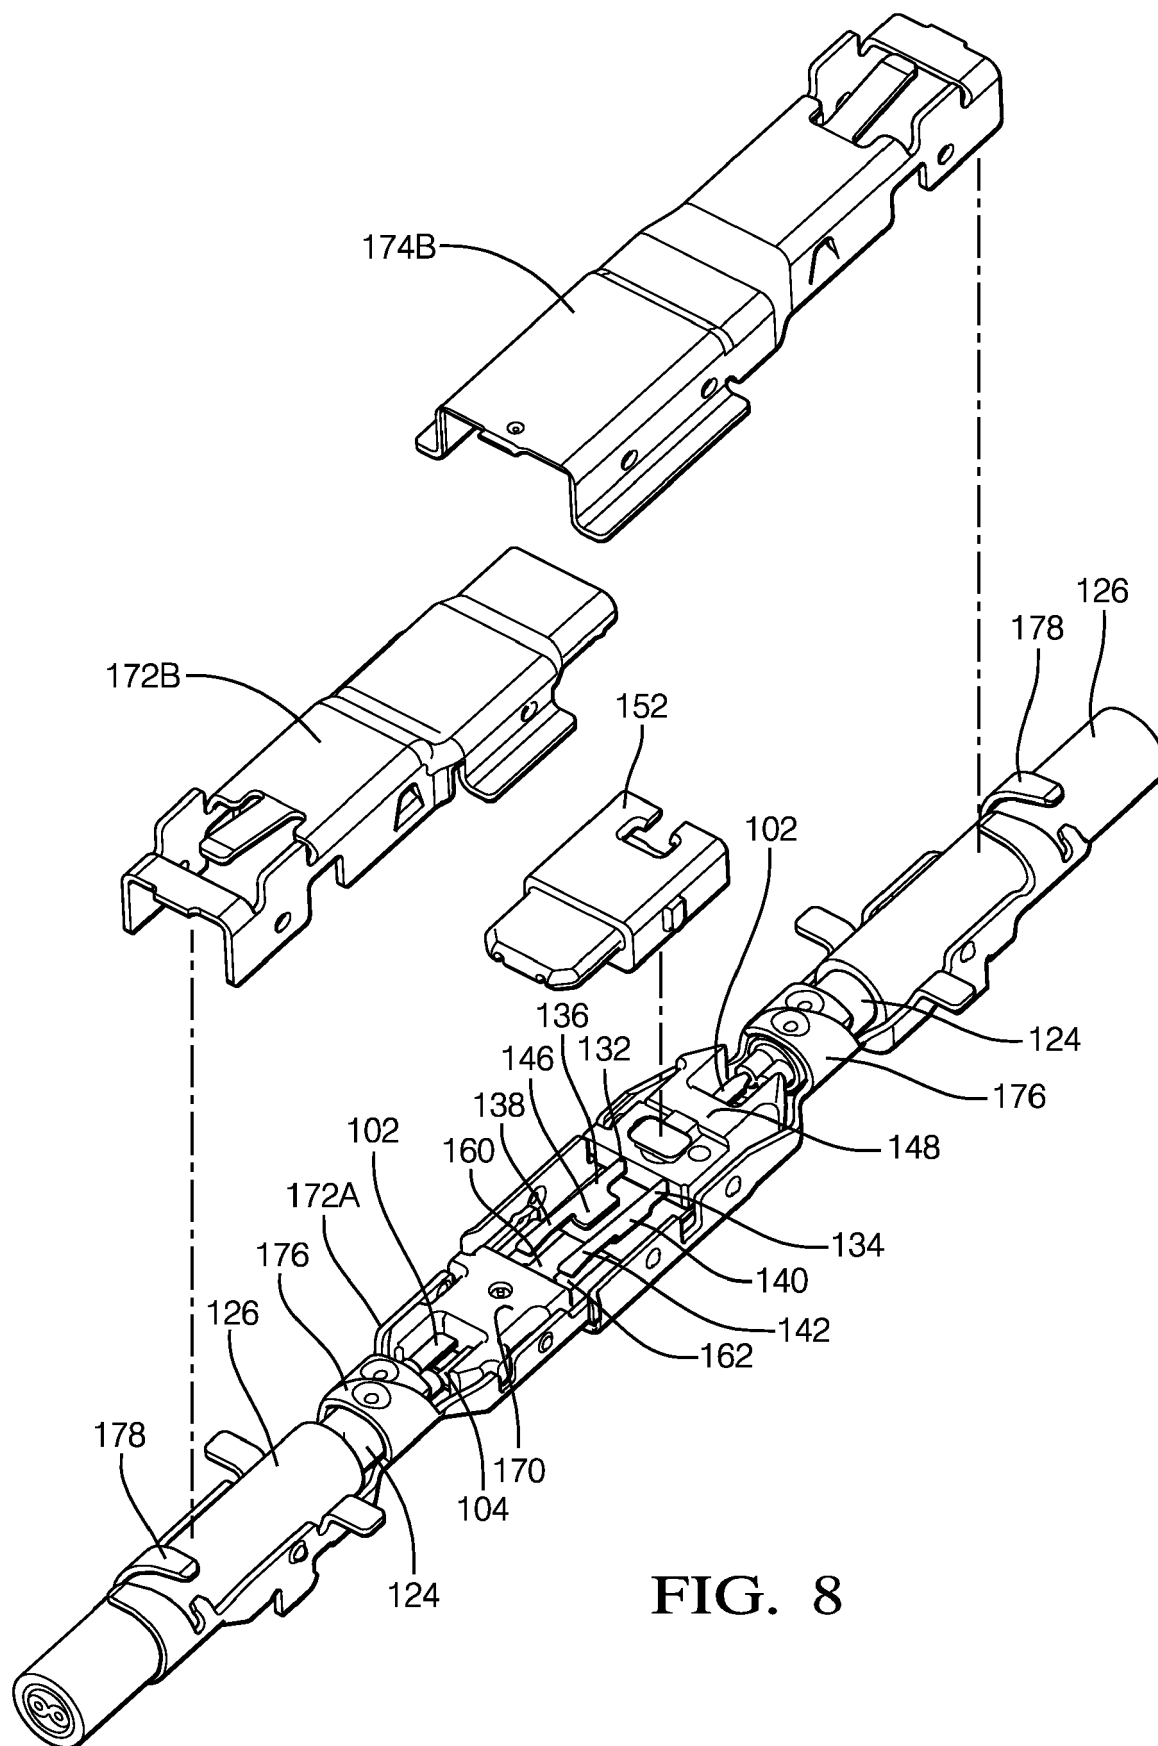


FIG. 8

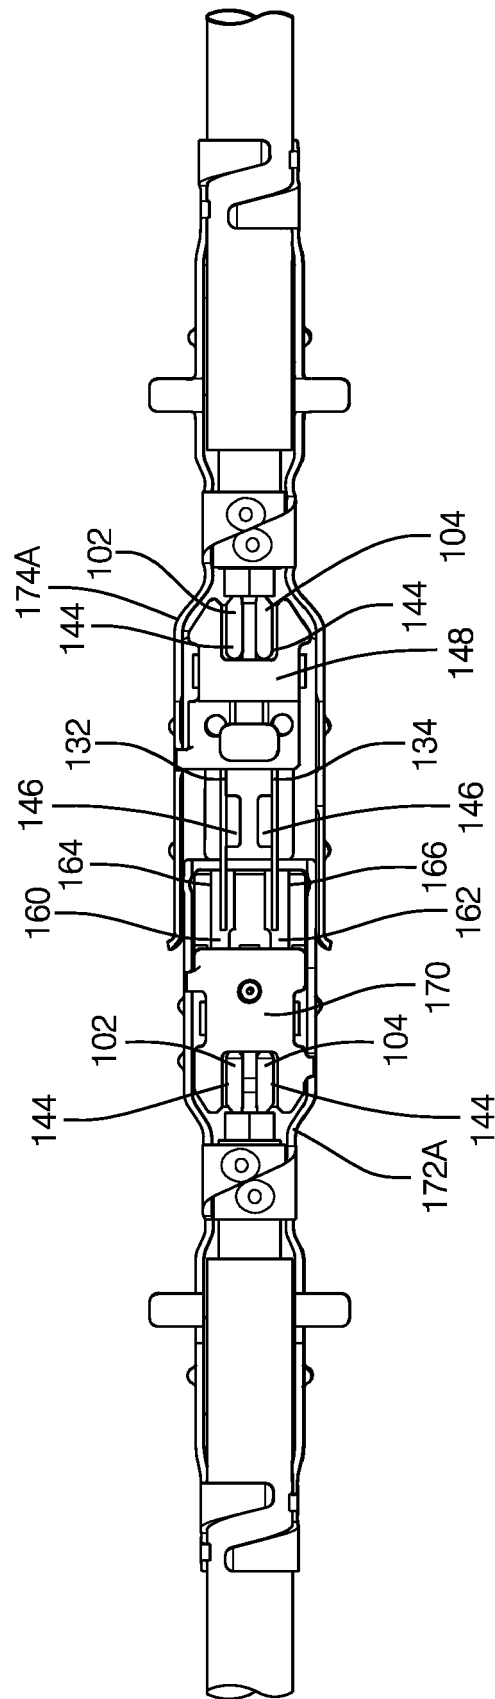


FIG. 9

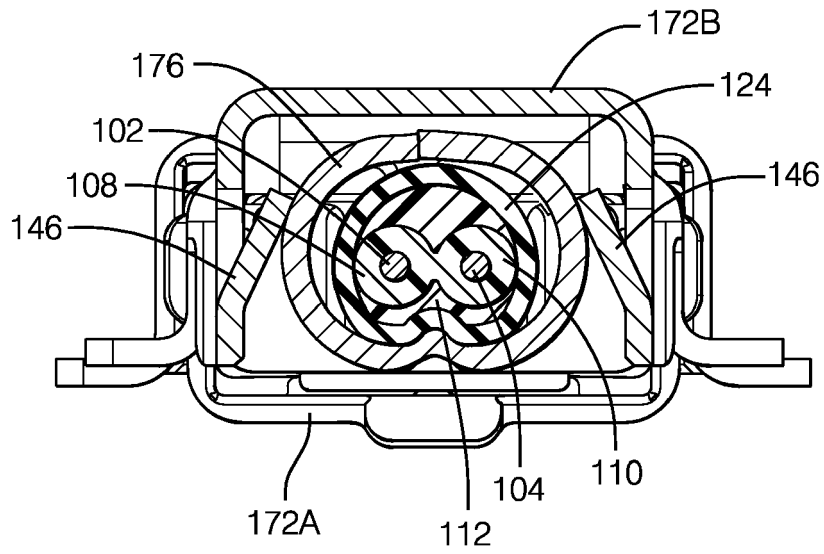


FIG. 10A

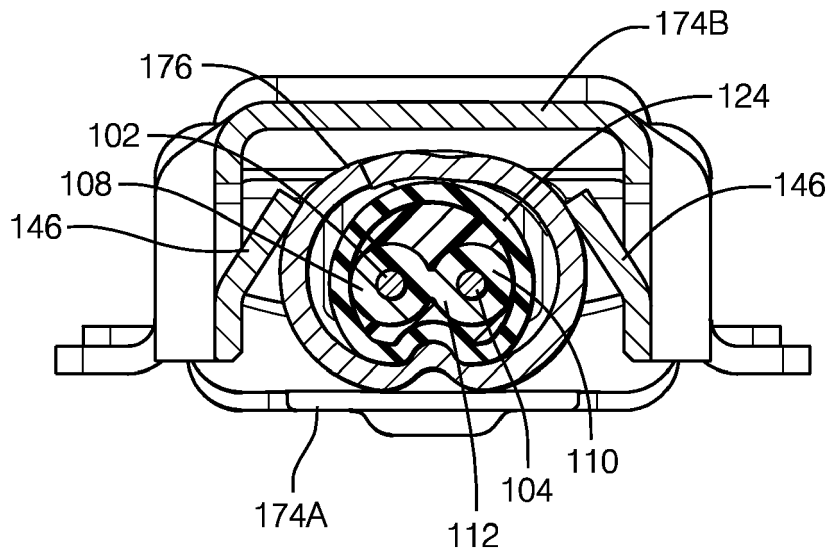


FIG. 10B

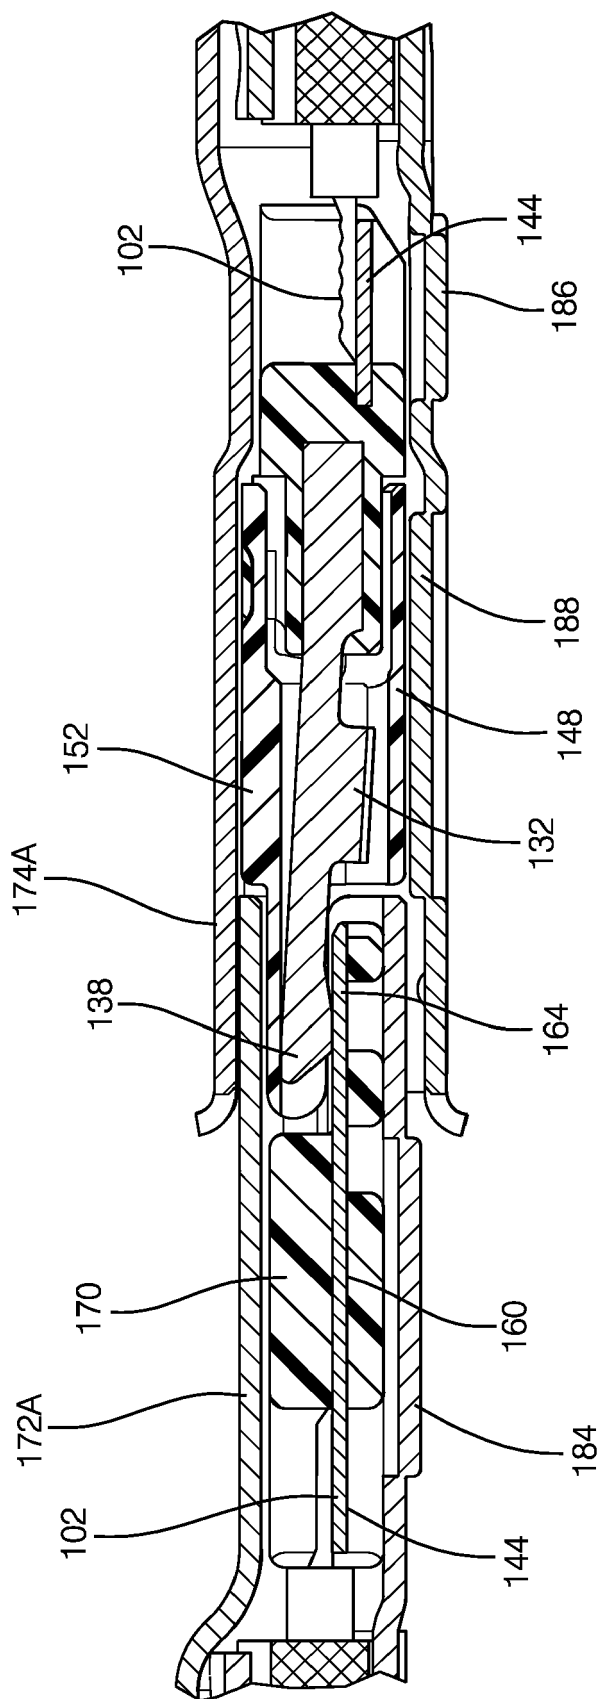


FIG. 11



EUROPEAN SEARCH REPORT

Application Number
EP 18 20 1302

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 9 142 907 B2 (DELPHI TECH INC [US]) 22 September 2015 (2015-09-22)	1-3,6-8	INV. H01R13/6593
Y	* figures 13,14,23 * * abstract *	4,5	ADD. H01R13/6474 H01R24/62 H01R107/00 H01R13/6591
Y	US 2014/051295 A1 (WESTMAN JOHN EUGENE [US] ET AL) 20 February 2014 (2014-02-20)	4,5	
A	* figure 4 * * paragraph [0037] - paragraph [0040] *	1-3,6-8	
A	WO 2016/112384 A1 (MOLEX LLC [US]) 14 July 2016 (2016-07-14) * figures 8a,8b,8c * * abstract *	1-8	
			TECHNICAL FIELDS SEARCHED (IPC)
			H01R
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 13 February 2019	Examiner Skaloumpakas, K
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 18 20 1302

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-02-2019

10

15

20

25

30

35

40

45

50

55

ORM P0459

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 9142907 B2	22-09-2015	CN 104701655 A	10-06-2015
		EP 2884592 A1	17-06-2015
		JP 2015130327 A	16-07-2015
		JP 2017103236 A	08-06-2017
		KR 20150067733 A	18-06-2015
		US 2015162692 A1	11-06-2015

US 2014051295 A1	20-02-2014	TW 201409874 A	01-03-2014
		US 2014051295 A1	20-02-2014
		WO 2014028224 A1	20-02-2014

WO 2016112384 A1	14-07-2016	CN 107112666 A	29-08-2017
		JP 2018501622 A	18-01-2018
		KR 20170102011 A	06-09-2017
		TW 201711290 A	16-03-2017
		US 2018034175 A1	01-02-2018
		WO 2016112384 A1	14-07-2016
