

(19)



(11)

EP 3 482 001 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

07.10.2020 Bulletin 2020/41

(51) Int Cl.:

E01F 8/00 ^(2006.01)

(86) International application number:

PCT/EP2017/067073

(21) Application number: **17739941.7**

(22) Date of filing: **07.07.2017**

(87) International publication number:

WO 2018/011074 (18.01.2018 Gazette 2018/03)

(54) A SOUND ABSORBING GUARD RAIL SYSTEM

SCHALLDÄMPFENDES FÜHRUNGSSCHIENENSYSYSTEM

SYSTÈME DE GLISSIÈRE DE SÉCURITÉ ABSORBANT LE SON

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **11.07.2016 EP 16178822**

(43) Date of publication of application:

15.05.2019 Bulletin 2019/20

(73) Proprietor: **Rockwool International A/S**

2640 Hedehusene (DK)

(72) Inventors:

- **EMBORG, Michael**
4060 Kirke Saaby (DK)
- **JØRGENSEN, Kristian, Skovgaard**
4000 Roskilde (DK)

• **DRÖGE, Jan, Eike**

53125 Bonn (DE)

• **SCHNITZLER, Hans-Jürgen**

53567 Buchholz (DE)

• **SØRENSEN, Bruno, Kirk**

8960 Randers SØ (DK)

• **ANDERSEN, Steffen**

4180 Sorø (DK)

• **PEDERSEN, Leon, Samsø**

2800 Kgs. Lyngby (DK)

(74) Representative: **Høiberg P/S**

Adelgade 12

1304 Copenhagen K (DK)

(56) References cited:

WO-A1-2010/018028 JP-A- H10 338 913

US-A- 4 358 090

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 482 001 B1

Description

[0001] The present invention relates to a sound absorbing guard rail system for installation at a lateral side of a road, said guard rail system comprises a series of supporting posts, that are preferably vertically oriented, at least one noise absorbing panel that can be mounted to said supporting posts, and a series of longitudinal guard rails mounted on the side of the guard rail system facing the road.

[0002] A guard rail is provided at the lateral side of a road with the object of limiting personal injuries by absorbing the energy of a vehicle veering off the road by catching and slowing down the vehicle. Added to this primary function it is also found attractive to provide the guard rails with noise reducing means.

[0003] Accordingly, a sound absorbing guard rail of such kind is known from US 4,358,090.

[0004] Another known guard rail system is known from EP 1 528 158 A1. Herein the sound absorbing panels are made of aluminium or made transparent.

[0005] Another example of a guard rail with noise reducing measures is known from WO 2010/018028 A1, where a perforated plate is provided behind the guard rail beam.

[0006] In order to ensure road safety and to reduce the risk of personal injuries it is required that a guard rail must be able to absorb the impact of a collision without disintegrating. This requirement is also applicable to the noise reducing means. This requirement is to avoid flying objects and/or sharp fractures which can cause severe personal injuries in case of a collision. In the guard rails with noise-reducing measures mentioned above, the casing in aluminium or transparent materials, such as glass or plastic, is brittle, costly and may not withstand a vehicle impact without breaking apart.

[0007] By providing noise-reducing panels described above, the risk of disintegrating the panel during an impact is considered too high and it is therefore an object of the present invention to provide a guard rail with noise reducing means which is can withstand the impact of a vehicle colliding with the guard rail.

[0008] According to the invention, this object is achieved by a guard rail of the initially mentioned kind, wherein the noise absorbing panel comprises a noise absorbing material board which is encased in an energy absorbing material provided with openings. Such an energy absorbing material provided with openings is a stretch-metal netting.

[0009] By the invention it is found advantageous that the noise absorbing panel is contained in an energy absorbing material, i.e. said stretch-metal netting whereby an improved noise absorbing panel in a guard rail system may be achieved, which also meets the requirements concerning impact absorption and avoids disintegration at an impact with a vehicle.

[0010] The noise absorbing material is preferably a mineral wool fibre board, which has very good noise-

absorbing characteristics. However, it is realised that the noise absorbing panels can also be made with other materials, like foam material, integrated or partial rubber material, integrated or partial plastic material, or other noise absorbing material resistant in regard to weather conditions and wear effects next to traffic ways.

[0011] Stretch-metal or expanded metal provide very good energy-absorbing characteristics as the netting made of stretch-metal can be deformed to a large degree when impacted. Depending on the design of the stretch metal netting it is possible to provide different stretch behaviour in respective stress directions. E.g. it is possible to provide a higher stress resistance and thereby a higher energy absorption in an impact situation in longitudinal direction of the traffic way than in vertical direction. In those directions, where the stretch metal netting provides a higher stress resistance, the meshes of the stretch metal netting may provide a higher amount of deformation. In those directions where the stretch metal netting has less stress resistance, the meshes of the stretch metal netting deform less. This can be achieved e.g. by rhombus formed meshes, which have a longer diagonal in vertical direction and a shorter diagonal in the horizontal direction. Thereby, the ability of deformation of the rhombus formed meshes in horizontal direction is higher than in vertical direction. Braking of the panels in any situation, in particular in a crash-situation, is to be avoided.

[0012] Moreover, in addition to the mechanical behaviour of the netting made of stretch-metal, in particular in a stress situation, such a material can also provide additional beneficial optical and/or mechanical effects. The stretch metal may provide a surface structure with different groups of surfaces which are intentionally oriented into a particular direction. Thereby, it is possible to achieve particular optical reflection effects such that impacting light from a vehicle is reflected in preferred directions by certain groups of surfaces of the net material, whereas the impacting light is being dispersed in other less preferred directions. Moreover, inclining the groups of surfaces in preferred directions may also support that particular objects colliding with the net material may slide along the surface of the material with less friction in certain preferred directions, whereas objects impacting from another direction experience higher friction.

[0013] Besides that the mineral wool fibre board, and more preferably a stone wool material, has very good noise-absorbing characteristics, another advantage by in particular stone wool as the material is that this material fire-resistant. The energy absorbing material, i.e. the stretch-metal netting provides protection of the mineral wool and can further contribute to the energy absorption at an impact due to a collision into the guard rail and the energy absorbing material, i.e. stretch-metal netting also ensures that the sound absorbing panel does not disintegrate at such an impact. This synergy between the mineral wool fibre board and the energy absorbing material, i.e. stretch-metal is advantageous and results in an improved noise absorbing panel in a guard rail, which also

meets the requirements concerning impact absorption and avoids disintegration at an impact with a vehicle.

[0014] By the term stretch-metal netting is meant an expanded metal sheet, which is made by a process of slit and stretch. The process may involve a precision die which slits and stretches the sheet material in a single operation. Expanded metal is manufactured through cutting and expanding a solid sheet of metal in special machines. The machines cut and stretch the metal, expand it to a seamless mesh without joints. The production contains no welded joints and no woven threads, which contributes to the unique qualities of expanded metal. The mesh that is produced after expansion of the cut metal gives the material an excellent carrying capacity.

[0015] The material is then processed through a set of rollers, which adjusts the final thickness. The stretch-metal in the netting is a ductile metal capable of absorbing energy while being plastically deformed.

[0016] Preferably, the stretch-metal is galvanised steel. This is advantageous as it is weather resistant and inexpensive to produce and very ductile and deformable by deforming the mesh structure of the stretch metal netting when impacted. By galvanising the stretched metal sharp edges will also be rounded. However, it is by the invention realised that other types of protective coatings, such as plastic coating, paint or the like, may be used.

[0017] As a supplement to stretch-metal, the energy absorbing mesh could be a perforated metal sheet, a plastic netting or the like and/or a combination thereof, encasing said noise absorbing material board.

[0018] In an embodiment, the netting is a panel which encloses at least the main sides and the top side of the mineral wool fibre board. Preferably, the encasing is made from the stretch-metal netting panel which is bent into a box-like shape around the mineral wool fibre board and with mounting panels provided at each of the end sides.

[0019] By the invention it is realised that the stretch-metal netting panel may be produced with non-stretched areas at each of the end sections for receiving the mounting panels at each end for mounting the sound absorber to the supporting posts. Hereby, any sharp edges or pointy ends in the netting structure may be avoided, thereby reducing any risk of personal injuries to persons when handling the noise absorbing panel or during a collision with the guard rail. Moreover, as the noise absorbing panel may be installed in cities e.g. at parapets, this feature of the invention prevents the risk of injuring pedestrians or cyclists.

[0020] The noise absorbing panel is preferably approx. 90 cm in height and approx. 260 cm in length. This means that the panels may fit between posts in the usual guard rail structure designs. Alternatively, the panels may be positioned behind the post, as viewed from the traffic way, wherein a pair of two consecutive posts can be arranged in a distance of approx. 1 m, 1.3 m, 2 m or 4 m, respectively. However, any dimensioning of the noise absorbing panel is encountered by the present invention.

In particular, it is preferred to provide noise absorbing panels in predetermined standardized dimensions which match to the usual pre-confectioned guardrail sets for different applications. By the invention it is realised that the panels may alternatively also be mounted in front of the posts, i.e. between the posts and the guard rail. According to one embodiment of the invention, the panels are not directly interconnected or mechanically fixed to one another. Instead, they are mounted to the posts or the guard rail and arranged next to one another without a mutual fixation. In other instances, the panels can be mechanically connected.

[0021] In preferred embodiments, the mineral wool fibre board may also be provided with a density within the range of 60-150 kg/m³, preferably 80-120 kg/m³, more preferably 80-100 kg/m³. Hereby, noise absorbing panels are provided in a size which is easy to handle during mounting.

[0022] In an embodiment, the board is preferably provided with a protective fabric on its road-facing side. Hereby, the mineral fibre board is protected from salt, dirt and the like from the road. The fabric may be a fleece, i.e. a non-woven fabric, which is weather and UV resistant ensuring a long lifetime of the sound absorbing panel.

[0023] In addition to this feature, it is possible to provide the protective fabric with a structured surface having different appearances depending on the perspective. Thereby it is possible to provide optical effects depending on an actual line of vision. For example, the fleece and thereby the noise absorbing panel may reflect incident light more or less intensely depending on the actual incident angle. It is also possible to provide the protective fabric with particular light absorbing effects such that it has a different colour depending on the actual incident angle of light or line of vision. Thereby, the fleece may reflect light when illuminated from one driving direction of a traffic way and fully or partially absorb or deflect light when illuminated from the other driving direction of said traffic way. Besides design features, this feature may also provide functional benefits when the sound absorbing panel is installed next to traffic way.

[0024] By the present invention, it is found advantageous that the noise absorbing panel is provided in either a planar configuration or a curved configuration. Another advantage of the stretch-metal netting encasing the mineral fibre board is also that the stretch metal netting is manually deformable so that the noise panel is bendable into a preferred curved shape. As an alternative, if using more rigid less bendable panels, shorter panels can be used and arranged in a polygonal course for an installation at curved traffic ways.

[0025] In an embodiment of the invention, the guard rail is made of a beam, preferably made of a steel profile in a predetermined cross-sectional shape. The beam may be provided with sound reducing means, such as one or more sections of perforations.

[0026] As an alternative to a profile beam, the guard rail could be a tube or a wire.

[0027] According to a further embodiment of the present invention, the noise absorbing panel can be provided at the respective axial end portions with end profiles. Such end profiles may have I-, H-, U- or C- shape. Using end profiles with I-, H-shape allows a connection of two consecutive noise absorbing panels which can be introduced in the respective recesses provided by this shape profile. U- or C- shaped profiles can be used as end profiles of respective noise absorbing panels in case no further noise absorbing panel is to be connected.

[0028] According to a further embodiment of the invention, end portions of noise absorbing panels can be at least partially covered by cover elements. Those cover elements can be formed from material which is elastically deformable and which has good noise absorbing characteristics, e.g. from rubber material. It is possible to fix such singular elements to the energy absorbing mesh material on both sides of the noise absorbing panel, respectively. As an alternative, it is possible to provide cover elements which cover an end portion of the noise absorbing panel by surrounding or encompassing this end portion partially or completely. The cover element can be fixed by additional fixing means or it can be clamped to the noise absorbing panel. Holding ribs increasing friction or providing a form fit can be formed to the cover elements in order to engage with the noise absorbing panel, in particular with the end portions of the energy absorbing mesh material. The cover element can provide an elastically deformable structure, preferably rounded, in the center of the end face which can be brought in contact with the corresponding elastically deformable structure at an opposing cover element of an approximate noise absorbing panel. The elastically deformable structure can be formed by a rounded projection integrally formed within the cover, e.g. with a rounded projection surface. This allows to compensate tolerances when mounting or assembling the system and moreover provides additional noise absorbing characteristics also in the interfaces between two approximate noise absorbing panels.

[0029] In the following the invention is described in more detail with reference to the accompanying drawings, in which:

Fig. 1 is a schematic perspective view of a sound absorbing guard rail system according to a first embodiment of the invention;

Fig. 2 is a schematic front view of said guard rail system of the first embodiment of the invention,

Fig. 3 is a side view thereof, and

Fig. 4 is a top view thereof;

Fig. 5 is a schematic perspective view of a sound absorbing guard rail system according to a second embodiment of the invention, and

Fig. 6 is a schematic front view thereof;

Fig. 7 a)-c) is a series of cross-section views illustrating the absorption of an impact by a guard rail system according to the invention;

Figs. 8-10 are cross-section views of three embod-

iments of a noise absorbing panel according to the invention;

Figs. 11-14 are cross-section views of elements of each of said three embodiments;

Fig. 15 is a detailed front view of a preferred embodiment of a stretch-metal netting according to a preferred embodiment of the invention; and

Fig. 16 is a side view of the stretch-metal netting of fig. 15;

Fig. 17 is a schematic perspective view of an assembly profile for use between two adjacent noise-absorbing panels;

Fig. 18 is a front view of a guard rail beam according to an embodiment of the invention with areas of perforations;

Fig. 19 is a detailed perspective view of the beam of fig. 18; and

Fig. 20 is a cross-sectional view thereof;

Figs. 21 and 22 are views of a second embodiment of a guard rail beam; and

Figs. 23 and 24 are views of a third embodiment of a guard rail beam;

Fig. 25 and 26 are two cross-sectional shapes of guard rail beams;

Figs. 27-30 are schematic views of different perforation patterns for the perforations in the guard rail beams of the invention; and

Figs. 31-39 show different embodiments for designs for end elements covering end surfaces of noise absorbing panels.

[0030] With reference to figures 1 to 4, a first embodiment of a sound absorbing guard rail system according to the invention is shown. The guard rail system is installed at a lateral or median side of a road 2 and comprises a series of vertically oriented supporting posts 4. A series of noise absorbing panels 6 are mounted to one side of the supporting posts 4 facing away from the road and a series of longitudinal guard rails 8 are mounted on the other side of the posts 4 facing the road 2. Between the noise absorbing panels 6 assembly profiles 14 (see figures 1 and 2) are provided to ensure the noise absorbing panels 6 are suitably positioned and aligned.

[0031] The noise absorbing panel 6 comprises a noise absorbing material board 10 which is encased in an energy absorbing mesh 12 (see fig. 3).

[0032] In figures 5 and 6 a second embodiment of a sound absorbing guard rail system according to the invention is shown. According to this embodiment, the guard rails 8 are provided with perforated sections 81, 82 to further increase the sound absorbing characteristics of the guard rail system.

[0033] In figures 7 a) to c) the absorption of an impact by a guard rail system according to the invention is shown. As vehicle comes from the road 2 and collides with the guard rail 8, as indicated by the arrow in the figures, the posts 4 deflects at ground level and the noise absorbing panel 6 is tilted backwards, i.e. away from the

road 2, as well as deformed as the energy in the impact is absorbed in this deformation of the noise absorbing panel 6. As the energy is taken out of the impact the guard rail 8 breaks away from the posts 4 as shown in fig. 7 c).

[0034] Three embodiments of the noise absorbing panel 6 are shown in figures 8-10. Common for these three embodiments is that a noise absorbing material board 10 is encased in an energy absorbing mesh 12. The material of the noise absorbing material board 10 is preferably a mineral fibre wool, and in particular stone wool material. This material has good sound absorbing characteristics just as the material is fire resistant and the noise absorbing panel 6 made of stone wool can thereby contribute to that the guard rail system can prevent any fire from spreading in case a fire occurs in relation to a road accident with or without vehicle impact in the guard rail.

[0035] Protective profiles 16, 16', 16" are provided between the noise absorbing material board 10 and the energy absorbing mesh 12. In fig. 11 the noise absorbing material board 10 is shown alone and in figures 12-14 the three different designs of the protective profiles 16, 16', 16" are shown. The protective profile 16, 16' or 16" may be made of a transparent or non-transparent polymeric material, such as polypropylene, polycarbonate or the like.

[0036] As mentioned above, the noise absorbing material board 10 is encased in an energy absorbing mesh 12. This mesh 12 is provided as a netting made of stretch-metal or also called expanded metal. Such a netting of expanded metal is manufactured through cutting and expanding a solid sheet of metal in special machines. The machines cut and stretch the metal, expand it to a seamless mesh without joints. The mesh is hereby made up by ribs 12' and rhombus-like shaped openings 12" as shown in figures 15 and 16.

[0037] The mesh 12 of expanded metal is advantageous as this type of mesh is highly deformable without breaking and can therefore absorb a high amount of energy in case of an impact and at the same time prevent the noise absorbing material 10 encased in the mesh 12 from being disintegrated and scattered around the in the event of a vehicle impact of the guard rail system. The expanded metal mesh is formed such that it is more deformable in the longitudinal direction along the road than in the vertical direction. The expanded metal mesh 12 is preferably bent into shape so as to form cover for the front and back sides of the noise absorbing board 10 as well as at least the top side. Preferably, the mesh 12 is also formed so it covers at least a portion of the bottom side of the noise absorbing board 10.

[0038] As mentioned in relation to figures 1 and 2, an assembly profile 14 is provided between the noise absorbing panels 6. In fig. 17 an embodiment of the assembly profile 14 is shown. The profile 14 is made as an H-profile with two exterior flanges 142 and a web flange 144 therebetween. Hereby, two receiving slots 146 are

formed on each side of the web flange 144 for receiving the ends of two neighbouring noise absorbing panels 6. Alternatively two U-profiles, or Z-Profiles can be used.

[0039] In the following figures 18-30 various embodiments of the guard rail beams 8 are illustrated. The guard rail beams 8 are formed from a sheet of metal which is bent into a desired cross-sectional shape. In the embodiment shown in figures 18-20, the guard rail beam 8 is shaped with upper and lower longitudinal flange portions facing the road and a central flange portion therebetween. The upper and lower flange portions are provided with perforated sections 81 and the central flange portion is also provided with a perforated section 82. Mounting holes 80 are provided at least at the end portions of the beams 8.

[0040] In figures 21 and 22 another embodiment is shown of the beam design. This second design differs from the design shown in figs. 18-20 by having non-perforated sections 83 along the beam 8.

[0041] In figs. 23-24, yet another variant of the design of the perforations is shown, where only areas 84 around the mounting holes 80 are non-perforated.

[0042] Figures 25 and 26 show cross-sections of two alternative shapes of the guard rail beam 8 relative to the shape shown in fig. 20, which could be used for the road-facing guard rail beams 8 in a guard rail system according to the invention.

[0043] The perforations may be provided in the guard rail beams 8 with different patterns. In figures 27-30 some different perforation patterns are shown.

[0044] Figure 31 shows a detailed view of an end region of a noise absorbing panels 6 as described above. At the end region of the noise absorbing panel 6, two rubber elements 200 are fixed to the edges of the energy absorbing mesh material 12. Each of the rubber elements 200 in cross-section provides a profile with a U-shaped receiving part 202 with rib-like projections 204 and 206. Moreover, each of the rubber elements 200 has a hollow oval ring part 208. The rubber elements 200 are fixed to the free edge of the mesh material 12 by means of the receiving parts 202, wherein the rib-like projections 204 and 206 engage the mesh material 12 in order to retain the rubber elements 200 on the free edge of the mesh material 12. The hollow oval ring parts 208, which can be elastically deformed, project from the front surface 210 of the noise absorbing panel 6. Thereby, the rubber elements 200 provide a noise damping and mechanically cushioning interface to an approximate wall element or to another noise absorbing panel 6 formed with corresponding rubber elements 200. Moreover, tolerances can be compensated thereby.

[0045] It is to be added that the noise absorbing panel 6 also shows an additional protection layer 212 formed between the noise absorbing material board 10 and the energy absorbing mesh material 12. This additional protection layer 212 can be provided for protecting the noise absorbing material board 10 from dirt, water, or other external influences. Moreover, it can provide optical ef-

fects, e.g. particular reflection effects or light absorbing effects depending certain angular ranges. This additional protection layer can be provided in each embodiment as described above, independent from other structural features described.

[0046] Figure 32 shows an alternative embodiment for the design of an end cover design of a noise absorbing panel 6. The noise absorbing panel 6 at its free end is provided with a cover 220 formed from rubber material. The cover has bent edge regions 222 which encompass the free ends of the noise absorbing panel 6 and are held by elastic deformation and friction to the end regions of the energy absorbing mesh material 12.

[0047] Fig. 33 shows an embodiment for another cover 230 according to the invention which basically corresponds to the embodiment as described in regard to figure 32. Figure 35 additionally shows how two opposing noise absorbing panels 6 and 6' are arranged against one another equipped with covers 230, respectively. Moreover, figure 36 additionally shows a perspective view of the cover 230. According to this embodiment, the cover 230 has basically the same shape as shown in figure 32 in regard the cover 220 and it is also formed from elastically deformable material, e.g. rubber. Additionally, the cover 230 provides in its central region a rounded projection 232 with a hollow interior 234, which makes the rounded projection 232 elastically deformable. The general shape of the cover 230 is adapted to the geometry of the end side of a noise absorbing panel 6, as can be seen in figure 36. When fixed onto the end of two opposing noise absorbing panels 6 and 6', as shown in figure 35, the two corresponding rounded projections 232 and 232' of the respective covers 230 and 230' contact one another and under elastic deformation provide a tight engagement of the two end covers 230 and 230'. This allows to compensate tolerances and provides a tight connection and additional noise damping effects also in the interface between two approximate noise absorbing panels 6 and 6'.

[0048] Figure 34 shows another embodiment which is based on the embodiment according to figure 33. The end cover 240 corresponds in its shape to the end cover 230 as described above, i.e. it also has a rounded projection 242 with a hollow interior 244. In the interior of the projection 242 a partition wall 246 is provided extending from the inner surface of the projection 242 into the noise absorbing material board 10. The partition wall 246 additionally stabilizes the structure of the projection 242.

[0049] Figure 37 shows a further embodiment which is also based on the embodiment according to figure 33. In this embodiment, in the central area of the cover 250 the projection is formed by a closed ring-like structure 252 as can be seen in the cross-section with a hollow interior 254. The cover 250 is plugged onto the end portion of the noise absorbing panel 6 such that a part, in the example about one fourth of the circumference, of the inner portion 256 of the closed ring-like structure 252 engages the front surface of the noise absorbing material

board 10 and protrudes into it to a certain degree. This further stabilizes the cover 250 and allows to compensate tolerances. As can be seen in figure 39, the shape of the cover 250 is similar to the shape as already described in regard to figure 36.

[0050] Finally, as can be seen in figure 38, this embodiment provides a similar interface between two opposing or approximate noise absorbing panels 6 and 6' wherein the two ring-like structures 252 contact each other under a demanded elastic deformation in order to provide a tight fit with beneficial noise dampening and cushioning characteristics.

[0051] Above, the invention is described with reference to some currently preferred embodiments. However, it is realised that other embodiments may be provided without departing from the scope of the invention as defined in the accompanying claims.

Claims

1. A guard rail system for installation at a lateral or median side of a road (2), said guard rail system comprises a series of supporting posts (4), that are preferably vertically oriented, at least one noise absorbing panel (6) that is mounted to said supporting posts (4), and a series of longitudinal guard rails (8) mounted on the side of the guard rail system facing the road, said noise absorbing panel (6) comprising a noise absorbing material (10) and an energy absorbing material (12) provided with openings, **characterised in that** the energy absorbing material (12) is a stretch-metal netting encasing said noise absorbing material (10).
2. A guard rail system according to claim 1, wherein the noise absorbing material (10) is a mineral wool fibre material preferably provided as a board, foam material, integrated or partial rubber material, integrated or partial plastic material, or other noise absorbing material resistant in regard to weather conditions and wear effects next to traffic ways.
3. A guard rail system according to claim 1, wherein the stretch-metal is a ductile metal capable of absorbing energy while being plastically deformed.
4. A guard rail system according to claim 1 or 3, wherein the stretch-metal is galvanised steel.
5. A guard rail system according to any one of the preceding claims, wherein the netting is a panel, which encloses at least the main sides and the top side of the noise absorbing material (10).
6. A guard rail system according to any one of the preceding claims, wherein the encasing is made from stretch-metal netting panel, which is bent into the

box-like shape around the noise absorbing material board (10) and with mounting panels (14) provided at each of the end sides of the stretch-metal netting panel (12).

7. A guard rail system according to any one of the preceding claims, wherein the encasing is made from stretch-metal netting panel, which is cast into an insulation material made by a wet-felt process and with mounting panels (14) provided at each of the end sides of the stretch-metal netting panel. 10
8. A guard rail system according to claim 6 or 7, wherein the stretch-metal netting panel is produced with non-stretched areas at each of the end sections for receiving the mounting panels (14) at each end for mounting the noise absorbing panel (10) to the supporting posts (4). 15
9. A guard rail system according to any one of the preceding claims, wherein said noise absorbing panel (10) is approx. 90 cm in height and in length approx. 130 cm, approx. 260 cm. or approx. 520 cm or approx. 530 cm. 20
10. A guard rail system according to any one of claims 2 to 9, wherein the mineral wool fibre board is stone wool and provided with a density within the range of 60-150 kg/m³, preferably 80-120 kg/m³, more preferably 80-100 kg/m³. 25
11. A guard rail system according to any one of the preceding claims, wherein the noise absorbing material (10) is preferably provided with a protective fabric (212) on its road-facing side. 30
12. A guard rail system according to claim 11, wherein the protective fabric (212) has a structured surface having different appearances depending on an actual line of vision. 35
13. A guard rail system according to any one of the preceding claims, wherein said noise absorbing panel (10) is provided in a planar configuration or a curved or polygonal configuration. 40
14. A guard rail system according to any one of the preceding claims, wherein the noise absorbing panel (10) is provided at the respective axial end portions with end profiles, wherein the end profiles may have I-, H-, U- or C- shape. 45
15. A guard rail system according to any one of the preceding claims, wherein each guard rail is made of a beam (8), preferably made of steel in a predetermined cross-sectional shape. 50
16. A guard rail system according to claim 15, wherein

the beam (8) is provided with sound reducing means, such as one or more sections of perforations (82).

17. A guard rail system according to any one of the preceding claims, wherein each guard rail is a tube or a wire. 5

Patentansprüche

1. Führungsschienensystem zum Installieren an einem seitlichen oder mittleren Rand einer Straße (2), wobei das Führungsschienensystem Folgendes umfasst: eine Reihe von Stützpfeilen (4), die vorzugsweise vertikal ausgerichtet sind, mindestens eine schalldämpfende Platte (6), die an den Stützpfeilen (4) montiert ist, und eine Reihe in Längsrichtung verlaufender Führungsschienen (8), die an der Seite des Führungsschienensystems, die der Straße zugewandt ist, montiert sind, wobei die schalldämpfende Platte (6) ein schalldämpfendes Material (10) und ein mit Öffnungen versehenes Energie absorbierendes Material (12) umfasst, **dadurch gekennzeichnet, dass** es sich bei dem Energie absorbierenden Material (12) um ein Streckmetallgeflecht handelt, welches das schalldämpfende Material (10) umschließt. 10
2. Führungsschienensystem nach Anspruch 1, wobei es sich bei dem schalldämpfenden Material (10) um ein Material aus mineralischen Wollfasern, das vorzugsweise als Brett bereitgestellt wird, ein Schaumstoffmaterial, ein integriertes oder teilweises Gummimaterial, ein integriertes oder teilweises Kunststoffmaterial oder ein anderes schalldämpfendes Material handelt, das gegenüber Wetterbedingungen und Abnutzungseffekten neben Verkehrswegen beständig ist. 15
3. Führungsschienensystem nach Anspruch 1, wobei es sich bei dem Streckmetall um ein biegsames Metall handelt, das dazu in der Lage ist, Energie zu absorbieren, während es plastisch verformt wird. 20
4. Führungsschienensystem nach Anspruch 1 oder 3, wobei es sich bei dem Streckmetall um galvanisierten Stahl handelt. 25
5. Führungsschienensystem nach einem der vorhergehenden Ansprüche, wobei es sich bei dem Geflecht um eine Platte handelt, die zumindest die Hauptseiten und die Oberseite des schalldämpfenden Materials (10) umschließt. 30
6. Führungsschienensystem nach einem der vorhergehenden Ansprüche, wobei die Umhüllung aus ei-

ner Streckmetallgeflechtplatte besteht, die in die kastenartige Form um das schalldämpfende Materialbrett (10) gebogen ist, und wobei Montageplatten (14) an beiden Endseiten der Streckmetallgeflechtplatte (12) bereitgestellt sind.

7. Führungsschienensystem nach einem der vorhergehenden Ansprüche, wobei die Umhüllung aus einer Streckmetallgeflechtplatte besteht, die in ein Isoliermaterial gegossen ist, das durch einen Nassfilzprozess hergestellt wurde, und wobei Montageplatten (14) an beiden Endseiten der Streckmetallgeflechtplatte bereitgestellt sind.

8. Führungsschienensystem nach Anspruch 6 oder 7, wobei die Streckmetallgeflechtplatte mit nicht gestreckten Bereichen an beiden Endabschnitten hergestellt wird, welche an beiden Enden die Montageplatten (14) zum Montieren der schalldämpfenden Platte (10) an den Stützpfeilen (4) aufnehmen.

9. Führungsschienensystem nach einem der vorhergehenden Ansprüche, wobei die schalldämpfende Platte (10) eine Höhe von ungefähr 90 cm und eine Länge von ungefähr 130 cm, ungefähr 260 cm oder ungefähr 520 cm oder ungefähr 530 cm aufweist.

10. Führungsschienensystem nach einem der Ansprüche 2 bis 9, wobei das Brett aus mineralischen Wollfasern aus Steinwolle besteht und mit einer Dichte in dem Bereich von 60-150 kg/m³, vorzugsweise 80-120 kg/m³, besonders bevorzugt 80-100 kg/m³ bereitgestellt wird.

11. Führungsschienensystem nach einem der vorhergehenden Ansprüche, wobei das schalldämpfende Material (10) vorzugsweise auf der Seite, die der Straße zugewandt ist, mit einem Schutzgewebe (212) versehen ist.

12. Führungsschienensystem nach Anspruch 11, wobei das Schutzgewebe (212) eine strukturierte Oberfläche aufweist, die je nach tatsächlicher Blickrichtung unterschiedliche Erscheinungsbilder aufweist.

13. Führungsschienensystem nach einem der vorhergehenden Ansprüche, wobei die schalldämpfende Platte (10) in einer ebenen Konfiguration oder einer gekrümmten oder polygonalen Konfiguration bereitgestellt wird.

14. Führungsschienensystem nach einem der vorhergehenden Ansprüche, wobei die schalldämpfende Platte (10) an den jeweiligen axialen Endabschnitten mit Endprofilen versehen ist, wobei die Endprofile eine I-, H-, U- oder C-Form aufweisen können.

15. Führungssystem nach einem der vorhergehenden

Ansprüche, wobei jede Führungsschiene aus einem Holm (8) besteht, der vorzugsweise aus Stahl in einer vorher festgelegten Querschnittsform hergestellt ist.

16. Führungsschienensystem nach Anspruch 15, wobei der Holm (8) mit schallreduzierenden Mitteln versehen ist, wie etwa einem oder mehreren perforierten Abschnitten (82).

17. Führungsschienensystem nach einem der vorhergehenden Ansprüche, wobei es sich bei jeder Führungsschiene um ein Rohr oder einen Draht handelt.

Revendications

1. Système de glissière de sécurité à installer sur un côté latéral ou médian d'une route (2), ledit système de glissière de sécurité comprend une série de poteaux de support (4), qui sont de préférence orientés verticalement, au moins un panneau absorbant le bruit (6) qui est monté sur lesdits poteaux de support (4), et une série de glissières de sécurité longitudinales (8) montées sur le côté du système de glissière de sécurité faisant face à la route, ledit panneau absorbant le bruit (6) comprenant un matériau absorbant le bruit (10) et un matériau absorbant l'énergie (12) pourvu d'ouvertures, **caractérisé en ce que** le matériau absorbant l'énergie (12) est un filet en métal étirable enveloppant ledit matériau absorbant le bruit (10).

2. Système de glissière de sécurité selon la revendication 1, dans lequel le matériau absorbant le bruit (10) est un matériau en fibre de laine minérale de préférence fourni sous la forme d'un panneau, d'un matériau en mousse, d'un matériau en caoutchouc intégré ou partiel, d'un matériau plastique intégré ou partiel, ou d'un autre matériau absorbant le bruit résistant en ce qui concerne les conditions météorologiques et les effets d'usure à côté de voies de circulation.

3. Système de glissière de sécurité selon la revendication 1, dans lequel le métal étirable est un métal ductile capable d'absorber de l'énergie tout en étant déformé plastiquement.


4. Système de glissière de sécurité selon la revendication 1 ou 3, dans lequel le métal étirable est de l'acier galvanisé.




5. Système de glissière de sécurité selon l'une quelconque des revendications précédentes, dans lequel le filet est un panneau, qui renferme au moins les côtés principaux et le côté supérieur du matériau


absorbant le bruit (10).


6. Système de glissière de sécurité selon l'une quelconque des revendications précédentes, dans lequel l'enveloppe est faite d'un panneau de filet en métal étirable, qui est plié en forme de boîte autour du panneau de matériau absorbant le bruit (10) et avec des panneaux de montage (14) prévus sur chacun des côtés d'extrémité du panneau de filet en métal étirable (12). 5
7. Système de glissière de sécurité selon l'une quelconque des revendications précédentes, dans lequel l'enveloppe est faite d'un panneau de filet en métal étirable, qui est coulé dans un matériau d'isolation fabriqué par un processus de feutre humide et avec des panneaux de montage (14) prévus sur chacun des côtés d'extrémité du panneau de filet en métal étirable. 10
8. Système de glissière de sécurité selon la revendication 6 ou 7, dans lequel le panneau de filet en métal étirable est produit avec des zones non étirées à chacune des sections d'extrémité pour recevoir les panneaux de montage (14) à chaque extrémité pour monter le panneau absorbant le bruit (10) aux poteaux de support (4). 15
9. Système de glissière de sécurité selon l'une quelconque des revendications précédentes, dans lequel ledit panneau absorbant le bruit (10) mesure environ 90 cm de hauteur et environ 130 cm, environ 260 cm. ou environ 520 cm ou environ 530 cm de longueur. 20
10. Système de glissière de sécurité selon l'une quelconque des revendications 2 à 9, dans lequel le panneau de fibres de laine minérale est de la laine de roche et est pourvu d'une densité dans la plage de 60 à 150 kg/m³, de préférence de 80 à 120 kg/m³, de manière davantage préférée de 80 à 100 kg/m³. 25
11. Système de glissière de sécurité selon l'une quelconque des revendications précédentes, dans lequel le matériau absorbant le bruit (10) est de préférence pourvu d'un tissu protecteur (212) sur son côté faisant face à la route. 30
12. Système de glissière de sécurité selon la revendication 11, dans lequel le tissu de protection (212) a une surface structurée ayant différentes apparences en fonction d'une ligne de vision réelle. 35
13. Système de glissière de sécurité selon l'une quelconque des revendications précédentes, dans lequel ledit panneau absorbant le bruit (10) est prévu dans une configuration plane ou une configuration en courbe ou polygonale. 40


14. Système de glissière de sécurité selon l'une quelconque des revendications précédentes, dans lequel le panneau absorbant le bruit (10) est pourvu au niveau des parties d'extrémité axiales respectives de profils d'extrémité, dans lequel les profils d'extrémité peuvent avoir une forme de I, de H, de U ou de C. 45
15. Système de glissière de sécurité selon l'une quelconque des revendications précédentes, dans lequel chaque glissière de sécurité est constituée d'une poutre (8), de préférence constituée d'acier selon une forme en coupe transversale prédéterminée. 50
16. Système de glissière de sécurité selon la revendication 15, dans lequel la poutre (8) est pourvue de moyens de réduction du son, tels qu'une ou plusieurs sections de perforations (82). 55
17. Système de glissière de sécurité selon l'une quelconque des revendications précédentes, dans lequel chaque glissière de sécurité est un tube ou un fil.





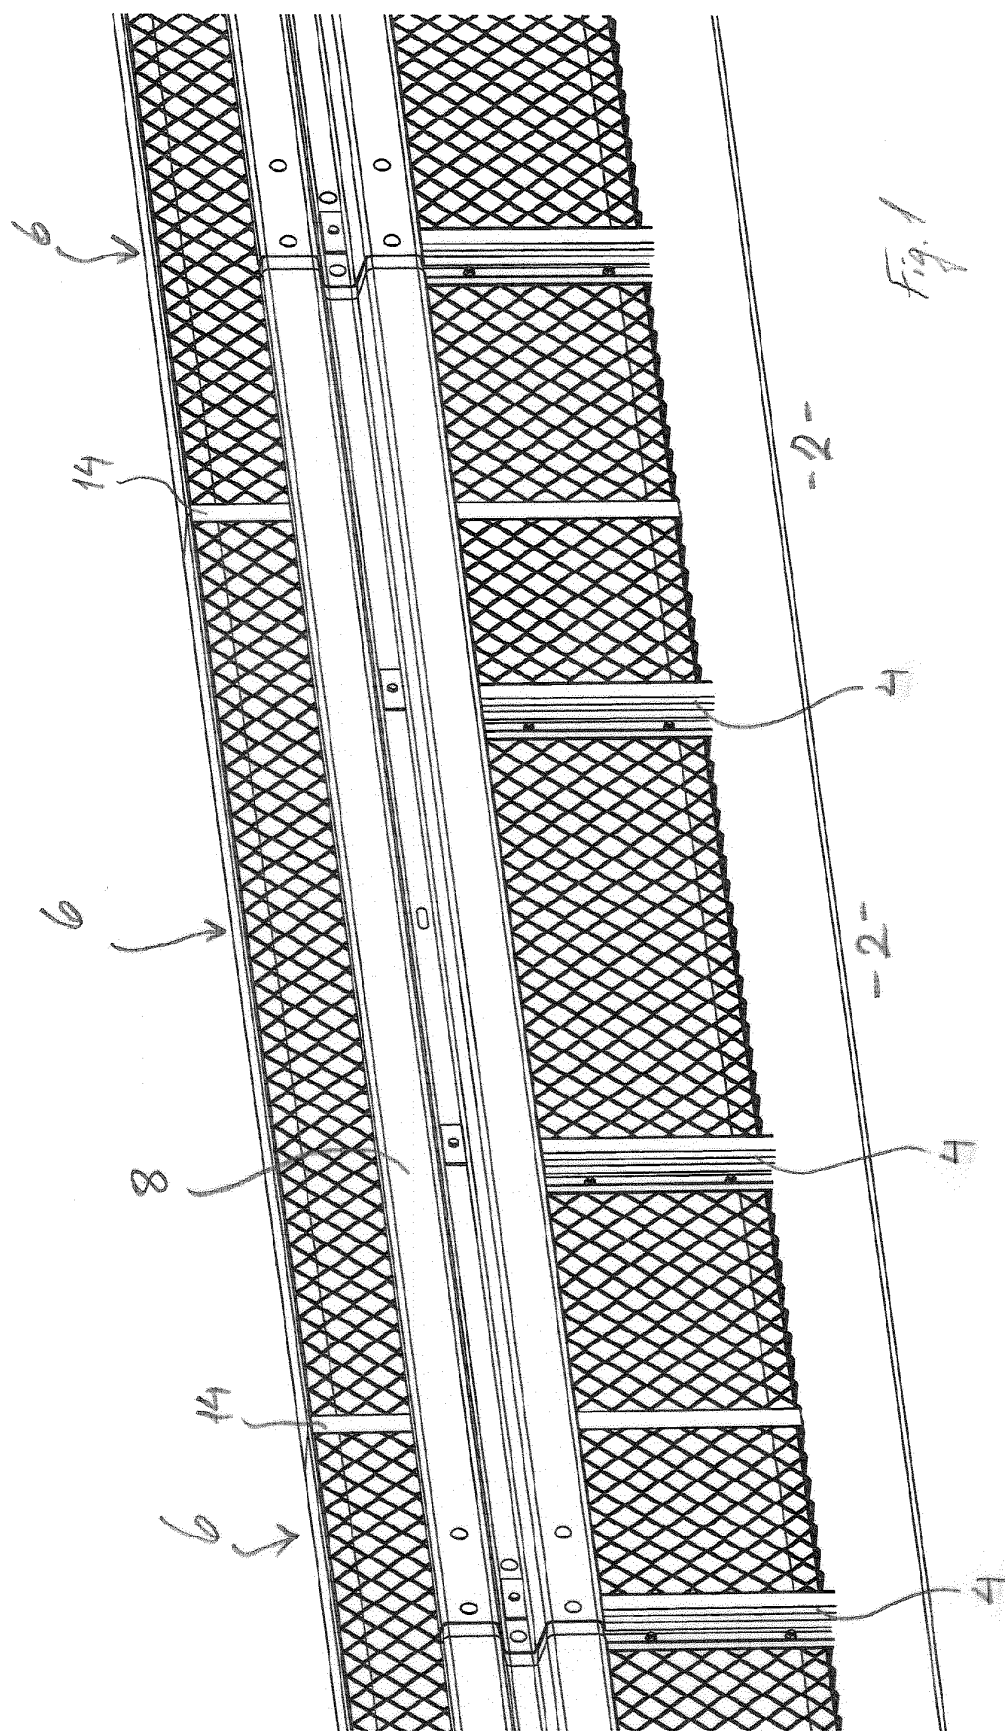


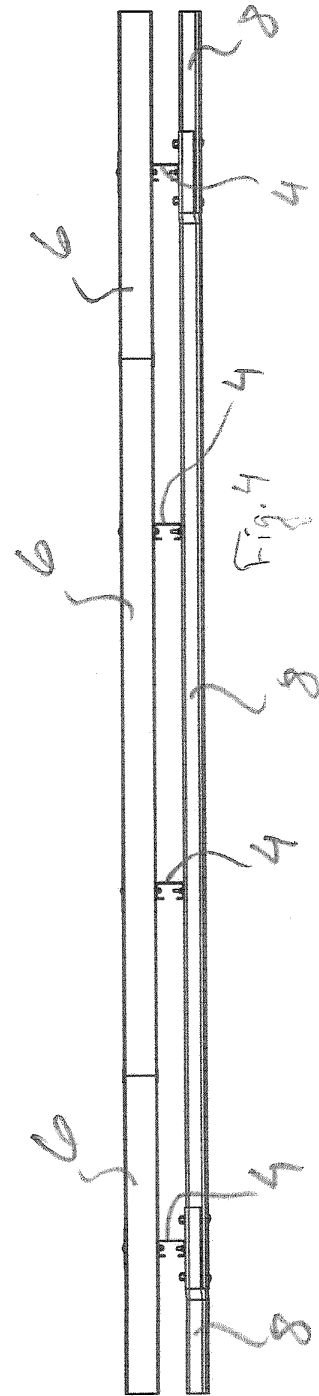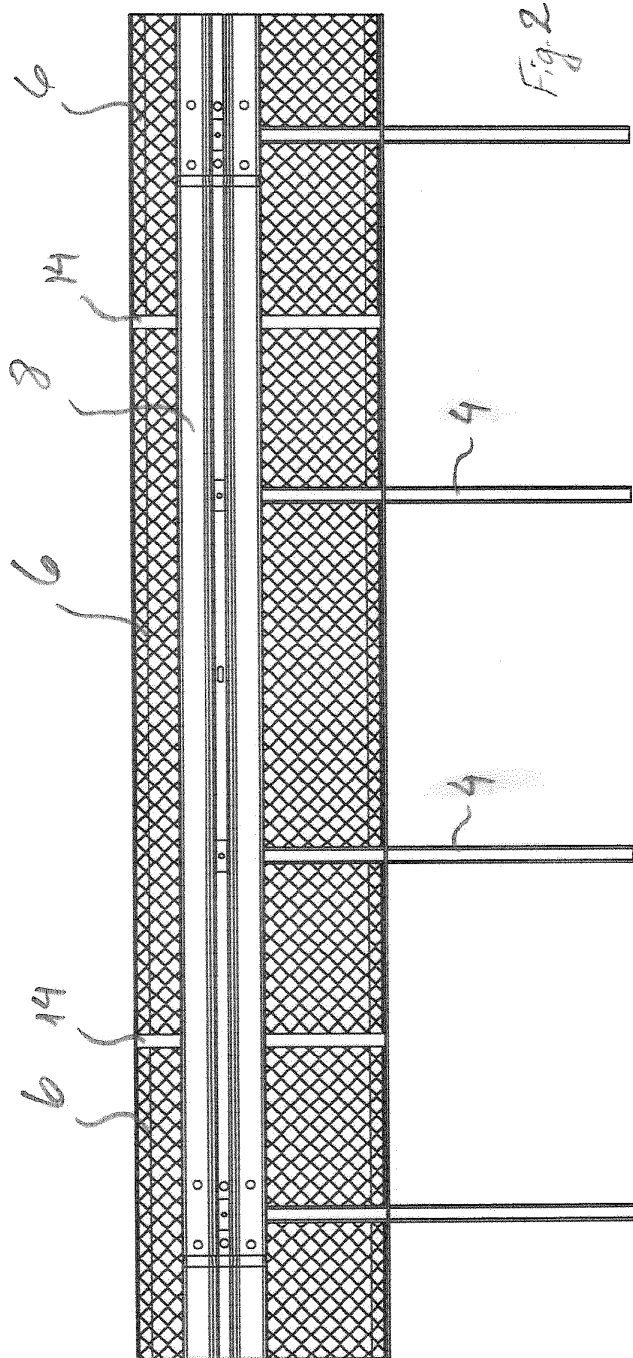
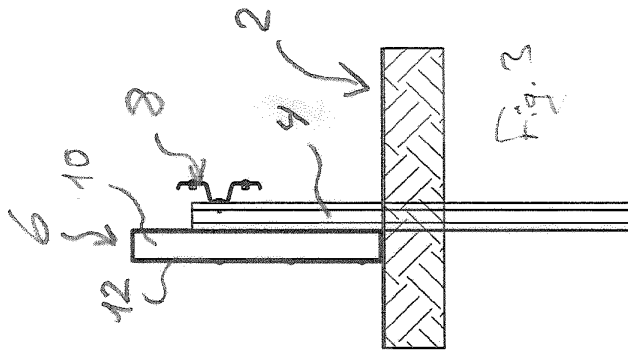


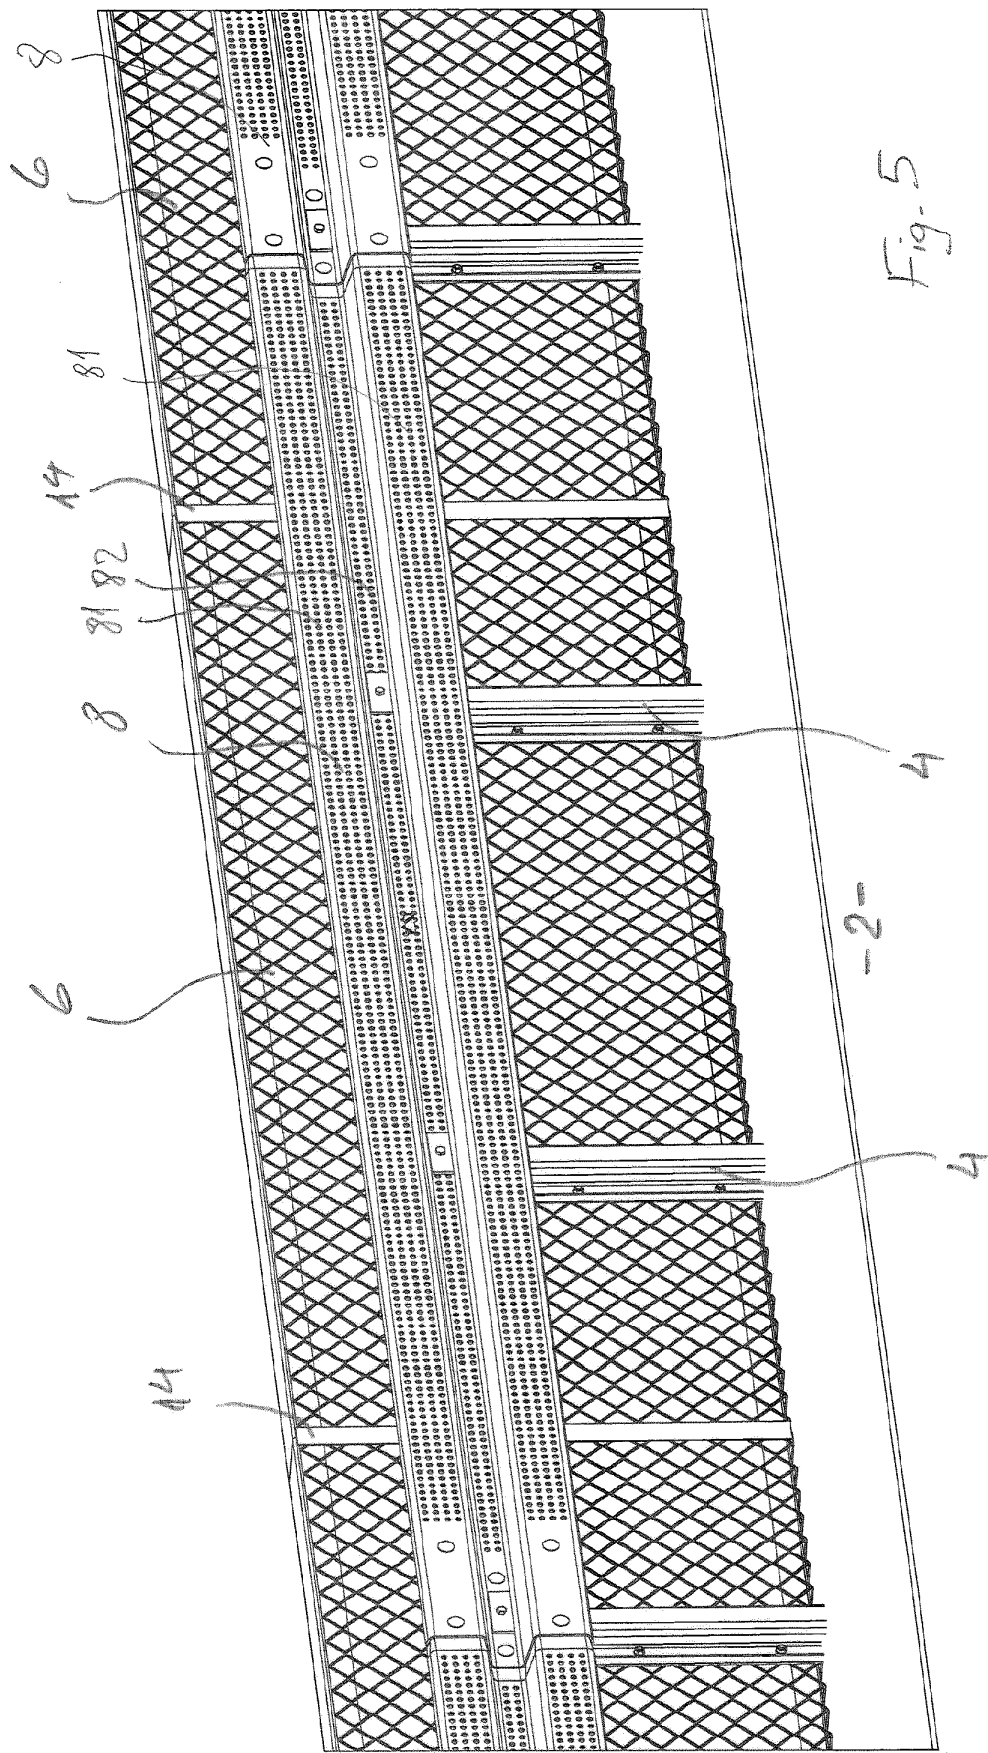

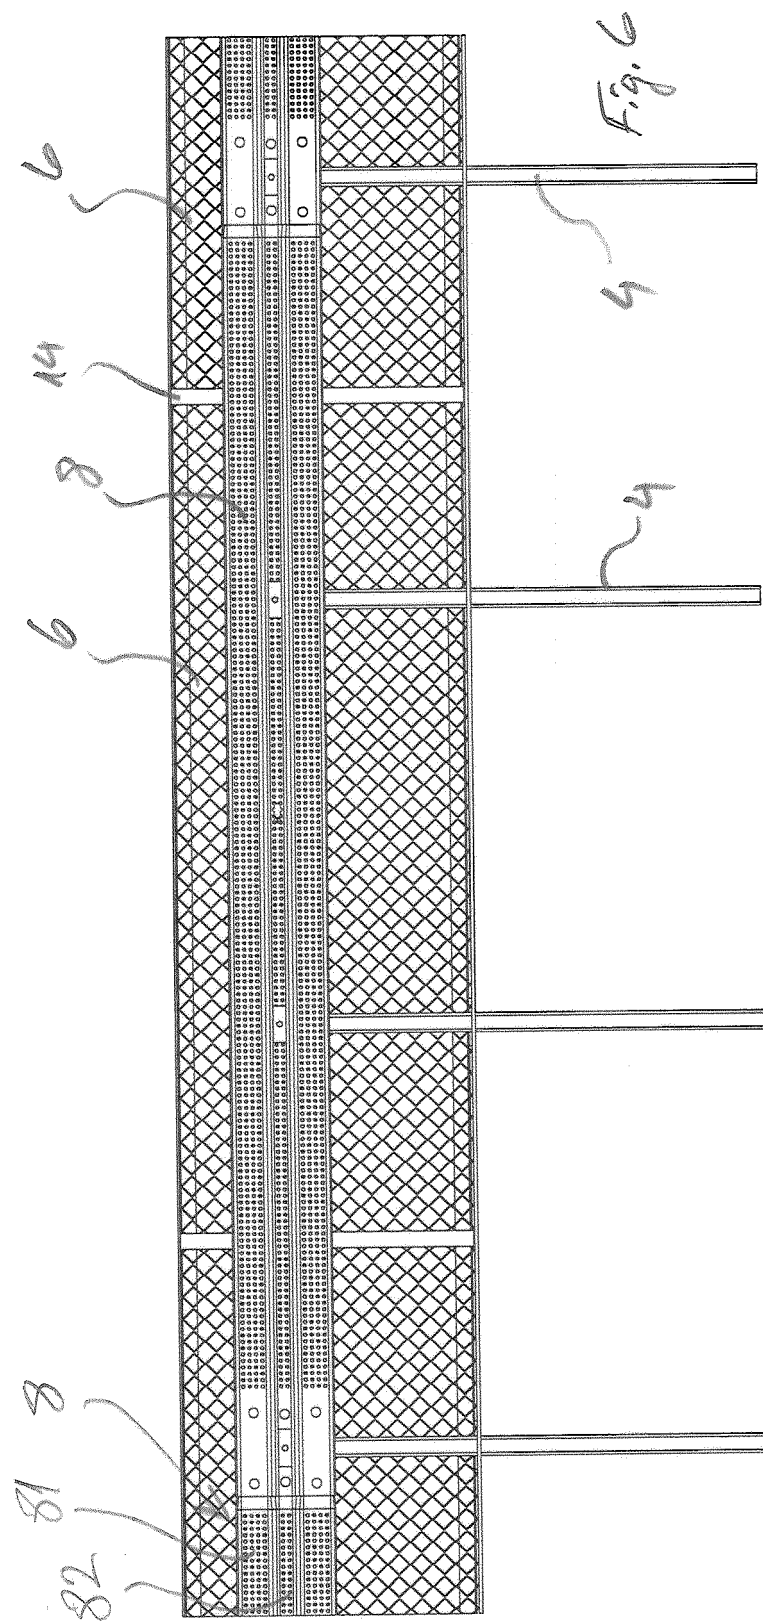

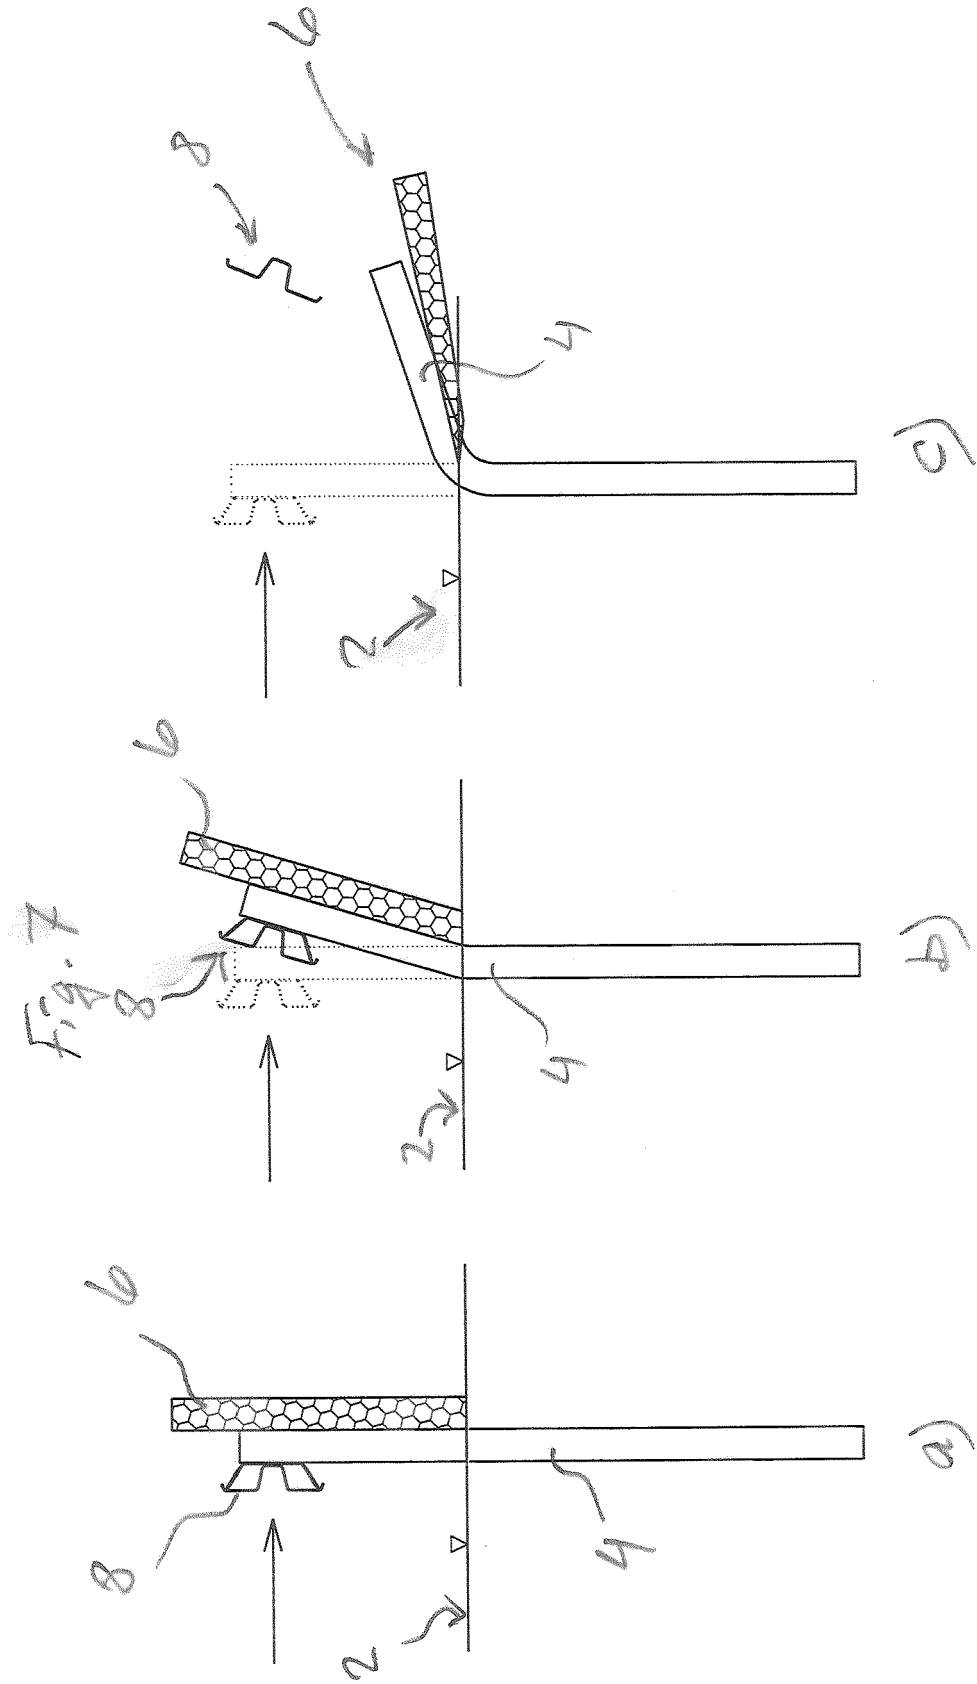

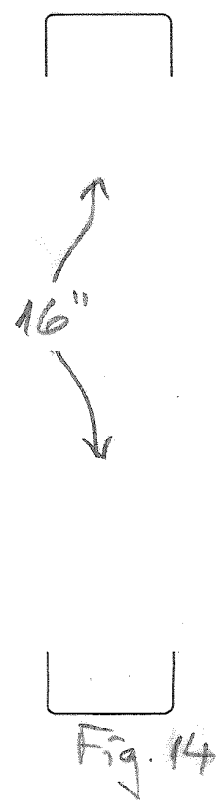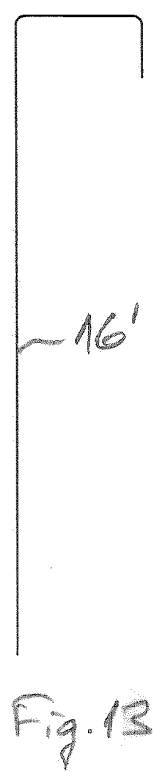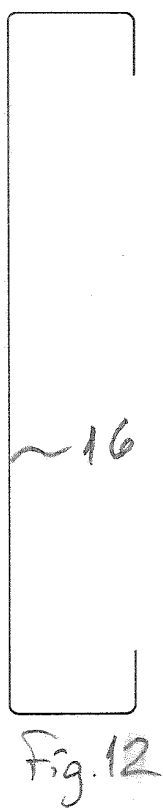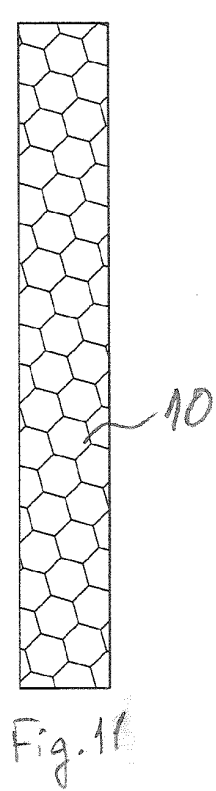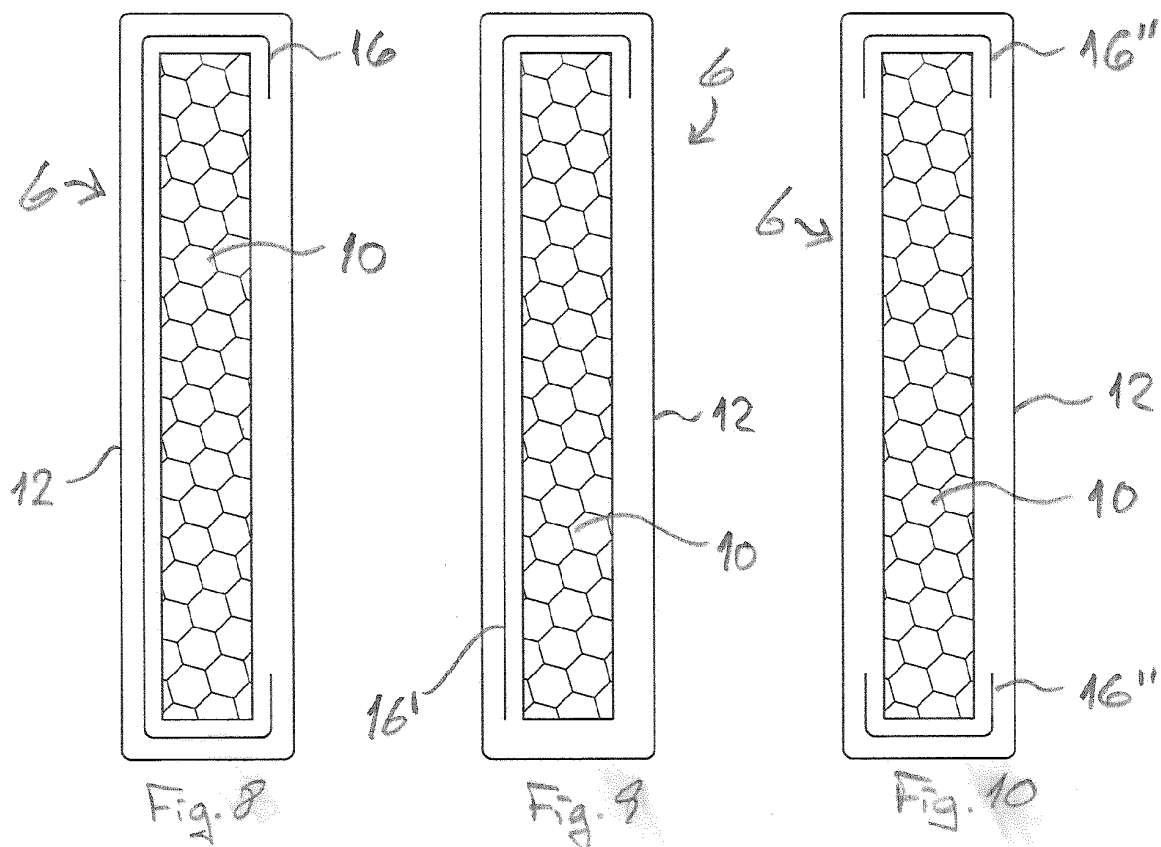

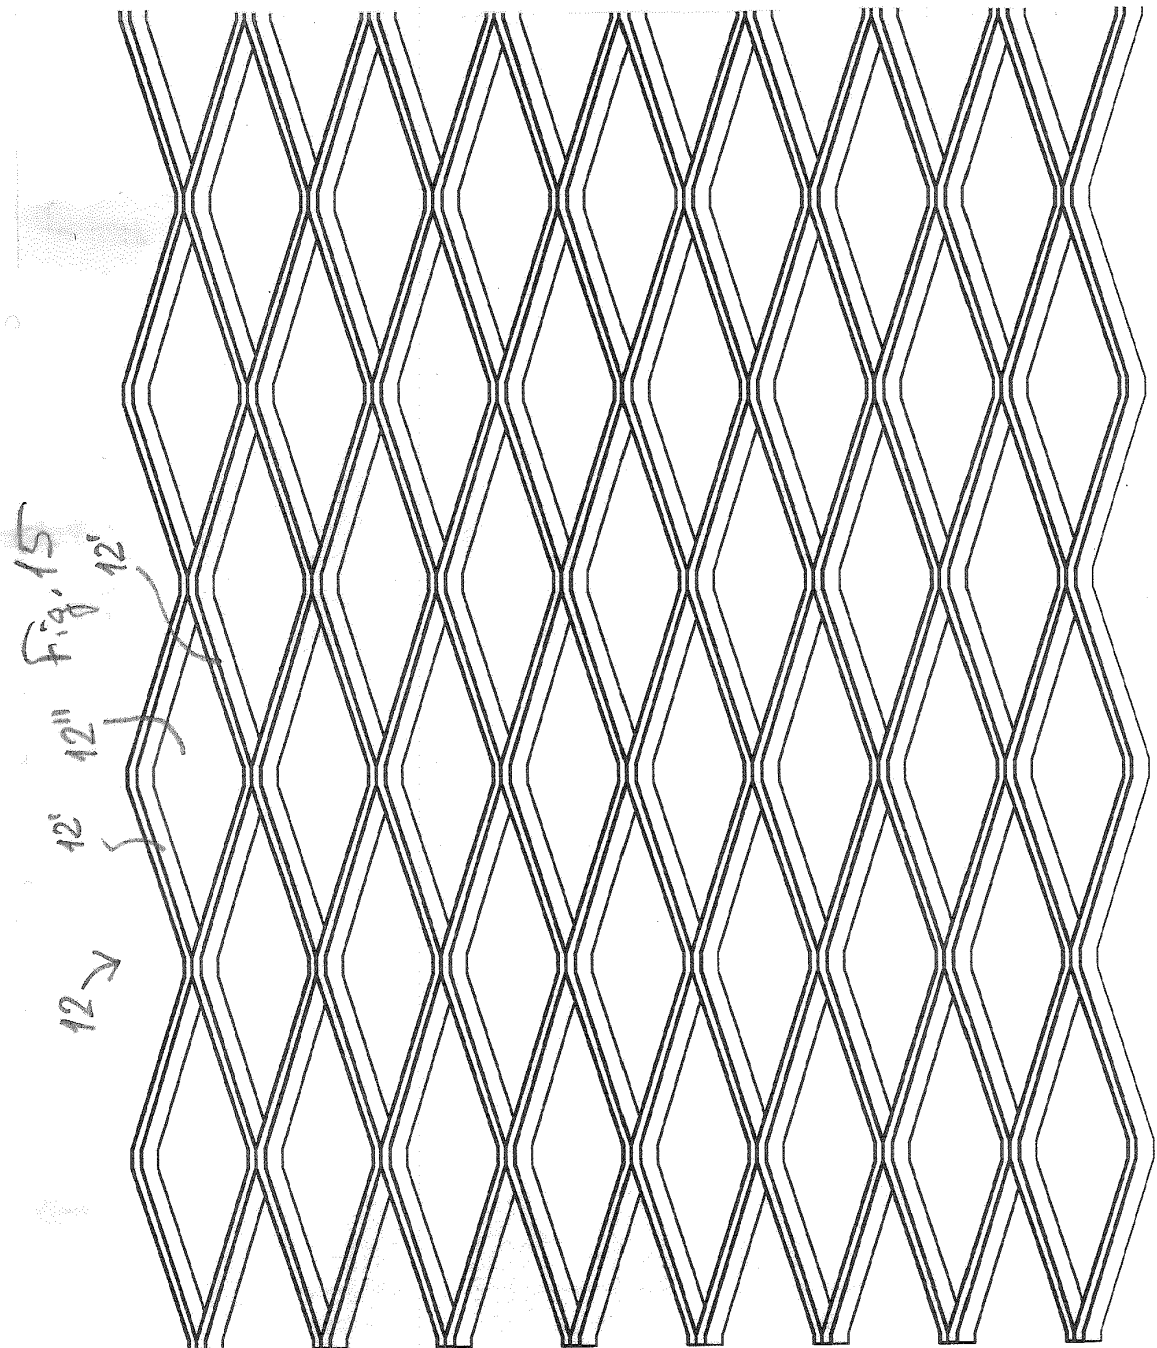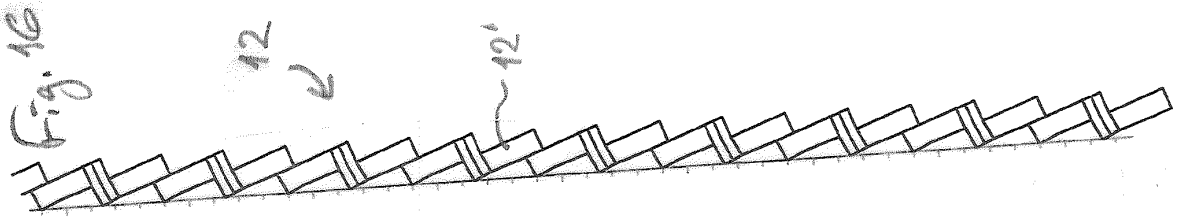

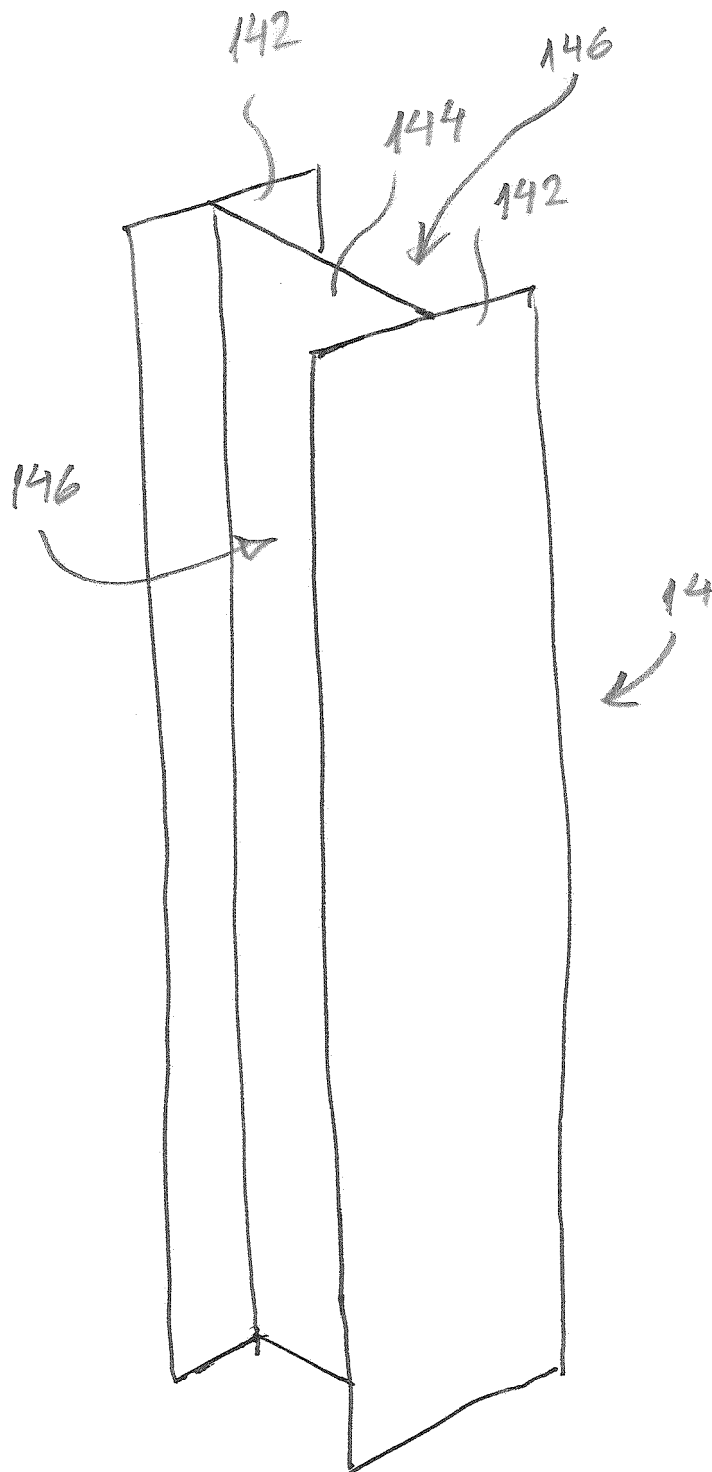
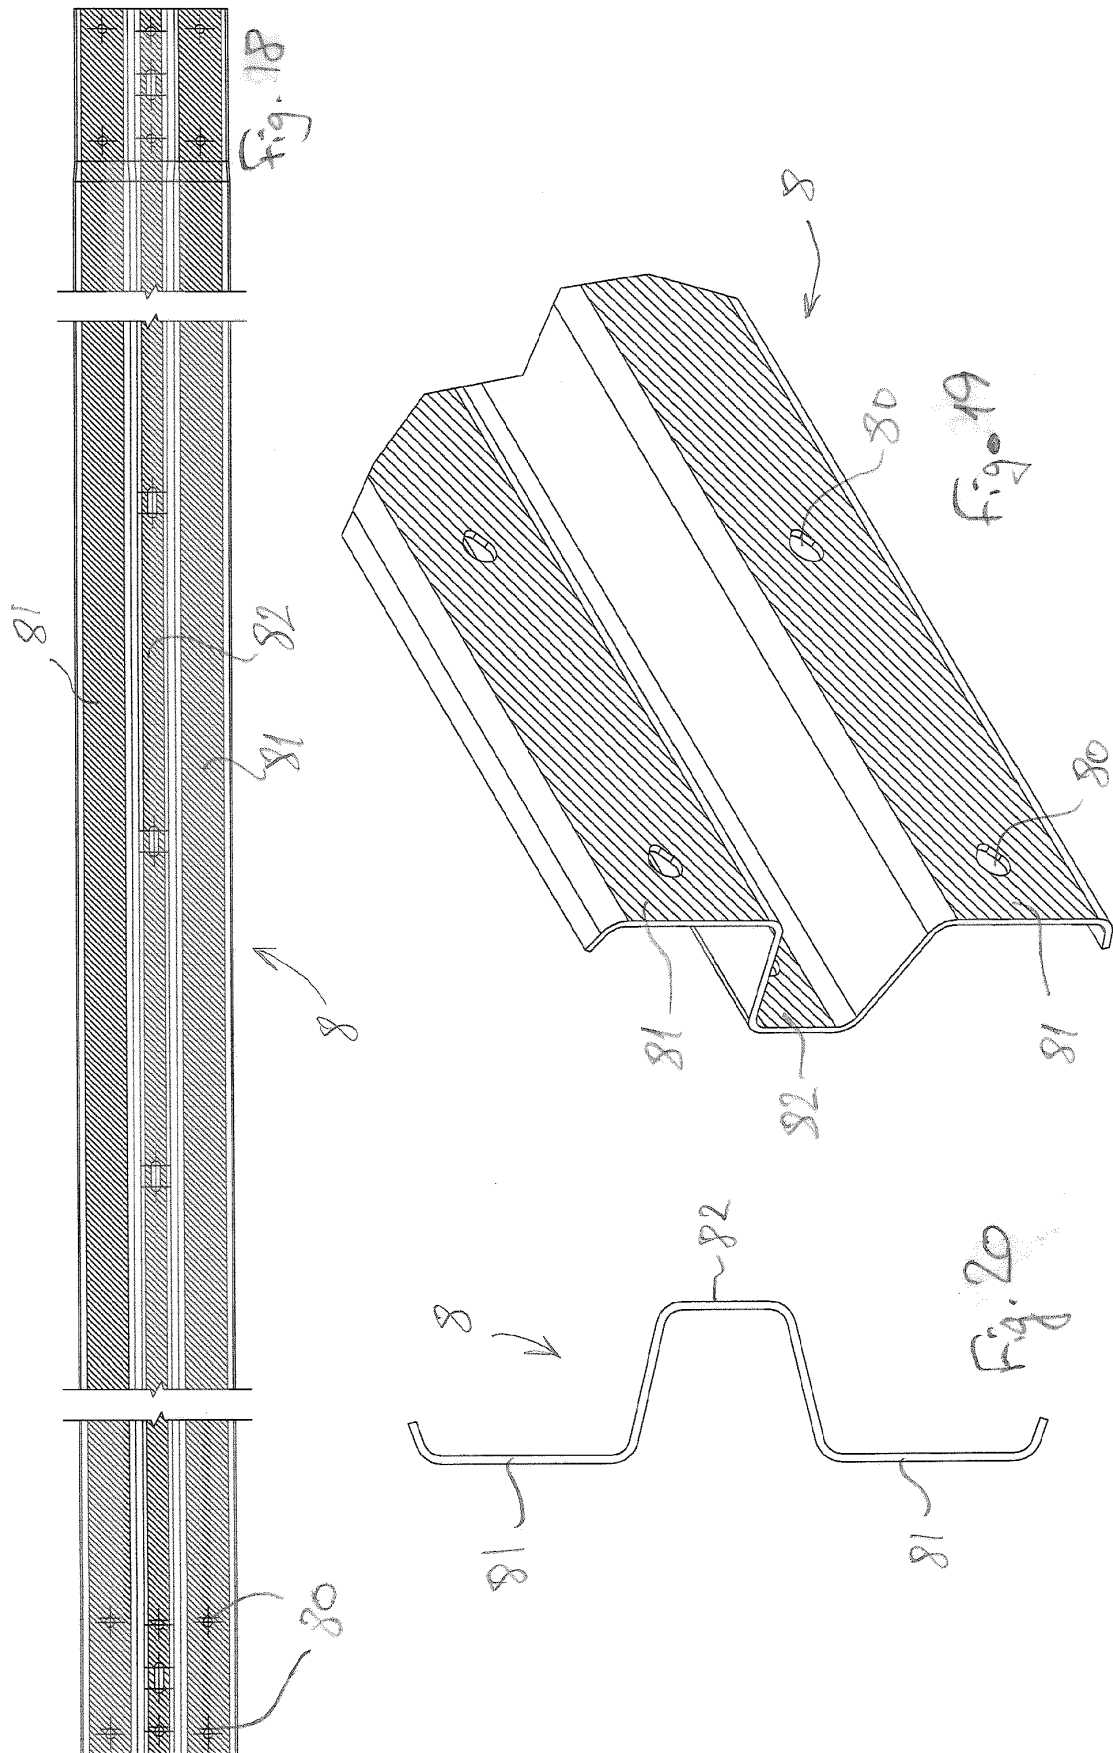
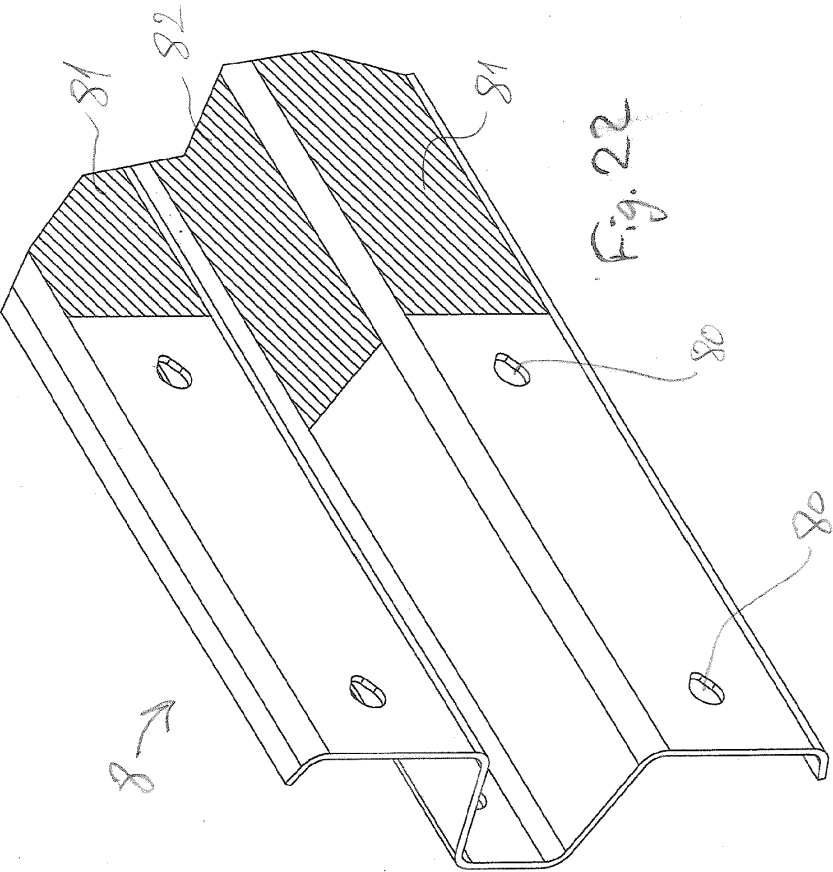
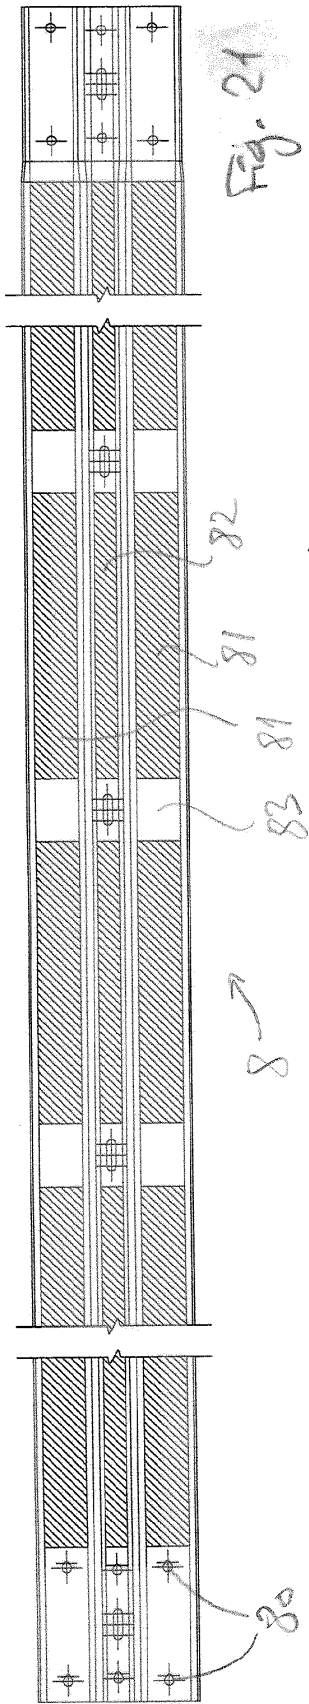
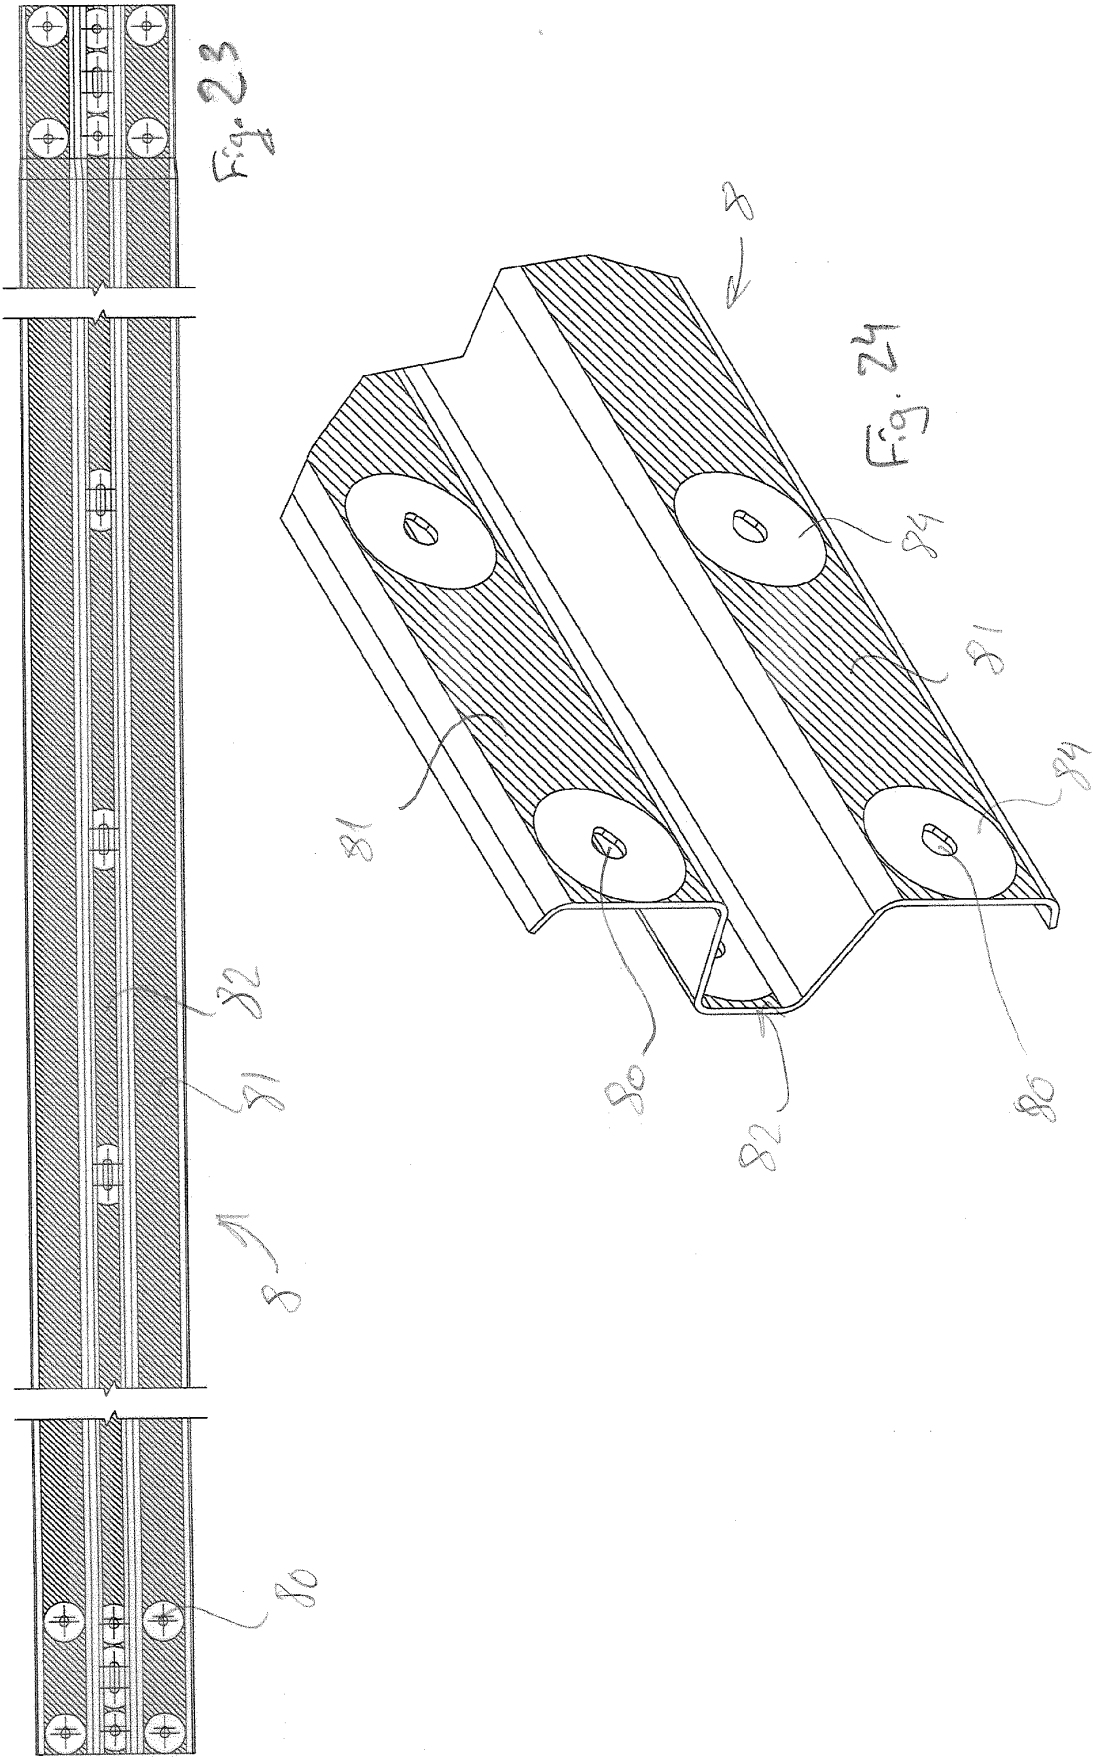


Fig. 17







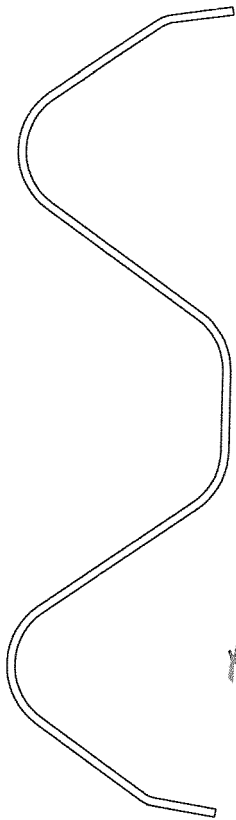


Fig. 25

8 ↗

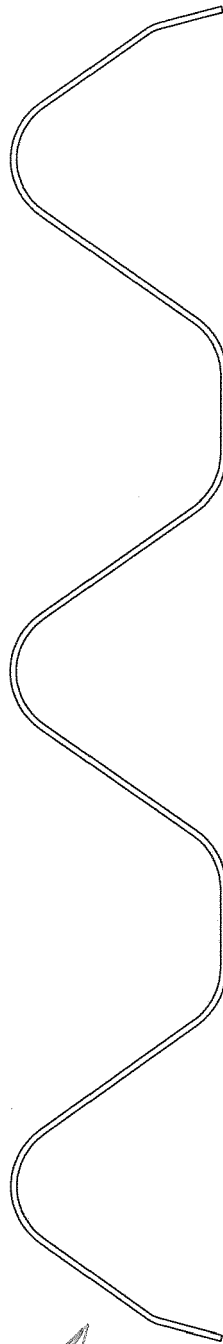
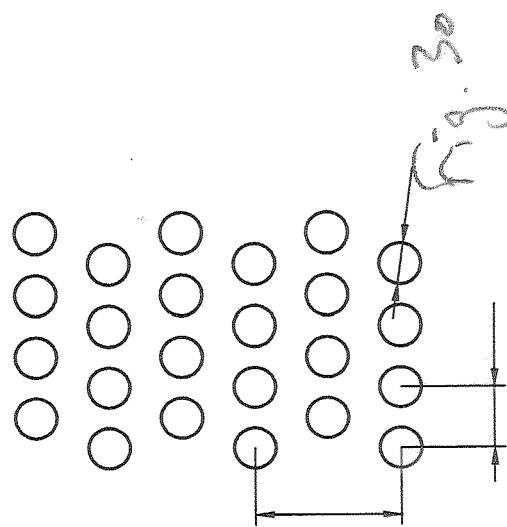
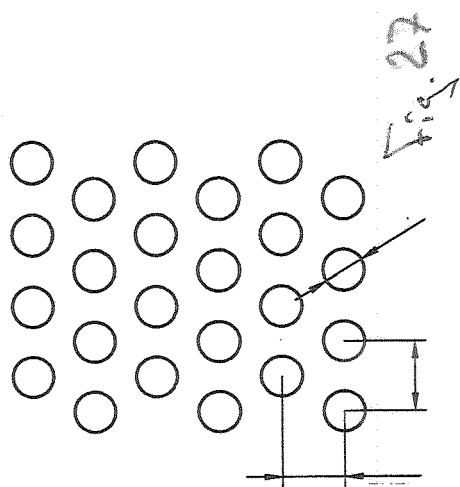
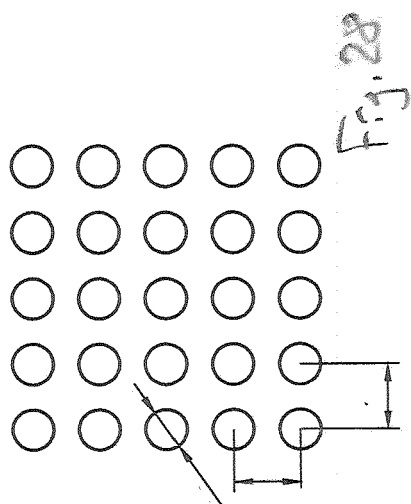
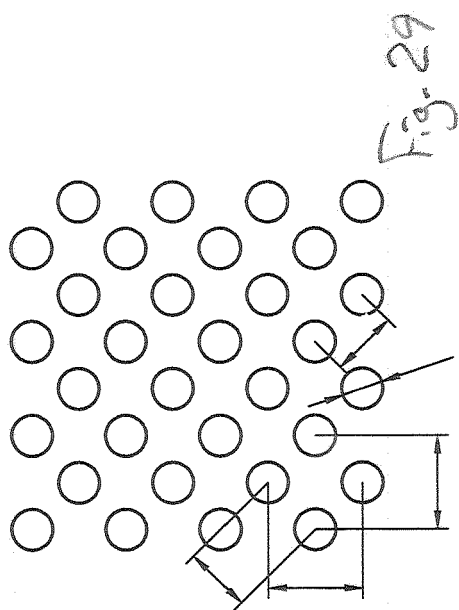
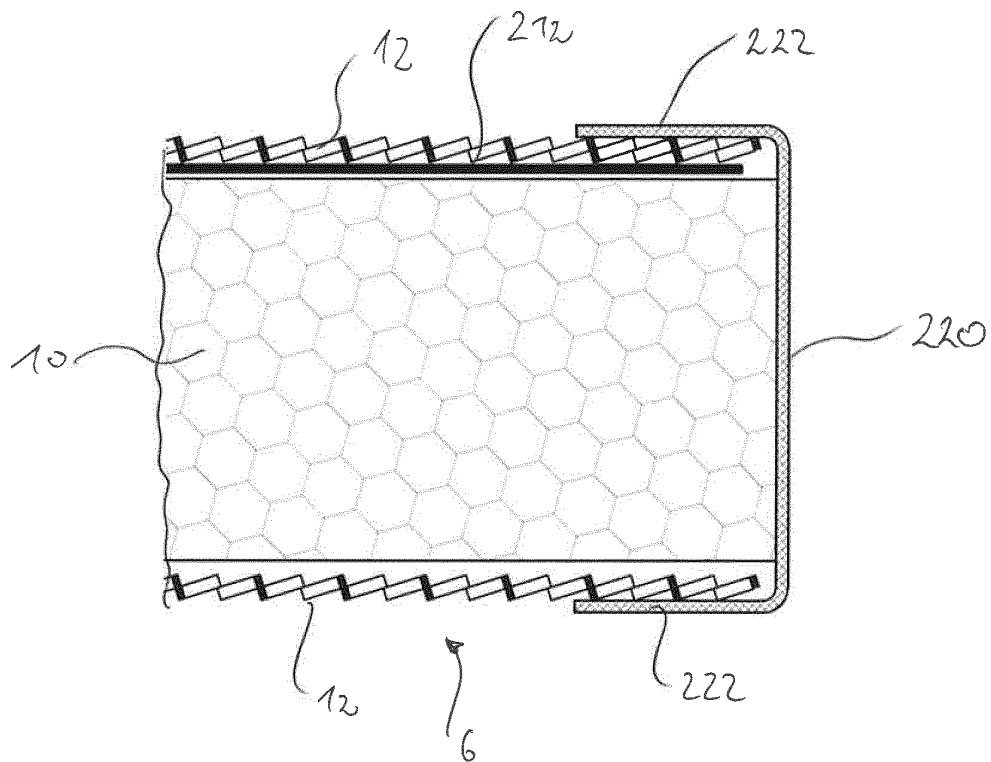
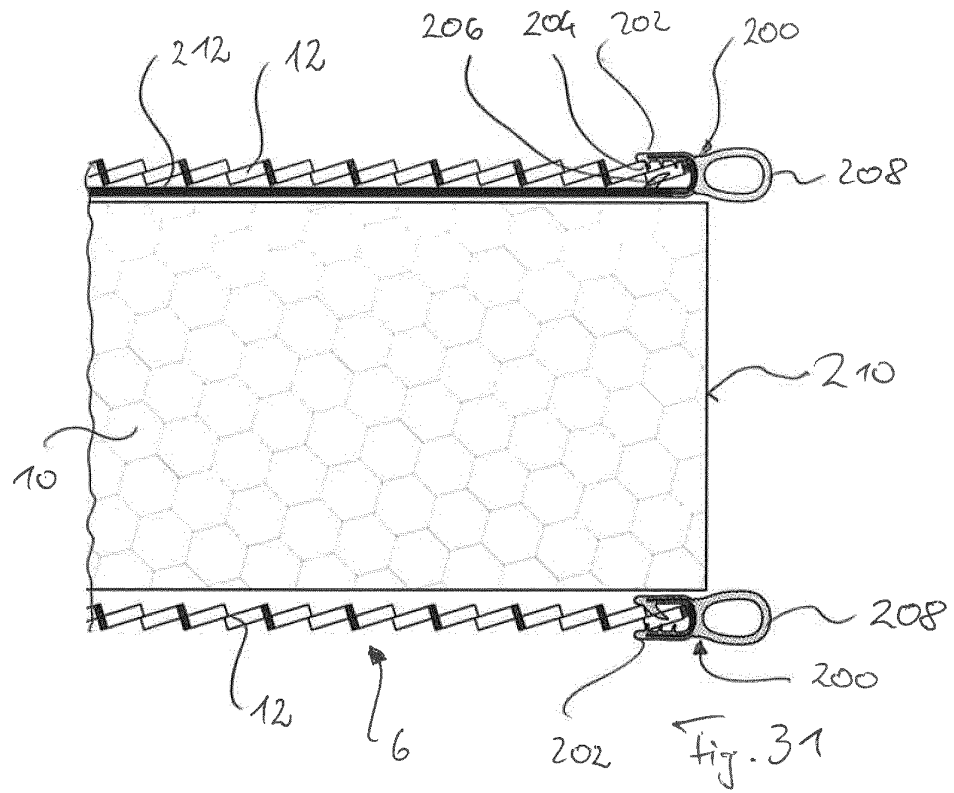
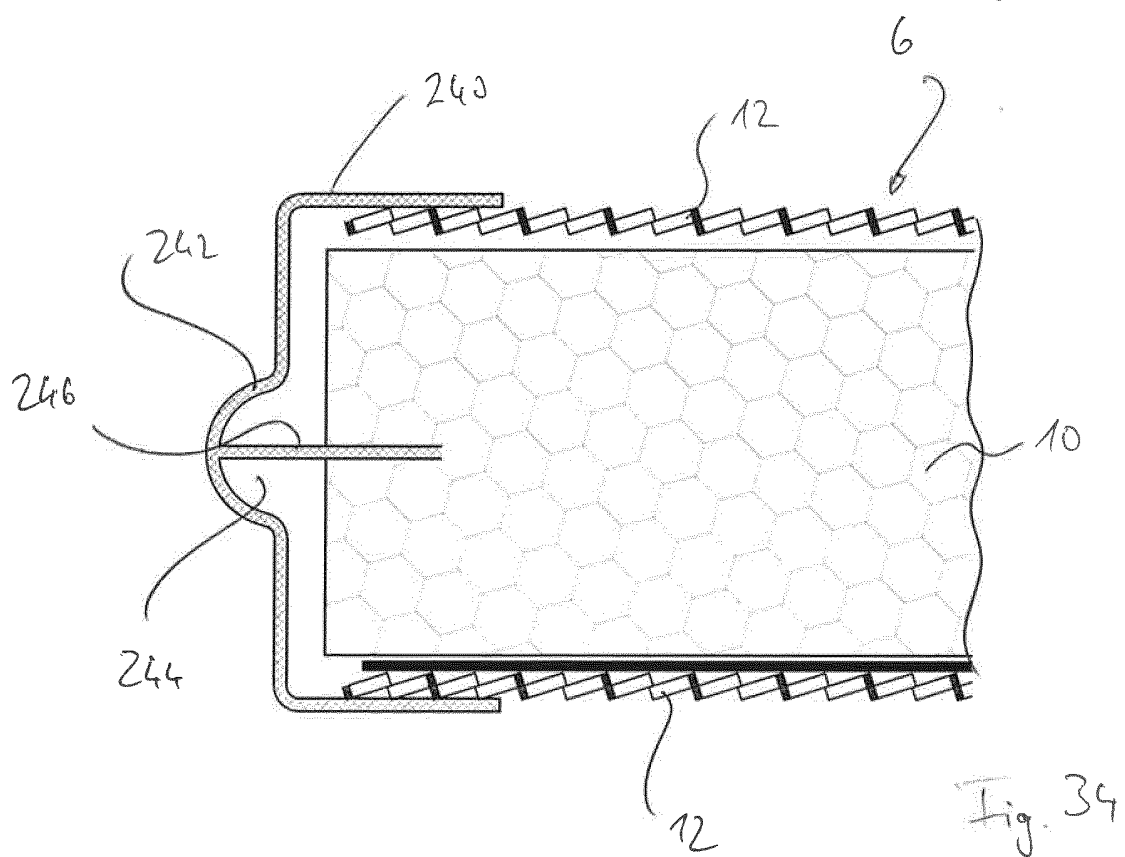
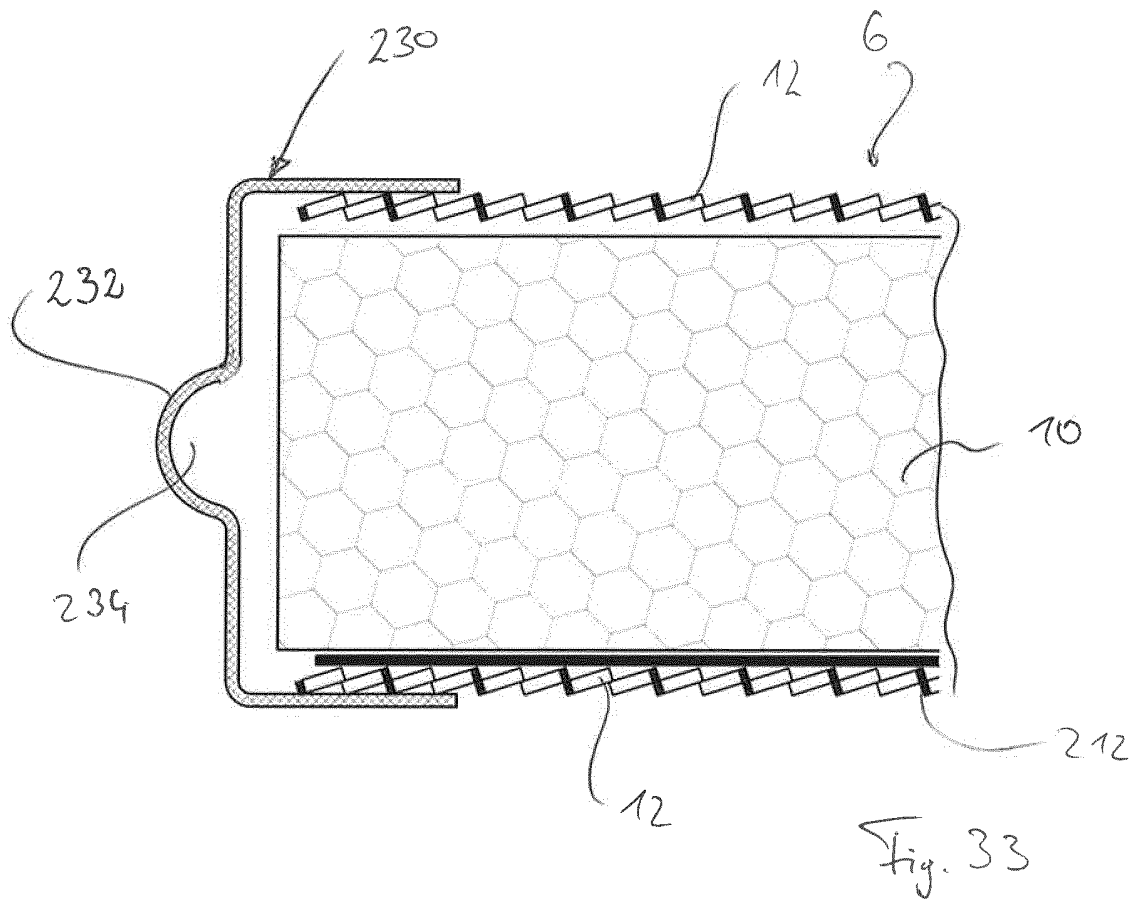


Fig. 26

↖ 8







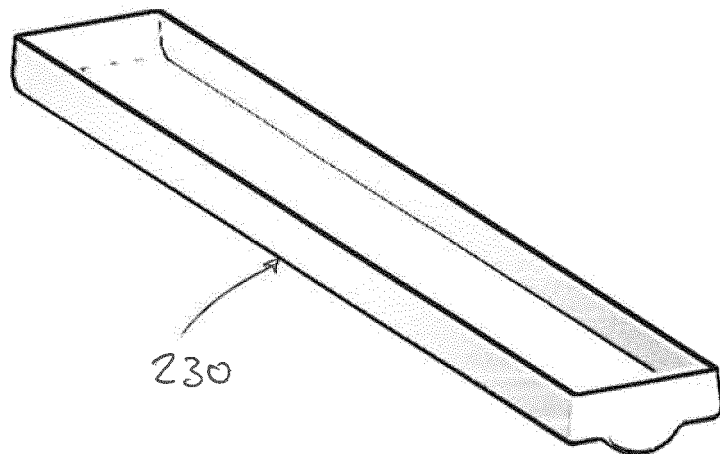
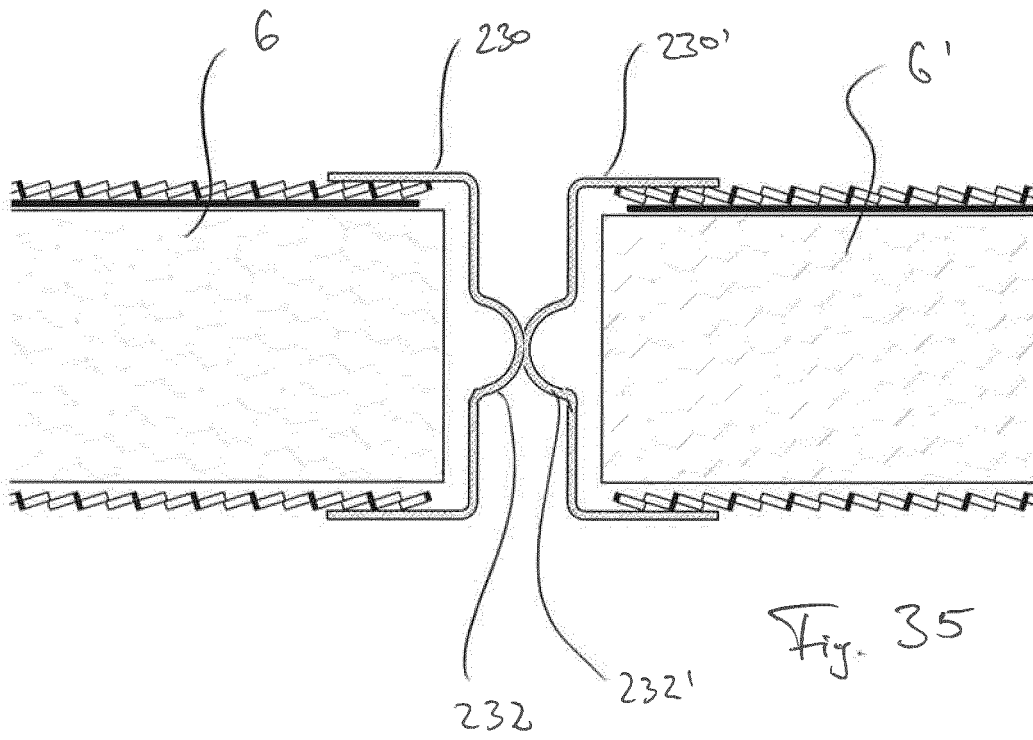


Fig. 36

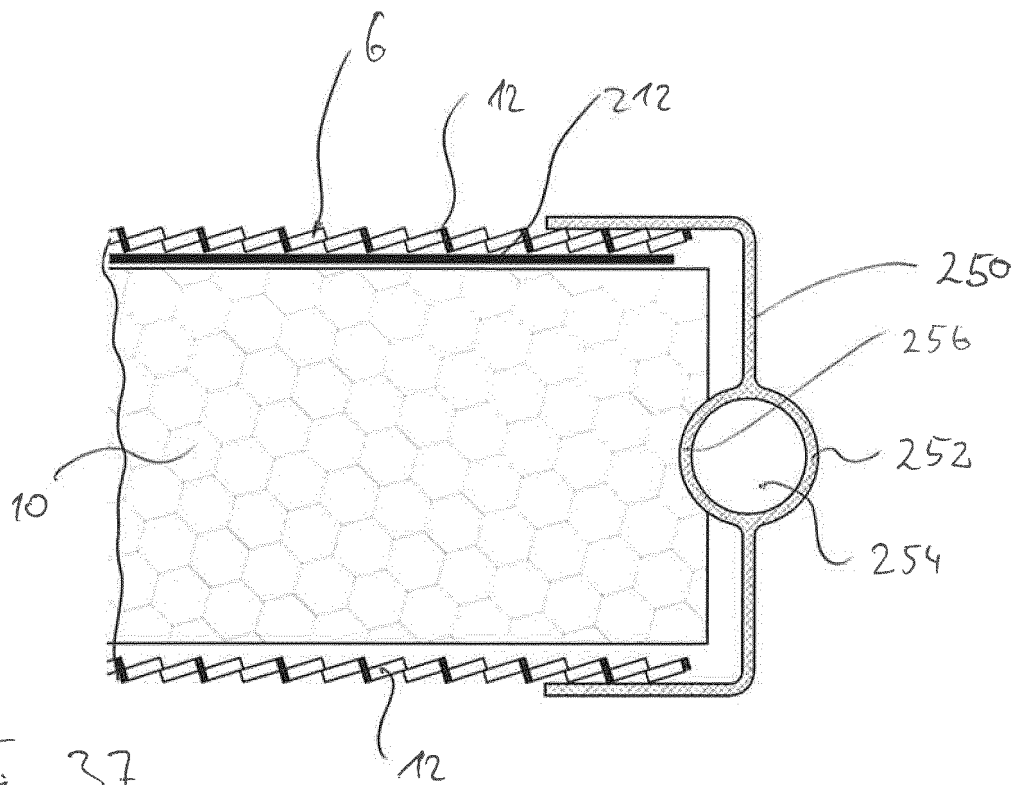


Fig. 37

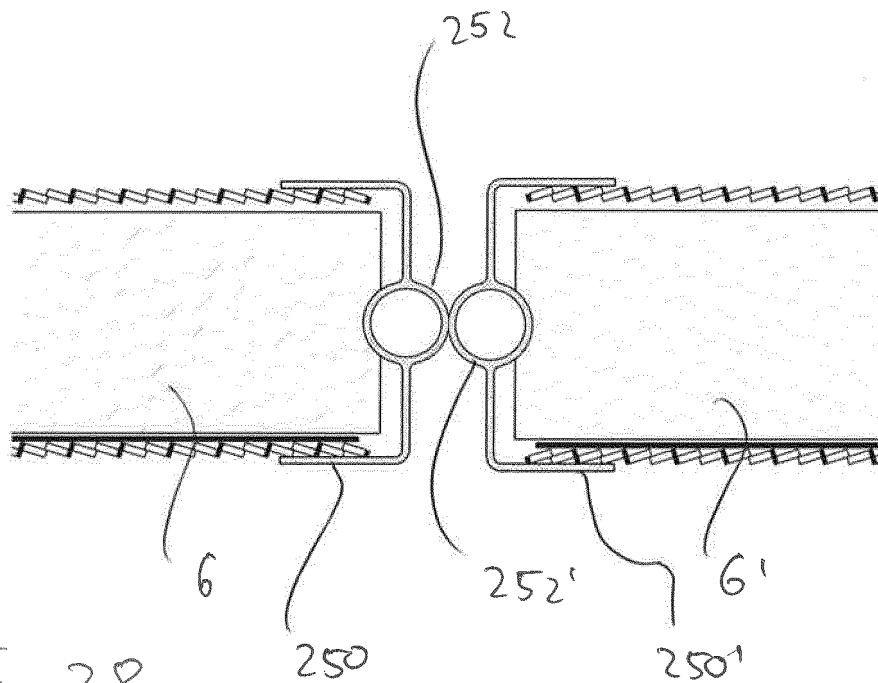


Fig. 38

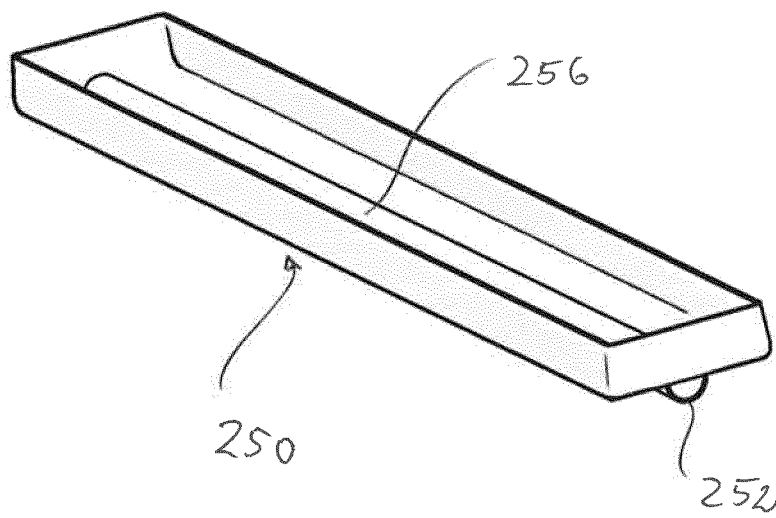


Fig. 39

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 4358090 A [0003]
- EP 1528158 A1 [0004]
- WO 2010018028 A1 [0005]