



**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**15.05.2019 Bulletin 2019/20**

(51) Int Cl.:  
**G08G 5/00 (2006.01)**

(21) Application number: **18205501.2**

(22) Date of filing: **09.11.2018**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**  
Designated Extension States:  
**BA ME**  
Designated Validation States:  
**KH MA MD TN**

- **MOHAN, Rajeev**  
**Morris Plains, NJ 07950 (US)**
- **UDUPA, Ravish**  
**Morris Plains, NJ 07950 (US)**
- **SNYDER, Richard**  
**Morris Plains, NJ 07950 (US)**
- **BROWNLEE, Robert**  
**Morris Plains, NJ 07950 (US)**
- **WALTER, Brian**  
**Morris Plains, NJ 07950 (US)**
- **LEWIS, Daniel E.**  
**Morris Plains, NJ 07950 (US)**

(30) Priority: **10.11.2017 IN 201711040268**  
**31.01.2018 US 201815884835**

(71) Applicant: **Honeywell International Inc.**  
**Morris Plains, NJ New Jersey 07950 (US)**

(72) Inventors:  
• **TOEWS, Phillip**  
**Morris Plains, NJ 07950 (US)**

(74) Representative: **Houghton, Mark Phillip**  
**Patent Outsourcing Limited**  
**Corner House**  
**1 King Street**  
**Bakewell**  
**Derbyshire DE45 1DZ (GB)**

(54) **METHODS ARE PROVIDED FOR FLIGHT MANAGEMENT SERVICES IN A CLOUD ENVIRONMENT**

(57) Methods for providing a flight management service in a cloud computing environment, the method includes: receiving, an object request by a server from a mobile device wherein the server is located in the cloud computing environment including: at least a flight management system (FMS) connected to a stateless object; processing, by the connected FMS hosted by the server, the object request generating a resource object for a particular flight plan wherein the resource object includes a data set; storing, by the connected FMS, the data set at the stateless object in the cloud environment; and sending, by the server, an object response from the connected FMS to the mobile device, for accessing the data set of the stateless object for the particular flight plan.

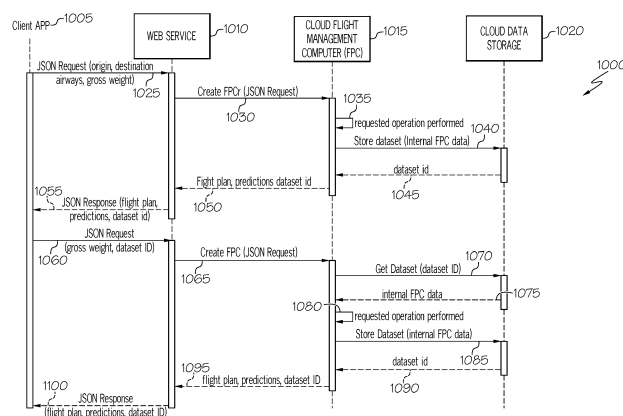


FIG. 10

**Description**

## TECHNICAL FIELD

5 **[0001]** The present invention generally relates to cloud based services of Flight Management Systems (FMS) and more particularly to a methods for managing cloud based services and providing cloud connectivity for flight management systems using object data formats for generating and storing objects of data sets for FMS applications.

## BACKGROUND

10 **[0002]** Cloud computing is the use of resources that are delivered as a service over a network, typically the Internet. Cloud based applications are enabling aviation connectivity solution executed by intelligent server based applications that allow for more efficient management of aircraft operations and efficiency by the pilot and ground personnel. In addition, these intelligent server based applications coupled to data analytical engines provide reporting tools for aircraft operational data and for modeling and processing goals, alerts and cost reduction during the aircraft operations.

15 **[0003]** JSON (JavaScript Object Notation) is a lightweight data-interchange format. It is based on a subset of the JavaScript Programming language. Web-based applications can exchange and/or store information in JSON format. Customized indexing and searching JSON data in data sets for these applications can be applicable for use in complex control systems such as the FMS in aircrafts for managing the data used in flight operations.

20 **[0004]** Onboard communication systems on an aircraft are equipped with transmitters and receivers that allow for the convenient connectivity and transmission of changes and updates to Flight Management Systems (FMS) on aboard the aircraft from cloud based servers and remote clients.

**[0005]** Current FMS operate on an embedded model where limited accessibly, connectivity and modeling are provided as well as the inability to store data sets for static moments of flight operation for particular modes of the FMS. In addition, current systems fail to provide distributed computing modes of accessibly; the ability of multiple personnel including pilots and ground personnel to enter data for modeling flight operations in a FMS. Also, current systems fail to provide convenient storing and updating of data sets and remote entry of data sets prior to flight operations of an aircraft. Finally, current systems fail to provide a platform independent FMS system capable of receiving data sets of multiple aircraft types and configurable by linked libraries and historical data.

30 **[0006]** Hence, it is desirable to address these inadequacies raised in flight management systems that occur with the pilot and the ground controllers with a cloud based service that provides methods and systems using customized objects to improve aviation systems connectivity, analytics and distributed computing functionality and that allows for entry of data from disparate independent systems such as mobile devices and server systems to improve efficiency of avionic operations and control systems. The present disclosure addresses at least this need.

## BRIEF SUMMARY

40 **[0007]** Methods and systems are provided for a flight management service in a cloud computing environment that enables the creating, sharing, and updating of data sets for use by a flight management system in the computing environment and an embedded flight management system.

**[0008]** In an exemplary embodiment, a method for providing a flight management service in a cloud computing environment is provided, the method includes: receiving, an object request by a server from a mobile device wherein the server is located in the cloud computing environment including: at least a flight management system (FMS) connected to a stateless object; processing, by the connected FMS hosted by the server, the object request generating a resource object for a particular flight plan wherein the resource object includes: a data set; storing, by the connected FMS, the data set at the stateless object in the cloud environment; and sending, by the server, an object response from the connected FMS to the mobile device, for accessing the data set of the stateless object for the particular flight plan.

45 **[0009]** In another exemplary embodiment, a computer program product for a cloud-computing environment is provided and includes a plurality of cloud-computing resources, the product includes a computer-readable storage medium in which program instructions are stored, the program instructions are configured to cause a flight management computer to perform the operations of: receiving, an object request by a server from a mobile device wherein the server is located in the cloud computing environment which includes: at least a flight management system (FMS) connected to a stateless object; processing, by the connected FMS hosted by the server, the object request generating a resource object for a particular flight plan wherein the resource object includes: a data set; storing, by the connected FMS, the data set at the stateless object in the cloud environment; and sending, by the server, an object response to the mobile device, for accessing from the connected FMS the data set of the stateless object for the particular flight plan.

55 **[0010]** In yet another exemplary embodiment, a non-transitory computer-readable medium storing a computer program product executable by a processor of a computer system in a cloud computing environment for processing an object

request is provided, the non-transitory computer-readable medium includes: code for receiving, the object request by a server from a mobile device wherein the server is located in the cloud computing environment which includes: at least a flight management system (FMS) connected to a stateless object; code for processing, by the connected FMS hosted by the server, the object request generating a resource object for a particular flight plan wherein the resource object includes: a data set; code for storing, by the connected FMS, the data set at data storage in the cloud environment; and code for sending, by the server, an object response from the connected FMS to the mobile device, for accessing the data set of the stateless object for the particular flight plan.

**[0011]** This summary is provided to describe select concepts in a simplified form that are further described in the Detailed Description.

**[0012]** This summary is not intended to identify key or essential features of the claimed subject matter, nor is it intended to be used as an aid in determining the scope of the claimed subject matter.

**[0013]** Furthermore, other desirable features and characteristics of the system and method will become apparent from the subsequent detailed description and the appended claims, taken in conjunction with the accompanying drawings and the preceding background.

## BRIEF DESCRIPTION OF THE DRAWINGS

**[0014]** The present invention will hereinafter be described in conjunction with the following drawing figures, wherein like numerals denote like elements, and wherein:

FIG. 1 is a block diagram of a system suitable for use in an aircraft in accordance with the exemplary embodiments described herein;

FIG. 2 is a block diagram of a system suitable for use in an aircraft in accordance with the exemplary embodiments described herein;

FIG. 3 is a diagram of the connected FMS of an exemplary method suitable for use with the system of FIGS. 1-2 in accordance with the exemplary embodiments;

FIG. 4 is a diagram of the connected FMS of an exemplary method suitable for use with the system of FIGS. 1-2 in accordance with the exemplary embodiments;

FIG. 5 is a diagram of the connected FMS of an exemplary method suitable for use with the system of FIGS. 1-2 in accordance with the exemplary embodiments;

FIG. 6 is a diagram of the connected FMS of an exemplary method suitable for use with the system of FIGS. 1-2 in accordance with the exemplary embodiments;

FIG. 7 is a diagram of the connected FMS of an exemplary method suitable for use with the system of FIGS. 1-2 in accordance with the exemplary embodiments;

FIG. 8 is a diagram of the connected FMS of an exemplary method suitable for use with the system of FIGS. 1-2 in accordance with the exemplary embodiments;

FIG. 9 is a diagram of the connected FMS of an exemplary method suitable for use with the system of FIGS. 1-2 in accordance with the exemplary embodiments; and

FIG. 10 is a process diagram of the connected FMS in accordance with exemplary embodiments described herein.

## DETAILED DESCRIPTION

**[0015]** The following detailed description is merely exemplary in nature and is not intended to limit the invention or the application and uses of the invention. As used herein, the word "exemplary" means "serving as an example, instance, or illustration." Thus, any embodiment described herein as "exemplary" is not necessarily to be construed as preferred or advantageous over other embodiments. All the embodiments described herein are exemplary embodiments provided to enable persons skilled in the art to make or use the invention and not to limit the scope of the invention that is defined by the claims. Furthermore, there is no intention to be bound by any expressed or implied theory presented in the preceding technical field, background, brief summary, or the following detailed description.

**[0016]** While the exemplary embodiments described herein refer to JSON JavaScript Object Notation (JSON) Application Programming Interfaces (API) used in methods and systems for communicating with flight management systems related to the aircraft operation, it is contemplated that other APIs may be used. For example, alternatives to APIs include but are not limited to gRPC, XML, and other WebAPIs.

**[0017]** The connected FMS will enable a variety of FMS features to be offered as a web based FMS service. In an exemplary embodiment, the FMS service may use an API or WebAPI for capturing a data set of a static mode of the FMS. The JSON API is a specification for how a client should request that resources be fetched or modified, and how a server should respond to those requests.

**[0018]** For example, this may be considered a RESTful (Representational State Transfer) API (Application Program Interface) which would enable the retention of data inputted by the user and associated with a particular request to the FMS. That is, the FMS does not retain such call or request data but by inputting the data using the protocol of the RESTful API, the connected FMS would provide a cloud repository for the data. When using an embedded FMS as opposed to a connected FMS, a client residing on a mobile device used with the embedded FMS would receive the data inputted by the user but would not be able to retain the data in memory nor be able to update the data at a later time. For example, if the user enters an initial flight plan via the client to the embedded FMS of the aircraft, the client associated with the embedded FMS is not able to send a flight plan to the connected FMS nor able at a later time to modify the initial flight plan with, for example, a cruise change in the flight plan without having to re-enter the entire set up information of the original flight plan. In other words, there is no state persistence of the FMS that can be saved or retained and the ability to recall prior previous entries.

**[0019]** In exemplary embodiment, the RESTful API enables the connected FMS to retain a data set without the need of the client having to re-send all the setup data with each modification to the flight plan. In addition, the connected FMS does not have to remain in an active mode during the flight operation but can be actuated from a sleep mode to an active mode when needed. By having the active and inactive modes processing bandwidth is limited as background processing of the data set is not required when using the connected FMS. This is because the connected FMS uses a data set which is captured of a particular instance or static state of the flight operation and not for ongoing flight operations. This proves particularly useful for a complex flight modification in the flight plan operation which may involve a large amount of setup data in the flight plan (e.g. data from many waypoints, constraints, and wind data).

**[0020]** The connected FMS relies on a database to capture embedded FMS internal data after each operation in the flight plan and provides a snapshot of a data set of a particular instance in the flight plan. This database of the data sets is stored at a cloud based server in remote communication with the client of connected FMS. In instances, a unique identifier is used to identify a particular client and the unique identifier enables other independent clients access to the data set to reuse or modify the associated flight plan without having to resend all the initial set-up information to reproduce the particular state of the embedded FMS in the flight operation. The connected FMS may also be used for the embedded FMS input to sync with the embedded FMS data set and to modify the flight plan, reposition the aircraft flight, or to restore a prior state in a state databases associated with the connected FMS.

**[0021]** In addition the data set may be synced to another FMS as part of a redundancy management feature. In an exemplary example, the connected FMS stored the data set in memory and the proceeds to securely transfer the data set via the client to another FMS with the FMS in operation so there is no loss of functionality as the data set is received or buffered, validated for determinations of integrity of the data set, and then executed by the receiving FMS.

**[0022]** This data save / restore capability is defined by the use of the database connected to the flight management service in the cloud environment. The service based FMS saves the "sync" data service into a database to respond to future requests, This data is then provided either as an unique new identifier source to a dataset provided (if required to be sent back to the client) or as the original data set. The client to access the dataset just provides the requested request with the unique ID to perform a FMS modification in operation and uses the previously stored dataset in the database (by providing the unique ID as part of the initial request). Alternatively, the client may just re-request the previously produced response with no changes to review the results of a previous request.

**[0023]** The Next Generation (NextGen) overhaul of the United States airspace system and the companion Single European Sky ATM Research (SESAR) overhaul of the European airspace system creates various trajectory-based mechanisms to improve air traffic management on these continents. That is, electronic instrumentation displays continue to advance in sophistication, achieving increasingly higher levels of information density and, consequently, presenting a greater amount of visual information to be perceived and understood by the operator, e.g., the pilot and adding to burdens incurred by the pilot. Aviation systems connectivity such as the connected FMS can lessen pilot workloads and counter the additional burdens placed on the pilot from the increases in automation.

**[0024]** In an exemplary example, electronic flight bag (EFB) solutions, which include electronic display systems for the flight deck or cabin crew member use, are gaining in popularity. For example, EFB devices can display a variety of aviation data or perform basic calculations (e.g., performance data, fuel calculations, takeoff and landing computations, etc.). In the past, some of these functions had to be manually entered using paper references or were based on data provided to the flight crew by an airline's flight dispatch function. Connected FMS may alleviate the need in some instance

for inputting all the aviation data needed in these EFB solutions.

**[0025]** With other increased burdens placed on the pilot and crew in the aircraft operations, there may be a resultant increase in human errors due to a number of factors which include: non-coordinated cockpit system messages, poor external visibility, fatigue, lack of position awareness, misunderstood ATC clearances, multiple or conflicting ATC clearances, or inadvertent flight deck distractions leading to accidents. Cloud based applications such as the connected FMS and remote input of data for flight management modeling and use may be used to counter such affects. For example, data sets for flight management can be used in conjunction with avionic control systems for a host of applications to aid the pilot in flight operations with systems that include but are not limited to the cockpit display systems, Flight Management Systems, Enhanced Ground Proximity Warning System (EGPWS), Traffic Collision Avoidance System TCAS, Weather or RADAR Systems, EFB devices, etc.

**[0026]** Also, the pervasive use of personal electronic devices and complex systems such as the flight deck systems provides an opportunity for improving performance using interactive prediction models and cloud applications such as the connected FMS.

**[0027]** Certain terminologies are used with a regard to the various embodiments of the present disclosure. For example, a display unit is an aircraft onboard device that provides a user interface for a particular avionic system onboard an aircraft, which may include a Flight Management System (FMS), Communications Management Function (CMF), assigned spacing goal (ASG), achieve by point (ABP), automatic dependent surveillance broadcast (ADS-B), flight information services-broadcast (FIS-B) or other avionics systems. The flight crew members may use the FMS interface to perform tasks associated with flight planning, navigation, guidance, and performance. A processor may be coupled to the display unit to format communications of data transmissions originating from one or more avionics systems onboard an aircraft, and which are directed to a cockpit display onboard the aircraft.

**[0028]** FIG. 1 depicts a block diagram of an exemplary aircraft navigation and control system, in accordance with the disclosed embodiments. FIG. 1 is a functional block diagram of an avionics display system **20** in accordance with an exemplary embodiment. The avionics display system **20** includes at least one processor **22** and at least one monitor **24**, which is operatively coupled to processor **22**. During the operation of the avionics display system **20**, the processor **22** drives the graphics module **27** which, in conjunction with processor **22**, drives the monitor **24** to produce a graphics display **26** that visually provides the pilot and flight crew with information pertaining to the aircraft and to neighboring aircraft within a predetermined vicinity of the host aircraft. The processor **22** includes a speech recognizer **11** and may be used to provide the functions of the speech recognizer **11**. The speech recognizer **11** may convert received speech transmissions to text as well as perform appending of text and concatenating of text messages with system messages. The speech recognizer **11** may perform natural language processing ("NLP") of received audio or voice transmission as well as monitoring of broadcasts and transmissions for conversion to text and further processing by the processor **22**. The speech recognizer **11** may perform or assist the processor **22** in performing functions related to contextual interpretations and aggregations of the received broadcasted and transmitted voice transmissions. These transmissions may include transmissions as well as broadcasts from the ATC and aeronautical operation control ("AOC") to the aircraft or other aircrafts. The graphics display **26** may include visual representations of one or more flight characteristics pertaining to a neighboring aircraft, as described more fully below. The processor **22** may generate a graphics display **26** in a two-dimensional format (e.g., as a lateral or vertical profile map display) or in a hybrid format (e.g., in a picture-in-picture or split screen arrangement) and may be incorporated into all units capable of displaying TCAS data; e.g. the primary flight display, the multi-function display, and the interactive navigation display. The processor **22** may generate aural and audio messages to an audio output device **40** that provides the pilot and flight crew with information pertaining to the aircraft and to neighboring aircraft within a predetermined vicinity of the host aircraft. An audio capture device **42** may also be included connected into the processor **22**. This audio capture device **42** may capture aural alerts from other systems of the aircraft or from pilot communications for processing by the processor **22**.

**[0029]** The processor **22** may include, or be associated with, any suitable number of individual microprocessors, flight control computers, navigational equipment, memories, power supplies, storage devices, interface cards, and other standard components known in the art. In this respect, the processor **22** may include or cooperate with any number of software programs (e.g., avionics display programs) or instructions designed to carry out the various methods, process tasks, calculations, and control/display functions described below, for example, processor **22** may be included within a Flight Management Computer (FMC) of the type commonly deployed within a Flight Management System (FMS). The processor **22** may carry out functions associated with parsing, transcribing, aggregating and appending aural and text messages received by various inputs to the aircraft or from internal systems of the aircraft. The processor **22** with the speech recognizer **11** may include applications and solutions to perform natural language processing (NLP) of inputs of aural alerts to convert the aural alerts to text alerts. The conversion may include aural alerts consistent in structure with the message alert for aggregating together with the message alert to form a concatenated message alert type. The NLP may be applied with context based attributes based on applications of the processor **22** with the speech recognizer **11** to determine a context of the aural alert by matching with a set of context attributes prior derived for the particular aircraft and stored locally in memory of the processor **22** or memory **55**.

**[0030]** The image-generating devices suitable for use as monitor **24** include various analog (e.g., cathode ray tube) and digital (e.g., liquid crystal, active matrix, plasma, etc.) display devices. In certain embodiments, monitor **24** may assume the form of a Head-Down Display (HDD) or a Head-Up Display (HUD) included within an aircraft's Electronic Flight Instrument System (EFIS). The monitor **24** may be disposed at various locations throughout the cockpit. For example, the monitor **24** may include a primary flight display (PFD) and reside at a central location within the pilot's primary field-of-view. Alternatively, the monitor **24** may include a secondary flight deck display, such as an Engine Instrument and Crew Advisory System (EICAS) display, mounted at a location for convenient observation by the aircraft crew but that generally resides outside of the pilot's primary field-of-view. In still further embodiments, monitor **24** may be worn by one or more members of the flight crew.

**[0031]** The processor **22** includes one or more inputs operatively coupled to one or more air traffic data sources. During operation of the avionics display system **20**, the air traffic data sources continually provide the processor **22** with navigational data pertaining to any neighboring aircraft. In the exemplary embodiment illustrated in FIG. 1, the air traffic data sources include a wireless transceiver **28** and a navigation system **30**, which are operatively coupled to first and second inputs of processor **22**, respectively.

**[0032]** The navigation system **30** includes an on-board radar **32** and various other on-board instrumentation **34** such as a radio altimeter, a barometric altimeter, a global positioning system (GPS) unit, and the like. In a preferred embodiment, navigation system **30** may be included within a FMS; and on-board radar **32** may be included within a Terrain Awareness and Warning System (TAWS), such as an Enhanced Ground Proximity Warning System (EGPWS).

**[0033]** In some embodiments, graphic displays **26** may provide an output from the on-board radar **32** of the aircraft. For example, graphic displays **26** may provide a top-down view, a horizontal view, or any other view of a weather condition, an object and/or a particular terrain detected by the on-board radar **32** of the aircraft. The views of a weather condition may include monochrome or color graphical representations of the weather. A graphical representation of a weather condition may include an indication of altitude (or altitudinal coordinates) of those objects or the altitude relative to the aircraft.

**[0034]** The avionics display system **20** provides the display information to the pilot or flight crew in a highly intuitive manner. For this exemplary embodiment, the avionics display system **20** includes the processor **22** connected to a database **14**, a flight management system **16**, a navigation system **30**, a graphics module **27**, and a graphics display **26**. Further, it is contemplated that while the avionics display system **20** appears in FIG. 1 to be arranged as an integrated system, the present disclosure is not intended to be so limited and may also include an arrangement whereby one or more of processor(s) **22**, database **14**, flight management system **16**, navigation system **30**, graphics module **27**, and graphics display **26** is a separate component or a subcomponent of another system located either onboard or external to an aircraft.

**[0035]** Also, for example, avionics display system **20** may be arranged as an integrated system (e.g., aircraft display system, Primary Flight Display system, etc.) or a subsystem of a more comprehensive aircraft system (e.g., flight management system, navigation and control system, target aiming and control system, collision alert and/or avoidance system, weather avoidance system, etc.). Furthermore, the present disclosure is not limited to aircraft displays, and may also be implemented for other types of vehicles' electronic displays (such as, for example, spacecraft navigation displays, ship navigation displays, submarine navigation displays, train navigation displays, motor vehicle navigation displays, etc.).

**[0036]** The database **14** may also include, for example, a terrain database, which may include the locations and elevations of natural terrain obstacles such as mountains or other elevated ground areas, and also the locations and elevations of man-made obstacles such as radio antenna towers, buildings, bridges, etc. As another example, airport and runway location data, and other types of high priority target data (e.g., locations of incoming traffic to avoid, constructed waypoints, obstacles in the aircraft's flight path, etc.) may be retrieved and/or received by processor **22** from a suitable source of such data, such as, for example, an onboard flight management system database (e.g., a component of flight management system **16**), an onboard navigation database (e.g., a component of navigation system **30**), on-board sensors **36** or the on-board radar **32**, or an external database (e.g., via a data communication up-link).

**[0037]** The aircraft may be any aviation vehicle that uses a flight management system **16** as a primary user interface for flight crew interaction with the avionics display system **20** onboard the aircraft. The aircraft may be implemented as an airplane, helicopter, spacecraft, hovercraft, or the like. The one or more avionics systems may include a Flight Management System (FMS), aircraft interface device (AID) or the like. Data obtained from the one or more avionics systems may include, without limitation: flight plan data, aircraft state data, weather data, brake system data, fuel and weights data, runway analysis data, aircraft performance data, or the like.

**[0038]** The memory **55** can be external to and operatively coupled to processing unit or, instead, in integrated into processor **22**. In one embodiment, a processor and memory of the processor **22** reside in an Application Specific Integrated Circuit ("ASIC"). Memory **55** may store data, such as various software or firmware, supporting operation of processor **22** and other components included in avionics display system **20**, such as graphics system, sensor system, and the source of aircraft state data. Additionally, the memory **55** may store one or more onboard databases or be connected to the database **14**. Onboard the aircraft, the database **14** can include a navigational database, a terrain

database, a weather database, a historical trend database, and/or a runway database, such as an Enhanced Ground Proximity Warning System ("EGPWS") runway database.

**[0039]** The processor **22** and a graphics module **27** cooperate to display, render, or otherwise convey one or more graphical representations, synthetic displays, graphical icons, visual symbology, or images associated with operation of avionics display system **20** on graphics display **26**. An embodiment of an avionics display system **20** may utilize existing graphics processing techniques and technologies in conjunction with graphics module **27**. Graphics module **27** is suitably configured to support well-known graphics technologies and display techniques including (i) synthetic vision, (ii) enhanced vision, (iii) combined vision, and (iv) compressed attitude.

**[0040]** Graphics display **26** may include any image-generating device or devices capable of producing one or more navigation displays of the types described herein. As a point of emphasis, the term "display device" encompasses display devices (image-generating devices) fixed to the aircraft (A/C) cockpit, as well as Electronic Flight Bags ("EFBs") and other portable display devices that may be carried by a pilot into the cockpit of an A/C and perform the below-described functions. For example, the graphics display **26** may implement one or more of a multi-function display (MFD), a three-dimensional MFD, a primary flight display (PFD), a synthetic vision system (SVS) display, a vertical situation display (VSD), a horizontal situation indicator (HSI), a traffic awareness and avoidance system (TAAS) display, a three-dimensional TAAS display, just to name a few. Moreover, the display may be implemented with multiple types of graphics display **26**, each of which may implement one or more of these different, non-limiting displays. No matter the number or particular type of display that is used to implement the graphics display **26**, it was noted above that the graphics display **26** is responsive to the image rendering display commands it receives to render various images. The images that the graphics display **26** renders will depend, for example, on the type of display being implemented.

**[0041]** The graphics display **26** may also consider input data received via user input device **21** when performing the above-described functions. In this regard, user input device can include any number and type of input devices suitable for receiving pilot input, which may be distributed throughout the cockpit of an aircraft (A/C) and possibly included in other systems or subsystems. In one embodiment, user input interface assumes the form of or includes the alphanumeric keypad of an FMS.

**[0042]** The processor **22** is configured, upon receipt of data and information, to continuously process the information to identify the predictive tracking angle, roll, pitch, and yaw for the aircraft A/C, and to generate a symbolic form representative thereof. The symbolic form is an aircraft orientation cue to be displayed on the graphics display **26**, and the dimensions of the symbolic form vary predictably to indicate, respectively, predictive tracking angle, roll, and yaw.

**[0043]** Within other on-board instrumentation **34**, each sensor may include one or more sensor technologies, devices, instruments (such as on-board radar, radar altimeter, a global positioning system (GPS)), and software, sufficient for detecting and providing aircraft A/C status data (including speed, location, position, remaining fuel, faults, conditions, and detected weather and temperature).

**[0044]** FIG. 2 depicts a block diagram of an exemplary aircraft navigation and control system for use with speech recognition, in accordance with the disclosed embodiments. FIG. 2 includes an automatic dependent surveillance broadcast (ADS-B) receiver **205** which is an integral component of NextGen national airspace strategy were the aircraft receives flight information services-broadcast (FIS-B) and traffic information services broadcast (TIS-B) data and other ADS-B data such as direct communication from nearby aircrafts at a traffic computer **210**. The traffic computer **210** receives the ADS-B in and generates the target aircraft state parameters to an aircraft interface device (AID) **215**. The traffic computer **210** may also include processors of a voice recognizer **211** for speech recognition and may provide voice recognize functions to convert voice transmissions to text. In addition, the voice recognizer **211** may include solutions for semantic contextual interpretations of the voice transmissions and for appending and aggregating to other text messages or flight data. For example, functions and solutions of the voice recognizer **211** together with functions and solutions of the traffic computer **210** may be used to match aural and text messages, concatenate aural and text messages, and append or aggregate in similar or same structures pairs of aural transformed messages with text messages. Also, the AID **215** receives the flight data, weather, wind as well as inputs received from a System Wide Information Management/Air Traffic Control (SWIM/ATC) data source **220**. The aircraft interface device (AID) **215** is coupled to the FMC **225** and sends speed data to the autopilot **230**.

**[0045]** The ADS-B receiver **205** is considered an air traffic data source in that ADS-B receiver **205** receives navigational data from external control sources and relays this data to traffic computer **210**. For example, ADS-B receiver **205** may receive Traffic Information Services-Broadcast (TIS-B) data from external control sources. In a preferred embodiment, the ADS-B receiver **205** receives Traffic Collision Avoidance System (TCAS) data, and may receive Automatic Dependent Surveillance-Broadcast (ADS-B) data from neighboring aircraft. This data, and other such external source data, is formatted to include air traffic information, which may be utilized to determine a neighboring aircraft's current position and the existence and location of air traffic.

**[0046]** In addition, the TCAS is an airborne system that detects and tracks aircraft near a host aircraft. TCAS includes a processor, antennas, a traffic display (e.g. an LMAP display, a VSD, etc.), and means for controlling the aviation display system, such as is shown in FIG. 1. The processor and antennas detect and track other aircraft by interrogating their

transponders, and tracking these potential intruders on a display. The TCAS processor analyzes the transponder replies to determined range, bearing and relative altitude. If the system determines that a potential hazard exists, it issues visual and aural advisories to the crew. The visual advisory takes the form of symbols on the one or more traffic displays; e.g. the LMAP display and VSD.

**[0047]** Also, it is contemplated that in an Internet of Things environment many of the participating systems may be connected to each other and additional systems connected or interconnected could be easily added or removed.

**[0048]** Fig. 3 illustrates a system in accordance with an exemplary embodiment. JSON (JavaScript Object Notation) is a lightweight data interchange format for gathering, collecting, or share data among applications and interfaces. JSON provides data to its corresponding calling function in key value pairs, 'key' as in the variable and 'value' as in the corresponding value for the variable. The data that is parsed from a JSON API is in the form of objects that need to be converted into their respective data formats as acceptable by the system. REST (Representational State Transfer) is an architectural style and is an approach to communications between different modules often used in the development of web services.

**[0049]** In RESTful systems, requests and responses are built around the transfer of representations of resources such as in this instance data sets, which capture a current or intended state of the underlying resource. RESTful components perform actions on a resource by using a representation to capture the current or intended state of that resource, and transferring that representation between components.

**[0050]** To create a RESTful API, the user executes a customized application provided by the developer, in this case the connected FMS service, and defines the RESTful API by configuring a backend database for in this instance, the data set for the connected FMS. In instances, the data set for the connected FMS may be used or synced to the data set of the embedded FMS. The developer of the connected FMS may define objects that may be requested through the RESTful API and these objects may relate or map to datasets of a database associated with the connected FMS service. In addition, the developer of the connected FMS may configure what access to these objects is allowed to the client applications.

**[0051]** The client application sends one or more RESTful API requests (i.e., HTTP messages) to an API generator to create an object and afterwards send RESTful API requests to use the object. In the connected FMS the requests could be retrieve the data sets of the objects, add to the data sets or use the data sets for further processing and modeling.

**[0052]** The flight management system **300** includes a mobile device **310** hosting a client application **305** which sends a "JSON" request to the server device **315** to the FMS service application **320** hosted on the server. Thus, for example, the client device **305** may transmit RESTful API requests to the server device **315** executing an object for the dataset or a defined resource. In turn, the server device **315** may then transmit and receive messages from the FMS service **320** which hosts a database (e.g., to create a database table for a created object). Although the communications between the FMS service application **320** and the server device **315** are illustrated herein as passing through a communication link **335**; it is contemplated that the JSON request may be made by any number of client applications residing on different client devices. In an exemplary embodiment, the client application **305** would be a downloaded app or in-app that is configurable by the user and is agnostic to the operating system on the mobile device **310**. The client application **305** sends the request to the JSON API with all the data of the response documents in the header i.e. the response document in this instance is a template or object storing the data set for use with the connected FMS. The server device **315** will respond with an "acceptable status" to the request. In an exemplary example, request may include the JSON API requests or may include a link to the object of the data set.

**[0053]** Additionally, the mobile device **310** which includes the client application **305** may use a mobile software development kit "SDK" platform. This SDK platform can provide one step activation of an on-demand service via in app of the client application **305** for activating an on-demand service such as the connected FMS. The mobile device **310** may include any mobile or connected computing device including "wearable mobile devices" having an operating system capable of running mobile applications or apps individually or in conjunction with other mobile or connected devices. Examples of "wearable mobile devices" include GOOGLE® GLASS™ and ANDROID® watches. Typically, the mobile device will have capabilities such as a display screen, a microphone, speakers and may have associated keyboard functionalities or even a touchscreen providing a virtual keyboard as well as buttons or icons on a display screen. Many such devices can connect to the internet and interconnect with other devices via Wi-Fi, Bluetooth or other near field communication (NFC) protocols.

**[0054]** FIG. 4 illustrates the JSON response to the request of the data set identifier. The connected FMS service **400** includes the client application **405**, the mobile device **410**, the JSON response **435**, the FMS service **420** connected to the dataset1 **425** hosted by the server **415**. The JSON response **435** includes the resource identifier object which is the dataset1 **425**. The dataset1 can be considered the primary data and may be a single resource object. In an alternate embodiment, multiple datasets may be represented as an array. The resource object in the JSON API includes a type and ID. Here the type and ID are "dataset" and "1 ID". Within a given API, each resource object's type and id pair identifies a single, unique resource which in this instance is the dataset 1 ID of the dataset1 **425**. The FMS service **420** executes the request, saves the Dataset 1 state, sends the response back to the client application **405** and the JSON response



**435** includes the dataset 1.

**[0055]** In an exemplary embodiment, a sample script of a JSON API for generating the dataset1 **425** is as follows:

SAMPLE API for Dataset 1

```

5  {
    "APIVERSION": "vX.0.0",
    "Response": {
      "TRANSACTION_ID": 234545454,
      "AIRCRAFT_PROFILE_DATA": {
10    "NAV_DATABASE_CYCLE": "2015-02-05T00:00:00Z/2015-03-05T00:00:00Z",
      "MAX_RESERVE_FUEL": {
        "VALUE": "1000",
        "UNITS": "LBS"
      },
      "MIN_RESERVE_FUEL": {
15    "VALUE": "0",
        "UNITS": "LBS"
      },
      "MAX_FUEL_WEIGHT": {
        "VALUE": "60000",
        "UNITS": "LBS"
20    },
      "MIN_FUEL_WEIGHT": {
        "VALUE": "0",
        "UNITS": "LBS"
      },
      "MAX_ZERO_FUEL_WEIGHT": {
25    "VALUE": "120000",
        "UNITS": "LBS"
      },
      "MIN_ZERO_FUEL_WEIGHT": {
30    "VALUE": "1000",
        "UNITS": "LBS"
      },
      "MAX_GROSS_WEIGHT": {
        "VALUE": "90000",
        "UNITS": "LBS"
35    },
      "MIN_GROSS_WEIGHT": {
        "VALUE": "1000",
        "UNITS": "LBS"
      },
      "BASIC_OPERATING_WEIGHT": {
40    "VALUE": "6000",
        "UNITS": "LBS"
      }
    },
    "FLIGHT_PLAN": {
45    "FLIGHT_NUMBER": "",
    "RECALL_ID": "Dataset 1",
    "PERFORMANCE_INITIALIZATION_DATA": {
      "PAYLOAD": {
        "VALUE": "16000",
        "UNITS": "LBS"
50    },
      "FUEL_WEIGHT": {
        "VALUE": "1500",
        "UNITS": "LBS"
55    }
    }
  },
  "FPLN_SEGMENTS": [
    {
      "ACTIVE": "FALSE",

```

```

"ROUTE_DEFINITION": {
  "COMPANY_ROUTE": "",
  "ROUTE_STRING": "NONE",
  "ORIGIN_AIRPORT": {
5    "ORIGIN": {
      "CATEGORY": "DEFINED_AIRPORT",
      "IDENT": "KSFO",
      "POSITION": {
        "LATITUDE": "37.61881828",
10      "LONGITUDE": "-122.3754215"
      },
      "FIELD_ELEVATION": {
        "VALUE": "10",
        "UNITS": "FEET",
        "ALT_TYPE": "MSL"
15    },
    "RUNWAY_LIST": [
      {
        "IDENT": "RWY01L",
        "LENGTH": {
20      "VALUE": "1.259028077",
        "UNITS": "NM"
      },
        "BEARING": {
          "VALUE": {
            "VALUE": "13.79902032",
25      "ANGLE_TYPE": "NORM"
          }
        }
      }
    ]
  }
}

```

**[0056]** In appendix A, the JSON API includes the "TRANSACTION\_ID": 234545454" for identifying a particular JSON request; the particular aircraft by the "AIRCRAFT\_PROFILE\_DATA". This profile data includes aircraft attributes as follows: "NAV\_DATABASE\_CYCLE": "2015-02-05T00:00:00Z/2015-03-05T00:00:00Z", "MAX\_RESERVE\_FUEL" "MIN\_RESERVE\_FUEL": "MAX\_FUEL\_WEIGHT etc. In other words, the JSON API generates data necessary for a particular flight path and the script stores the data in the dataset, in this instance, the dataset1.

**[0057]** FIG. 5 illustrates the retention of the dataset 1 in the FMS service after the connected FMS session has been completed. In an exemplary embodiment, the dataset 1 525 residing at the server 515 or a database (not shown) associated with the server may designated as unique to the particular request made by the client application 505 hosted on the mobile device 510. For example, if the client application 505 requests the connected FMS service compute a flight plan and compute a time and a gross weight at the destination for a particular aircraft, the dataset is unique for that request for the particular aircraft. In another instance, the client application 505 could then request a change to the previous flight plan or gross weight data upon which the connected FMS service has already processed by the client application 505 only having to send a request with the dataset id and the changed data as part of a subsequent request or at the least populate the data set of the subsequent request with some similar data from the original data set. For example, if the dataset is deemed to be aircraft specific, in such instances, only a limited subset of the original data of the data set may be of value. However, in such instances, the client application 505 may still allow for retrieval and pre-populating of the limited subset of data for convenience.

**[0058]** FIG. 6 illustrates a connected FMS 600 with a JSON request 635 from the client application 605 residing on the client device 610 including the object of the dataset1 ID 625 to initialize the connected FMS service of the server 615 for a given state and in addition provisioning of any additional modification inputted by the user. For example, the user may want to model particular modifications to the dataset and execute the flight plan with the modeled data. In addition, the user may desire certain operational achievements, like achieving a particular waypoint or fuel consumption efficiency. The resource object of the dataset1 625 with the JSON request 635 may or may not have all the attributes in the original object of the dataset1 625. In such instances, the server 615 may include the current attributes for missing attributes, hence the JSON request 635 may not be a complete request and include missing elements. The connected FMS service would still using the elements of the original resource object of the dataset1 625 be able to complete the request.

**[0059]** In FIG. 7, the connected FMS service 700 includes the FMS service 740 hosted by the server 720 connected to the resource object of the dataset1 725 and receives the JSON request 735 with the updated resource of the dataset1 from the client application 705 residing on the mobile device 710. The FMS service 740 which is generated on the server 720 using the JSON API, the JSON request 735 is sent to the FMS service 740 using the initial conditions which provisions

the state of the connected FMS.

[0060] In FIG. 8, the connected FMS **800** includes the FMS service **840** hosted by the server **820** connected to the resource object of the dataset1 **825** and sends the JSON response **835** with the updated resource of the dataset1 to the client application **805** residing on the mobile device **810**. The FMS service **840** executes the JSON request, updates the resource object of the dataset1 **825** and send the JSON response **835** back to the client application **805**. The JSON response **835** sent back includes the dataset 1 ID so the client application **805** can access the dataset1 with the updates.

[0061] In FIG. 9 the connected FMS **900** includes the dataset1 **925** residing on the server **920** which is not in communication with the mobile device **910** or client application **905** residing on the mobile device **910**. In this instance, the object resource of the dataset1 **925** resides at the server **920** until requested. Further, the resource object of the dataset1 **925** may be made available to other client applications and for other users to access, modify or update depending on the privileges granted.

[0062] FIG. 10 illustrates a flow diagram for the connected FMS **1000** and includes the client application **1005**, the web service **1010**, the cloud flight management computer (FPC) **1015** and the cloud data storage **1020**. The client application **1005** sends a JSON request **1025** to the web service **1010**, the JSON request **1025** may include flight plan attributes of the origin of the particular flight, the destination, the airway to take, the gross weight of the aircraft etc.. The FPC **1015** from the web service **1010** receives a create FPCr (JSON request) **1030** to create the flight plan. At **1035**, the FPC **1015** executes the requested operation received. The FPC may need to access the cloud data storage **1020** with a fetch or access request at **1040** for the storedataset(internal FPC data). At **1045**, the FPC **1015** receives the dataset id **1045** of link to the dataset from the cloud data storage **1020**. At **1050**, the attributes of the flight plan, predictions dataset id are set to the web service **1010**. A JSON response **1055** to an initial JSON request **1025**, is sent to the client application **1005**. The JSON response includes attributes such as the flight plan, predictions, dataset id etc.. These may be framed as one or more data structures or objects. The client application **1005** may then send another JSON request **1060** with updates or modifications or simply retrieval of the of the original dataset data. In any event the JSON request **1060** is sent from the client application **1005** to the web service **1010**. A set of attributes may also be included in this JSON request **1060** of gross weight, dataset ID etc.. This JSON request **1060** is sent to the web service **1010** which in turn sends a create FPC(JSON request) **1065** to the FPC **1015**. The FPC **1015** in turn sends a getdataset(dataset ID) request **1070** to the cloud data storage **1020**. The cloud data storage **1020** responds with the internal FPC data **1075**. The requested operation at **1080** is executed by the FPC **1015**. At **1085**, the storedataset(internal FPC data) is sent to the cloud data storage **1020** for retention. In some instances, the internal FPC data may be synced with the original FPC data. At **1090**, the dataset id is sent to the FPC **1015** from the cloud data storage and subsequently sent from the FPC **1015** with the attributes of for example of: a generated flight plan, predictions, and data set id at **1095** to the web service **1010**. The web service **1010** sends a JSON response **1100** with this data to the client application **1005**.

[0063] Those of skill in the art will appreciate that the various illustrative logical blocks, modules, circuits, and algorithm steps described in connection with the embodiments disclosed herein may be implemented as electronic hardware, computer software, or combinations of both. Some of the embodiments and implementations are described above in terms of functional and/or logical block components (or modules) and various processing steps. However, it should be appreciated that such block components (or modules) may be realized by any number of hardware, software, and/or firmware components configured to perform the specified functions. To clearly illustrate the interchangeability of hardware and software, various illustrative components, blocks, modules, circuits, and steps have been described above generally in terms of their functionality.

[0064] Whether such functionality is implemented as hardware or software depends upon the particular application and design constraints imposed on the overall system. Skilled artisans may implement the described functionality in varying ways for each particular application, but such implementation decisions should not be interpreted as causing a departure from the scope of the present invention. For example, an embodiment of a system or a component may employ various integrated circuit components, e.g., memory elements, digital signal processing elements, logic elements, look-up tables, or the like, which may carry out a variety of functions under the control of one or more microprocessors or other control devices. In addition, those skilled in the art will appreciate that embodiments described herein are merely exemplary implementations.

[0065] The various illustrative logical blocks, modules, and circuits described in connection with the embodiments disclosed herein may be implemented or performed with a general-purpose processor, a digital signal processor (DSP), an application specific integrated circuit (ASIC), a field programmable gate array (FPGA) or other programmable logic device, discrete gate or transistor logic, discrete hardware components, or any combination thereof designed to perform the functions described herein. A general-purpose processor may be a microprocessor, but in the alternative, the processor may be any conventional processor, controller, microcontroller, or state machine. A processor may also be implemented as a combination of computing devices, e.g., a combination of a DSP and a microprocessor, a plurality of microprocessors, one or more microprocessors in conjunction with a DSP core, or any other such configuration.

[0066] The steps of a method or algorithm described in connection with the embodiments disclosed herein may be embodied directly in hardware, in a software module executed by a controller or processor, or in a combination of the

two. A software module may reside in RAM memory, flash memory, ROM memory, EPROM memory, EEPROM memory, registers, hard disk, a removable disk, a CD-ROM, or any other form of storage medium known in the art. An exemplary storage medium is coupled to the processor such that the processor can read information from, and write information to, the storage medium. In the alternative, the storage medium may be integral to the processor. The processor and the storage medium may reside in an ASIC.

**[0067]** In this document, relational terms such as first and second, and the like may be used solely to distinguish one entity or action from another entity or action without necessarily requiring or implying any actual such relationship or order between such entities or actions. Numerical ordinals such as "first," "second," "third," etc. simply denote different singles of a plurality and do not imply any order or sequence unless specifically defined by the claim language. The sequence of the text in any of the claims does not imply that process steps must be performed in a temporal or logical order according to such sequence unless it is specifically defined by the language of the claim. The process steps may be interchanged in any order without departing from the scope of the invention as long as such an interchange does not contradict the claim language and is not logically nonsensical.

**[0068]** Furthermore, depending on the context, words such as "connect" or "coupled to" used in describing a relationship between different elements do not imply that a direct physical connection must be made between these elements. For example, two elements may be connected to each other physically, electronically, logically, or in any other manner, through one or more additional elements.

**[0069]** While at least one exemplary embodiment has been presented in the foregoing detailed description of the invention, it should be appreciated that a vast number of variations exist. It should also be appreciated that the exemplary embodiment or exemplary embodiments are only examples, and are not intended to limit the scope, applicability, or configuration of the invention in any way. Rather, the foregoing detailed description will provide those skilled in the art with a convenient road map for implementing an exemplary embodiment of the invention. It being understood that various changes may be made in the function and arrangement of elements described in an exemplary embodiment without departing from the scope of the invention as set forth in the appended claims.

## Claims

1. A method for providing a flight management service in a cloud computing environment, the method comprising:

receiving, an object request associated with an object hosted by a server from a mobile device wherein the server is located in the cloud computing environment comprising: at least a flight management system (FMS) connected to a stateless object;  
processing, by the connected FMS hosted by the server, the object request generating a resource object for a particular flight plan wherein the resource object comprises: a data set;  
storing, by the connected FMS, the data set at the stateless object in the cloud environment; and  
sending, by the server, an object response from the connected FMS to the mobile device, for accessing the data set of the stateless object for the particular flight plan.

2. The method of claim 1, wherein the object response comprises: at least a dataset id.

3. The method of claim 1, further comprising:

receiving, by the server, the object request with a set of attributes for the particular flight plan.

4. The method of claim 3, further comprising:

sending, by the server, the object response with an updated set of attributes for the particular flight plan.

5. The method of claim 3, further comprising:

provisioning, by the server, a flight management computer of the connected FMS with the attributes of the object request.

6. The method of claim 1 wherein the mobile device further comprising:

receiving, by the server, the object request from a client application residing on the mobile device.

7. The method of claim 1 further comprising:

configuring the connected FMS with an embedded FMS residing locally at the mobile device.

5 8. A computer program product for a cloud-computing environment comprising a plurality of cloud-computing resources, the product comprising: a computer-readable storage medium in which program instructions are stored, the program instructions are configured to cause a flight management computer to perform the operations of:

10 receiving, an object request by a server from a mobile device wherein the server is located in the cloud computing environment which comprises: at least a flight management system (FMS) connected to a stateless object; processing, by the connected FMS hosted by the server, the object request generating a resource object for a particular flight plan wherein the resource object comprises: a data set; storing, by the connected FMS, the data set at the stateless object in the cloud environment; and  
15 sending, by the server, an object response from the connected FMS to the mobile device, for accessing the data set of the stateless object for the particular flight plan.

9. The method of claim 8, wherein the object response comprises: at least a dataset id.

20 10. The method of claim 8, further comprising:

receiving, by the server, the object request with a set of attributes for the particular flight plan.

25

30

35

40

45

50

55

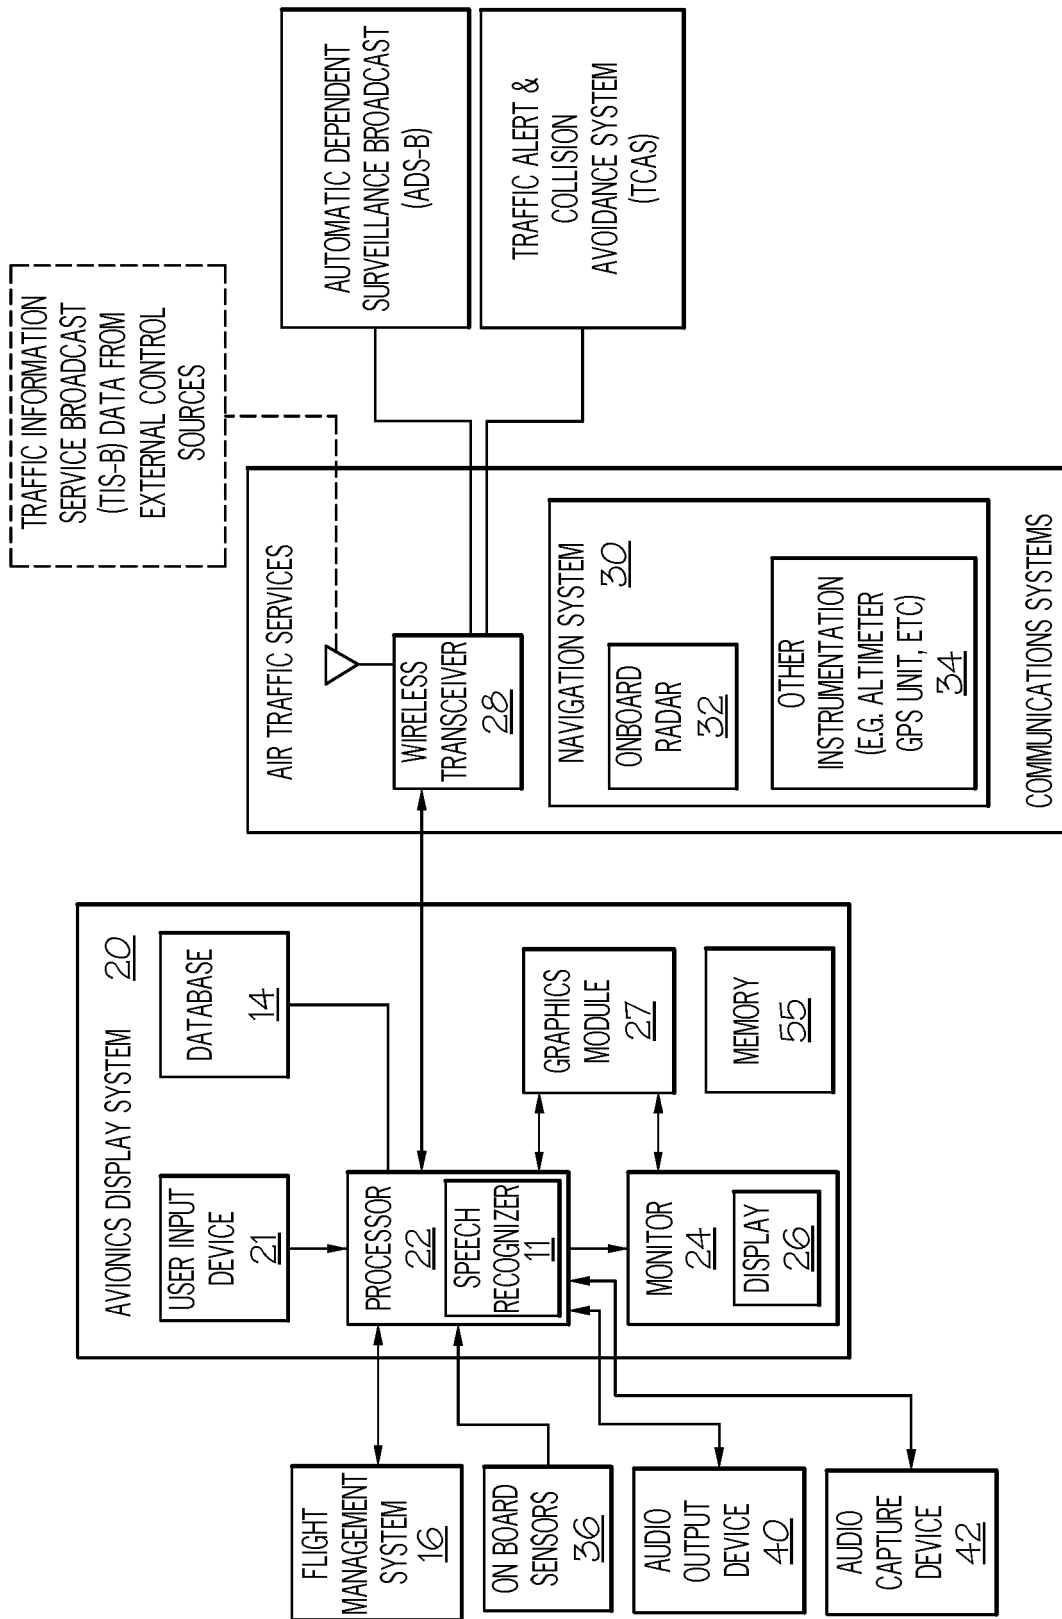


FIG. 1

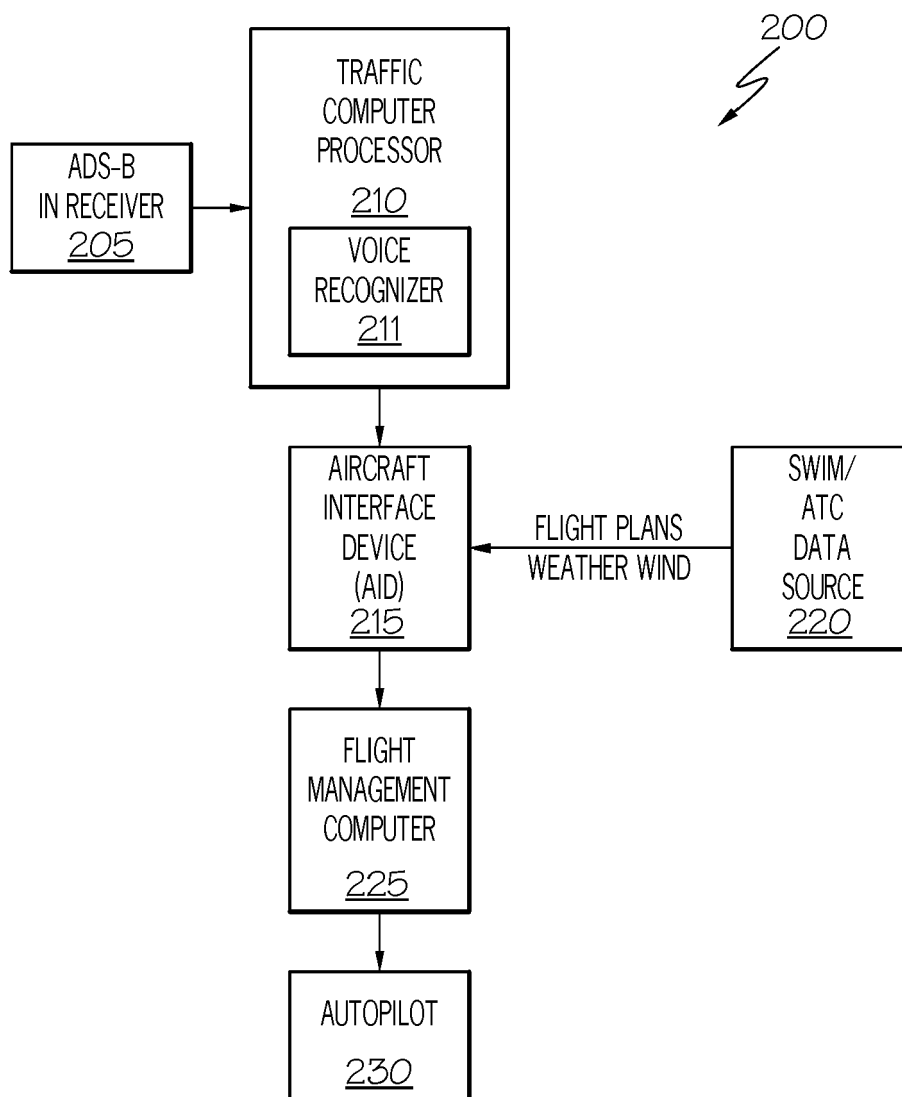


FIG. 2

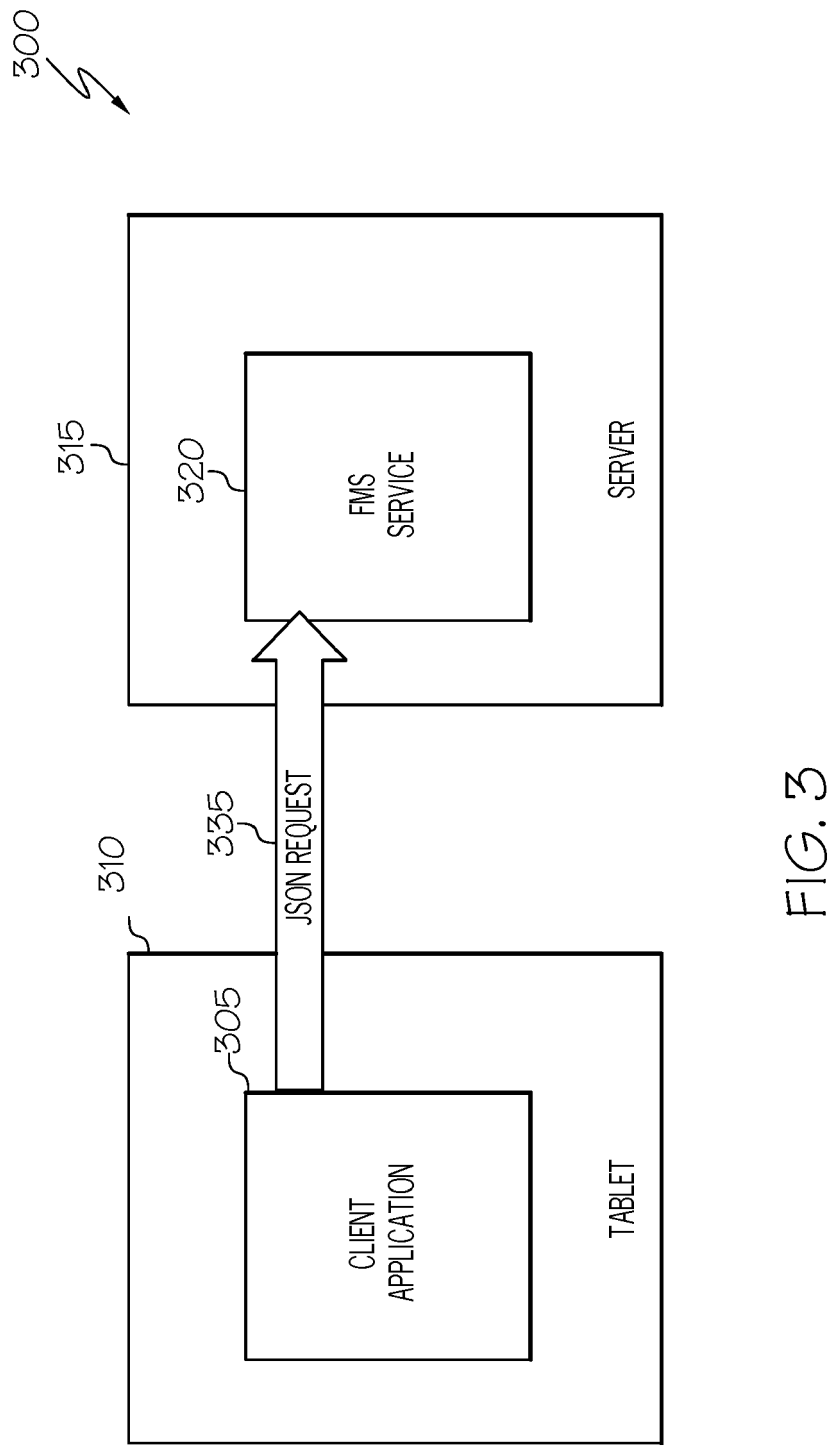


FIG. 3



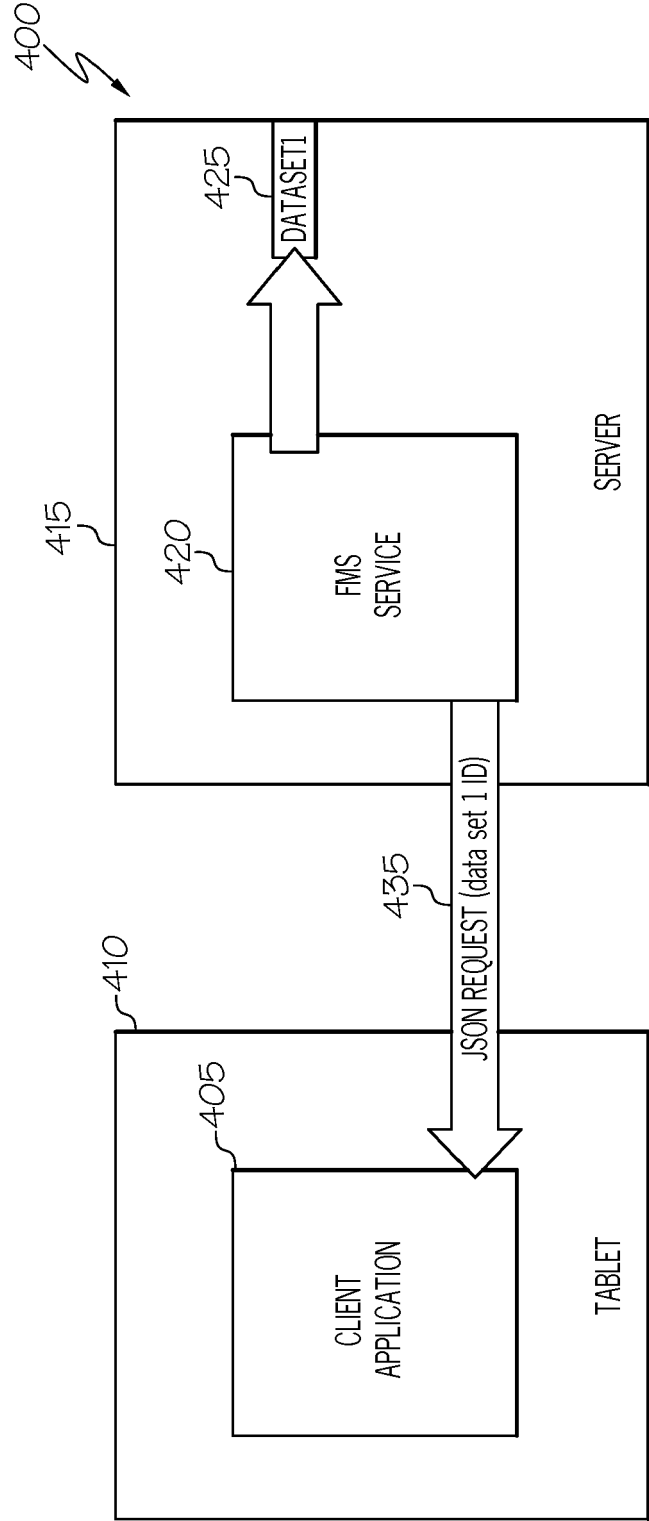


FIG. 4

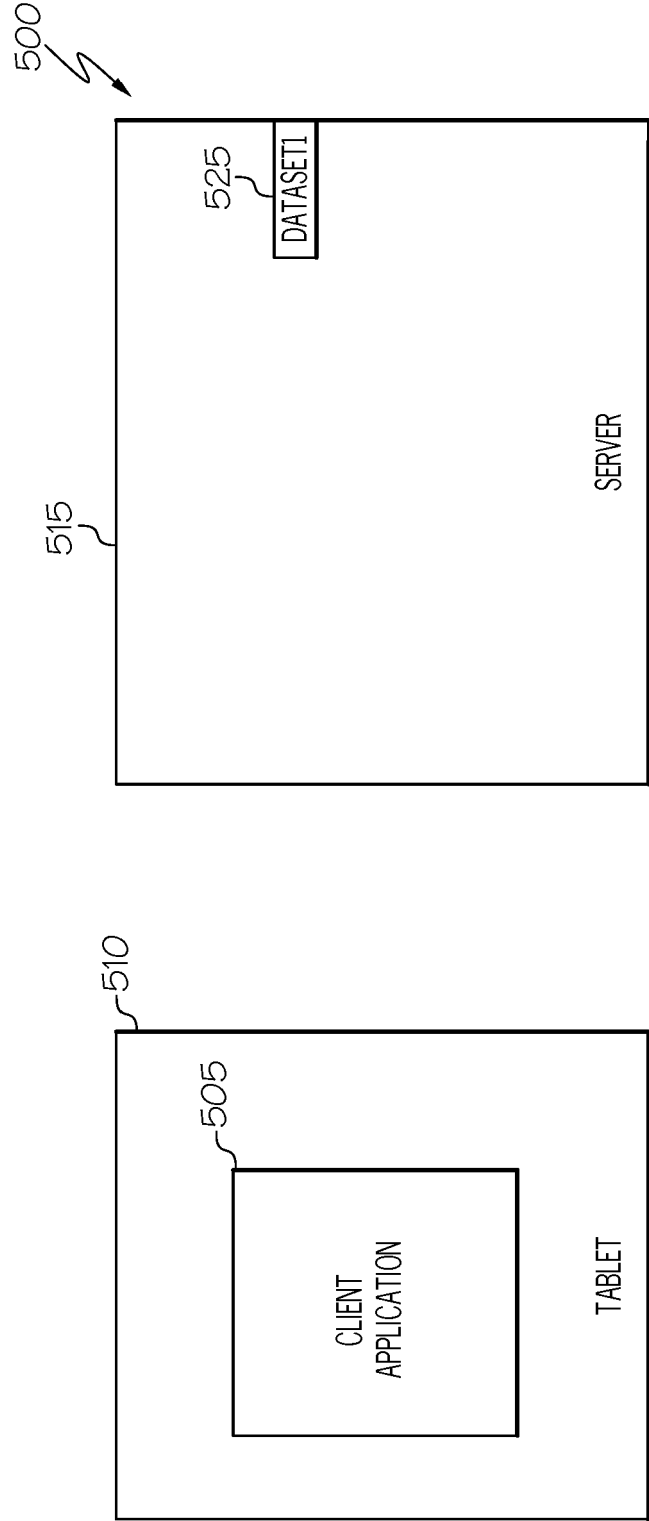


FIG. 5

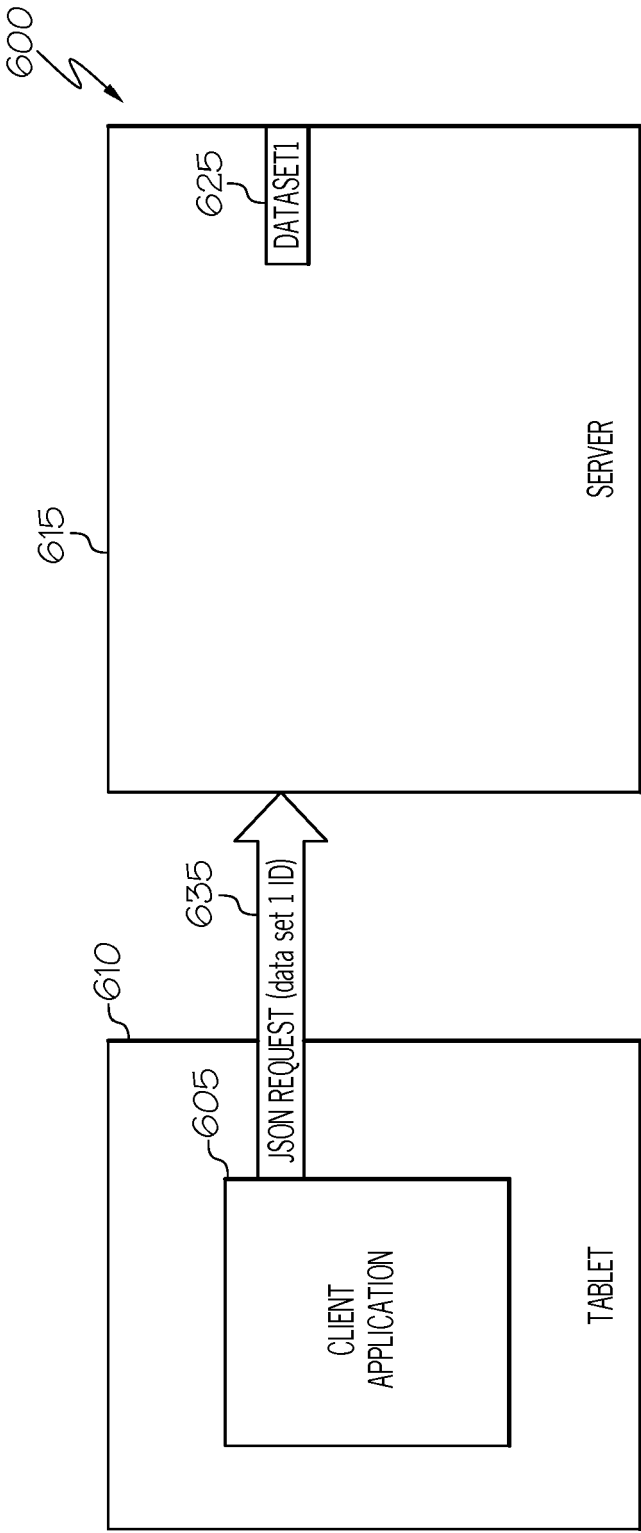


FIG. 6

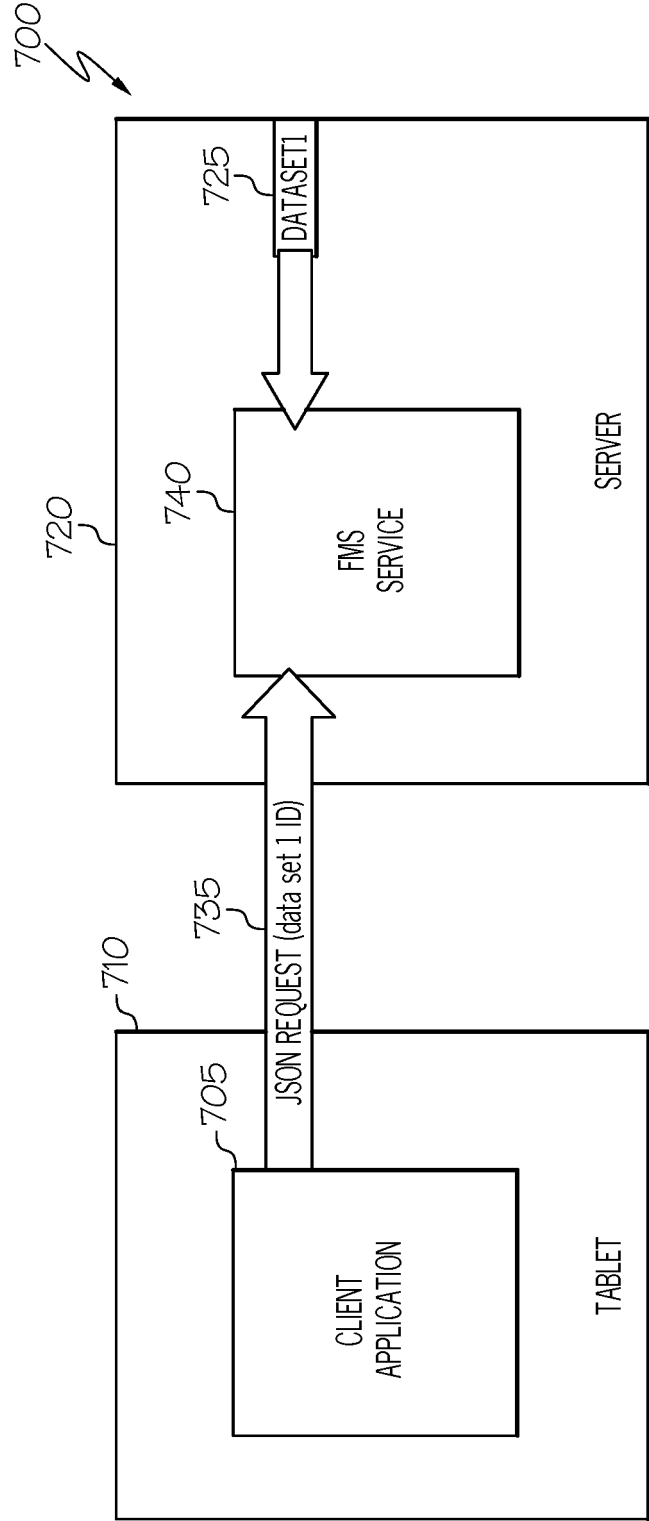


FIG. 7

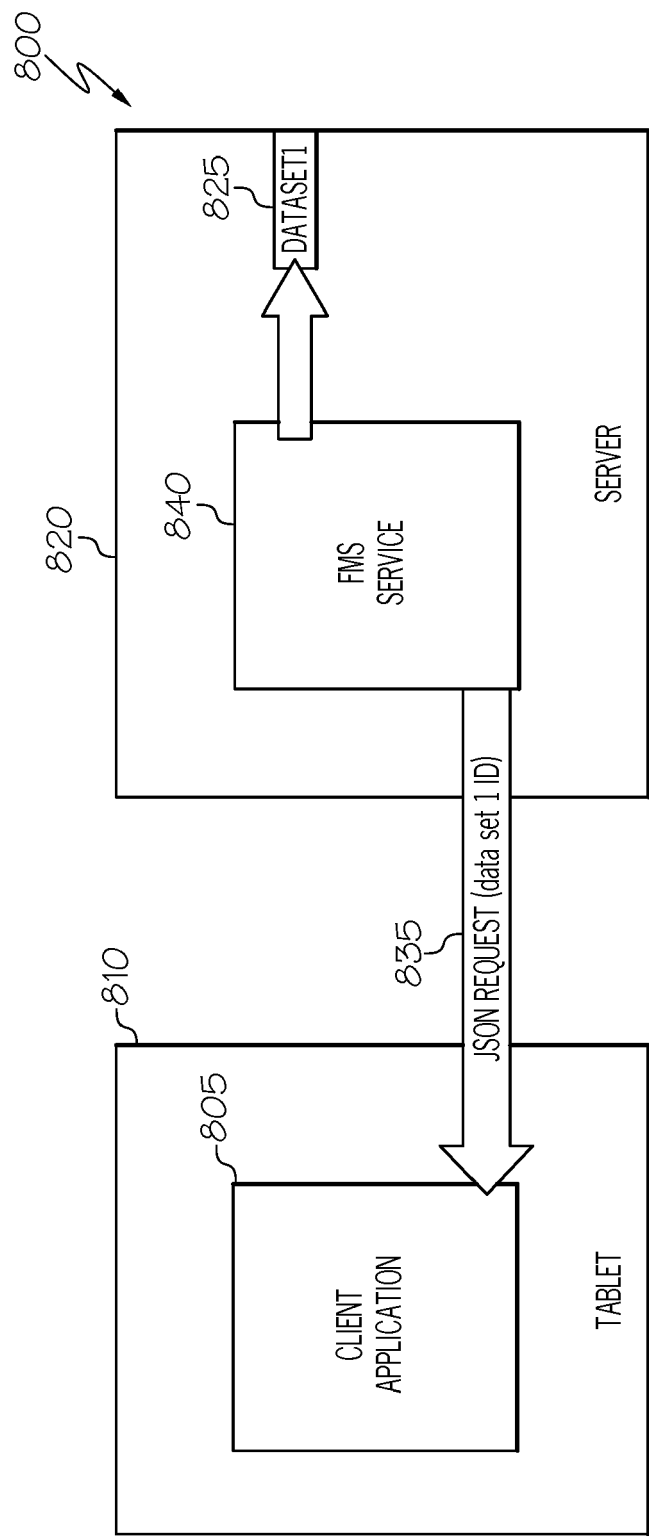


FIG. 8

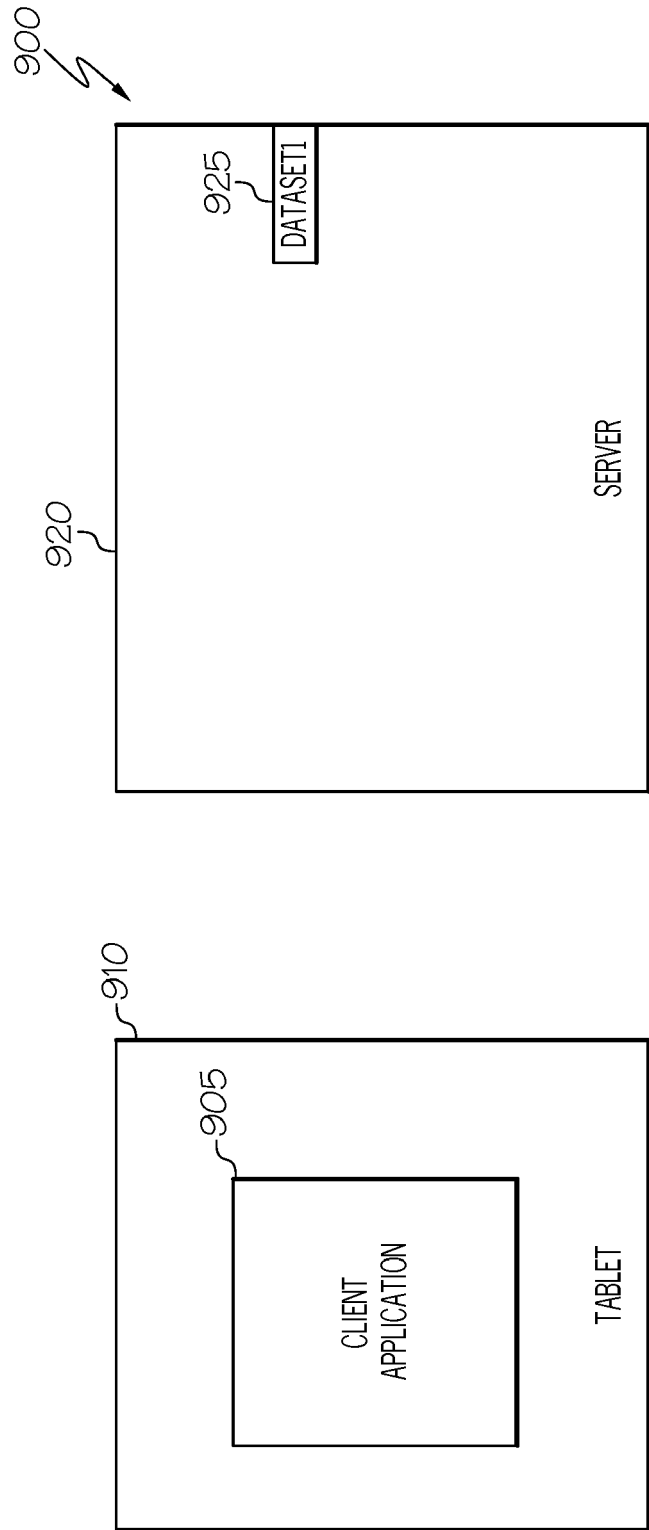


FIG. 9

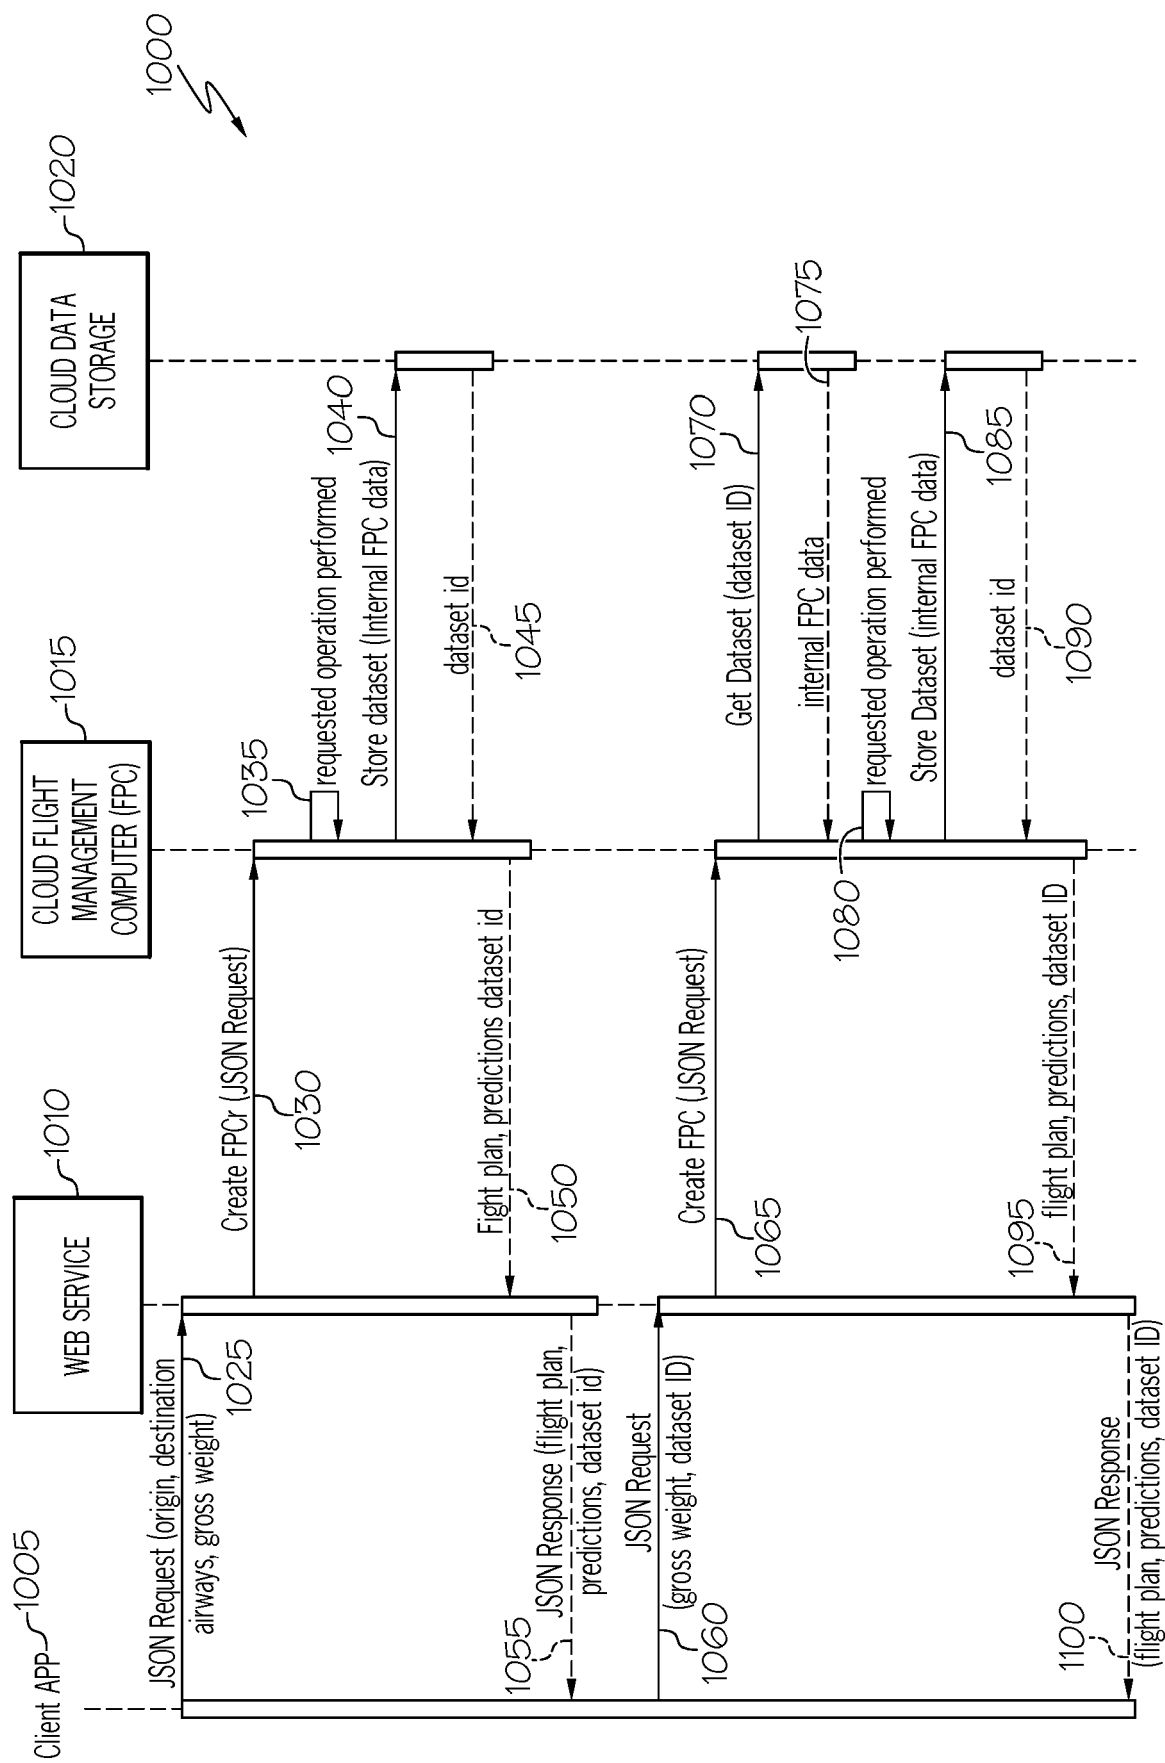


FIG. 10



## EUROPEAN SEARCH REPORT

Application Number  
EP 18 20 5501

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2012/265372 A1 (HEDRICK GEOFFREY S M [US]) 18 October 2012 (2012-10-18) * abstract; claims 1 - 6; figures 1, 4 * * paragraph [0018] - paragraph [0021] * * paragraph [0024] - paragraph [0026] *	1-10	INV. G08G5/00
X	US 2012/215505 A1 (SRIVASTAV AMIT [IN] ET AL) 23 August 2012 (2012-08-23) * abstract; figures 1, 2 * * paragraph [0004] - paragraph [0005] * * paragraph [0010] - paragraph [0012] * * paragraph [0029] - paragraph [0031] * * paragraph [0034] - paragraph [0040] * * paragraph [0044] - paragraph [0045] * * paragraph [0053] *	1-10	
X	US 7 437 225 B1 (RATHINAM SETHU R [US]) 14 October 2008 (2008-10-14) * abstract; figures 1, 6 * * column 3, line 6 - column 4, line 22 * * column 6, line 18 - line 34 * * column 7, line 65 - column 8, line 10 *	1-10	TECHNICAL FIELDS SEARCHED (IPC) G08G
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 25 March 2019	Examiner Berland, Joachim
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 1  
EPO FORM 1503 03.82 (P04C01)



**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 18 20 5501

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-03-2019

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2012265372 A1	18-10-2012	EP 2530905 A2	05-12-2012
		JP 6046369 B2	14-12-2016
		JP 6178473 B2	09-08-2017
		JP 2012224328 A	15-11-2012
		JP 2016210418 A	15-12-2016
		KR 20120117643 A	24-10-2012
		US 2012265372 A1	18-10-2012
-----			
US 2012215505 A1	23-08-2012	EP 2490200 A2	22-08-2012
		US 2012215505 A1	23-08-2012
-----			
US 7437225 B1	14-10-2008	NONE	
-----			