

(19)



(11)

EP 3 495 287 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
16.12.2020 Bulletin 2020/51

(51) Int Cl.:
B65D 51/00 (2006.01) B65D 51/20 (2006.01)

(21) Application number: **18382750.0**

(22) Date of filing: **22.10.2018**

(54) CLOSING DEVICE FOR AN OPEN FOOD CAN

VERSCHLUSSVORRICHTUNG FÜR EINE OFFENE LEBENSMITTELDOSE

DISPOSITIF DE FERMETURE POUR CONSERVE D'ALIMENTS OUVERTE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **30.11.2017 ES 201731472 U**

(43) Date of publication of application:
12.06.2019 Bulletin 2019/24

(73) Proprietor: **Blanco Fernandez, Julian
28690 Brunete (ES)**

(72) Inventor: **Blanco Fernandez, Julian
28690 Brunete (ES)**

(74) Representative: **Baños Treceño, Valentín
A.A. Manzano Patentes y Marcas, S.L.
Avda. Pedro Diez, 21
Duplicado 1° Oficina 9
28019 Madrid (ES)**

(56) References cited:
**EP-A2- 1 728 648 WO-A1-2016/135226
ES-U- 1 048 748 US-A- 2 859 786
US-A- 3 371 847 US-B2- 8 308 021**

EP 3 495 287 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

OBJECT OF THE INVENTION

[0001] The present invention relates to a closing device according to the preamble of claim 1, that is used to close food cans that are open. This closing device is an element that can be adapted to any type of food packaging and one of the advantages thereof is that it is reusable.

[0002] The general field of application of the present invention is the industry for producing plastic parts or elements, and particularly, this invention is also related to the industrial sector for producing packaging or lids for canned food products, in the same way that it is intended for domestic use or industrial use related to providing restoration services.

[0003] The object of the invention is to introduce a solution that enables food cans to be able to be closed, given that once this type of packaging is opened, it cannot be closed, which thus leads to the oxidation or degradation of the characteristics of the food product, even if it is inside a refrigerator, just as it enables preventing accidental harm caused by unintentional cuts.

BACKGROUND

[0004] It is common knowledge that not all food maintains the optimal consumption conditions thereof for a prolonged amount of time. To solve this problem, the solution of food cans arose in the 19th century where certain types of elements were protected inside the packaging, which has logically evolved from the original packaging made of glass sealed with lead to the current solutions consisting of metal containers, the most common ones being made from tin and aluminium depending on the area and the product to be preserved.

[0005] All the types of known cans enable the food product to be preserved for a prolonged amount of time, but they only protect said product as long as the can is closed. Once a user opens the can, the food is irretrievably subjected to degradation. Generally, in order to solve this problem, one attempts to cover the can again with the broken part, where one part continues to remain open, or a plastic film is placed thereon which is a weak film and is susceptible to being easily broken. This is combined with the insertion of the can into a refrigerator, which makes it so the degradation process is slower, but which may create another type of disadvantage such as the refrigerator becoming impregnated with the smell of the food, it can get dirty or other commonly derived disadvantages.

[0006] Thus, it is evident that a problem arises from preserving a food product protected inside a food can once said can is opened.

[0007] To this end, it is worth noting that, like in all the application fields, solutions have been created which intend to solve this problem. We will highlight certain registrations related to the present invention that have differentiated structures. Regarding beverage cans, which are a type that the present invention is not preferably intended for, solutions have been developed such as the one disclosed in document ES2187937 where the opening of the can is reinforced with an annular bead with flanges which enables the coupling of a complementary closing lid. Document ES1069073U is also known, intended for cans with a particularly cylindrical configuration and the content of which is a liquid, which discloses a complementary lid with an opening that can be opened and closed given that it is an element able to be articulated, and where said lid is coupled to the open face of the cylindrical can. Document ES1023228U is also notable, wherein a closing device for beverage cans is disclosed that can be coupled by means of a lever to the opening of said type of cylindrical cans. Finally, that which is disclosed in document ES1048748U is notable; it describes a closing lid for a can which, although preferably intended for cans with a cylindrical configuration, can be modified for any type of configuration. It consists of a lid that is coupled and clipped on the rims of the can, closes the entire open surface, and further comprises a tab or ring that enables it to be pulled in order to facilitate the opening of said lid.

[0008] It is known that US2859786 discloses a plastic device that is a top cover that covers the entire surface of an open can or container, but is used in cans that doesn't have its lid because it has been removed previously, and wherein the top cover has a U-shape fixing along all the perimeter of the walls of the open can.

[0009] As can be seen, all these types of solutions are based on added lids or surfaces that are placed on all the open surface of the can, which makes it so the problem of the closing is solved; however, to do so it requires precisely covering the entire surface with another independent lid.

[0010] Taking into account the solutions existing in the state of the art, it can be seen that there is no known solution that closes food cans where one of the faces thereof is opened but not removed in its entirety; therefore, it does not require a new lid to be placed, but rather ensure that said open face returns to the position thereof such that it closes the assembly of the can again. In order to solve this problem, which is present in practically all the different types of food cans, preferably food cans not intended for beverages or liquid products, but rather for solid foods, the present invention is developed. This invention introduces a simple device into this sector that can be coupled on the rims of the can and press on the open face so that it closes the assembly of the food can.

[0011] It can thus be noted that the present invention has a series of advantages, such as preventing or reducing the oxidation or degradation of the product, which among other things creates a mixture of smells in the refrigerator; it is used to prevent accidental harm from unintentional cuts; it contributes to savings in the home as it also does with the environment when we avoid throwing away a number of cans because the food con-

tent thereof has gone bad too quickly since they were not properly closed; it prevents it from splashing when an open, poorly closed can is taken out, for example, a can of squid in black ink sauce where the lid comes off like a spring, coming up and splashing everything nearby.

[0012] Thus, the present invention resolves the technical problem of ensuring the closing of a food can once opened without needing to clip or place a new lid on the open part of said food can, thereby ensuring that the product is conserved in optimal conditions for a longer amount of time and given the previously explained advantages.

DESCRIPTION OF THE INVENTION

[0013] The present invention describes a stop-like device or individual part that is used to ensure that a food can be closed again, said device being able to be reused, and with which this device resolves this problem without needing to use additional complex closing systems or the need to have to cover the entire can with a new cover.

[0014] Taking into account these aspects, the device object of the invention is a part that clips on the point of the open circumference of the can, and which, by means of a fastening tab, enables the open lid of the can to be pressed so that it is in a closed position. By means of the use of a plurality of devices along the circumference, it is ensured that the entirety of the lid of the can remains closed, without needing to use a new cover.

[0015] To do so, the device is an element of a preferably plastic nature, which has a transverse cross section with an inverted U-shaped profile, where a ridge projects from one side and a fastening tab projects of the other side of each of the facing walls thereof. The ridge is useful in that it enables the user to be able to press it for correct clipping inside the perimeter rim of the can, and also enabling the removal thereof; while the fastening tab has the feature of pushing and ensuring the position of the lid of the can so that the assembly remains covered.

[0016] Entering into more detail, the inverted U-shaped profile is comprised of two walls facing each other, an inner wall and an outer wall, joined by an upper edge. At least one surface slit is arranged in the outer wall, the function of which is to enable the action of clipping and removing the device to be more comfortable and safer, and so that the device does not interfere with the tab of the lid of the can. The two walls do not necessarily have to have the same height, in fact, the height of the outer wall can be, for example, greater than that of the inner wall.

[0017] A ridge projects from the free end of the outer wall, preferably in a perpendicular plane, the ridge being a bent projection along all the entire rim thereof that is long enough so that a force can be exerted manually, like a lever, on the device. A fastening tab projects from the free end of the inner wall, which is also preferably in a perpendicular plane, which is a sheet which acts as a stop so that the lid of the can remains fastened on the lower surface thereof and thus requires the lid of the can

to remain in a closed position.

[0018] Entering into a longitudinal configuration of the device, the surface of the fastening tab can comprise at least one notch that functions as a handle, which, at the same time that it continues to fasten the position of the lid of the food can, may have that additional feature. Moreover, the device can adapt longitudinally to the circumference of the can; therefore, the device can be linearly straight for straight rims, or it can be curved for can configurations with curves, such that said curvature can have different diameters being adjusted to different types of food cans that exist in any grocery store in the world.

[0019] The device is intended to be made from a plastic material, and preferably it is intended to be made from PVC, given that this material has the light flexibility needed for the actions of clipping and removing the device from the rim of the can; however, it also has enough rigidity for the lid of the can to be fastened in the required position. Nevertheless, this term is not limiting, and the device can be made from any other material that meets these two conditions.

[0020] Finally, the device is intended for relatively small dimensions, due to the fact that the optimal closing of the lid of the open can requires a plurality of points where the device must be indicated along the circumference thereof.

[0021] To this end, it is considered that the optimal range of length of the device is between 10 and 100 mm, where the width of the fastening tab is between 7 and 15 mm, the width of the ridge between 2 and 7 mm, the width of the edge of the U-shaped profile between 1 and 5 mm, and the height of both walls of the U-shaped profile between 3 and 10 mm. Nevertheless, this term is not limiting, and any part of the device can have another dimension, as long as it meets the proportional relationship with the remaining parts of the device.

[0022] To complete the present description, and for the purpose of aiding in a better understanding of the characteristics of the invention, a set of drawings is presented wherein, by way of non-limiting examples, the following has been represented:

Figure 1 shows a transverse cross section of the device and how it is clipped or coupled to the perimeter rim of the can, and how the device fastens the open lid of the can.

Figure 2 shows a front view of the device.

Figure 3 shows a top view of the device when it has a straight linear configuration.

Figure 4 shows a top view of the device when it has a curved linear configuration and with a notch in the fastening overlap.

DESCRIPTION OF THE DRAWINGS

[0023] As seen in the set of figures, the closing device (2) for an open food can, according to the previously described characteristics, is placed in the open circumfer-

ence or rim (11) of the food can and where the can (1) still has the lid (12) thereof which has not been completely removed.

[0024] This device (2) is made from plastic material, preferably PVC, and has a transverse cross section comprising a central inverted U-shaped profile (3) with an outer wall (31) facing an inner wall (32) and both remaining joined by an edge (33). As seen in Figure 1, the height of both walls does not need to be the same, and in fact, preferably, the height of the outer wall (31) is greater than that of the inner wall (31), both of them thus having different heights. As seen in that figure, the rim (11) remains fitted by being clipped in the inverted U-shaped profile (3). A ridge (4) projects from the free end of the outer wall (31), preferably in a perpendicular plane, which has the function of reinforcing as well as enabling the user to use leverage to clip or remove the device (2). A fastening tab (5) projects from the free end of the inner wall (32), which is a sheet with a preferably larger dimension than that of the ridge (4) and that fastens the lid (12) of the can (1). It can be seen that the inner face of the outer wall (31) has a surface slit (34) which enables the action of clipping or removing the device (2) to be more comfortable.

[0025] As seen in Figures 3 and 4, the device (2) can have a straight or curved linear configuration, with the aim of being able to adapt to any type of circumference configuration of food cans, just as the device (2) can comprise a notch (6) with the function of freeing up space for the ring or handle of the food can, usually known as an easy-open element, said notch (6) being located in the surface of the fastening tab (5) seen from above.

[0026] Having sufficiently described the nature of the invention above, taking into account that the terminology that has been used in this specification should be taken in a broad and non-limiting sense, as well as the description of the best mode of carrying it out in practice, and, it having been proven that it constitutes a positive technical advancement, the invention is defined by the appended claims.

Claims

1. A closing device for an open food can, which is a stop-like device suitable to be placed on a point of the open circumference or rim (11) of a food can (1) that still has the lid (12) thereof, and to clip on that point of the open circumference enabling the lid of the opened food can to be pressed in a closed position, wherein by means of the use of several closing devices along the circumference it is ensured that the entirety of the lid of the can remains in a closed position; and wherein that device (2) is made from plastic material and has a transverse cross section comprising an inverted U-shaped central profile (3) with an outer wall (31) facing an inner wall (32) and both remaining joined by an edge (33); **character-**

ized in that it also comprises a ridge (4) that projects from the free end of the outer wall (31), and a fastening tab (5) that projects from the free end of the inner wall (32); and at least one surface slit (34) in the inner face of the outer wall (31).

2. The closing device for an open food can, according to claim 1, wherein the inner and outer walls (31, 32) have different heights.
3. The closing device for an open food can, according to any of the preceding claims, wherein the fastening tab (5) comprises at least one notch (6).
4. The closing device for an open food can, according to any of the preceding claims, wherein the device (2) from a top view is straight.
5. The closing device for an open food can, according to any of claims 1 to 3, wherein the device (2) from a top view is curved.

Patentansprüche

1. Schließvorrichtung für eine offene Lebensmittelkonserve, wobei es sich um eine anschlagartige Vorrichtung handelt, die an einer Stelle des offenen Umfangs oder einer Einfassung (11) einer Lebensmittelkonserve (1), die weiterhin den Deckel (12) davon aufweist, platziert werden kann, und um sich an die Stelle des offenen Umfangs zu klemmen, wodurch der Deckel der offenen Lebensmittelkonserve in eine geschlossene Position gepresst werden kann, wobei mittels der Verwendung von verschiedenen Schließvorrichtungen entlang des Umfangs sichergestellt wird, dass die Gesamtheit des Deckels der Konserve in einer geschlossenen Position verbleibt; und wobei die Vorrichtung (2) aus Kunststoffmaterial hergestellt ist und einen quer verlaufenden Querschnitt aufweist, umfassend ein umgekehrtes U-förmiges zentrales Profil (3) mit einer äußeren Wand (31), die zu einer inneren Wand (32) weist und beide durch einen Rand (33) zusammengefügt bleiben; **dadurch gekennzeichnet, dass** diese auch einen Wulst (4) umfasst, der von dem freien Ende der äußeren Wand (31) vorsteht und eine Befestigungslasche (5), die von dem freien Ende der inneren Wand (32) vorsteht; und mindestens einen Oberflächenschlitz (34) in der inneren Fläche der äußeren Wand (31).
2. Schließvorrichtung für eine offene Lebensmittelkonserve nach Anspruch 1, wobei die inneren und äußeren Wände (31, 32) unterschiedliche Längen aufweisen.
3. Schließvorrichtung für eine offene Lebensmittelkon-

serve nach einem der vorhergehenden Ansprüche, wobei die Befestigungslasche (5) mindestens eine Einkerbung (6) umfasst.

4. Schließvorrichtung für eine offene Lebensmittelkonserve nach einem der vorhergehenden Ansprüche, wobei die Vorrichtung (2) aus einer Draufsicht gerade ist. 5
5. Schließvorrichtung für eine offene Lebensmittelkonserve nach einem der Ansprüche 1 bis 3, wobei die Vorrichtung (2) aus einer Draufsicht gekrümmt ist. 10

Revendications

15

1. Dispositif de fermeture pour une boîte de conserve ouverte, qui est un dispositif en forme de butée apte à être placé sur un point de la circonférence ouverte ou pourtour (11) d'une boîte de conserve (1) qui a encore le couvercle (12) de celle-ci, et pour se clipser sur ce point de la circonférence ouverte permettant au couvercle de la boîte de conserve d'être appuyé dans une position fermée, dans lequel, au moyen de l'utilisation de plusieurs dispositifs de fermeture le long de la circonférence, il est garanti que la totalité du couvercle de la boîte peut rester dans une position fermée ; et dans lequel ce dispositif (2) est en matière plastique et a une section transversale comprenant un profil central en forme de U inversé (3) avec une paroi externe (31) en regard d'une paroi interne (32) et les deux restant reliés par un bord (33) ; **caractérisé en ce qu'il** comprend également un rebord (4) qui fait saillie de l'extrémité libre de la paroi externe (31), et une patte de fixation (5) qui fait saillie de l'extrémité libre de la paroi interne (32) ; et au moins une fente de surface (34) dans la face interne de la paroi externe (31). 20 25 30 35
2. Dispositif de fermeture pour une boîte de conserve ouverte, selon la revendication 1, dans lequel les parois interne et externe (31, 32) ont des hauteurs différentes. 40
3. Dispositif de fermeture pour une boîte de conserve ouverte, selon l'une quelconque des revendications précédentes, dans lequel la patte de fixation (5) comprend au moins une encoche (6). 45
4. Dispositif de fermeture pour une boîte de conserve ouverte, selon l'une quelconque des revendications précédentes, dans lequel le dispositif (2) d'une vue de dessus est droit. 50
5. Dispositif de fermeture pour une boîte de conserve ouverte, selon l'une quelconque des revendications 1 à 3, dans lequel le dispositif (2) d'une vue de dessus est incurvé. 55

Fig.1

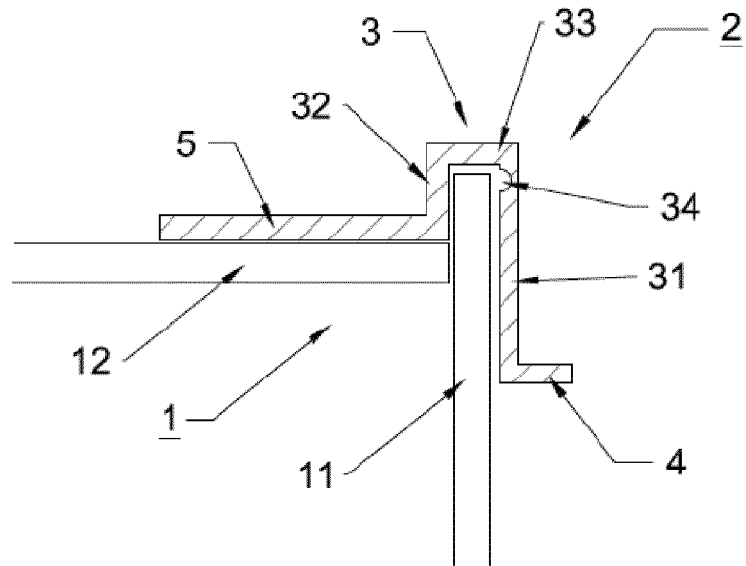


Fig.2

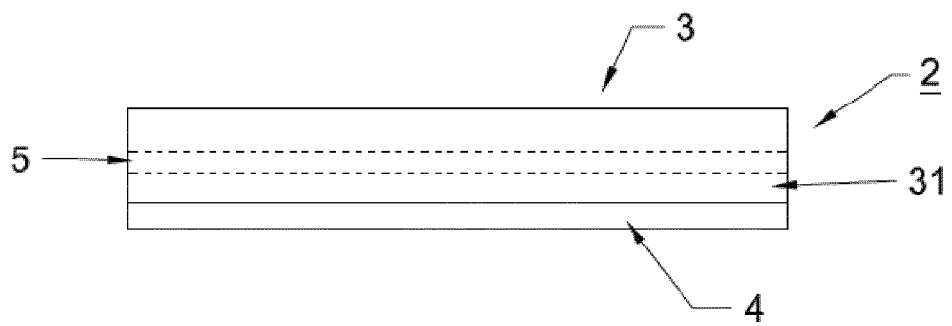


Fig.3


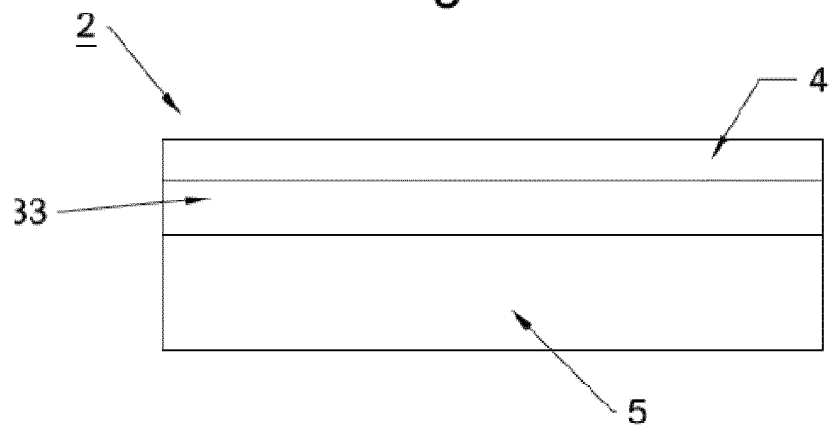


Fig.4

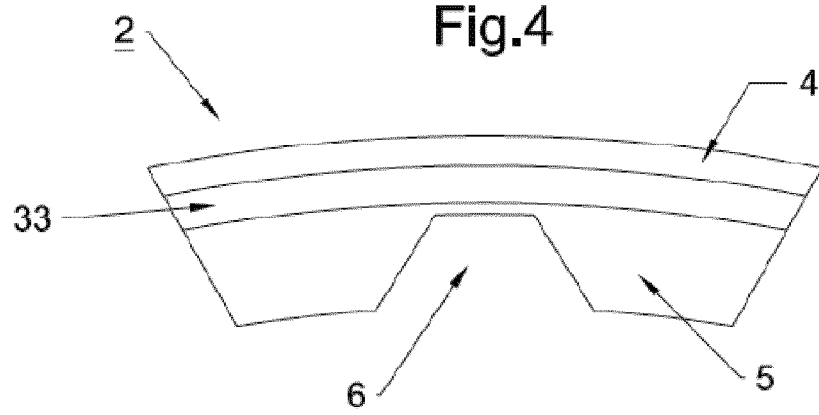

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- ES 2187937 [0007]
- ES 1069073 U [0007]
- ES 1023228 U [0007]
- ES 1048748 U [0007]
- US 2859786 A [0008]