

(19)



(11)

**EP 3 495 587 B1**

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

**06.07.2022 Bulletin 2022/27**

(51) International Patent Classification (IPC):

**E04H 4/16 (2006.01)**

(52) Cooperative Patent Classification (CPC):

**E04H 4/1654**

(21) Application number: **18207706.5**

(22) Date of filing: **23.09.2013**

(54) **SWIMMING POOL CLEANER**

SCHWIMMBECKENREINIGER

SYSTÈME DE NETTOYAGE DE PISCINE

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB  
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO  
PL PT RO RS SE SI SK SM TR**

(30) Priority: **26.09.2012 US 201213627637**

(43) Date of publication of application:

**12.06.2019 Bulletin 2019/24**

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:

**17181150.8 / 3 266 959**

**13841082.4 / 2 900 888**

(73) Proprietor: **Hayward Industries, Inc.**

**Berkeley Heights, NJ 07922 (US)**

(72) Inventors:

- **RIEF, Dieter J.**  
**Santa Rosa, CA 95404 (US)**
- **SCHILTZER, Hans Rainer**  
**Rohnert Part, CA 94928 (US)**

(74) Representative: **Cross, James Peter Archibald**

**Maucher Jenkins**  
**Seventh Floor Offices**  
**Artillery House**  
**11-19 Artillery Row**  
**London SW1P 1RT (GB)**

(56) References cited:

**AT-U1- 5 391 GB-A- 2 433 694**  
**US-A- 5 604 950 US-B1- 7 378 026**

**EP 3 495 587 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### FIELD OF THE INVENTION

**[0001]** The present invention relates to swimming pool cleaners and, more particularly, to automatic swimming pool cleaners movable along an underwater pool surface for purposes of cleaning debris therefrom. Still more particularly, this invention relates to swimming pool cleaners having the flow of water pumped and/or sucked by remote pumps into and through the pool cleaners.

### BACKGROUND OF THE INVENTION

**[0002]** Automatic swimming pool cleaners of the type that move about the underwater surfaces of a swimming pool are driven by many different kinds of systems. A variety of different pool-cleaner devices in one way or another harness the flow of water, as it is drawn or pushed through the pool cleaner by the pumping action of a remote pump for debris collection purposes.

**[0003]** Suction automatic pool cleaners are very successful when there is fine debris or debris that become soft in water. This fine debris is sucked up by the cleaner and deposited into a pump basket, or other debris-collection device, and the really fine debris passes into the pool filter. An example of a suction cleaner is disclosed in commonly-owned United States Patent No. 6,854,148 (Rief et al.), or US 5,604,950 A.

**[0004]** Suction automatic swimming pool cleaners are used in places with much sand and silt. Although suction cleaners can take leafy debris once it has softened in the pool, large debris such as large acorns and hard leaves would plug up a suction cleaner. Suction swimming pool cleaners are also limited to the debris size due to loss of suction if the inlet and/or outlet orifices are widened to accommodate such large debris and the possibility of large debris clogging the pool pipes.

**[0005]** Conversely, pressure automatic swimming pool cleaners are very successful when there is large debris such as leaves and acorns, these large debris are pulled off the pool surface by virtue of a Venturi effect and are placed into a debris-collection device, such as a bag, above the cleaner. An example of a pressure cleaner is disclosed in commonly-owned United States Patent No. 6,782,578. With a pressure swimming pool cleaner, the limitation is the opposite to the suction cleaner. In removing very large debris from the swimming pool, a pressure cleaner uses a collection bag or other receptacle. Regardless of how fine the walls of such receptacle are, sand and silt can pass through them back into the pool.

**[0006]** The problem is that most often only one cleaner is used in a pool. Therefore, people have either a suction cleaner or a pressure cleaner. Many swimming-pool builders place a suction cleaner into a pool when it is built. This is because there is no real landscaping around the pool at the time of the cleaner installation. However, just few years later, when trees and bushes have grown

up, the debris becomes overwhelming and constantly plugs the suction cleaner.

**[0007]** Still with the pressure cleaner, no matter how large debris is in the pool, there is always sand and silt from cement and other elements of the surrounding environment. Such fine debris will pass through the debris-collection bag back into the pool. Although some swimming pool pressure cleaners have tails that supposedly whip the debris toward the main drain, in reality such tails only bring the dirt into suspension until it falls back on the pool bottom to start the process all over again.

**[0008]** Attempts have been made to utilize both a suction power and a pressure flow from remote pumps by the same swimming pool cleaner apparatus. One such apparatus is disclosed in United States Patent No. 5,099,535 (Chauvier et al.). The apparatus of the Chauvier et al. patent is connected to both a pressure and suction remote pumps at the same time. However, only the suction hose is used for removal of the debris from the swimming pool underwater surface. The Chauvier et al. cleaner utilizes the pressure flow only for displacement of the cleaner along the underwater pool surface such that the Chauvier et al. cleaner remains a suction cleaner at all times and retains disadvantages of suction cleaners described earlier. Therefore, to remove large or hard debris from the swimming pool, one would have to use a separate cleaner or cleaning method which accommodates successful removal of such large debris. It should further be noted that, because suction and pressure line connectors are not in the same vicinity of a swimming pool, the connection to both lines at the same, as proposed by the Chauvier et al. patent, is practically not possible.

**[0009]** United States Patent No. 7,168,120 (Habif et al.) discloses a pressure-fed vacuum swimming pool cleaning robot. The robot of the Habif et al. patent has a structure which extends from a debris-inlet end applied to the swimming-pool underwater surface to an opposite debris-outlet end which is distal from the underwater surface. In the robot of the Habif et al. patent, the suction is always created at the debris-outlet end by either a connection of the debris-outlet end to a suction hose or by creating a Venturi effect at the debris-outlet. The structure of the Habif et al. patent consistently operates as a suction cleaner which successfully removes only fine or very soft debris. This structure is not configured for removal of large and hard debris which would plug up the debris inlet as well as inner passages of the Habif et al. robot. Therefore, as with the Chauvier et al. patent, large or hard debris would have to be removed from the swimming pool by a separate cleaner different from the robot of the Habif et al. patent or by some other means designed for removal of such large debris.

**[0010]** Also, in some states law requires variable speed pumps. It would be beneficial to have a cleaner which consistently provides an efficient performance with pumps running at lower or higher rates and is successful in removing both fine and large debris from the swim-

ming-pool underwater surface.

**[0011]** US 7 378 026 B1 concerns an apparatus and a method for removing particulate matter from a plurality of vessels.

**[0012]** AT 5 391 U1 concerns a device for suction of deposits, in particular mud and/or algae from the bottom of a body of water.

**[0013]** It would be desirable to have a pool cleaner allowing manufacturing to be standardized and the end user have easy accessibility to the cleaner parts for maintenance.

## STATEMENTS OF THE INVENTION

**[0014]** Aspects of the present invention are defined by the accompanying claims. According to a first aspect there is provided a swimming pool cleaner in accordance with claim 1. Examples of the following description not falling under the scope of the claims and should be interpreted as examples useful for understanding the invention. Preferred optional features are defined in the dependent claims. This invention is an improved swimming pool cleaner of the type movable along an underwater pool surface to clean debris therefrom. The swimming pool cleaner of the present invention provides an important advantage of substantially strain-free and tool-free assembly.

**[0015]** The swimming pool cleaner includes a body having a debris inlet and a debris outlet. The swimming pool cleaner may include a segmented skirt which includes a plurality of flap members each of which extends from a proximal end hinged to the body to a distal end which is configured for extending along the pool surface such that the skirt forms with the pool surface a plenum from which water and debris are drawn into the inlet. The body may define an elongate slotted cavity extending between two ends and pivotably holding the proximal ends of the flap members therewithin. The slotted cavity has an openable inlet-adjacent middle region permitting strain-free insertion of the flap-member proximal ends into the cavity for sliding therealong. The cleaner further includes a nozzle inserted into the debris inlet to control debris-laden water flow. The nozzle may be positioned over the middle region of the slotted cavity retaining the flap-member proximal ends in the cavity.

**[0016]** The slotted cavity may be formed by first and second wall portions separated by a slot. In some embodiments, a first wall-portion configuration being continuous between the closed side ends, and a second wall-portion configuration being interrupted along the inlet-adjacent middle region permitting strain-free insertion of the flap-member proximal ends into the cavity.

**[0017]** In certain embodiments, the first and second wall-portion configurations each include a plurality of spaced tabs holding the flap-member proximal ends. In some of such embodiments, the second configuration is lacking the tabs along the inlet-adjacent middle region thereby opening access for sliding the flap-member prox-

imal ends in or out of the cavity for strain-free assembly of the segmented skirt.

**[0018]** The cleaner body may also include a frame structure extending laterally from the debris inlet along the slotted cavity. In such versions, the tabs of the second wall-portion configuration protrude from the frame structure thereby have a reinforced configuration minimizing breakage of the tabs.

**[0019]** The nozzle may have two opposite lateral sides and a cavity-adjacent side therebetween. In some embodiments, the nozzle includes at least one tab extending from the cavity-adjacent side over the cavity thereby closing the inlet-adjacent middle region and retaining the flap-member proximal ends within the cavity by providing continuity for the second wall-portion configuration.

**[0020]** In certain embodiments, the nozzle is removable from the debris inlet and is configured for engagement with the frame structure which holds the nozzle within the debris inlet. The pool cleaner may include a plurality of interchangeable nozzles each of which having a flow opening which is different in size than flow openings of the other nozzles.

**[0021]** Such varying in size nozzle permits easy adjustment of the inlet size to accommodate the size of debris falling into the pool. The nozzle with a larger nozzle opening will allow large debris such as leaves, plant seeds and the like to pass through while the nozzles with a small or medium flow opening may not be able to pass such debris through. Furthermore, the interchangeable nozzles of the present invention consistently provide a required efficient performance of the cleaner with variable speed pumps. The interchangeable nozzles of the present invention consistently provide a required efficient performance of the cleaner. In particular, when the pump runs at a lower rate, the nozzle with the smaller flow opening will provide the required performance. And, when the pump runs at a high rate, the nozzle with the larger flow opening will have the required performance.

**[0022]** In some embodiments of the present invention, the pool cleaner may be interchangeably usable as a suction cleaner for removal of fine debris such as sand and silt and as a pressure cleaner for removal of large and hard debris such as large leaves, acorns and stones. In such embodiments, the body is adapted at the debris outlet for securement of either a water-suction hose connected to a remote suction system or a debris-collection device entrapping debris and passing water therethrough back into the pool. When the cleaner is used as a pressure cleaner, the one of the nozzles which has the larger flow opening is secured with respect to the body. When the cleaner is used as a suction cleaner, the inlet size can be reduced by installing that one of the nozzles which has the smaller flow opening.

**[0023]** The pool cleaner includes a tool-free nozzle mounting. Such tool-free nozzle mounting may include a pair of lateral protrusions each extending from one of the lateral sides of the nozzle and a pair of frame-structure side portions extending laterally from the inlet and

each engaging the corresponding lateral protrusion of the nozzle thereby retaining the nozzle within the debris inlet.

**[0024]** Each protrusion may have a first surface substantially orthogonal to the nozzle lateral side and a second surface sloping between the first surface and the nozzle lateral side. The orthogonal surface allows pressing on the corresponding side body portion and the sloping surface permits release of the nozzle from the inlet. Each side portion of the frame structure includes a spring-grip inwardly displaceable when pressed by the corresponding lateral protrusion of the nozzle being inserted into the debris inlet. The nozzle is being inserted beyond the spring-grip which resiliently returns into alignment with the side portion thereby locking the nozzle within the inlet.

**[0025]** In some embodiments, each side portion of the frame structure extends outwardly from the debris inlet thereby forming a tapered surface minimizing entrapment of the cleaner on step-like pool structures.

**[0026]** In certain embodiments, the pool cleaner also includes a tool-free wheel-mounting assembly which supports at least one pair of wheels moving the cleaner along the pool surface. The tool-free wheel-mounting assembly includes each of the wheels having a ball bearing rotatably holding such wheel on a non-rotating shaft extending laterally from the respective side of the cleaner body, each ball-bearing having an interior configuration matching an exterior configuration of the shaft in non-rotating engagement therewith. Each shaft may have a polygonal exterior with each bearing having a polygonal interior matching the shaft exterior in non-rotating engagement therewith. The ball bearing may be a double-race bearing in non-rotating engagement with the respective wheel.

**[0027]** In some versions, each shaft has a hollow interior with an inwardly-facing shoulder therewithin. In such versions, the tool-free wheel-mounting assembly includes a removable clip inserted into the shaft interior and in a locking engagement with the shoulder. The clip has at least two fingers which extend from an exterior head and terminate with a hook-end within the shaft interior. The fingers are being pressed together upon insertion into the shaft and spreading outwardly into the locking engagement with the shoulder thereby securely holding the wheel on the shaft.

**[0028]** Another aspect of the present disclosure a non-claimed method for tool-free assembly of the swimming pool cleaner. In this method, the nozzle is installed by pressing the spring-grip with the nozzle into the inlet until the nozzle is beyond the spring-grip which resiliently returns to its original orientation thereby locking the nozzle within the inlet.

**[0029]** The method also includes the step of hingedly attaching the segmented skirt to the body. The skirt is attached to the body in a stain-free fashion. In particular, prior to installing the nozzle, a proximal end (also referred to as an attaching end) of each flap member is freely

places into the open inlet-adjacent middle region of the slotted cavity. The flap members are secured within the cavity by the step of installing the nozzle being positioned over and closing the inlet-adjacent middle region.

**[0030]** The tool-free assembly method also may further include a step of tool-free mounting of the wheels by sliding the ball-bearing polygonal interior of each wheel over the corresponding matching polygonal shaft exterior for a non-rotating engagement therebetween. In such embodiments, the ball bearing provides wheel rotation. The wheel is securely held on the shaft by the removable clip inserted into the shaft interior and into a locking engagement with the shoulder.

## 15 BRIEF DESCRIPTION OF THE DRAWINGS

### [0031]

FIGURE 1 is an exploded bottom perspective view of a swimming pool cleaner according to the present invention.

FIGURE 2 is an exploded cross-sectional side view of the swimming pool of FIGURE 1.

FIGURE 3 is a cross-sectional side view of the assembled swimming pool cleaner of FIGURE 1.

FIGURE 4 is a perspective view of a nozzle for the swimming pool cleaner according to the present invention.

FIGURE 5 is an enlarged fragmentary cross-sectional view showing a configuration of a slotted cavity seen in FIGURE 1.

FIGURE 6 is a lateral cross-sectional view showing the step of installing the nozzle by pressing the spring-grip with the nozzle.

FIGURE 7 is an enlarged fragmentary cross-section view showing interaction between the nozzle lateral side and the spring-grip as seen in FIGURE 6.

FIGURE 8 is a lateral cross-sectional view showing the step of installing the nozzle by pressing the nozzle into the inlet beyond the spring-grip.

FIGURE 9 is an enlarged fragmentary cross-section view showing interaction between the nozzle lateral side and the spring-grip as seen in FIGURE 8.

FIGURE 10 is a lateral cross-sectional view showing the step of removing the nozzle from the inlet by inward displacement of the spring-grip thereby releasing the nozzle.

FIGURE 11 is an enlarged fragmentary cross-section view showing interaction between the nozzle lateral side and the spring-grip as seen in FIGURE 10.

FIGURE 12 is a perspective view of the nozzle with a small flow opening for the swimming pool cleaner according to the present invention.

FIGURE 13 is a perspective view of the nozzle with a medium flow opening for the swimming pool cleaner according to the present invention.

FIGURE 14 is a perspective view of the nozzle with a large flow opening for the swimming pool cleaner

according to the present invention.

FIGURE 15 is a lateral exploded cross-sectional view showing the step of tool-free wheel mounting. FIGURE 16 is an enlarged fragmentary exploded lateral cross-sectional view showing the step of tool-free wheel mounting of one of the wheels as seen in FIGURE 15.

FIGURE 17 is a lateral fragmentary cross-sectional view showing the tool-free mounting of one of the wheels.

FIGURE 18 is a bottom perspective view of a swimming pool cleaner showing alternative shapes for a matching shaft exterior and ball-bearing interior for tool-free wheel mounting according to the present invention.

FIGURE 19 is a side cross-sectional view of one example of a suction cleaner.

FIGURE 20 is a side cross-sectional view of an example of a pool cleaner which can be interchangeably used as a suction cleaner and a pressure cleaner.

#### DETAILED DESCRIPTION OF EMBODIMENTS

**[0032]** FIGURES 1-21 illustrate exemplary embodiments of aspects of the present invention for an improved swimming pool cleaner 100 of the type movable along an underwater pool surface 2 to clean debris therefrom.

**[0033]** FIGURES 1 and 18-20 illustrate swimming pool cleaner 100 including a body 10 having a debris inlet 11 and a debris outlet 12. As best seen in FIGURES 1-3, a segmented skirt 20 includes a plurality of flap members 21 each of which extends from a proximal (or mounting) end 22 hinged to body 10 to a distal end 23 which is configured for extending along pool surface 2 such that skirt 20 forms with pool surface 2 a plenum from which water and debris are drawn into inlet 11, as best illustrated in FIGURE 19. FIGURES 1-3, 5 and 18 show body 10 defining an elongate slotted cavity 40 extending between two ends 41 and pivotably holding proximal ends 22 of flap members 21 therewithin.

**[0034]** Prior to this invention, proximal ends of the skirt were clipped into the slotted cavity. Such clipping created stress on the cavity walls and skirt retaining structures which would later easily break later after the exposure to pool chemicals and deterioration of the plastic materials of which the body is made.

**[0035]** FIGURES 1-3 show that inventive cleaner 100 has slotted cavity 40 with an openable inlet-adjacent middle region 42 permitting strain-free insertion of flap-member proximal ends 22 into cavity 40. FIGURE 1 shows skirt 20 including forward and rear sets of flap members 21 A and 21B. Each set includes a pair of end flap members 21 which are inserted into middle region 42 for sliding along cavity 40 toward their installed positions at a respective end 41. Each set is also shown to include a pair of middle flap members 21 which are inserted into middle region 42 in their installed position adjacent inlet

11. FIGURES 1-3 best illustrate proximal ends 23 of flap members 21 having a substantially cylindrical shape and cavity 40 being configured to substantially conform such cylindrical shape (see FIGURE 5) with a slot 44 being configured and dimensioned to permit pivoting of flap members 21, as seen in FIGURE 3.

**[0036]** FIGURES 2-4 show a nozzle 30 inserted into debris inlet 11 to control debris-laden water flow. As best seen in FIGURE 3, nozzle 30 is positioned over middle region 42 of slotted cavity 40 thus retaining flap-member proximal ends 22 in cavity 40. Nozzle 30 is installed over proximal ends 21 of the middle flap members 41.

**[0037]** FIGURES 2 and 5 best show slotted cavity 40 formed by first and second wall portions 45 and 46 separated by slot 44. FIGURES 1 and 18 show a first wall-portion configuration 45A continuously between ends 41 which are shown as closed side ends. A second wall-portion configuration 46A is shown as being interrupted along inlet-adjacent middle region 42 to permit strain-free insertion of flap-member proximal ends 22 into cavity 40. Such strain-free and tool-less skirt assembly also permits for easy replacement of worn flap members by the end user without any tools.

**[0038]** FIGURES 1 and 18 further show first and second wall-portion configurations 45A and 46A each including a plurality of spaced tabs 17 holding flap-member proximal ends 22. Second configuration 46A lacks tabs 17 along inlet-adjacent middle region 42 thereby opening access for strain-free insertion or removal of flap-member proximal ends 22 in or out of cavity 40 for strain-free assembly of segmented skirt 20.

**[0039]** FIGURES 1, 6-11 and 18 show cleaner body 10 also including a frame structure 18 extending laterally from debris inlet 11 along slotted cavity 40. It is further seen in FIGURES 1 and 18 that tabs 17 of second wall-portion configuration 46A protrude from frame structure 18 thereby being reinforced to minimize breakage of tabs 17.

**[0040]** FIGURES 1, 6, 8, 10 and 18 also show frame structure 18 extending laterally and outwardly from debris inlet 11 thereby forming a pair of tapered surfaces 181 minimizing entrapment of cleaner 100 on step-like pool structures. Such angled surfaces give the cleaner an ability to slide off any step or pool ledge, thus minimizing stopping of the cleaner on such pool structures.

**[0041]** FIGURE 4 shows nozzle 30 having two opposite lateral sides 31 and two opposite cavity-adjacent sides 32 therebetween. Nozzle 30 includes tabs 33 extending from each of cavity-adjacent sides 32 over cavity 40 thereby closing inlet-adjacent middle region 42 and retaining flap-member proximal ends 22 within cavity 40 by providing continuity for second wall-portion configuration 46A.

**[0042]** FIGURES 2, 3 and 6-11 show nozzle 30 being removable from debris inlet 11 and configured for engagement with frame structure 18 which holds nozzle within debris inlet 11.

**[0043]** FIGURES 19 and 20 show body 10 defining a

water-flow chamber 13 through which water passes from debris inlet 11 to debris outlet 12. Illustrated swimming pool cleaner 100 is of the type motivated by water flow through it to move cleaner 100 along underwater pool surface 2 to be cleaned. As seen in FIGURES 19 and 20, turbine 14 is rotatably mounted within water-flow chamber 13 and has turbine vanes 141 which are moved by the water flow to rotate turbine 14.

**[0044]** The improved cleaner of this invention provides excellent power and drive particularly when the turbine is in the highly preferred forms which are the subject of co-owned U.S. Pat. Nos. 6,292,970 and 6,854,184.

**[0045]** The removability of nozzle 30 allows easy access to chamber 13 through inlet 11 such that the end user may remove any debris entrapped within turbine 14 without any need for opening an upper housing of the cleaner. Furthermore, in cleaner 100 with removable nozzle 30, body 10 can be molded as one standard configuration without the need for sonic welding of threaded inserts onto body 10. This also positively affects storage of body 10 which is a lower body piece for cleaner like cleaner 100. Prior to this invention, in cleaners with a non-removable nozzle and smaller flow opening, the lower body had to have a separate molding process.

**[0046]** As illustrated in FIGURES 6-11 nozzle 30 is installed and is removable without any tools. Pool cleaner 100 includes a tool-free nozzle mounting which includes a pair of lateral protrusions 34 each extending from one of lateral sides 31 of nozzle 30 and a pair of frame-structure side portions 19 extending laterally from inlet 11 and each engaging the corresponding lateral protrusion 34 of nozzle 30 thereby retaining nozzle 30 within debris inlet 11. Each side portion 19 of frame structure 18 includes a spring-grip 16 inwardly displaceable when pressed by the corresponding lateral protrusion 34 of nozzle 30 being inserted into debris inlet 11.

**[0047]** As best seen in FIGURES 7, 9 and 11, each protrusion 34 has a first surface 35 substantially orthogonal to nozzle lateral side 31 and a second surface 36 sloping between first surface 35 and nozzle lateral side 31. FIGURES 6-9 illustrate installation of nozzle 30 by pressing orthogonal surface 35 of nozzle 30 on the corresponding spring-grip 16 (see FIGURES 6 and 7) to pass nozzle 30 toward inlet 11 and beyond spring-grip 16 which resiliently returns to its original orientation in alignment with side portion 19 thereby locking nozzle 30 within inlet 11 (see FIGURES 8 and 9). FIGURES 10 and 11 illustrate how sloping surface 36 permits release of nozzle 30 from inlet 11 by pressing each side portion 19 inwardly beyond orthogonal surface 34 of nozzle 30 which is then free for removal from inlet 11.

**[0048]** Cleaner 100 has a plurality of nozzles 30A, 30B and 30C for being interchangeably used with cleaner 100. FIGURES 12-14 show each of nozzles 30A, 30B and 30C having a flow opening 37A, 37B and 37C which is different in size than flow openings 37 of other nozzles 30. Such varying in size nozzle permits easy adjustment of the inlet size to accommodate the size of debris falling

into the pool. Nozzle 30C with larger flow opening 37C will allow large debris such as leaves, plant seeds and the like to pass through while nozzles 30A and 30B with small and medium flow openings 37A and 37B may not be able to pass such debris through. Interchangeable nozzles 30 also accommodate variable speed pumps such that when the pump runs at a lower rate, nozzle 30A with smaller flow opening 37A will provide the required performance. And, when the pump runs at medium or high rate, nozzles 30B and 30C with medium and larger flow openings 37B and 37C will have the required performance.

**[0049]** FIGURE 20 illustrates pool cleaner 200 which may be interchangeably usable as a suction cleaner and as a pressure cleaner. FIGURE 20 shows body 10A adapted at debris outlet 12 for securement of either a water-suction hose connected to a remote suction system or a debris-collection device entrapping debris and passing water therethrough back into the pool. When cleaner 200 is used as a pressure cleaner, nozzle 30C which has larger flow opening 37C is secured with respect to body 10A. When cleaner 200 is used as a suction cleaner, the inlet size can be reduced by installing nozzle 30A which has the smaller flow opening 37A.

**[0050]** FIGURES 15-18 illustrate a tool-free wheel-mounting assembly 50. FIGURES 18-20 show a one pair of wheels 51 for moving cleaner 100 along pool surface 2. FIGURES 15-17 illustrate tool-free wheel-mounting assembly 50 as including a ball bearing 52 for each of wheels 51 and rotatably holding such wheel 51 on a non-rotating shaft 53 extending laterally from the respective side 15 of cleaner body 10. It is seen in FIGURES 16 and 17 that each ball-bearing 52 has an interior configuration 520 matching an exterior configuration 530 of shaft 53 such that ball bearing 52 and shaft 53 are in non-rotating engagement with each other. Each shaft exterior 530 and each bearing interior 520 are shown in FIGURE 18 as having a polygonal configuration. FIGURE 18 also illustrates other possible shaft exterior and bearing-interior configurations, including polygons with 4, 5, 6, 7, 9 and 10 sides. One such configuration may be round with a protrusion on one of the shaft exterior 530 and the bearing interior 520 and a conforming cavity on the other one of the shaft exterior 530 and the bearing interior 520 such that shaft 53 and bearing 52 are locked in non-rotating engagement therebetween. When this configuration is round, ball bearing 52 is closely fitted over shaft 53 to prevent rotation therebetween.

**[0051]** Prior to this invention, shoulder bolts had to be used for securing wheels to the cleaner body. The shoulder bolts have shown to wear fairly quickly resulting in wheel hubs getting an undesirable lateral movement. Such lateral movement negatively affects a sonic molding of wheel-supporting parts to the body such that the sonic molding is separated and the wheel-supporting parts being removed out of the body.

**[0052]** FIGURES 15-17 show ball bearing 52 as a double-race bearing which is in a non-rotating engagement

with respective wheel 51. The bearings have shown superior rotating properties and through extended tests exhibited wear and tear as well as their overall performance significantly better than prior wheel-assembly configurations. The tool-less wheel assembly which provided for easy disassembly gives the end user an ability to easily replace bearings in the wheel hubs without the need for any special tools.

**[0053]** FIGURES 16 and 17 show each shaft having a hollow interior 531 with an inwardly-facing shoulder 55 inside shaft 53. Tool-free wheel-mounting assembly 50 also includes a removable clip 53 which is inserted into shaft interior 531 into a locking engagement with shoulder 55, as seen in FIGURE 17. FIGURES 16 and 17 further show clip 56 having at least two fingers 561 which extend from an exterior head 562 and terminate with a hook-end 563 within shaft interior 531. Fingers 561 are being pressed together upon insertion into shaft 53 and then spread out inside shaft 53 into the locking engagement with shoulder 55 thereby securely holding wheel 51 on shaft 53, as illustrated in FIGURE 17.

**[0054]** While the principles of the invention have been shown and described in connection with specific embodiments, it is to be understood that such embodiments are by way of example and are not limiting.

## Claims

1. A swimming pool cleaner (100, 200) comprising:
  - a body (10) having a debris inlet (11) and a debris outlet (12);
  - a removable nozzle (30, 30A-C) within the debris inlet (11) to control debris-laden water flow;
  - characterized by**
  - a tool-free nozzle-mounting structure at the debris inlet (11) removably retaining the nozzle (30, 30A-C) within the debris inlet (11).
2. The pool cleaner (100, 200) of claim 1 wherein the tool-free nozzle-mounting structure includes forming a spring-grip (16) formed by the body (10) and inwardly displaceable when pressed by the nozzle (30, 30A-C) being inserted into the debris inlet (11) beyond the spring-grip (16) which resiliently returns to its original orientation thereby locking the nozzle (30, 30A-C) within the inlet (11).
3. The pool cleaner (100, 200) of claim 2 wherein:
  - the nozzle (30, 30A-C) has a pair of lateral protrusions (34) each extending from one of lateral sides of the nozzle (30, 30A-C); and
  - the spring-grip (16) is formed by a pair of side body portions (19) extending laterally from the inlet (11) and each engaging the corresponding lateral protrusion (34) of the nozzle (30, 30A-C)

thereby retaining the nozzle (30, 30A-C) within the debris inlet (11).

4. The pool cleaner (100, 200) of claim 3 wherein each protrusion (34) has a first surface (35) substantially orthogonal to the nozzle (30, 30A-C) lateral side and a second surface (36) sloping between the first surface (35) and the nozzle (30, 30A-C) lateral side, the orthogonal surface pressing on the corresponding side body portion (19) and the sloping surface permitting release of the nozzle (30, 30A-C) from the inlet (11).
5. The pool cleaner (100, 200) of claim 4 wherein each side body portion (19) extends outwardly from the debris inlet (11) thereby forming tapered body surfaces minimizing entrapment of the cleaner on step-like pool structures.

## Patentansprüche

1. Schwimmbeckenreiniger (100, 200), der Folgendes aufweist:
  - einen Körper (10) mit einem Schmutzeinlass (11) und einem Schmutzauslass (12);
  - eine abnehmbare Düse (30, 30A-C) in dem Schmutzeinlass (11) zum Regeln von schmutzbelastetem Wasserdurchfluss;
  - gekennzeichnet durch**
  - eine Anordnung zur werkzeugfreien Düsenmontage an dem Schmutzeinlass (11), die die Düse (30, 30A-C) abnehmbar in dem Schmutzeinlass (11) hält.
2. Schwimmbeckenreiniger (100, 200) nach Anspruch 1, wobei die Anordnung zur werkzeugfreien Düsenmontage das Bilden einer Federklemme (16) beinhaltet, die von dem Körper (10) gebildet wird und nach innen verlagert werden kann, wenn sie von der Düse (30, 30A-C) bei Einführen in den Schmutzeinlass (11) über die Federklemme (16) hinaus gedrückt wird, die federnd in ihre Ausgangsausrichtung zurückkehrt, wodurch die Düse (30, 30A-C) in dem Einlass (11) arretiert wird.
3. Schwimmbeckenreiniger (100, 200) nach Anspruch 2, wobei:
  - die Düse (30, 30A-C) ein Paar lateraler Vorsprünge (34) hat, die sich jeweils von einer der lateralen Seiten der Düse (30, 30A-C) erstrecken; und
  - die Federklemme (16) von einem Paar von Seitenkörperteilen (19) gebildet wird, die sich von dem Einlass (11) lateral erstrecken und jeweils mit dem entsprechenden lateralen Vorsprung

(34) der Düse (30, 30A-C) in Eingriff kommen, wodurch die Düse (30, 30A-C) in dem Schmutzeinlass (11) gehalten wird.

4. Schwimmbeckenreiniger (100, 200) nach Anspruch 3, wobei jeder Vorsprung (34) eine erste Oberfläche (35), die zur lateralen Seite der Düse (30, 30A-C) im Wesentlichen orthogonal ist, und eine zweite Oberfläche (36), die zwischen der ersten Oberfläche (35) und der lateralen Seite der Düse (30, 30A-C) schräg verläuft, hat, wobei die orthogonale Oberfläche auf den entsprechenden Seitenkörperteil (19) drückt und die schräg verlaufende Oberfläche die Freigabe der Düse (30, 30A-C) aus dem Einlass (11) zulässt.
5. Schwimmbeckenreiniger (100, 200) nach Anspruch 4, wobei jeder Seitenkörperteil (19) sich von dem Schmutzeinlass (11) nach außen erstreckt, wodurch angeschrägte Körperflächen gebildet werden, die das Hängenbleiben des Reinigers an stufenartigen Schwimmbeckenstrukturen minimieren.


#### Revendications

1. Dispositif de nettoyage de piscine (100, 200) comportant :
  - un corps (10) ayant une entrée de débris (11) et une sortie de débris (12) ;
  - une buse amovible (30, 30A-C) à l'intérieur de l'entrée de débris (11) servant à réguler le débit de l'eau chargée de débris ; **caractérisé par** une structure de montage de buse sans outil au niveau de l'entrée de débris (11) servant à retenir la buse (30, 30A-C) de manière amovible à l'intérieur de l'entrée de débris (11).
2. Dispositif de nettoyage de piscine (100, 200) selon la revendication 1, dans lequel la structure de montage de buse sans outil comprend la formation d'un dispositif de préhension à ressort (16) formé par le corps (10) et en mesure d'être déplacé vers l'intérieur quand il est comprimé par l'insertion de la buse (30, 30A-C) dans l'entrée de débris (11) au-delà du dispositif de préhension à ressort (16) qui revient de manière élastique dans son orientation d'origine pour de ce fait verrouiller la buse (30, 30A-C) à l'intérieur de l'entrée (11).
3. Dispositif de nettoyage de piscine (100, 200) selon la revendication 2, dans lequel :
  - la buse (30, 30A-C) a une paire de parties saillantes latérales (34) s'étendant chacune depuis l'un des côtés latéraux de la buse (30, 30A-C) ; et
  - le dispositif de préhension à ressort (16) est for-


mé par une paire de parties de corps latérales (19) s'étendant dans le sens latéral depuis l'entrée (11) et se mettant chacune en prise avec la partie saillante latérale correspondante (34) de la buse (30, 30A-C) pour de ce fait retenir la buse (30, 30A-C) à l'intérieur de l'entrée de débris (11).

4. Dispositif de nettoyage de piscine (100, 200) selon la revendication 3, dans lequel chaque partie saillante (34) a une première surface (35) sensiblement orthogonale par rapport au côté latéral de la buse (30, 30A-C) et une deuxième surface (36) allant en s'inclinant entre la première surface (35) et le côté latéral de la buse (30, 30A-C), la surface orthogonale venant comprimer la partie de corps latérale correspondante (19) et la surface allant en s'inclinant permettant la libération de la buse (30, 30A-C) par rapport à l'entrée (11).
5. Dispositif de nettoyage de piscine (100, 200) selon la revendication 4, dans lequel chaque partie de corps latérale (19) s'étend vers l'extérieur depuis l'entrée de débris (11) pour de ce fait former des surfaces de corps coniques permettant de minimiser tout coincement du dispositif de nettoyage sur des structures de piscine similaires à des marches.




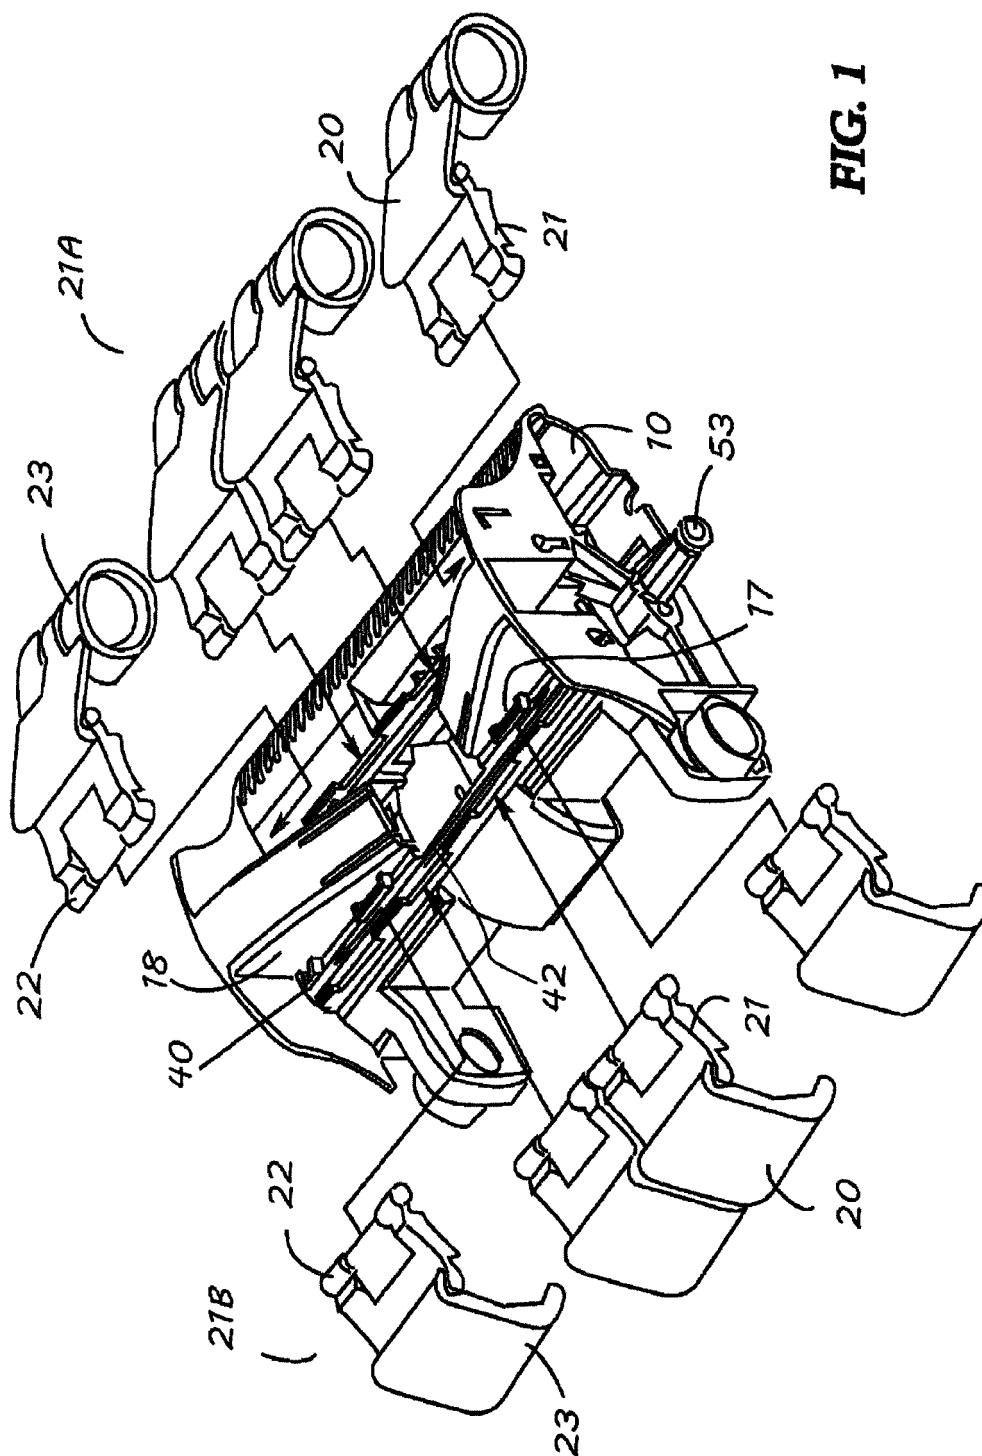


**FIG. 1**

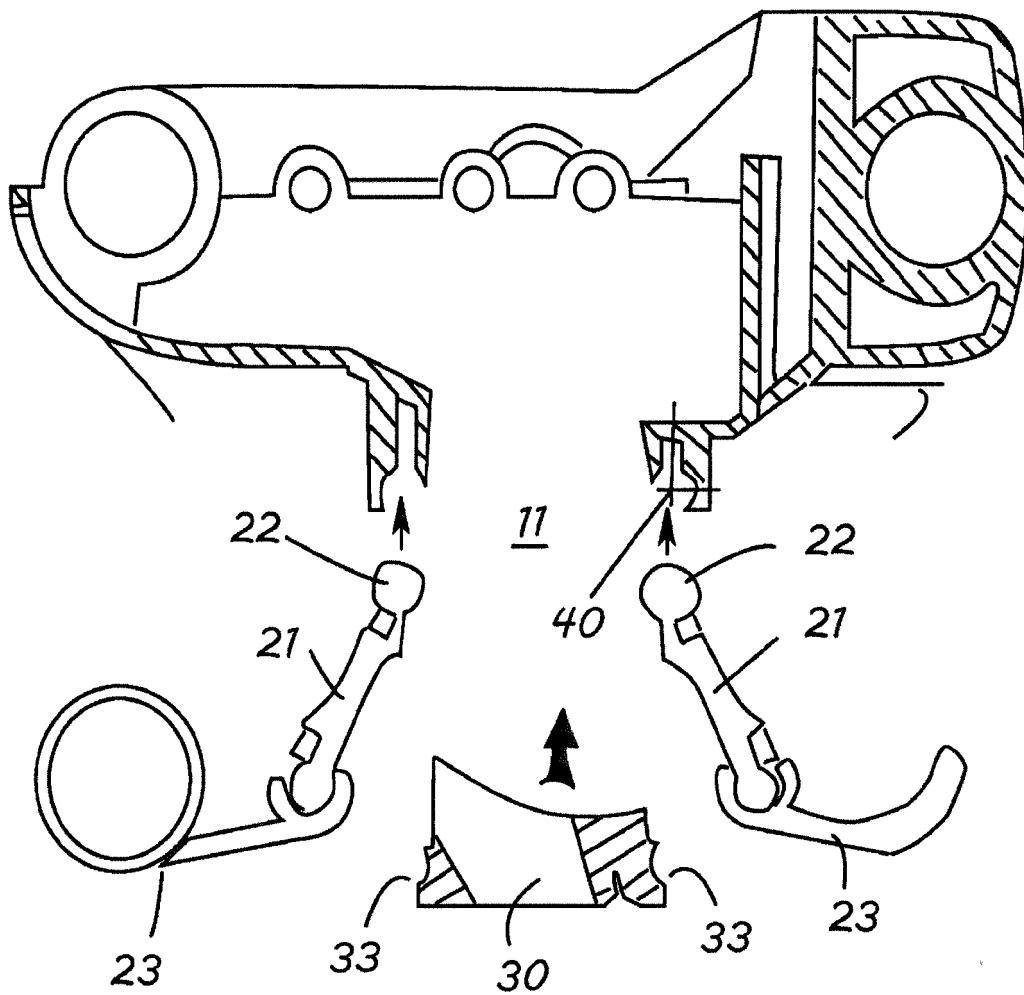


**FIG. 2**

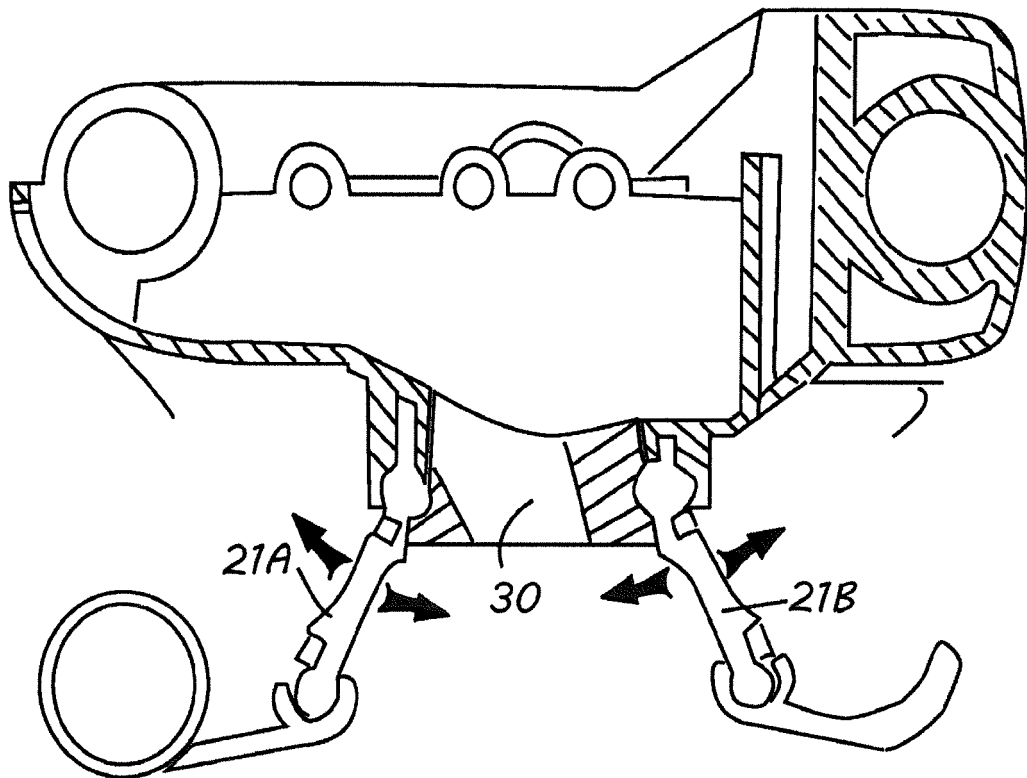



**FIG. 3**

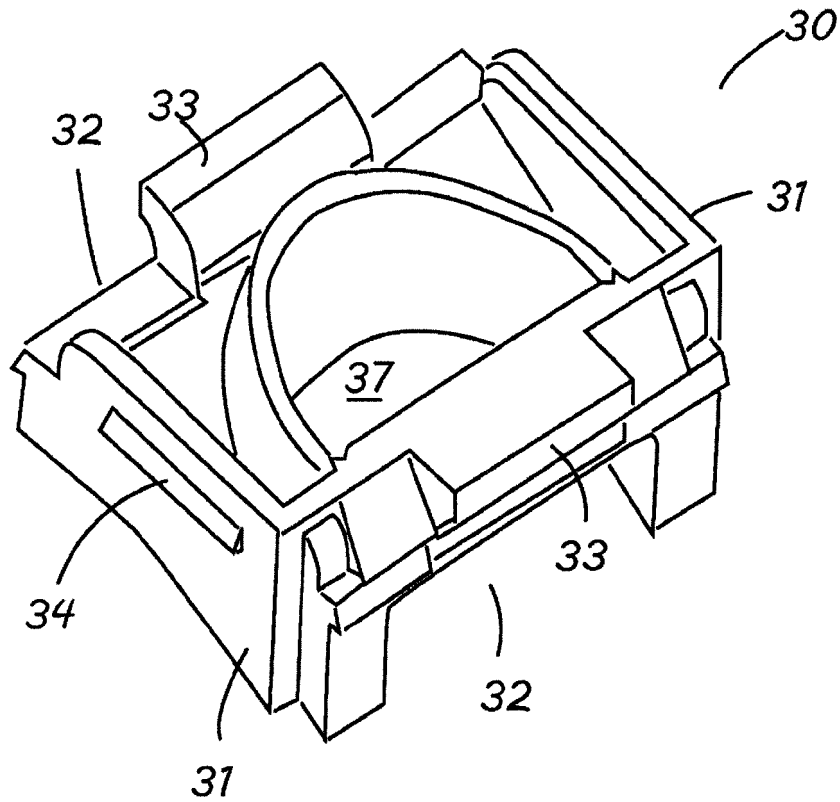



**FIG. 4**

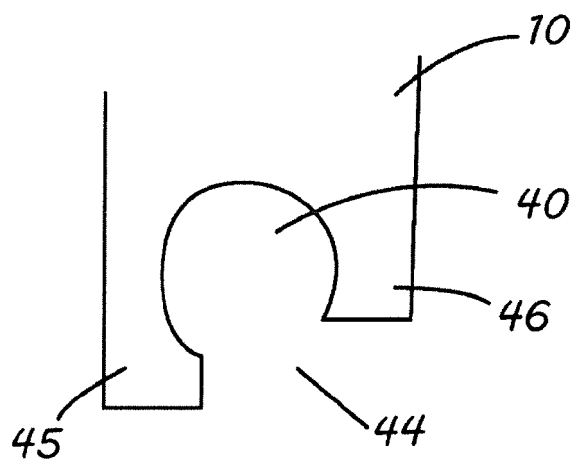


**FIG. 5**

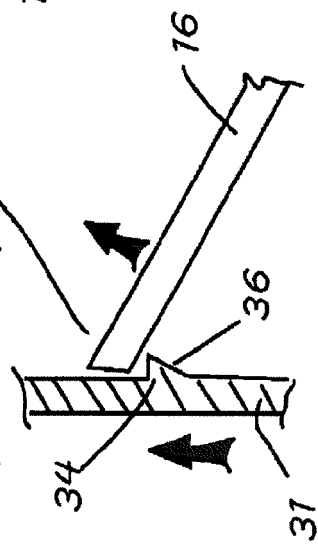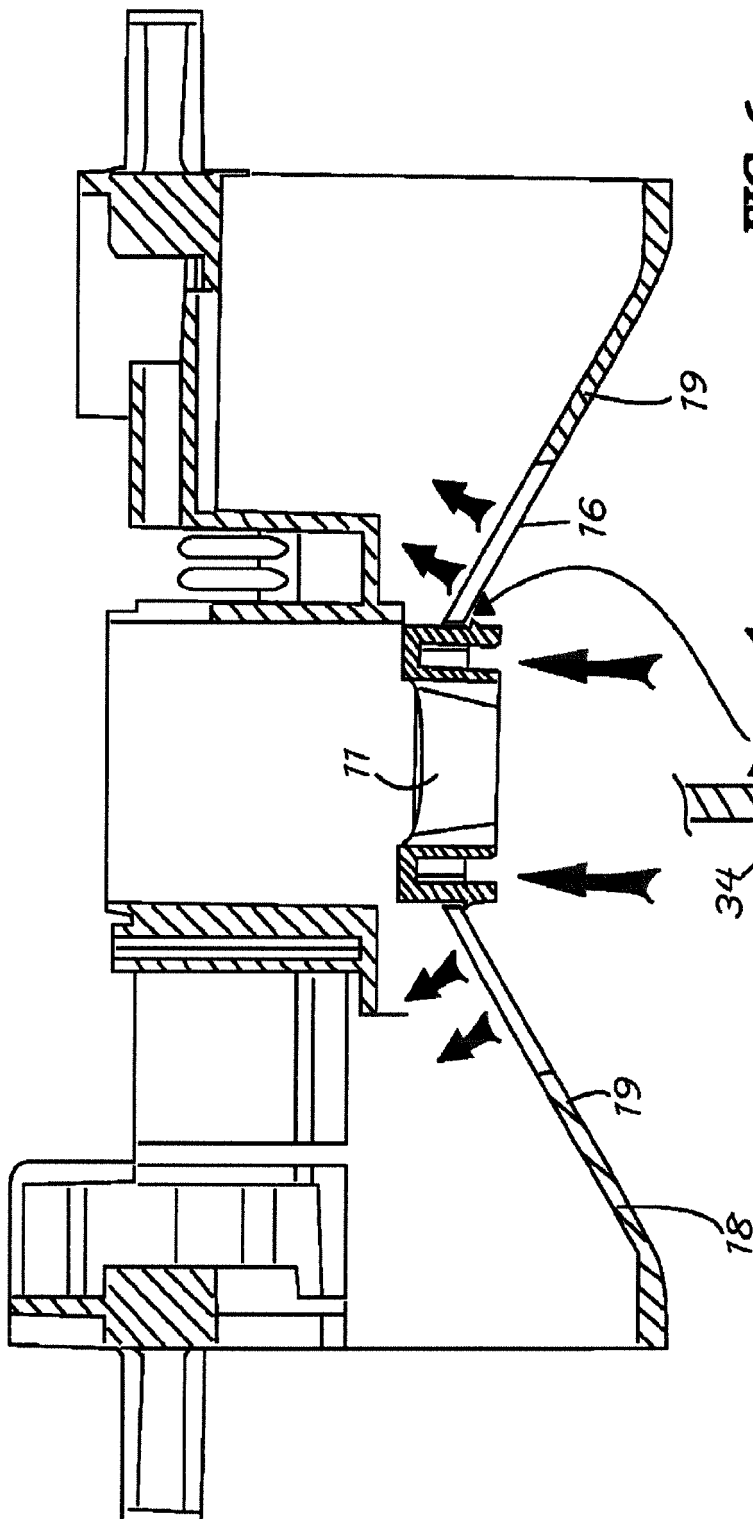

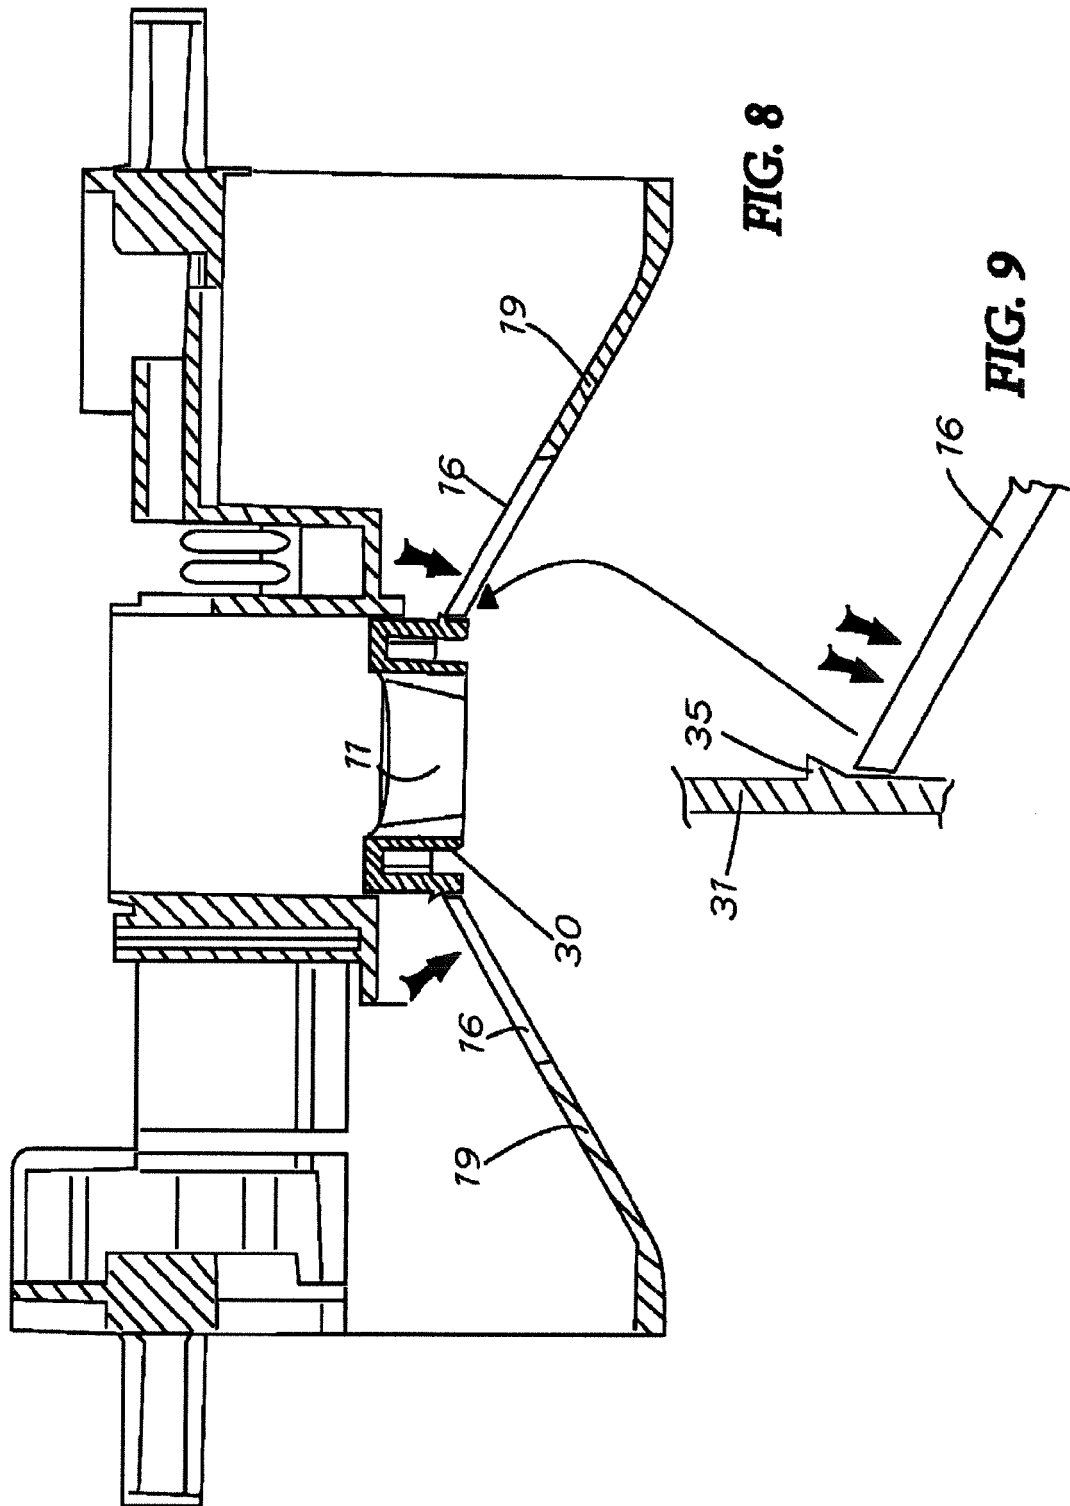


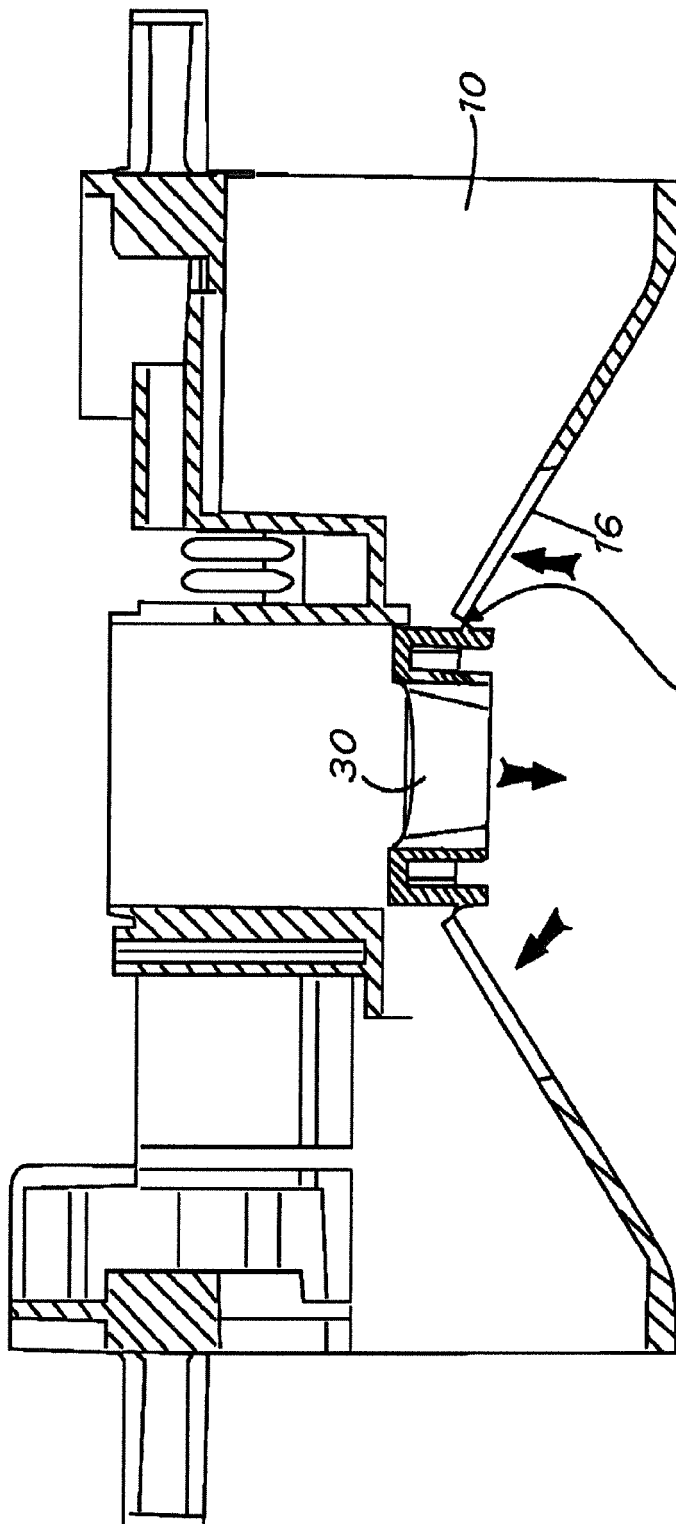


**FIG. 10**

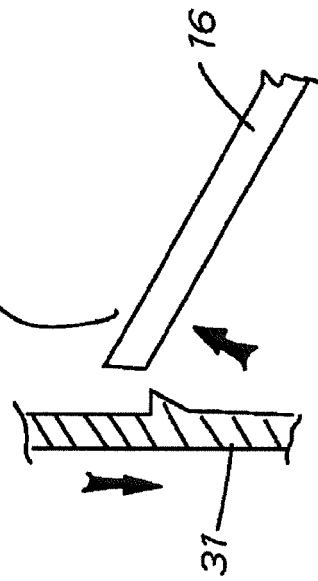


**FIG. 11**

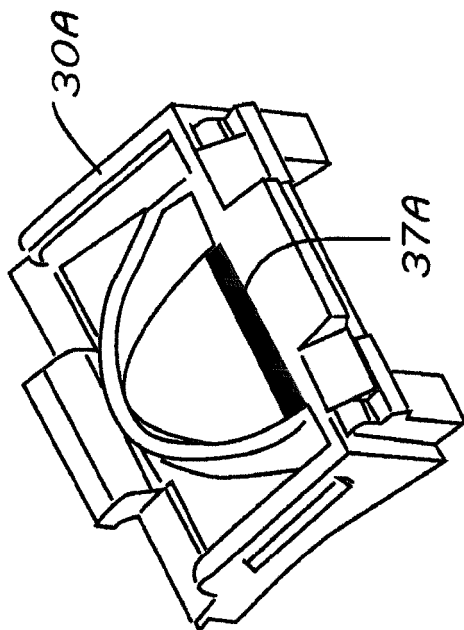

**FIG. 12**

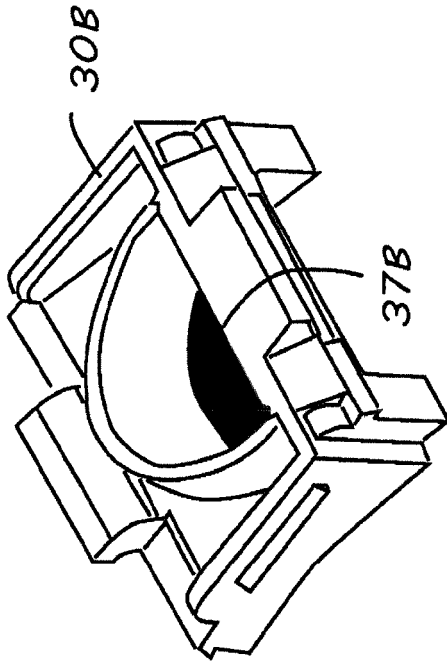


**FIG. 13**

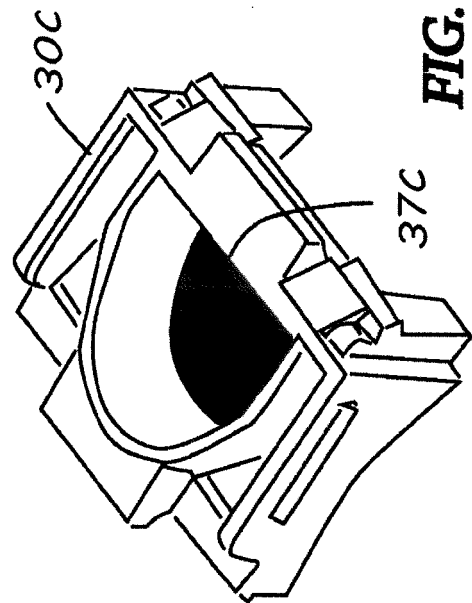


**FIG. 14**




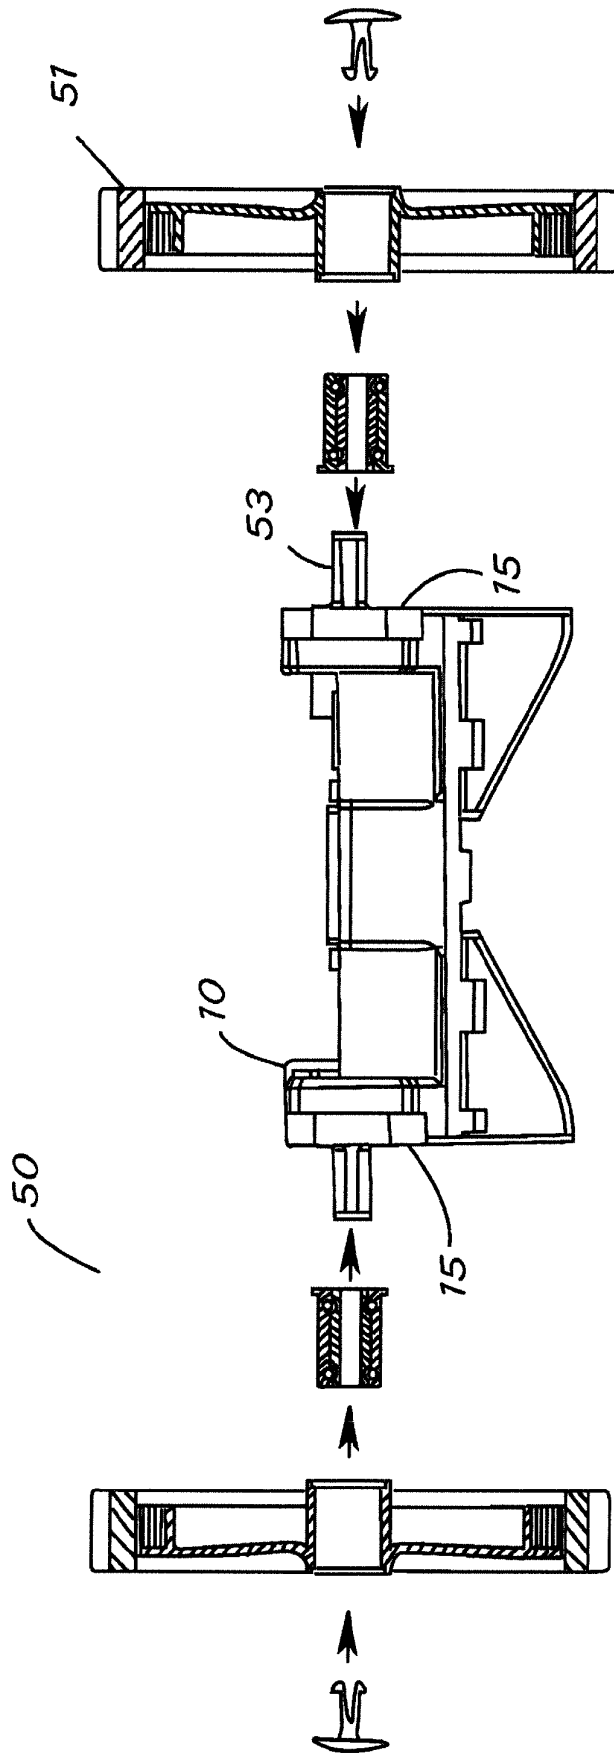

**FIG. 15**

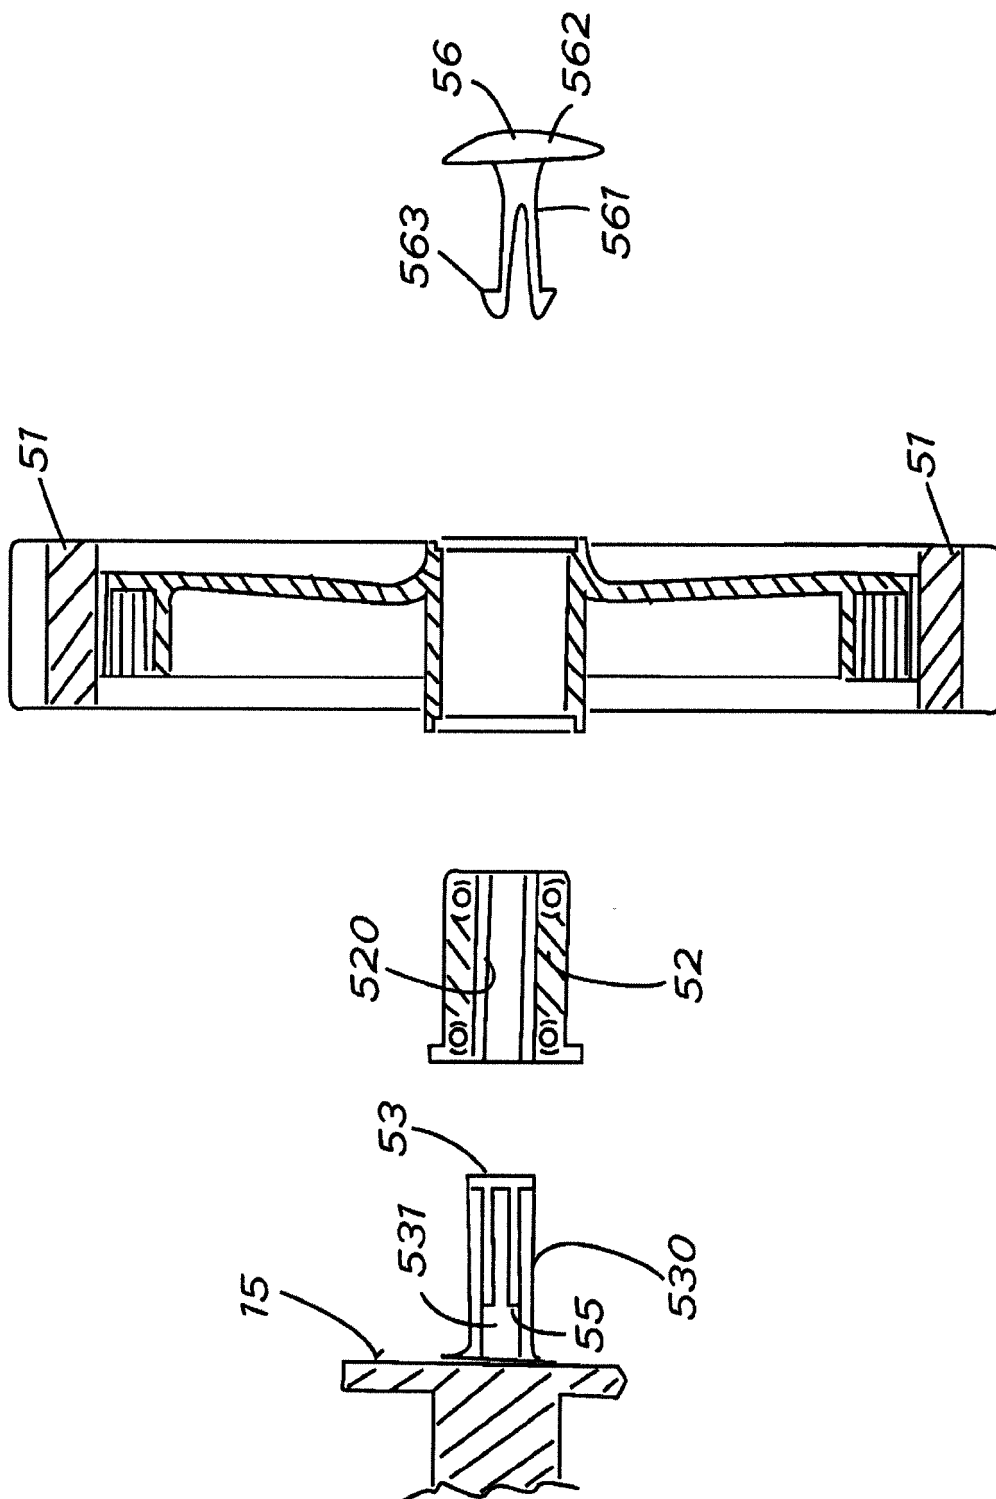

**FIG. 16**

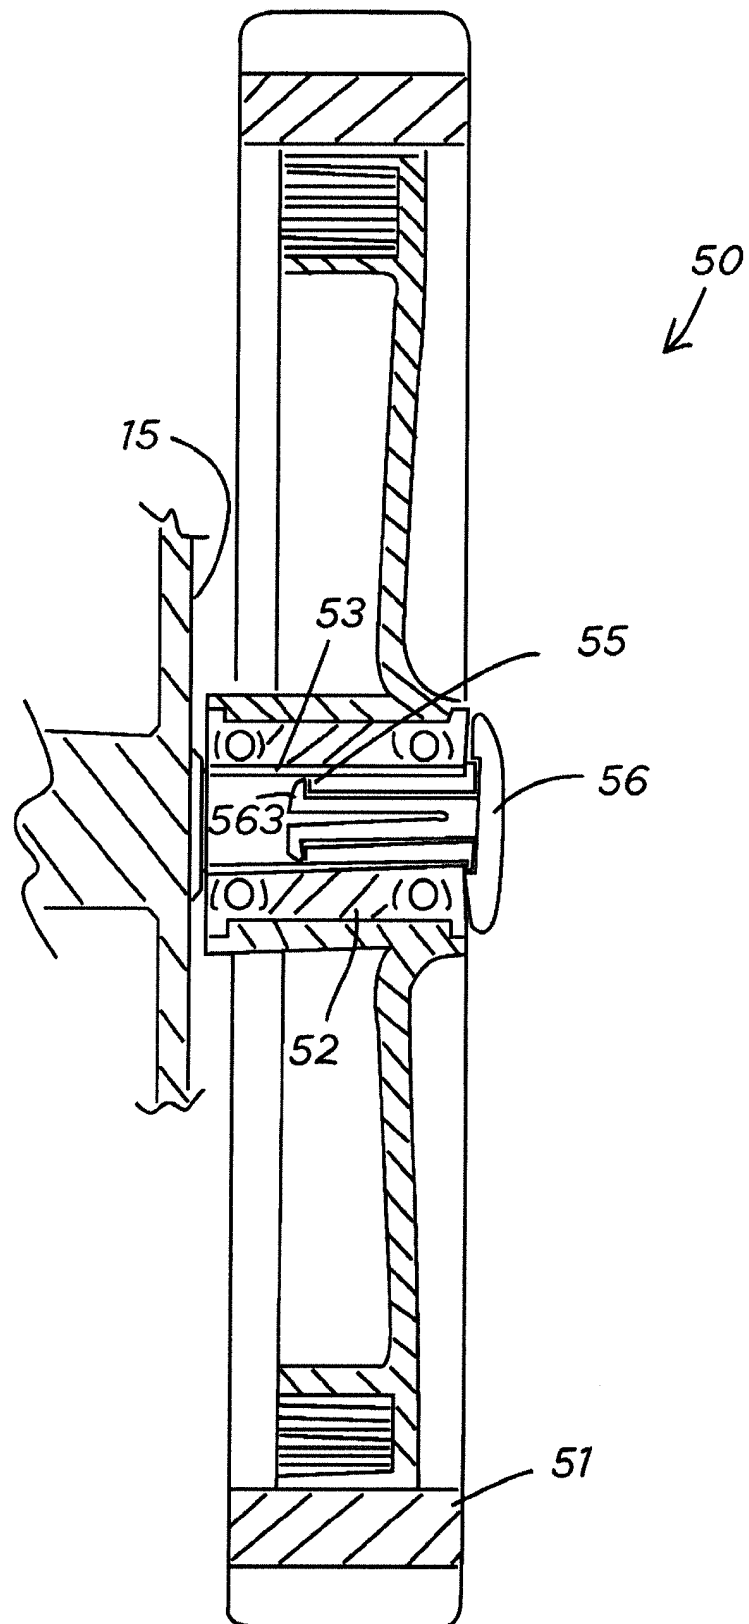

**FIG. 17**



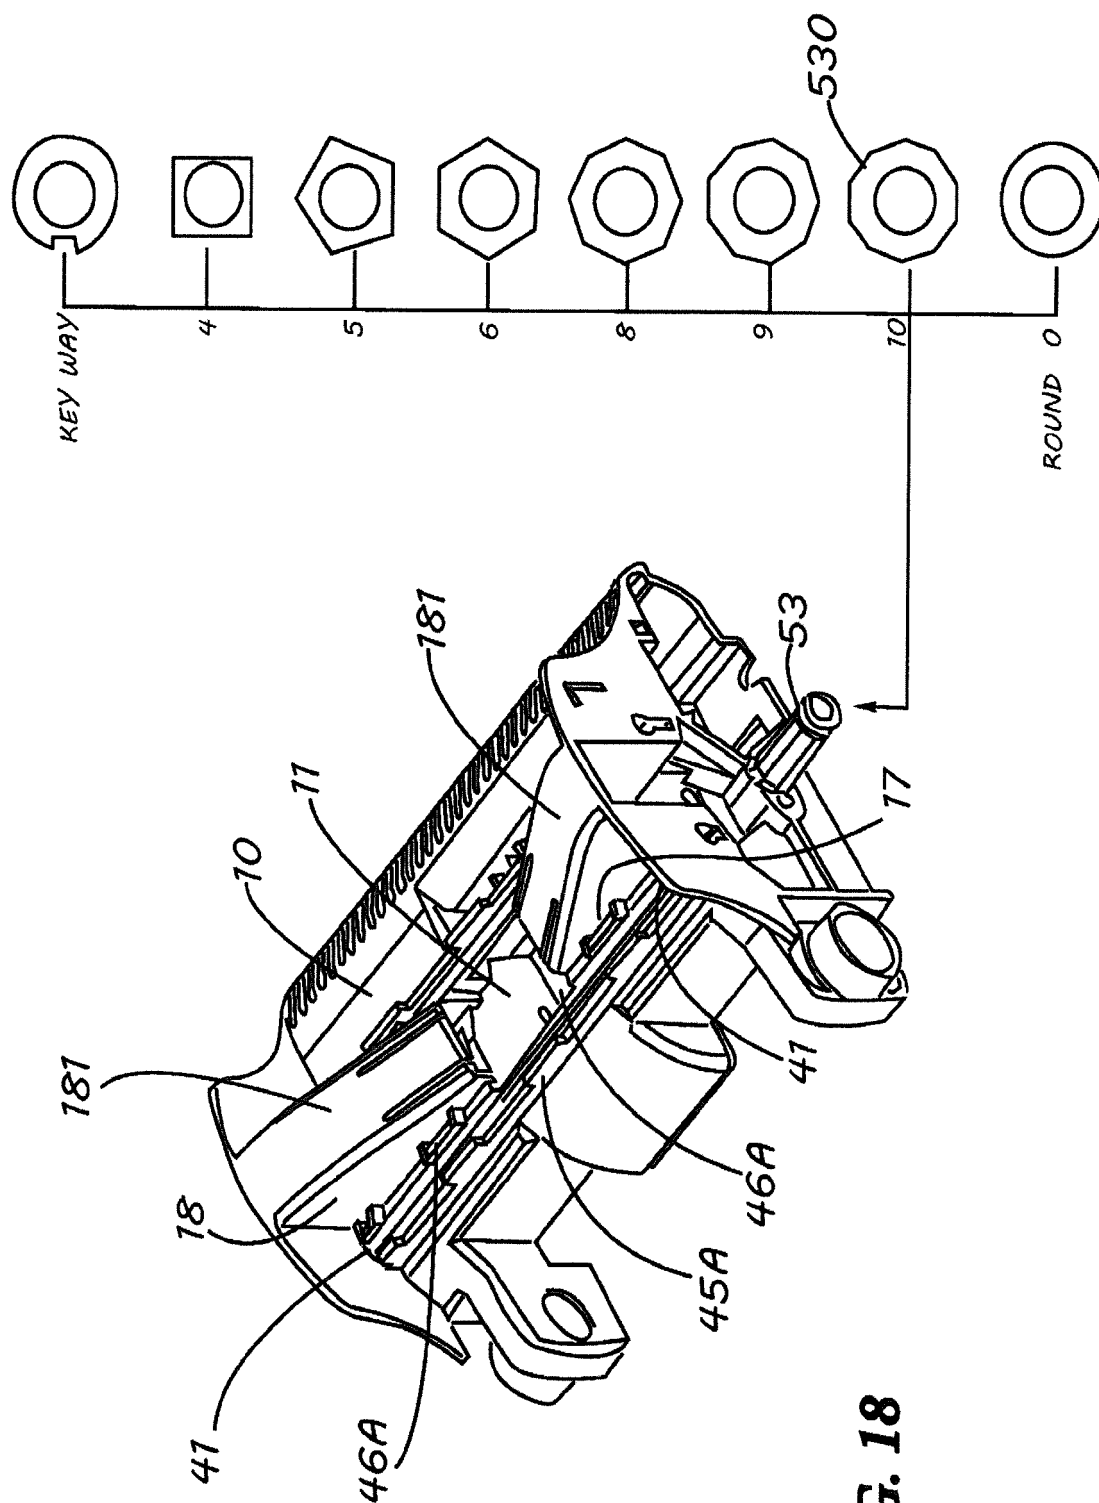


FIG. 18

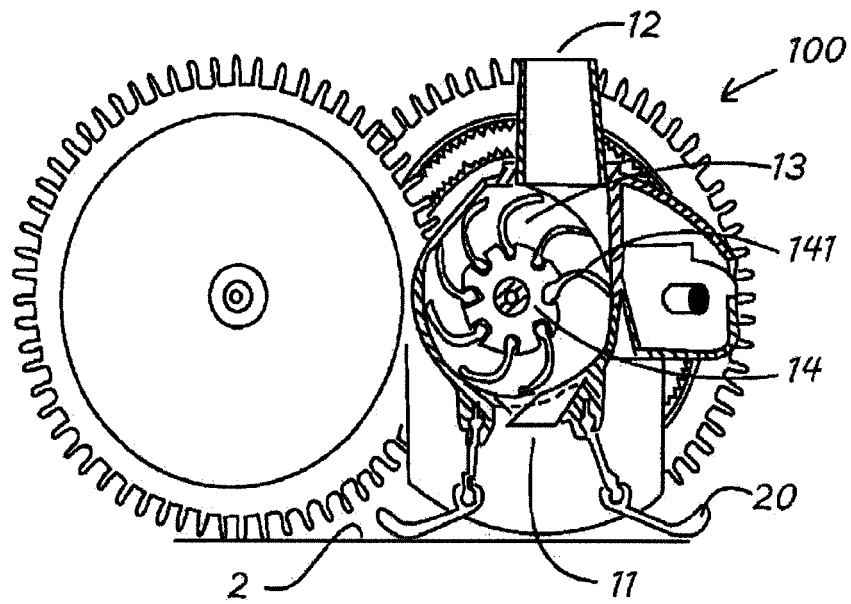

**FIG. 19**

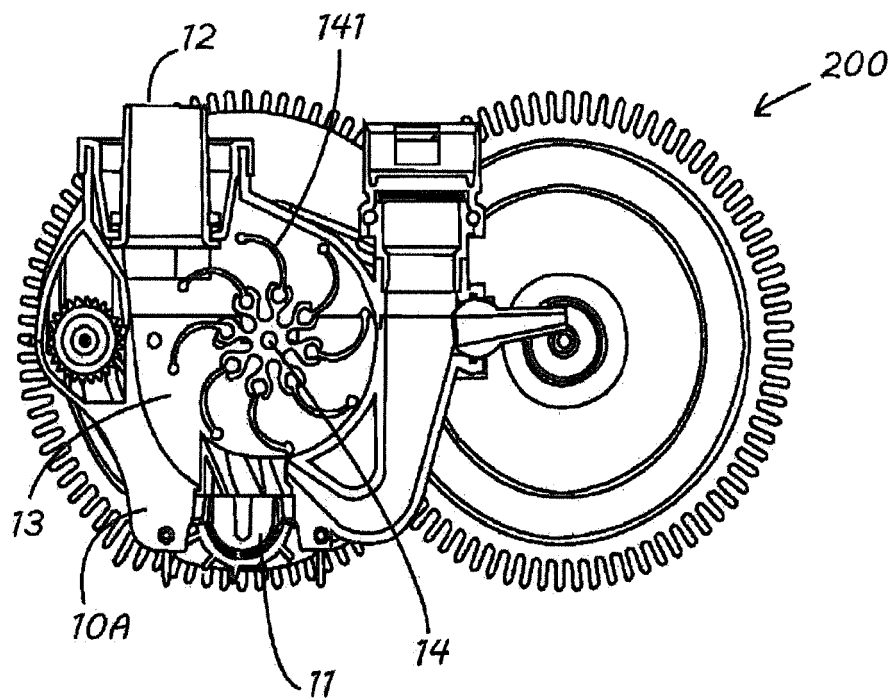

**FIG. 20**

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 6854148 B, Rief **[0003]**
- US 5604950 A **[0003]**
- US 6782578 B **[0005]**
- US 5099535 A, Chauvier **[0008]**
- US 7168120 B, Habif **[0009]**
- US 7378026 B1 **[0011]**
- AT 5391 U1 **[0012]**
- US 6292970 B **[0044]**
- US 6854184 B **[0044]**