

(19)



(11)

EP 3 517 873 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
21.07.2021 Bulletin 2021/29

(51) Int Cl.:
F28D 9/00 (2006.01) **F28F 9/02** (2006.01)
F28D 21/00 (2006.01)

(21) Application number: **18211108.8**

(22) Date of filing: **07.12.2018**

(54) HEAT EXCHANGER AND METHOD OF COOLING A FLOW OF HEATED AIR

WÄRMETAUSCHER UND VERFAHREN ZUR KÜHLUNG EINES STROMS ERWÄRMTER LUFT

ÉCHANGEUR DE CHALEUR ET PROCÉDÉ DE REFROIDISSEMENT D'UN FLUX D'AIR CHAUFFÉ

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **26.01.2018 US 201815880624**

(43) Date of publication of application:
31.07.2019 Bulletin 2019/31

(73) Proprietor: **Modine Manufacturing Company
Racine, Wisconsin 53403-2552 (US)**

(72) Inventors:
• **Lippke, Frank
70794 Filderstadt (DE)**

• **Glück, Rainer
72070 Tübingen (DE)**
• **Peskos, Thomas
75443 Ötisheim (DE)**

(74) Representative: **Winter, Josef
Birkhuhnweg 22
88048 Friedrichshafen (DE)**

(56) References cited:
**EP-A1- 1 830 048 WO-A1-99/64805
DE-A1- 19 646 349 DE-A1-102012 006 346
US-A1- 2015 068 717**

EP 3 517 873 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND

[0001] The present invention relates to a heat exchanger.

SUMMARY

[0002] The invention relates to a heat exchanger, for example an indirect air cooler, in which the air, for example compressed charge air for an internal combustion engine, is cooled, for example, by means of a fluid, wherein the heat exchanger is constructed from stacked pairs of plates with fins arranged therebetween, and the stack is arranged in a housing to which the air flows, flows through the fins and flows out, wherein said air is cooled by the fluid flowing in the plate pairs, which fluid is conducted into the plate pairs via at least one inlet and conducted away via at least one outlet, wherein the inlet and the outlet are located at a common edge of the plates and the air flows through the fins approximately in the direction of this edge.

[0003] Charge air coolers which are installed in motor vehicles and serve to cool the charge air by means of a cooling fluid are often referred to as indirect air coolers, in contrast to direct air coolers, a term used when the exemplary charge air is cooled with ambient air which is conveyed through the cooler by means of a fan.

[0004] The cooling fluid used is cooled directly by means of cooling air and is then used for cooling the engine as well as for other cooling purposes, and recently also to a greater extent for (indirect) charge air cooling.

[0005] The efficiency of the transmission of heat is known to be highest if the media are conducted through the heat exchanger in countercurrent (DE 29 809 080 U1). However, a throughflow in countercurrent is not always possible depending on the locality in which the air cooler (heat exchanger) is located and on other restrictions. The positions of the inlets and outlets can actually rarely be defined in such a way that the preferred throughflow can also occur or the actualization thereof often requires excessively high complexity in terms of design and construction.

[0006] For this reason, sometimes what is referred to as countercurrent or often cross-countercurrent is selected in which, for example, at least one of the media describes a meandering path. An example of cross-countercurrent can be found in DE 10 2006 048 667 A1.

[0007] DE-A-102012006346 and US-A-2015068717 disclose a heat exchanger according to the preamble of claim 1.

[0008] The object of the invention is to construct the described heat exchanger with simple structural features, that is to say features which are also manufacture-friendly, in such a way that said heat exchanger provides a relatively high level of efficiency. This object is met by a heat exchanger and a method of cooling a flow of heat-

ed air according to claims 1 and 9 respectively. Advantageous embodiments of the invention are defined in claims 2-8 and 10-13.

[0009] According to one particular aspect of the invention there is provision that the fluid can be conducted in an inlet region and/or outlet region of the plate pairs in at least one flow path approximately parallel to the air flow direction and/or of the common edge, flows further through at least a first duct approximately in cross current with respect to the air, and passes through the plate pairs over the largest heat exchange area of the plate pairs, substantially approximately in countercurrent with respect to the air, in order to flow through at least one second duct, approximately in cross current, back to the outlet.

[0010] There is preferably at least one inlet-side flow path and the inlet-side first duct as well as the at least one outlet-side second duct and also outlet-side flow path. In both flow paths, the preferred fluid flows approximately in the direction of the air. The lengths of the flow paths can be minimized by arrangement of the inlets and outlets at the corners of the plates. According to the present invention the entire mass flow of the fluid does not pass over the entire length of the ducts but instead a considerable portion thereof does. Shortly after the entry of the fluid into the at least one first duct, a partial flow already flows through the plate pairs in countercurrent with respect to the air via corrugated internal fins. The same applies to the at least one second duct which leads to the outlet-side flow path. The ducts have a relatively low flow resistance so that the regions of the plates which are remote from the outlet are also sufficiently involved in the exchange of heat. The cross-sectional geometry of the ducts can be of corresponding design so that sufficient involvement is achieved.

[0011] The largest heat-exchanging region of the plates is equipped with the corrugated internal fins. The corrugated internal fins can be embodied as lanced and offset fins, such as are used, for example, in the field of oil cooling and elsewhere. In such fins, parts of the corrugation edges are arranged offset alternately to the right and to the left. Breakthroughs or cutouts are present between the offset parts. They permit a throughflow in the longitudinal direction. If this direction is blocked, a throughflow in the lateral direction is also possible. The longitudinal direction is parallel to the direction of the corrugation edges here. The internal fins in the plate pairs have a significantly smaller pressure loss than in the lateral direction when throughflow occurs in the longitudinal direction.

[0012] The direction in which the corrugations of the corrugated internal fins run is preferably provided transversely with respect to the longitudinal direction of the plates so that the fluid can flow in the longitudinal direction with relatively little resistance along the offset corrugation edges. A significantly larger flow resistance is present in the direction in which the corrugations run, a direction which, as mentioned above, is located transversely with

respect to the direction of the corrugation edges because the fluid must flow through the numerous breakthroughs or cutouts in the corrugation edges and in the process also experiences numerous changes in the direction of flow. Approximately the entire mass flow flows through one flow path which is formed near to the inlet and the outlet by means of a flow barrier. In the flow path, the fluid flows in countercurrent with exemplary air since the flow barrier is arranged approximately parallel to the lateral edges. This can be accepted because the proportion of the entire heat-exchanging area taken up by the portion of the inlet and outlet region including the flow paths in terms of area is very small. It is generally not significantly more than approximately 15%, with 3 to 12% being preferred. The flow barrier is also located relatively close to the one lateral edge of the plate pairs, which is referred to above as the common edge. At the ends of the flow barrier located opposite there is a hydraulic connection to the ducts. At the other lateral edge of the plate pairs there is preferably no such flow path or duct so that the fluid cannot escape or is forced to take the path through the internal fin which has greater pressure loss and is located in countercurrent with respect to the airflow.

[0013] Simulation calculations carried out by the Applicant have resulted in a significant increase in the heat exchange rate for the proposed heat exchanger compared to the prior art.

[0014] The invention will be described in exemplary embodiments with reference to the appended drawings. Further features of the invention can be found in the following description, said features being either contained in the dependent claims or may prove to be significant later.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015]

Fig. 1 shows a perspective view of a heat exchanger according to the prior art (illustrated without a housing).

Fig. 2 shows a similarly perspective view with a cover plate on the stack of plate pairs and fins.

Fig. 3 shows a stack made of plates and fins in which the one plate of the upper plate pair has been removed in order to make the interior of this plate pair visible.

Figs. 4 and 5 show two plates which form a plate pair.

Fig. 6 shows a perspective view of a plate part with an internal fin.

Fig. 7 shows a view of the heat exchanger in a suitable housing.

Figs. 8 and 9 show modified plate configurations.

Figs. 10A-10D show a plate of a plate pair according to the invention

DETAILED DESCRIPTION

[0016] Before any embodiments of the invention are explained in detail, it is to be understood that the invention is not limited in its application to the details of construction and the arrangement of components set forth in the following description or illustrated in the accompanying drawings. The invention is capable of other embodiments and of being practiced or of being carried out in various ways. Also, it is to be understood that the phraseology and terminology used herein is for the purpose of description and should not be regarded as limiting. The use of "including," "comprising," or "having" and variations thereof herein is meant to encompass the items listed thereafter and equivalents thereof as well as additional items. Unless specified or limited otherwise, the terms "mounted," "connected," "supported," and "coupled" and variations thereof are used broadly and encompass both direct and indirect mountings, connections, supports, and couplings. Further, "connected" and "coupled" are not restricted to physical or mechanical connections or couplings.

[0017] In the perspective illustration (Fig. 1) of the heat exchanger, which is an indirect air cooler, the inlet **4** and the outlet **5** are located at the right-hand edges of metallic plates **1**, which therefore represent the "common" edges **E** here. The inlet **4** is arranged at the end remote from the air inflow side **AAir** of the heat exchanger. The outlet **5** is, on the other hand, located closer to the inflow side of the charge air which is indicated by three block arrows. The inlet and outlet connectors have the reference symbols **40** and **50**. The inlet and outlet cross sections have a circular shape in these embodiments. Instead of charge air, a mixture of charge air and exhaust gas or pure exhaust of an internal combustion engine (not shown) can also be present.

[0018] An advantage is that the inlet **4** and the outlet **5** can be located on opposite edges which would then constitute the "common" edges **E**, without changing the throughflow. The edges **E** are the lateral edges of the plates **1**. Two parallel longitudinal edges of the plates **1** are located approximately perpendicularly on the lateral edges, wherein the terms are used merely to differentiate between the edges, but do not in any case mean that the longitudinal edges, as shown in the exemplary embodiment, are longer than the lateral edges. The edges can all have the same length. The lateral edges can also be longer than the longitudinal edges. The fact that the edges in the exemplary embodiment shown are straight and therefore approximately rectangular plates **1** are present is also not an important precondition for solving the stated problem. The edges can also be arcuate or embodied in some other way which deviates from a straight line.

[0019] In the exemplary embodiment shown, the plates **1** have a cutout **8** at the common edge **E** which is the right-hand lateral edge in fig. 1. The depth of the cutout **8** is somewhat smaller than the depth of the inlet and outlet region **10**. The position of the inlets and outlets **4**,

5 is situated approximately in the center between the central longitudinal axis **15** of the plates **1** and their longitudinal edges. The inlet-side flow paths **11** extend from the inlets to the first ducts **12**, which are arranged in the inner edge region of the one longitudinal edge in the plate pairs **1a, 1b**. In the inner edge region of the other longitudinal edge there is the at least one second duct **13** which leads to the outlet-side flow path **11** and further to the outlet **5**.

[0020] In the exemplary embodiment shown, the ducts **12, 13** have the same cross section throughout. The ducts **12, 13** have a low flow resistance, that is to say at least a partial cross section of the ducts **12, 13** does not have flow impediments or the like. Since, as mentioned, approximately rectangular plates are present in the exemplary embodiment shown, the flow paths **11** and the ducts **12, 13** are also located approximately perpendicularly with respect to one another.

[0021] In some embodiments (not shown), the inlets and outlets **4, 5** are also arranged at a common edge **E** but in the vicinity of the corners of the plates **1** here, with the result that the lengths of the flow paths **11** becomes virtually zero. In other words, fluid can enter virtually directly into the first ducts **12** and virtually directly enter the outlets **5** from the second ducts **13**. There would also be no reason, in at least some embodiments, not to arrange the inlets **4** in the corners and merely to position the outlets **5** approximately as shown, or vice versa. As a result, only significantly pronounced outlet-side flow paths **11** would be present in such embodiments while the length of the inlet-side flow paths **11** would approach zero, that is to say would be virtually invisible. The designer therefore has multiple options available for adapting the heat exchanger to restrictions forced on him by the installation location, without having to accept a loss of power.

[0022] The flow paths **11** can be implemented by construction of beads in the plates **1** forming the pairs, as is apparent from the illustrations according to figs. 4 and 5. Instead of beads, rods which are inserted and soldered in the plate pairs can also be provided. In the exemplary embodiment shown, the beads or the rods form the flow barriers **6** mentioned above. These figures show plan views of the two plates **1** which form a plate pair **1a, 1b**, with an internal fin **14** which is inserted therein, but is not illustrated in detail here.

[0023] The plate **1b** shown in figure 5 is rotated through 180° about its longitudinal axis **15** and is positioned on the plate **1a** in fig. 4. The two beads come to bear one against the other in the plate pair **1a, 1b** and are connected later. They accordingly have a height which is approximately half as large as the distance between the two plates **1** which form the plate pair **1a, 1b**. The height of the internal fin **14** must correspond to this distance. In addition, the plates **1a** and **1b** come to bear one against the other with their edges and are connected to one another in a sealed fashion. In the exemplary embodiment they are bent-over edges.

[0024] Various other edge configurations are known

from the prior art. These can alternatively be provided.

[0025] The inlet and outlet openings **4, 5** of the plate pair **1a, 1b** are provided with collars **41, 51** which protrude upward at the upper plate **1a** and downward at the lower plate **1b**. The connection to the adjacent plate pairs **1a, 1b** takes place at these collars. Sealing rings which are located between the plate pairs and connect the latter are also an alternative to such collars **41, 51**. In embodiments which are not shown just one of the plates **1** has a bead whose height has to be correspondingly larger, that is to say which should correspond to the height of the internal fin **14**. Of course, the entire stack, that is to say the plate pairs and the fins **2** located therebetween, are connected to one another, preferably connected metalically, for example soldered in a soldering oven. The soldered-in internal fin **14** through which the fluid flows is located within each plate pair **1a, 1b**.

[0026] Since the aforementioned internal fin **14** can have a smaller dimension than the plate **1** in which it is inserted owing to construction of the ducts **12, 13**, the position of the internal fin **14** is indeterminate, which is disadvantageous. A correct position of the internal fin **14** within the plate **1** can be implemented by virtue of the fact that inwardly protruding knobs or similar shaped elements **16** are formed in the corners of the plates **1** and serve as a stop for the internal fin **14**. As a result, the preassembly of the heat exchanger improves. With this measure it is also possible to prevent an undesired bypass for the fluid, or at least largely suppress it. However, in some embodiments such a bypass may be desirable, as described in greater detail hereafter.

[0027] In Figs. 3, 4 and 5, the inlet and outlet region which has already been mentioned is provided with the reference symbol **10**. It makes up approximately 12% of the entire heat-exchanging area here. Since this region for exchanging heat cannot contribute very much, the aim is to make it as small as possible. In Fig. 3, two arrows indicate that the corrugated internal fin **14** is preferably inserted into the plate pair **1a, 1b** in such a way that when there is a flow through them in the longitudinal direction a significantly lower pressure loss Δp occurs than when there is a throughflow in the lateral direction. The fluid is forced by the special design to take the path in the lateral direction and accordingly to flow through the plate pairs **1a, 1b** in countercurrent with respect to the direction of the flow of air.

[0028] The heat exchanger thereby provides multiple cooling fluid flow paths extending hydraulically in parallel with one another between the inlet **4** for the cooling fluid and the outlet **5** for the cooling fluid, with each one of the multiple cooling fluid flow paths extending through one of the plate pairs **1a, 1b**. Each such cooling fluid flow path includes a first portion **12** extending between one of the internal fins **14** and a longitudinal edge of the pair, and a second portion **13** extending between that one of the internal fins **14** and the opposing longitudinal edge of the plate pair. A third portion of the cooling fluid flow path extends through the internal fin in the high pressure

drop direction to provide fluid communication between the first portion **12** and the second portion **13**. Preferably, the direction of the cooling fluid flow along that third portion of the cooling fluid flow path is counter to the direction of the heated air flow. In some, but not all, embodiments the cooling fluid flow path also includes a portion **11** located within the inlet and outlet region and extending from the inlet **4** for the cooling fluid to the first portion **12**, as well as another portion **11** located within the inlet and outlet region and extending from the second portion **13** to the outlet **5** for the cooling fluid.

[0029] Fig. 6 shows, in a section, a perspective view of the corrugated internal fin **14** which is located in the plate **1**. Some details of the corrugated internal fin **14** can be seen. The direction in which the corrugation runs in the heat exchanger is the lateral direction thereof, that is to say the direction of the significantly higher pressure loss **dp**. In the corrugation edges **17** there are break-throughs or cutouts **18** offset alternately to the left and to the right when viewed in the direction of said corrugation edge **17**. The width of the ducts **12**, **13** is determined by the distal end of the flow barrier **6** and the longitudinal edge of the plate. As is also shown by Fig. 6, a narrow strip of the duct **12** is completely free.

[0030] In embodiments according to the invention (not shown) the entire duct **12**, **13** is of free design. In other embodiments (not shown) the longitudinal edge of the internal fin **14** extends directly to the longitudinal edge of the plates **1**, with the result that the entire duct cross section is occupied by a section of the internal fin **14**. The function of the ducts **12**, **13** is retained because the aforementioned section points in the direction of the low pressure loss **dp** which corresponds to the direction of the duct. There is also the possibility of covering the cross section of the one duct completely with part of the internal fin **14** and leaving the other duct completely free.

[0031] As is also the case in known heat exchangers, the compressed charge air **AAir** to be cooled flows through an opening into a housing **3** in which the aforementioned stack made of plate pairs **1a**, **1b** and fins **2** (not illustrated in more detail) are located (Fig. 7). The housing **3** can be the intake manifold of an internal combustion engine. According to the proposal, the charge air then flows through the corrugated fins **2** in countercurrent with respect to the fluid flowing in the plate pairs, and in the process it is cooled extremely efficiently. The direction of flow of the charge air is, also according to the proposal, provided in the direction of the common edge **E** at which the inlet **4** and the outlet **5** for the fluid are located, or in the exemplary embodiment in the direction of the lateral edges of the plates **1**. As a result, the cooled charge air leaves the heat exchanger through another opening in the housing **3** in order to be available for charging the internal combustion engine (not shown). The protruding edge **9.1**, of the cover plate **9** which can be seen in Fig. 2 and which terminates the stack and is connected metallically thereto, for example, can be used in a known fashion to attach the plate stack in the housing **3** and

therefore serves as a closure of an assembly opening in the housing **3**.

[0032] Fig. 8 shows a plate **1** with elongate holes as inlets and outlets **4**, **5**. The flow paths **11** have been virtually integrated into the elongate holes since there to a certain extent a flow guide is formed in the direction of the common edge **E**, as is also the case with the flow paths of the other exemplary embodiments. In embodiments which are not shown, the inlets and outlet **4**, **5** have other different hole shapes. These may also include hole shapes which are configured asymmetrically. Fig. 9 in turn shows round plate holes **4**, **5** but modified flow barriers **6**.

[0033] Figs. 10A-10D show several variations of a plate **1** of the invention, wherein a bypass channel **21** is incorporated into each one of the plate pairs **1a**, **1b**. As can be seen in Fig. 10A, the bypass **21** allows a portion of the cooling fluid passing through the plate pair **1a**, **1b** between the cooling fluid inlet **4** and the cooling fluid outlet **5** to bypass the corrugated internal fin **14** along a lateral edge of the plates **1**. A flow barrier **18** is provided in order to provide a fluid separation between the heat transfer region, characterized for example by the corrugated internal fin **14**, and the bypass channel **21**. The flow barrier **18** can be constructed in a similar fashion as the flow barrier **6**, such as by beads formed into the plates **1**.

[0034] In such an embodiment, the cooling fluid flow path through the plate pair **1a**, **1b** is thereby modified to add a fourth portion (characterized by the bypass channel **21**) arranged between the internal fin **14** and a lateral edge of the plates **1**. The fourth portion **21** is fluidly connected to the first portion **12** of the cooling fluid flow path, so that the cooling fluid flowing along the cooling fluid flow path is directed through either the third portion or the fourth portion.

[0035] Heat transfer between the charge air and that portion of the cooling fluid which passes through the bypass channel **21** is intentionally inhibited, for example through the absence of any heat transfer enhancing features within the bypass channel **21**, so that the portion of the cooling fluid passing through the bypass channel **21** is essentially unchanged in temperature. Alternatively or in addition, the transfer of heat between the charge air and the portion of the cooling fluid passing through the bypass channel **21** can be inhibited by blocking or impeding the flow of charge air through those portion of the air flow passages directly adjacent the bypass channel **21**, for example by way of formed features of the edges of the plates **1**. The bypass section **21** thereby allows a portion of the cooling fluid to bypass the heat exchange section of the plate pair **1a**, **1b**, characterized by that section of the plate pair that is occupied by the corrugated internal fin **14**.

[0036] As seen in Fig. 10A, the bypass channel **21** can be fluidly connected to the channel **13** so that the portion of the cooling fluid passing through the bypass channel **21** can discharge directly into the channel **13**. The momentum of the cooling fluid passing through the bypass

channel **21** will cause it to be directed towards the longitudinal plate edge of the channel **13**. This has the beneficial effect of allowing the relatively unheated cooling fluid to cool the leading edges of the plates **1** onto which the heated charge air directly impinges. The inventors have found that such a cooling effect helps to reduce the metal temperature of these leading plate edges, thereby avoiding an undesirable boiling of the cooling fluid which might otherwise result.

[0037] In the alternate plate design of Fig. 10B, the channel **13** is divided into a first portion **13a** and a second portion **13b** by another flow barrier **19**. The flow barrier **19** can be, but need not necessarily be, joined to the flow barrier **18**. The flow barrier **19** maintains the separation within the flow channel **13** of the portion of the cooling fluid that passed through the bypass channel **21** and the portion of the cooling fluid that passed through the heat exchange section **14**. As a result, the cooling effect on the leading edges of the plates **1** can be enhanced, and the risk of cooling fluid boiling can be further reduced. The flow channel portion **13b** thereby defines a fifth portion of the cooling fluid flow channels that is connected in series to the fourth portion defined by the bypass channel **21**.

[0038] Figs. 10C and 10D depict variations of the plates **1** of Figs. 10A and 10B, respectively. In the plates **1** of Figs. 10C and 10D, the corrugated internal fin **14** defining the heat exchange section of the plate pair has been replaced by a successively arranged series of flow passages **22** through which that portion of the cooling fluid flow that is not directed through the bypass channel **21** is directed. The series of flow passages **22** together constitute a heat exchange section **14'** of the plate pair. Each of the flow passages **22** extend in a direction that is parallel to the longitudinal edges of the plates **1** between the flow barrier **6** and the flow barrier **18**. The cooling fluid is directed through the series of flow passages **22** in a counter-cross-flow direction to the flow of heated air through the heat exchanger. Additional flow barriers **23** are arranged between adjacent ones of the flow channels **22** in order to define the flow channels **22**, with the flow barriers **23** alternately extending from the flow barrier **6** and from the flow barrier **18**. One of those flow barriers **23** also serves to separate the initial one of the flow passages **22** from the duct **12**, while another one of those flow barriers **23** also serves to separate the terminal one of the flow passages **22** from the duct **13**.

[0039] A heat exchanger built using the plates **1** as described in Figs. 10A-D can be particularly desirable for cooling a flow of heated air (such as for example compressed charge air for an internal combustion engine) using a flow of liquid cooling fluid with high heat exchange efficiency without the increased risk of causing undesirable boiling of the cooling fluid. In at least one embodiment of a method of cooling such a flow of heated air, a flow of heated air **Aair** (for example, compressed charge air for an internal combustion engine) is directed through the air flow passages of the heat exchanger in an air flow

direction. Simultaneously, a flow of cooling fluid is directed into the heat exchanger and is distributed among the plate pairs **1a**, **1b** of the heat exchanger through coolant inlets **4** of the plate pairs. Within each one of the plates pairs **1a**, **1b**, the cooling fluid is first directed through a first duct **12** in a direction that is perpendicular to the air flow direction. A first portion of the cooling fluid is then directed from the first duct **12** through a heat exchange section **14**, **14'**. Within the heat exchange section **14**, **14'**, the cooling fluid is directed in a direction that is overall counter to the air flow direction, such as in a counter-flow or a cross-counter-flow direction. Heat is transferred from the flow of heated air to that first portion of the cooling fluid as it flows through the heat exchange section **14**, **14'**. Simultaneously, a second portion of the cooling fluid is directed from the first duct **12** through a bypass section **21** of the plate pair, also in a direction that is counter to the air flow direction. The transfer of heat between the flow of heated air and the second portion of the cooling fluid is inhibited within the bypass section, so that the second portion of the cooling fluid exits the bypass section at a lower temperature than the first portion exits the heat exchange section. The first and the second portions are subsequently directed through a second duct **13** in a direction that is again perpendicular to the air flow direction.

[0040] In some embodiments, such as ones using plates **1** such as are depicted in Fig. 10A and Fig. 10C, the second duct **13** is a single duct through which the first portion of the cooling fluid and the second portion of the cooling fluid both flow. In such an embodiment, some mixing of the first and second portions of the cooling fluid can occur within the second duct **13**. In other embodiments, such as for example ones using plates **1** as are depicted in Fig. 10B and Fig. 10D, the first portion of the cooling fluid and the second portion of the cooling fluid are separated within the second duct **13** and mixing of the two portions within that duct **13** is prevented. The first portion of the cooling fluid can be directed through a portion **13a** of the second duct **13** while the second portion of the cooling fluid can be directed through a portion **13b** of the second duct **13**. The portion **13b** can advantageously be arranged to be upstream of the portion **13a** with respect to the direction of the heated air flow through the heat exchanger, so that the portion of the flow of cooling fluid that passed through the bypass duct **21** (and which is, consequently, at a lower temperature) can sufficiently depress the temperature of the plates surfaces that are directly impacted by the hottest air in order to prevent any boiling of the cooling fluid.

[0041] Various alternatives to the certain features and elements of the present invention are described with reference to specific embodiments of the present invention. With the exception of features, elements, and manners of operation that are mutually exclusive of or are inconsistent with each embodiment described above, it should be noted that the alternative features, elements, and manners of operation described with reference to one

particular embodiment are applicable to the other embodiments.

[0042] The embodiments described above and illustrated in the figures are presented by way of example only and are not intended as a limitation upon the concepts and principles of the present invention. As such, it will be appreciated by one having ordinary skill in the art that various changes in the elements and their configuration and arrangement are possible without departing from the scope of the present invention as defined in the appended claims.

Claims

1. A heat exchanger comprising:

a plurality of stacked plate pairs (1a, 1b) having air flow passages arranged between adjacent ones of the plurality of stacked plate pairs (1a, 1b), the air flow passages extending between a set of first longitudinal edges of the stacked plate pairs (1a, 1b) and an opposing set of second longitudinal edges of the stacked plate pairs (1a, 1b) to define an air flow direction through the heat exchanger perpendicular to the first and second longitudinal edges;

an inlet and outlet region (10) for cooling fluid, each of the plurality of stacked plate pairs (1a, 1b) having an inlet (4) for cooling fluid and an outlet (5) for cooling fluid arranged within the inlet and outlet region (10) and aligned with the air flow direction;

a plurality of corrugated internal fins, each being located within one of the plurality of stacked plate pairs (1a, 1b) and having a low pressure drop direction aligned with the direction of the longitudinal edges and a high pressure drop direction aligned with the air flow direction;

a plurality of flow barriers comprising a plurality of first flow barriers (6) constructed by beads of the plate pairs (1a, 1b), said plurality of first flow barriers (6) arranged between the inlet and outlet region (10) for the cooling fluid and the plurality of corrugated internal fins; and

a plurality of cooling fluid flow paths (11), each of the cooling fluid flow paths (11) extending through one of the plurality of stacked plate pairs (1a, 1b) between the inlet (4) for cooling fluid and the outlet (5) for cooling fluid and including a first portion extending between one of the plurality of corrugated internal fins (14) and one of the set of first longitudinal edges, a second portion extending between that one of the plurality of corrugated internal fins (14) and one of the set of second longitudinal edges, and a third portion extending through that one of the plurality of corrugated internal fins (14) in the high pres-

sure drop direction to provide fluid communication between the first portion and the second portion, wherein the direction of cooling fluid flow along the third portion is counter to the air flow direction,

characterized in, that

each one of the cooling fluid flow paths (11) further includes a fourth portion arranged between that one of the plurality of corrugated internal fins (14) and a lateral edge of the plate pairs (1a, 1b) perpendicular to the longitudinal edges of the plate pairs (1a, 1b), the fourth portion being fluidly connected to the first portion such that cooling fluid directed along the cooling fluid flow path (11) flows through either the third portion or the fourth portion and that the plurality of flow barriers further comprising a second plurality of flow barriers (18) constructed by beads of the plate pairs (1a, 1b), the second plurality of flow barriers (18) at least partially bounding the fourth portions of the plurality of cooling fluid flow paths (11).

2. The heat exchanger of claim 1, wherein each of the cooling fluid flow paths (11) further includes a fourth portion located within the inlet and outlet region (10) and extending from the inlet (4) for cooling fluid and the first portion, and a fifth portion located within the inlet and outlet region (10) and extending from the second portion to the outlet (5).

3. The heat exchanger of claim 1, wherein the inlet and outlet region (10) for cooling fluid is at least partially bounded by lateral edges of the plate pairs (1a, 1b) perpendicular to the longitudinal edges of the plate pairs (1a, 1b).

4. The heat exchanger of claim 1, wherein each one of the plurality of corrugated internal fins (14) is arranged between one of the first plurality of flow barriers (6) and one of the second plurality of flow barriers (18).

5. The heat exchanger of claim 1, wherein each one of the cooling fluid flow paths (11) further includes a fifth portion fluidly connected to the fourth portion to receive flow therefrom, the fifth portion being arranged between the second portion and one of the set of second longitudinal edges.

6. The heat exchanger of claim 5, further comprising a third plurality of flow barriers (23) constructed by beads of the plate pairs (1a, 1b), the second portions of the cooling fluid flow paths (11) being separated from the fourth portions of the cooling fluid flow paths (11) by the third plurality of flow barriers (23).

7. The heat exchanger of claim 6, wherein each one of

the second plurality of flow barriers (18) is joined to one of the third plurality of flow barriers (23).

8. The heat exchanger of claim 1, wherein the fourth portion is fluidly connected to the second portion.

9. A method of cooling a flow of heated air, comprising:

directing a flow of heated air through air flow passages of a heat exchanger in an air flow direction;

directing a flow of cooling fluid into the heat exchanger and distributing the flow of cooling fluid among plate pairs (1a, 1b) of the heat exchanger through cooling fluid inlets of the plate pairs (1a, 1b), the air flow passages being arranged between adjacent ones of the plate pairs (1a, 1b); within each one of the plate pairs (1a, 1b), directing the cooling fluid through a first duct (12) in a direction perpendicular to the air flow direction;

within each one of the plate pairs (1a, 1b), directing a first portion of the cooling fluid from the first duct (12) through a heat exchange section of the plate pair (1a, 1b) (1a, 1b) in a direction counter to the air flow direction;

transferring heat from the flow of heated air to the first portion of the cooling fluid as the first portion of the cooling fluid flows through the heat exchange section of the plate pair;

within each of the plate pairs (1a, 1b), directing a second portion of the cooling fluid from the first duct (12) through a bypass section (21) of the plate pair (1a, 1b) (1a, 1b) in a direction counter to the air flow direction, the transfer of heat between the flow of heated air and the second portion of the cooling fluid being inhibited within the bypass section (21) so that the second portion of the cooling fluid exits the bypass section (21) at a lower temperature than the first portion of the cooling fluid exits the heat exchange section;

within each of the plate pairs (1a, 1b), directing the first portion of the cooling fluid through a second duct (13) in a direction perpendicular to the air flow direction after directing the first portion of the cooling fluid through the heat exchange section of the plate pair;

within each of the plate pairs (1a, 1b), directing the second portion of the cooling fluid through the second duct (13) in a direction perpendicular to the air flow direction after directing the second portion of the cooling fluid through the bypass section (21) of the plate pair; and

removing the flow of cooling fluid from the heat exchanger through cooling fluid outlets of the plate pairs (1a, 1b).

10. The method of claim 9, wherein the steps of directing

the first portion of the cooling fluid through the second duct (13) and directing the second portion of the cooling fluid through the second duct (13) includes arranging the second portion upstream of the first portion with respect to the air flow direction.

11. The method of claim 9, wherein mixing of the first portion of the cooling fluid flow with the second portion of the cooling flow within the second duct (13) is prevented.

12. The method of claim 9, wherein directing the first portion of the cooling fluid flow through a heat exchange section of the plate pair (1a, 1b) (1a, 1b) includes passing the first portion of the cooling fluid flow through a corrugated internal fin (14) arranged within the plate pair.

13. The method of claim 9, wherein directing the first portion of the cooling fluid flow through a heat exchange section of the plate pair (1a, 1b) includes passing the first portion of the cooling fluid flow through a successively arranged series of flow passages (22), each of the successively arranged series of flow passages (22) extending in a direction perpendicular to the air flow direction.

Patentansprüche

1. Wärmetauscher, umfassend:

eine Vielzahl von gestapelten Plattenpaaren (1a, 1b) mit Luftstromkanälen, die zwischen benachbarten der Vielzahl von gestapelten Plattenpaaren (1a, 1b) angeordnet sind, wobei sich die Luftstromkanäle zwischen einem Satz erster Längskanten der gestapelten Plattenpaare (1a, 1b) und einem gegenüberliegenden Satz zweiter Längskanten der gestapelten Plattenpaare (1a, 1b) erstrecken, womit eine Luftstromrichtung durch den Wärmetauscher senkrecht zu den ersten und den zweiten Längskanten definiert wird;

einen Einlass- und Auslassbereich (10) für Kühlflüssigkeit, wobei jedes der Vielzahl von gestapelten Plattenpaaren (1a, 1b) einen Einlass (4) für Kühlflüssigkeit und einen Auslass (5) für Kühlflüssigkeit aufweist, die innerhalb des Einlass- und Auslassbereichs (10) angeordnet und mit der Luftstromrichtung ausgerichtet sind;

eine Vielzahl von gewellten Innenrippen, von denen jede innerhalb eines der Vielzahl von gestapelten Plattenpaaren (1a, 1b) angeordnet ist und eine Richtung mit niedrigem Druckabfall, die mit der Richtung der Längskanten ausgerichtet ist, und eine Richtung mit hohem Druckabfall, die mit der Luftstromrichtung ausgerichtet

ist, aufweist;

eine Vielzahl von Strömungsbarrieren, umfassend eine Vielzahl von ersten Strömungsbarrieren (6), die durch Wülste der Plattenpaare (1a, 1b) aufgebaut sind, wobei die Vielzahl von ersten Strömungsbarrieren (6) zwischen dem Einlass- und Auslassbereich (10) für die Kühlflüssigkeit und der Vielzahl von gewellten Innenrippen angeordnet ist; und

eine Vielzahl von Kühlflüssigkeitsströmungspfaden (11), wobei sich jeder der Kühlflüssigkeitsströmungspfade (11) durch eines der Vielzahl von gestapelten Plattenpaaren (1a, 1b) zwischen dem Einlass (4) für Kühlflüssigkeit und dem Auslass (5) für Kühlflüssigkeit erstreckt und einen ersten Abschnitt, der sich zwischen einer der Vielzahl von gewellten Innenrippen (14) und einer des Satzes von ersten Längskanten erstreckt, einen zweiten Abschnitt, der sich zwischen der einen der Vielzahl von gewellten Innenrippen (14) und einer des Satzes von zweiten Längskanten erstreckt, und einen dritten Abschnitt, der sich durch die eine der Vielzahl von gewellten Innenrippen (14) in der Richtung mit hohem Druckabfall erstreckt, beinhaltet, zum Bereitstellen von Fluidverbindung zwischen dem ersten Abschnitt und dem zweiten Abschnitt, wobei die Richtung des Kühlflüssigkeitsstroms entlang des dritten Abschnitts der Luftstromrichtung entgegengesetzt ist,

dadurch gekennzeichnet, dass

jeder der Kühlflüssigkeitsströmungspfade (11) ferner einen vierten Abschnitt beinhaltet, der zwischen dem einen der Vielzahl von gewellten Innenrippen (14) und einer Seitenkante der Plattenpaare (1a, 1b) senkrecht zu den Längskanten der Plattenpaare (1a, 1b) angeordnet ist, wobei der vierte Abschnitt mit dem ersten Abschnitt in Fluidverbindung steht, und zwar derart, dass Kühlflüssigkeit, die entlang des Kühlflüssigkeitsströmungspfade (11) geleitet wird, entweder durch den dritten Abschnitt oder den vierten Abschnitt strömt, und dass wobei die Vielzahl von Strömungsbarrieren ferner eine zweite Vielzahl von Strömungsbarrieren (18) umfasst, die durch Wülste der Plattenpaare (1a, 1b) aufgebaut sind, wobei die zweite Vielzahl von Strömungsbarrieren (18) zumindest teilweise die vierten Abschnitte der Vielzahl von Kühlflüssigkeitsströmungspfaden (11) begrenzt.

2. Wärmetauscher nach Anspruch 1, wobei jeder der Kühlflüssigkeitsströmungspfade (11) ferner einen vierten Abschnitt, der sich innerhalb des Einlass- und Auslassbereichs (10) befindet und sich vom Einlass (4) für Kühlflüssigkeit und dem ersten Abschnitt erstreckt, und einen fünften Abschnitt, der sich innerhalb des Einlass- und Auslassbereichs (10) befindet

und sich vom zweiten Abschnitt zum Auslass (5) erstreckt, beinhaltet.

3. Wärmetauscher nach Anspruch 1, wobei der Einlass- und Auslassbereich (10) für Kühlflüssigkeit zumindest teilweise durch Seitenkanten der Plattenpaare (1a, 1b) senkrecht zu den Längskanten der Plattenpaare (1a, 1b) begrenzt ist.
4. Wärmetauscher nach Anspruch 1, wobei jede der Vielzahl von gewellten Innenrippen (14) zwischen einer der ersten Vielzahl von Strömungsbarrieren (6) und einer der zweiten Vielzahl von Strömungsbarrieren (18) angeordnet ist.
5. Wärmetauscher nach Anspruch 1, wobei jeder der Kühlflüssigkeitsströmungspfade (11) ferner einen fünften Abschnitt beinhaltet, der mit dem vierten Abschnitt in Fluidverbindung steht, um von diesem einen Strom zu empfangen, wobei der fünfte Abschnitt zwischen dem zweiten Abschnitt und einer des Satzes von zweiten Längskanten angeordnet ist.
6. Wärmetauscher nach Anspruch 5, ferner umfassend eine dritte Vielzahl von Strömungsbarrieren (23), die durch Wülste der Plattenpaare (1a, 1b) aufgebaut sind, wobei die zweiten Abschnitte der Kühlflüssigkeitsströmungspfade (11) von den vierten Abschnitten der Kühlflüssigkeitsströmungspfade (11) durch die dritte Vielzahl von Strömungsbarrieren (23) getrennt sind.
7. Wärmetauscher nach Anspruch 6, wobei jede der zweiten Vielzahl von Strömungsbarrieren (18) mit einer der dritten Vielzahl von Strömungsbarrieren (23) verbunden ist.
8. Wärmetauscher nach Anspruch 1, wobei der vierte Abschnitt mit dem zweiten Abschnitt in Fluidverbindung steht.
9. Verfahren zum Kühlen eines Stroms erwärmter Luft, umfassend:
 - Leiten eines Stroms erwärmter Luft durch Luftstromkanäle eines Wärmetauschers in einer Luftstromrichtung;
 - Leiten eines Stroms von Kühlflüssigkeit in den Wärmetauscher und Verteilen des Stroms von Kühlflüssigkeit auf Plattenpaare (1a, 1b) des Wärmetauschers durch Kühlflüssigkeitseinlässe der Plattenpaare (1a, 1b), wobei die Luftstromkanäle zwischen benachbarten der Plattenpaare (1a, 1b) angeordnet sind;
 - innerhalb jedes der Plattenpaare (1a, 1b), Leiten der Kühlflüssigkeit durch einen ersten Kanal (12) in einer Richtung senkrecht zur Luftstromrichtung;

- innerhalb jedes der Plattenpaare (1a, 1b), Leiten eines ersten Anteils der Kühlflüssigkeit aus dem ersten Kanal (12) durch einen Wärmeaustauschbereich des Plattenpaares (1a, 1b) (1a, 1b) in einer Richtung entgegen der Luftstromrichtung;
- Übertragen von Wärme aus dem Strom erwärmter Luft auf den ersten Anteil der Kühlflüssigkeit, während der erste Anteil der Kühlflüssigkeit durch den Wärmeaustauschbereich des Plattenpaares fließt;
- innerhalb jedes der Plattenpaare (1a, 1b), Leiten eines zweiten Anteils der Kühlflüssigkeit aus dem ersten Kanal (12) durch einen Bypass-Bereich (21) des Plattenpaares (1a, 1b) (1a, 1b) in einer Richtung entgegen der Luftstromrichtung, wobei die Wärmeübertragung zwischen dem Strom erwärmter Luft und dem zweiten Anteil der Kühlflüssigkeit innerhalb des Bypass-Bereichs (21) verhindert wird, so dass der zweite Anteil der Kühlflüssigkeit den Bypass-Bereich (21) mit einer niedrigeren Temperatur verlässt als der erste Anteil der Kühlflüssigkeit den Wärmeaustauschbereich verlässt;
- innerhalb jedes der Plattenpaare (1a, 1b), Leiten des ersten Anteils der Kühlflüssigkeit durch einen zweiten Kanal (13) in einer Richtung senkrecht zur Luftstromrichtung, nachdem der erste Anteil der Kühlflüssigkeit durch den Wärmeaustauschbereich des Plattenpaares geleitet wurde;
- innerhalb jedes der Plattenpaare (1a, 1b), Leiten des zweiten Anteils der Kühlflüssigkeit durch den zweiten Kanal (13) in einer Richtung senkrecht zur Luftstromrichtung, nachdem der zweite Anteil der Kühlflüssigkeit durch den Bypass-Bereich (21) des Plattenpaares geleitet wurde; und
- Entfernen des Stroms von Kühlflüssigkeit aus dem Wärmetauscher durch Kühlflüssigkeitsauslässe der Plattenpaare (1a, 1b).
10. Verfahren nach Anspruch 9, wobei die Schritte des Leitens des ersten Anteils der Kühlflüssigkeit durch den zweiten Kanal (13) und des Leitens des zweiten Anteils der Kühlflüssigkeit durch den zweiten Kanal (13) das Anordnen des zweiten Anteils stromaufwärts des ersten Anteils in Bezug auf die Luftstromrichtung beinhaltet.
11. Verfahren nach Anspruch 9, wobei ein Vermischen des ersten Anteils des Kühlflüssigkeitsstroms mit dem zweiten Anteil des Kühlflüssigkeitsstroms innerhalb des zweiten Kanals (13) verhindert wird.
12. Verfahren nach Anspruch 9, wobei das Leiten des ersten Anteils des Kühlflüssigkeitsstroms durch einen Wärmeaustauschbereich des Plattenpaares

(1a, 1b) (1a, 1b) das Leiten des ersten Anteils des Kühlflüssigkeitsstroms durch eine gewellte Innenrippe (14), die innerhalb des Plattenpaares angeordnet ist, beinhaltet.

13. Verfahren nach Anspruch 9, wobei das Leiten des ersten Anteils des Kühlflüssigkeitsstroms durch einen Wärmeaustauschbereich des Plattenpaares (1a, 1b) das Durchleiten des ersten Anteils des Kühlflüssigkeitsstroms durch eine Reihe von aufeinanderfolgend angeordneten Strömungskanälen (22) beinhaltet, wobei sich jede der in einer Reihe aufeinanderfolgend angeordneten Strömungskanäle (22) in einer Richtung senkrecht zur Luftstromrichtung erstreckt.

Revendications

1. Échangeur de chaleur, comprenant :

une pluralité de paires de plaques empilées (1a, 1b) ayant des passages d'écoulement d'air agencés entre des paires adjacentes de la pluralité de paires de plaques empilées (1a, 1b), les passages d'écoulement d'air s'étendant entre un ensemble de premiers bords longitudinaux des paires de plaques empilées (1a, 1b) et un ensemble opposé de seconds bords longitudinaux des paires de plaques empilées (1a, 1b) pour définir une direction d'écoulement d'air à travers l'échangeur de chaleur perpendiculaire aux premiers et seconds bords longitudinaux ;

une région d'entrée et de sortie (10) pour fluide de refroidissement, chacune de la pluralité de paires de plaques empilées (1a, 1b) ayant une entrée (4) pour fluide de refroidissement et une sortie (5) pour fluide de refroidissement agencées à l'intérieur de la région d'entrée et de sortie (10) et alignées avec la direction d'écoulement d'air ;

une pluralité d'ailettes internes ondulées, chacune étant située à l'intérieur d'une de la pluralité de paires de plaques empilées (1a, 1b) et ayant une direction de chute de basse pression alignée avec la direction des bords longitudinaux et une direction de chute de haute pression alignée avec la direction d'écoulement d'air ;

une pluralité de barrières d'écoulement comprenant une pluralité de premières barrières d'écoulement (6) construites par des nervures des paires de plaques (1a, 1b), ladite pluralité de premières barrières d'écoulement (6) étant agencées entre la région d'entrée et de sortie (10) pour le fluide de refroidissement et la pluralité d'ailettes internes ondulées ; et

une pluralité de chemins d'écoulement de fluide

- de refroidissement (11), chacun des chemins d'écoulement de fluide de refroidissement (11) s'étendant à travers une de la pluralité de paires de plaques empilées (1a, 1b) entre l'entrée (4) pour fluide de refroidissement et la sortie (5) pour fluide de refroidissement et incluant une première partie s'étendant entre une de la pluralité d'ailettes internes ondulées (14) et un de l'ensemble de premiers bords longitudinaux, une deuxième partie s'étendant entre celle-ci de la pluralité d'ailettes internes ondulées (14) et un de l'ensemble de seconds bords longitudinaux, et une troisième partie s'étendant à travers celle-ci de la pluralité d'ailettes internes ondulées (14) dans la direction de chute de haute pression pour fournir une communication fluide entre la première partie et la deuxième partie, dans lequel la direction d'écoulement de fluide de refroidissement le long de la troisième partie est contraire à la direction d'écoulement d'air, **caractérisé en ce que** chacun des chemins d'écoulement de fluide de refroidissement (11) inclut en outre une quatrième partie agencée entre celle-ci de la pluralité d'ailettes internes ondulées (14) et un bord latéral des paires de plaques (1a, 1b) perpendiculaire aux bords longitudinaux des paires de plaques (1a, 1b), la quatrième partie étant raccordée de façon fluide à la première partie de telle sorte qu'un fluide de refroidissement orienté le long du chemin d'écoulement de fluide de refroidissement (11) s'écoule à travers la troisième partie ou la quatrième partie et que la pluralité de barrières d'écoulement comprenant en outre une deuxième pluralité de barrières d'écoulement (18) construites par des nervures des paires de plaques (1a, 1b), la deuxième pluralité de barrières d'écoulement (18) bornant au moins partiellement les quatrième parties de la pluralité de chemins d'écoulement de fluide de refroidissement (11).
2. Échangeur de chaleur selon la revendication 1, dans lequel chacun des chemins d'écoulement de fluide de refroidissement (11) inclut en outre une quatrième partie située à l'intérieur de la région d'entrée et de sortie (10) et s'étendant depuis l'entrée (4) pour fluide de refroidissement et la première partie, et une cinquième partie située à l'intérieur de la région d'entrée et de sortie (10) et s'étendant depuis la deuxième partie jusqu'à la sortie (5).
 3. Échangeur de chaleur selon la revendication 1, dans lequel la région d'entrée et de sortie (10) pour fluide de refroidissement est au moins partiellement bornée par des bord latéraux des paires de plaques (1a, 1b) perpendiculaires aux bords longitudinaux des paires de plaques (1a, 1b).
 4. Échangeur de chaleur selon la revendication 1, dans lequel chacune de la pluralité d'ailettes internes ondulées (14) est agencée entre une de la première pluralité de barrières d'écoulement (6) et une de la deuxième pluralité de barrières d'écoulement (18).
 5. Échangeur de chaleur selon la revendication 1, dans lequel chacun des chemins d'écoulement de fluide de refroidissement (11) inclut en outre une cinquième partie raccordée de façon fluide à la quatrième partie pour recevoir un écoulement à partir de celle-ci, la cinquième partie étant agencée entre la deuxième partie et un de l'ensemble de seconds bords longitudinaux.
 6. Échangeur de chaleur selon la revendication 5, comprenant en outre une troisième pluralité de barrières d'écoulement (23) construites par des nervures des paires de plaques (1a, 1b), les deuxième parties des chemins d'écoulement de fluide de refroidissement (11) étant séparées des quatrième parties des chemins d'écoulement de fluide de refroidissement (11) par la troisième pluralité de barrières d'écoulement (23).
 7. Échangeur de chaleur selon la revendication 6, dans lequel chacune de la deuxième pluralité de barrières d'écoulement (18) est jointe à une de la troisième pluralité de barrières d'écoulement (23).
 8. Échangeur de chaleur selon la revendication 1, dans lequel la quatrième partie est raccordée de façon fluide à la deuxième partie.
 9. Procédé de refroidissement d'un écoulement d'air chauffé, comprenant :
 - l'orientation d'un écoulement d'air chauffé à travers des passages d'écoulement d'air d'un échangeur de chaleur dans une direction d'écoulement d'air ;
 - l'orientation d'un écoulement de fluide de refroidissement dans l'échangeur de chaleur et la distribution de l'écoulement de fluide de refroidissement parmi des paires de plaques (1a, 1b) de l'échangeur de chaleur à travers des entrées de fluide de refroidissement des paires de plaques (1a, 1b), les passages d'écoulement d'air étant agencés entre des paires adjacentes des paires de plaques (1a, 1b) ;
 - à l'intérieur de chacune des paires de plaques (1a, 1b), l'orientation du fluide de refroidissement à travers une première conduite (12) dans une direction perpendiculaire à la direction d'écoulement d'air ;
 - à l'intérieur de chacune des paires de plaques (1a, 1b), l'orientation d'une première partie du fluide de refroidissement à partir de la première

conduite (12) à travers une section d'échange de chaleur de la paire de plaques (1a, 1b) (1a, 1b) dans une direction contraire à la direction d'écoulement d'air ;

le transfert de chaleur à partir de l'écoulement d'air chauffé à la première partie du fluide de refroidissement lorsque la première partie du fluide de refroidissement s'écoule à travers la section d'échange de chaleur de la paire de plaques ;

à l'intérieur de chacune des paires de plaques (1a, 1b), l'orientation d'une deuxième partie du fluide de refroidissement à partir de la première conduite (12) à travers une section de dérivation (21) de la paire de plaques (1a, 1b) (1a, 1b) dans une direction contraire à la direction d'écoulement d'air, le transfert de chaleur entre l'écoulement d'air chauffé et la deuxième partie du fluide de refroidissement étant empêché à l'intérieur de la section de dérivation (21) pour que la deuxième partie du fluide de refroidissement sorte de la section de dérivation (21) à une température inférieure à celle à laquelle la première partie du fluide de refroidissement sort de la section d'échange de chaleur ;

à l'intérieur de chacune des paires de plaques (1a, 1b), l'orientation de la première partie du fluide de refroidissement à travers une seconde conduite (13) dans une direction perpendiculaire à la direction d'écoulement d'air après l'orientation de la première partie du fluide de refroidissement à travers la section d'échange de chaleur de la paire de plaques ;

à l'intérieur de chacune des paires de plaques (1a, 1b), l'orientation de la deuxième partie du fluide de refroidissement à travers la seconde conduite (13) dans une direction perpendiculaire à la direction d'écoulement d'air après l'orientation de la deuxième partie du fluide de refroidissement à travers la section de dérivation (21) de la paire de plaques ; et

l'élimination de l'écoulement de fluide de refroidissement à partir de l'échangeur de chaleur à travers des sorties de fluide de refroidissement des paires de plaques (1a, 1b).

- 10.** Procédé selon la revendication 9, dans lequel les étapes de l'orientation de la première partie du fluide de refroidissement à travers la seconde conduite (13) et l'orientation de la deuxième partie du fluide de refroidissement à travers la seconde conduite (13) inclut l'agencement de la deuxième partie en amont de la première partie par rapport à la direction d'écoulement d'air.

- 11.** Procédé selon la revendication 9, dans lequel le mélangeage de la première partie de l'écoulement de fluide de refroidissement avec la deuxième partie de

l'écoulement de refroidissement à l'intérieur de la seconde conduite (13) est empêché.

- 12.** Procédé selon la revendication 9, dans lequel l'orientation de la première partie de l'écoulement de fluide de refroidissement à travers une section d'échange de chaleur de la paire de plaques (1a, 1b) (1a, 1b) inclut le passage de la première partie de l'écoulement de fluide de refroidissement à travers une ailette interne ondulée (14) agencée à l'intérieur de la paire de plaques.

- 13.** Procédé selon la revendication 9, dans lequel l'orientation de la première partie de l'écoulement de fluide de refroidissement à travers une section d'échange de chaleur de la paire de plaques (1a, 1b) inclut le passage de la première partie de l'écoulement de fluide de refroidissement à travers une série successivement agencée de passages d'écoulement (22), chacun de la série successivement agencée de passages d'écoulement (22) s'étendant dans une direction perpendiculaire à la direction d'écoulement d'air.

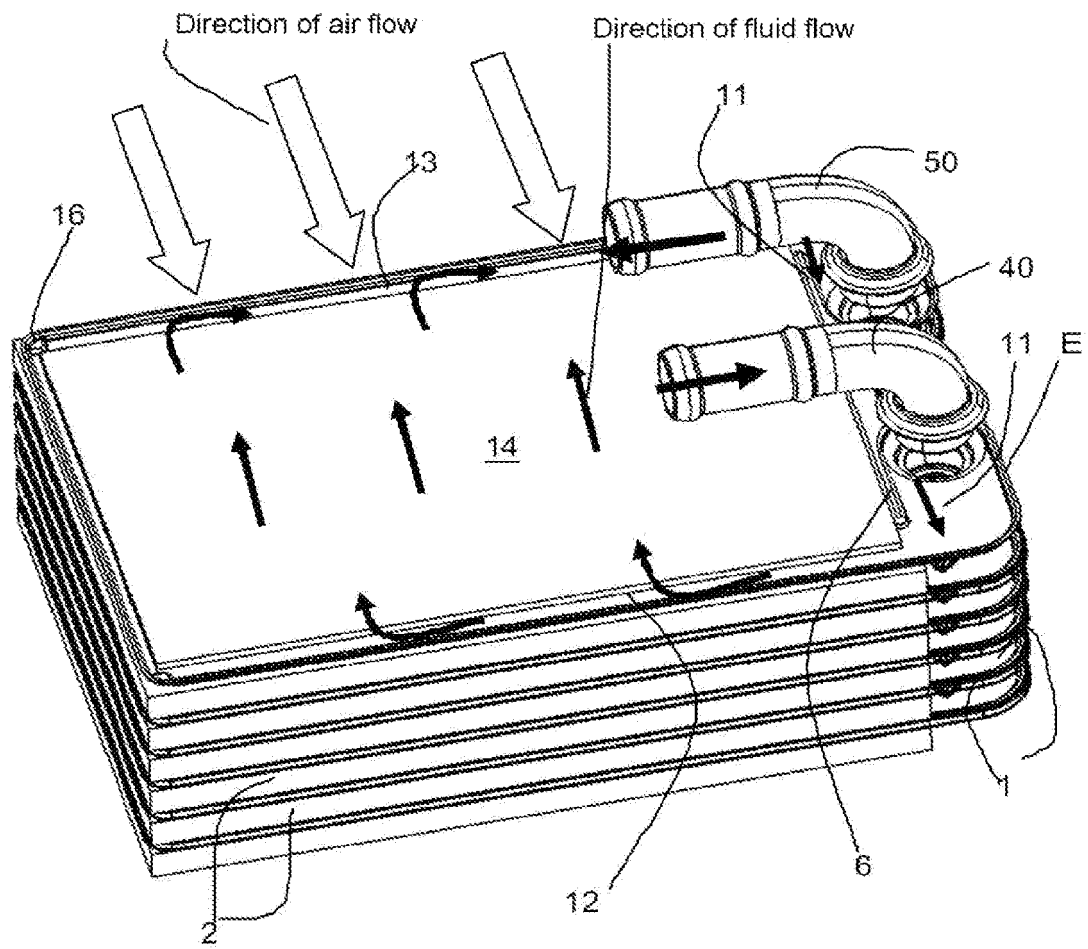
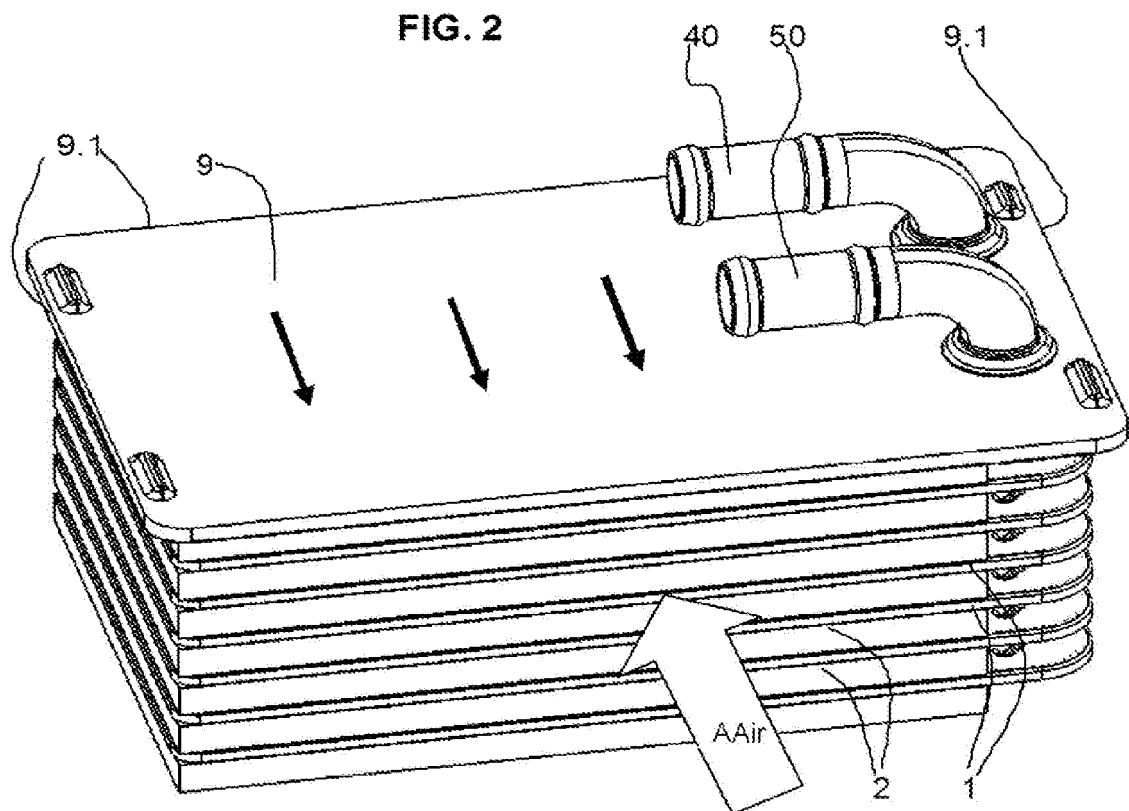
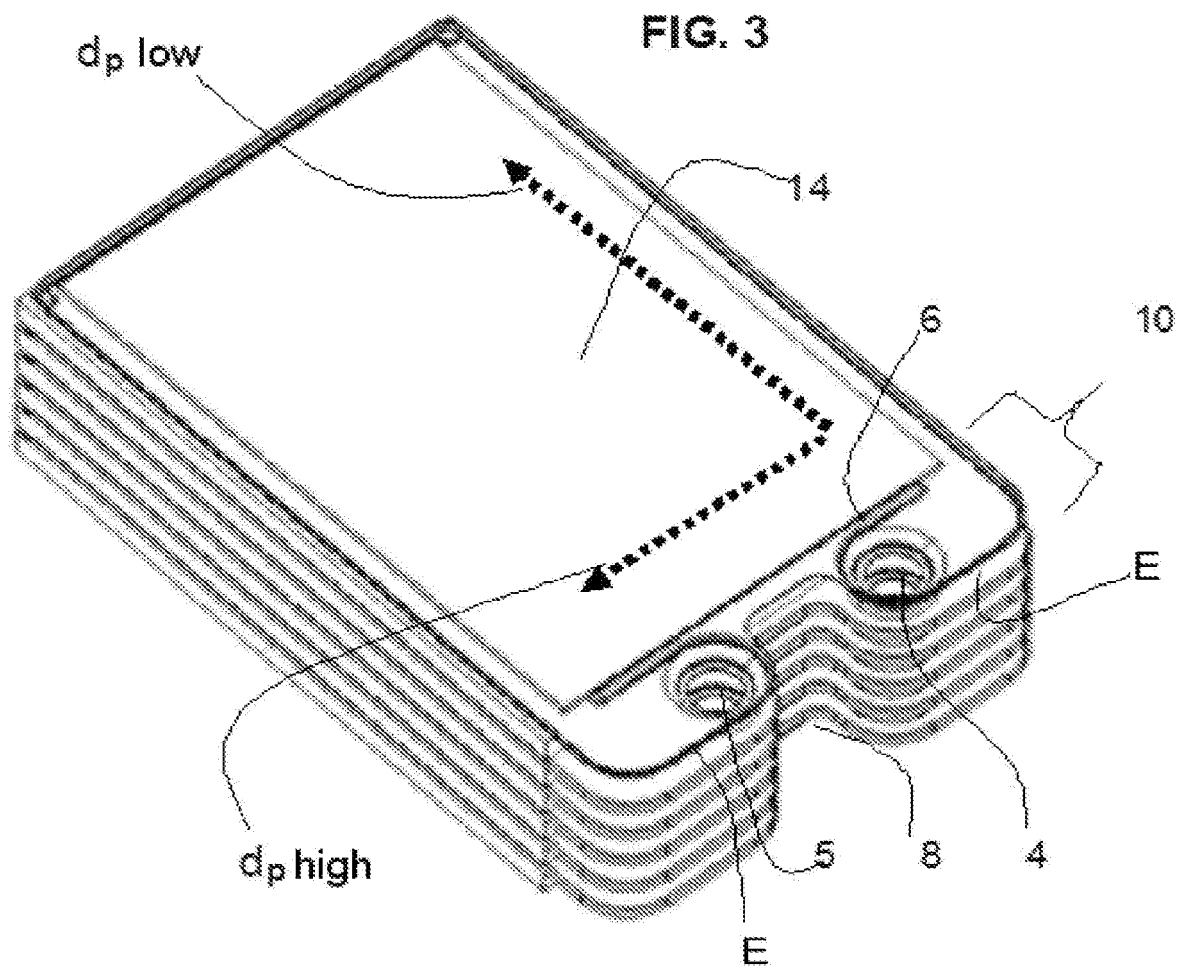


FIG. 1





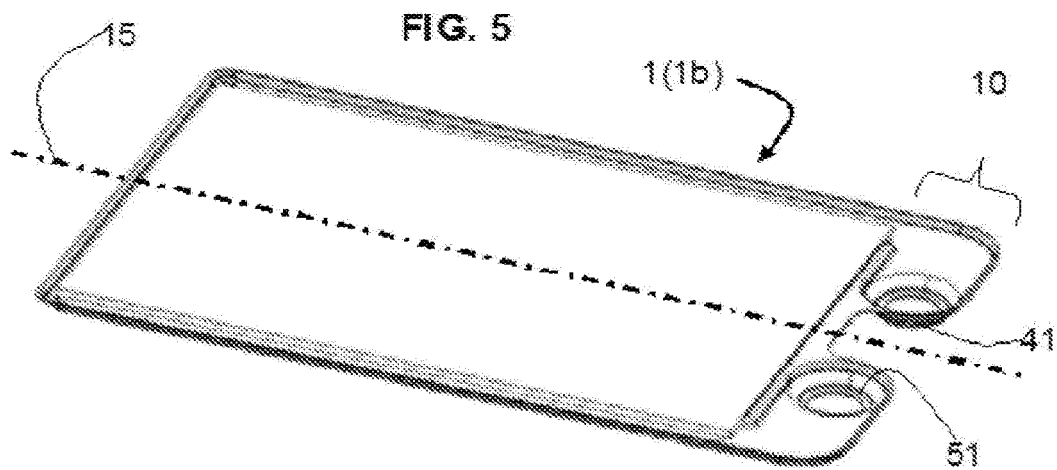
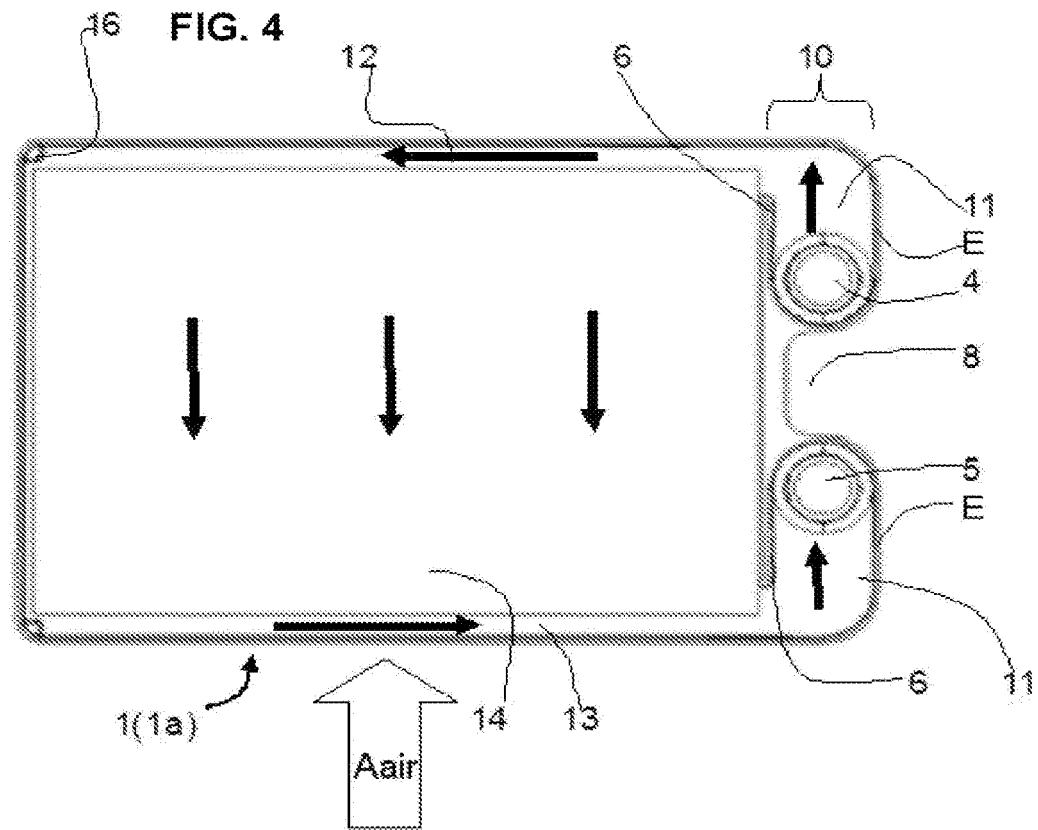


FIG. 6

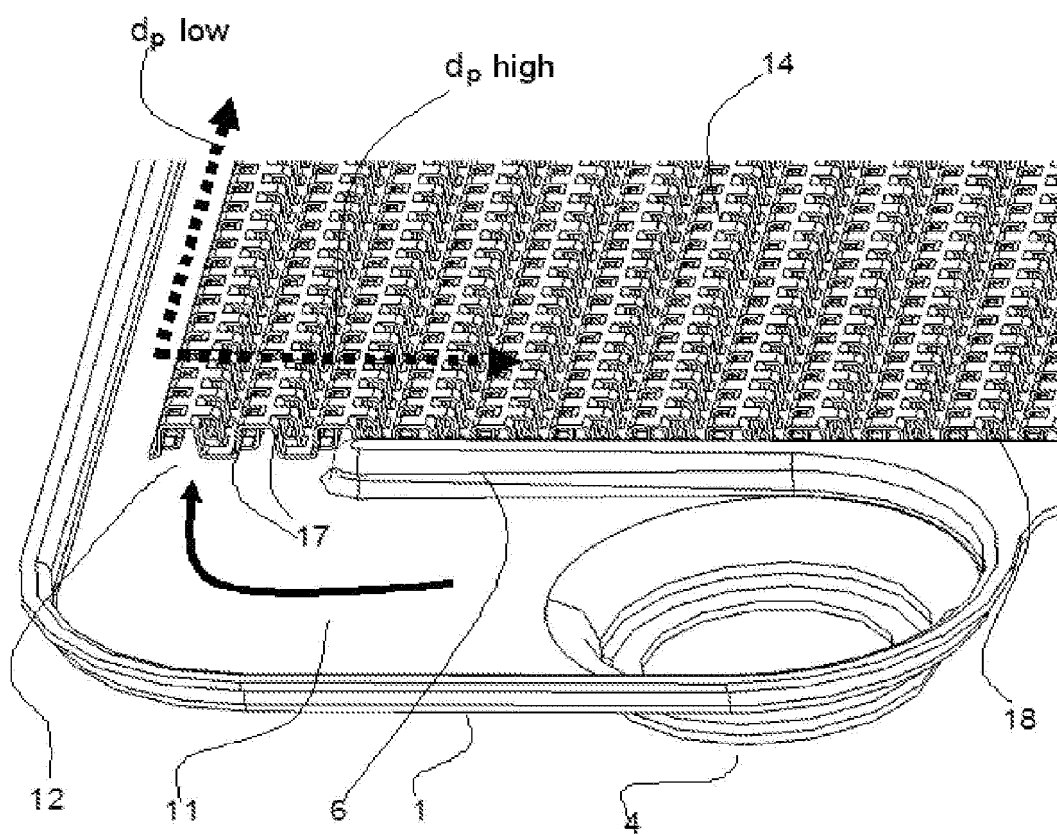


FIG. 7

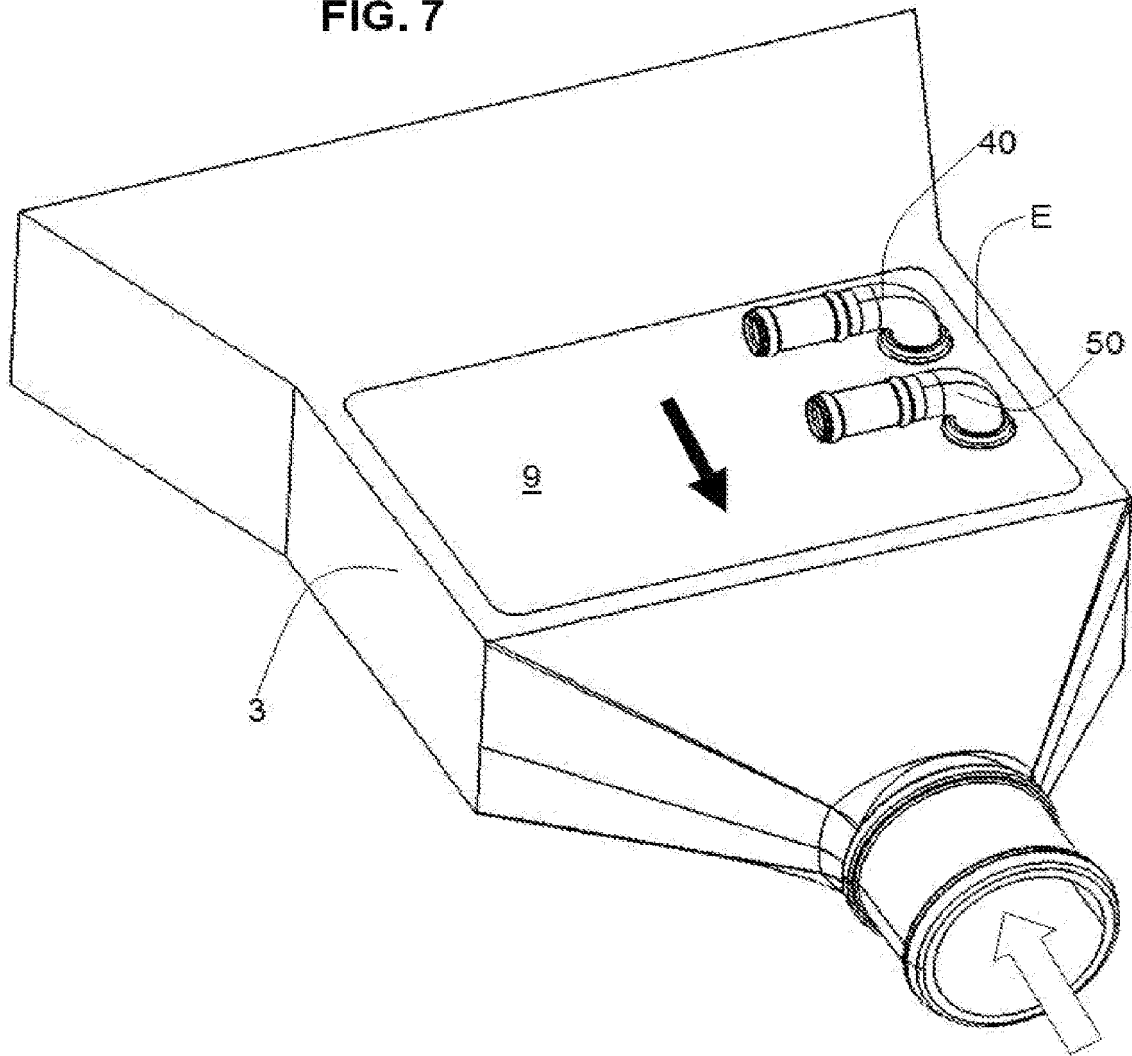


FIG. 8

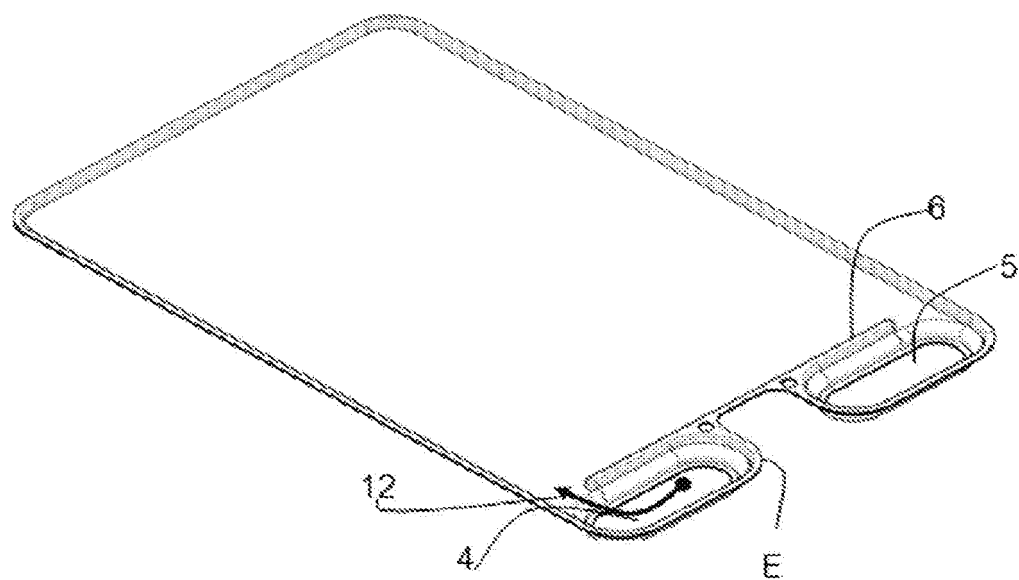


FIG. 9

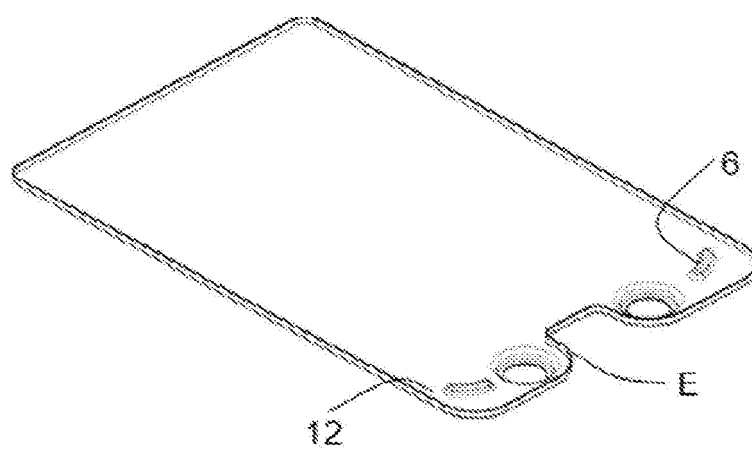


FIG. 10A

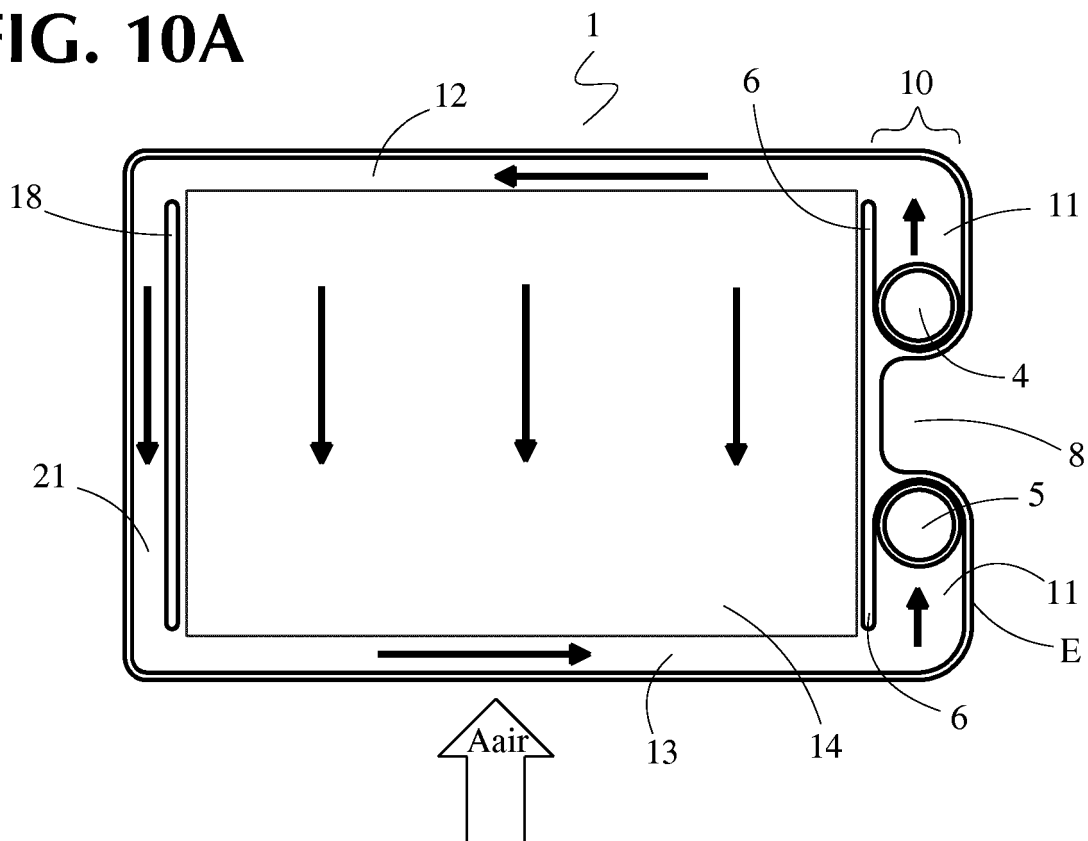


FIG. 10B

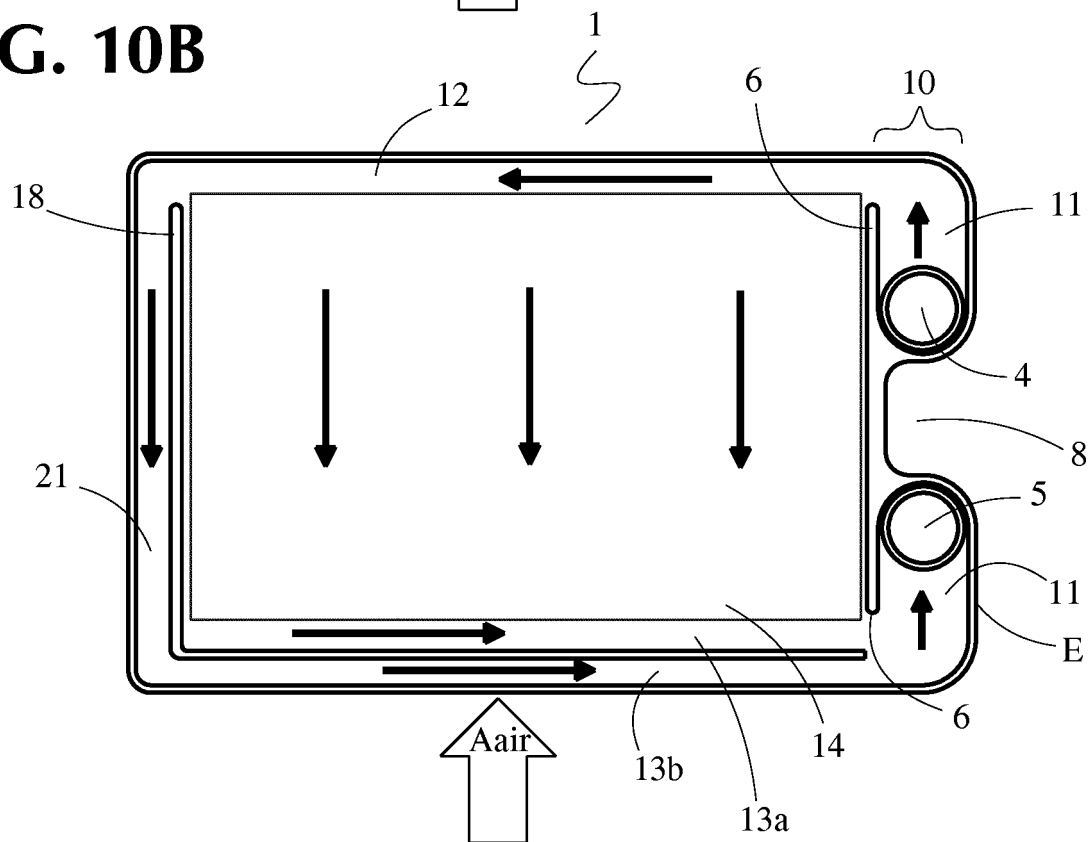


FIG. 10C


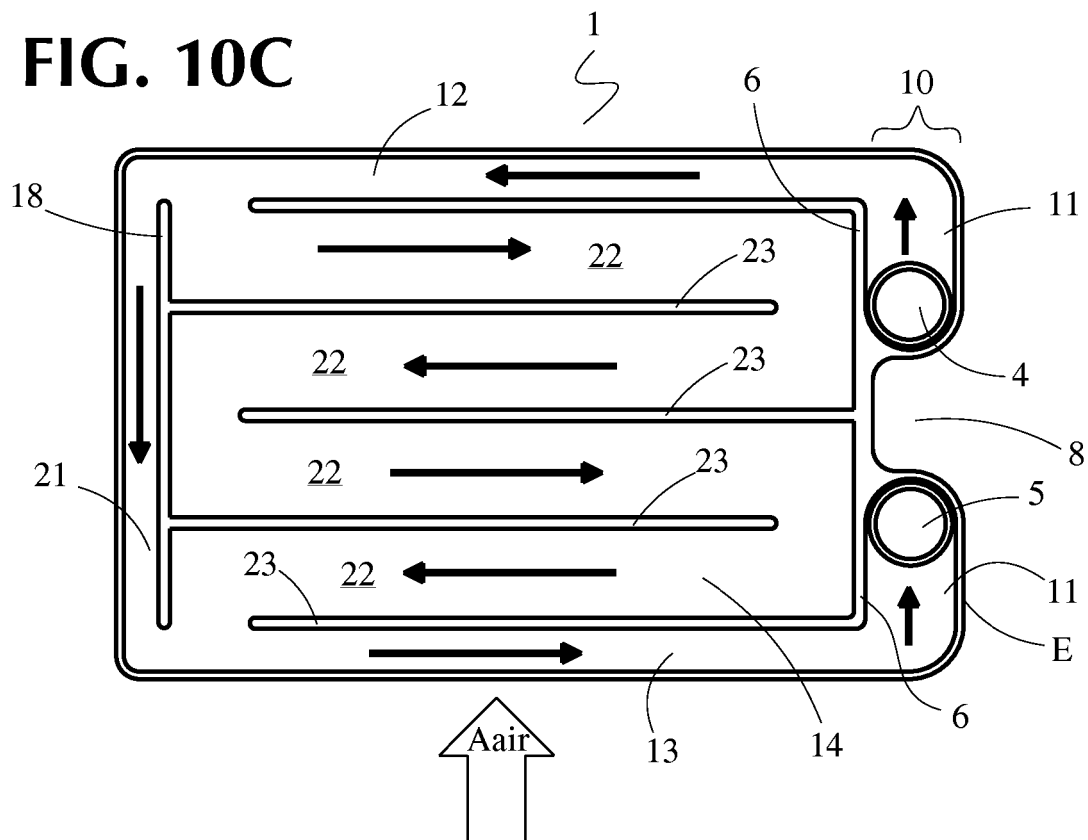


FIG. 10D

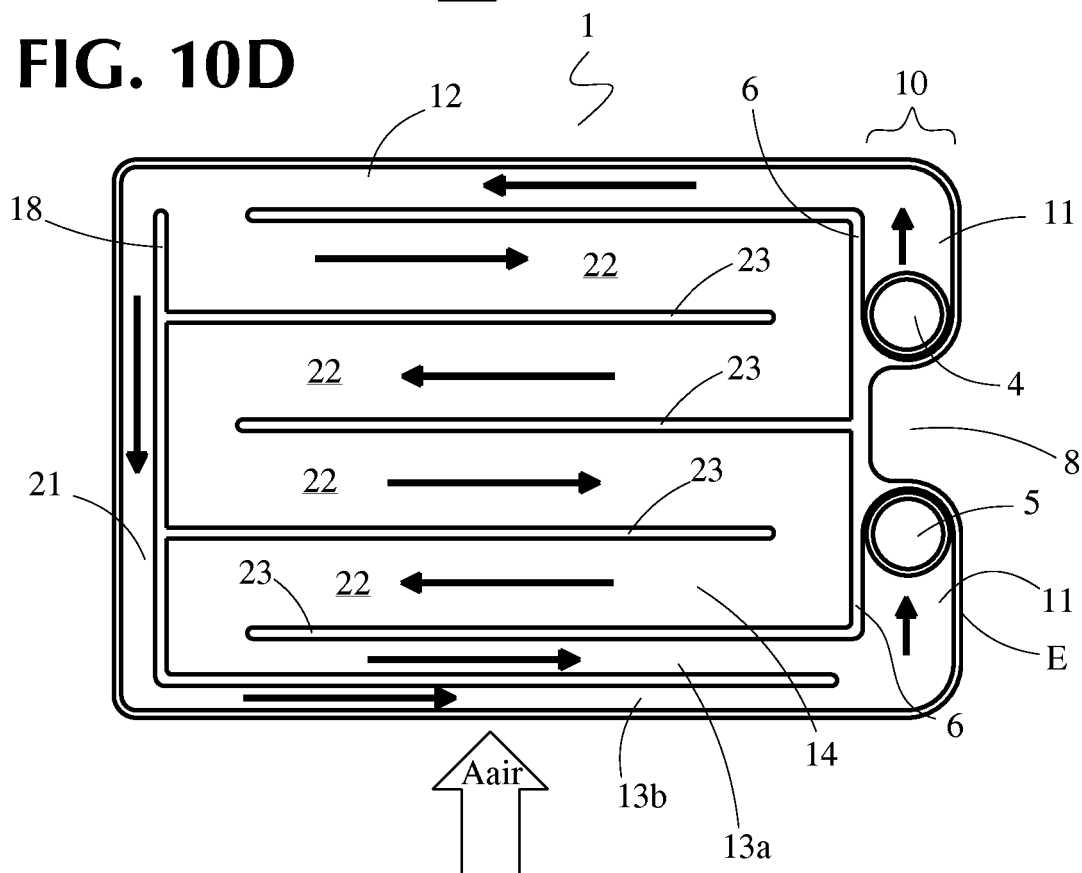

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- DE 29809080 [0005]
- DE 102006048667 A1 [0006]
- DE 102012006346 A [0007]
- US 2015068717 A [0007]