

(19)



(11)

EP 3 519 663 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
13.09.2023 Bulletin 2023/37

(21) Application number: **17853862.5**

(22) Date of filing: **21.09.2017**

(51) International Patent Classification (IPC):
E21B 7/06^(2006.01) E21B 47/024^(2006.01)

(52) Cooperative Patent Classification (CPC):
E21B 7/067; E21B 7/068; E21B 47/024

(86) International application number:
PCT/US2017/052655

(87) International publication number:
WO 2018/057698 (29.03.2018 Gazette 2018/13)

(54) **DRILLING APPARATUS USING A SELF-ADJUSTING DEFLECTION DEVICE AND DIRECTIONAL SENSORS FOR DRILLING DIRECTIONAL WELLS**

BOHRVORRICHTUNG MIT EINER SELBSTEINSTELLENDEN ABLENKVORRICHTUNG UND RICHTUNGSSSENSOREN ZUM BOHREN VON RICHTUNGSBOHRLÖCHERN

APPAREIL DE FORAGE UTILISANT UN DISPOSITIF DE DÉVIATION À RÉGLAGE AUTOMATIQUE ET CAPTEURS DIRECTIONNELS DE FORAGE DE Puits DIRECTIONNELS

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **23.09.2016 US 201615274892**

(43) Date of publication of application:
07.08.2019 Bulletin 2019/32

(73) Proprietor: **Baker Hughes Holdings LLC**
Houston, TX 77073 (US)

(72) Inventors:
• **PETERS, Volker**
Houston, Texas 77073 (US)
• **PETER, Andreas**
Houston, Texas 77073 (US)
• **FULDA, Christian**
Houston, Texas 77073 (US)

• **EGGERS, Heiko**
Houston, Texas 77073 (US)
• **GRIMMER, Harald**
Houston, Texas 77073 (US)

(74) Representative: **Novagraaf Group**
Chemin de l'Echo 3
1213 Onex / Geneva (CH)

(56) References cited:
WO-A1-2013/122603 US-A- 3 011 568
US-A- 4 442 908 US-A- 4 811 798
US-A- 5 195 754 US-A1- 2001 052 427
US-A1- 2003 127 252 US-A1- 2005 109 542
US-A1- 2007 163 810 US-A1- 2009 133 930
US-A1- 2011 308 858 US-A1- 2012 018 225
US-A1- 2013 043 076 US-A1- 2014 110 178
US-A1- 2014 231 136 US-B1- 6 203 435

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 519 663 B1

Description

BACKGROUND

1. Field of the Disclosure

[0001] This disclosure relates generally to drilling directional wellbores.

2. Background of the Art

[0002] Wellbores or wells (also referred to as boreholes) are drilled in subsurface formations for the production of hydrocarbons (oil and gas) using a drill string that includes a drilling assembly (commonly referred to as a "bottomhole assembly" or "BHA") attached to a drill pipe bottom. A drill bit attached to the bottom of the drilling assembly is rotated by rotating the drill string from the surface and/or by a drive, such as a mud motor, in the drilling assembly. A common method of drilling curved sections and straight sections of wellbores (directional drilling) utilizes a fixed bend (also referred to as adjustable kick-off or "AKO") mud motor to provide a selected bend or tilt to the drill bit to form curved sections of wells. To drill a curved section, the drill string rotation from the surface is stopped, the bend of the AKO is directed into the desired build direction and the drill bit is rotated by the mud motor. Once the curved section is complete, the drilling assembly, including the bend, is rotated from the surface to drill a straight section. Such methods produce uneven boreholes. The borehole quality degrades as the tilt or bend is increased, causing effects like spiraling of the borehole. Other negative borehole quality effects attributed to the rotation of bent assemblies include drilling of over-gauge boreholes, borehole breakouts, and weight transfer. Such apparatus and methods also induce high stress and vibrations on the mud motor components compared to drilling assemblies without an AKO and create high friction between the drilling assembly and the wellbore due to the bend contacting the inside of the wellbore as the drilling assembly rotates. Consequently, the maximum build rate is reduced by reducing the angle of the bend of the AKO to reduce the stresses on the mud motor and other components in the drilling assembly. Such methods result in additional time and expenses to drill such wellbores. Therefore, it is desirable to provide drilling assemblies and methods for drilling curved wellbore sections and straight sections without a fixed bend in the drilling assembly to reduce stresses on the drilling assembly components and utilizing various downhole sensors control drilling of the wellbore. US2007/163810A1 discloses a prior art apparatus having the features of the preamble of claim 1. US4442908A discloses another prior art apparatus for drilling a wellbore.

[0003] The disclosure herein provides apparatus and methods for drilling a wellbore, wherein the drilling assembly includes a deflection device that allows (or self-

adjusts) a lower section of the drilling assembly connected to a drill bit to tilt or bend relative to an upper section of the drilling assembly when the drilling assembly is substantially rotationally stationary for drilling curved wellbore sections and straightens the lower section of the drilling assembly when the drilling assembly is rotated for drilling straight or relatively straight wellbore sections. Various sensors provide information about parameters relating to the drilling assembly direction, deflection device, drilling assembly behavior, and/or the subsurface formation that is the drilling assembly drills through that may be used to drill the wellbore along a desired direction and to control various operating parameters of the deflection device, drilling assembly and the drilling operations.

SUMMARY

[0004] In one aspect, an apparatus for drilling a wellbore is provided according to claim 1.

[0005] In another aspect, a method for drilling a wellbore is provided according to claim 8.

[0006] Examples of the more important features of a drilling apparatus have been summarized rather broadly in order that the detailed description thereof that follows may be better understood, and in order that the contributions to the art may be appreciated. There are additional features that will be described hereinafter and which will form the subject of the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] For a detailed understanding of the apparatus and methods disclosed herein, reference should be made to the accompanying drawings and the detailed description thereof, wherein like elements are generally given same numerals and wherein:

FIG. 1 shows a drilling assembly in a curved section of a wellbore that includes a deflection device or mechanism for drilling curved and straight sections of the wellbore, according to one non-limiting embodiment of the disclosure;

FIG. 2 shows a non-limiting embodiment of the deflection device of the drilling assembly of **FIG. 1** when a lower section of the drilling assembly is tilted relative to an upper section;

FIG. 3 shows the deflection device of the drilling assembly of **FIG. 2** when the lower section of the drilling assembly is straight relative the upper section;

FIG. 4 shows a non-limiting embodiment of a deflection device that includes a force application device that initiates the tilt in a drilling assembly, such as the drilling assembly shown in **FIG. 1**;

FIG. 5 shows a non-limiting embodiment of a hydraulic device that initiates the tilt in a drilling assembly, such as the drilling assembly shown in **FIG. 1**;

FIGS. 6A and 6B show certain details of a dampener,

such as the dampener shown in **FIGS. 2-5** to reduce or control the rate of the tilt of the drilling assembly; **FIG. 7** shows a non-limiting embodiment of a deflection device that includes a sealed hydraulic section and a predefined minimum tilt of the lower section relative to the upper section;

FIG. 8 shows the deflection device of **FIG. 7** with the maximum tilt;

FIG. 9 is a 90 degree rotated view of the deflection device of **FIG. 7** showing a sealed hydraulic section with a lubricant therein that provides lubrication to the seals of the deflection device shown in **FIG. 7**

FIG. 10 shows a 90 degree rotated view of the deflection device of **FIG. 9** that further includes flexible seals to isolate the seals shown in **FIG. 9** from the outside environment;

FIG. 11 shows the deflection device of **FIG. 9** that includes a locking device that prevents a pin or hinge member of the deflection device from rotating;

FIG. 12 shows the deflection device of **FIG. 11** that includes a device that reduces friction between a pin or hinge member of the deflection device and a member or surface of the lower section that moves about the pin;

FIG. 13 shows the deflection device of **FIG. 7** that includes sensors that provide measurements relating to the tilt of the lower section of the drilling assembly with respect to the upper section and sensors that provide measurements relating to force applied by the lower section on the upper section during drilling of wellbores;

FIG. 14 shows the deflection device of **FIG. 7** showing a non-limiting embodiment relating to placement of sensors relating to directional drilling and drilling assembly parameters;

FIG. 15 shows the deflection device of **FIG. 7** that includes a device for generating electrical energy due to vibration or motion in the drilling assembly during drilling of the wellbore; and

FIG. 16 shows an exemplary drilling system with a drill string conveyed in a wellbore that includes a drilling assembly with a deflection device made according an embodiment of this disclosure.

DETAILED DESCRIPTION

[0008] In aspects, the disclosure herein provides a drilling assembly or BHA for use in a drill string for directional drilling (drilling of straight and curved sections of a wellbore) that includes a deflection device that initiates a tilt to enable drilling of curved sections of wellbores and straightens itself to enable drilling of straight (vertical and tangent) sections of the wellbores. Such a drilling assembly allows drilling of straight sections when the drilling assembly is rotated and allows drilling of curved sections when the drilling assembly is stationary while the drill bit is rotated with the downhole drive. In aspects, directional drilling is achieved by using a self-adjusting "articulation

joint" (also referred to herein as a "pivotal connection", "hinge device" or "hinged" device) to allow a tilt in the drilling assembly when the drill string and thus the drilling assembly is stationary and optionally using a dampener to maintain the drilling assembly straight when the drilling assembly is rotated. In other aspects a force application device, such as a spring or a hydraulic device, may be utilized to initiate or assist the tilt by applying a force into a hinged direction. In another aspect, the hinge device or hinged device is sealed from the outside environment (i.e., drilling fluid flowing through the drive, the wellbore, and/or the wellbore annulus). The hinge, about which a lower section of the drilling assembly having a drill bit at the end thereof tilts relative to an upper section of the drilling assembly, maybe sealed to exclude contaminants, abrasive, erosive fluids from relatively moving members. The term "upper section" of the drilling assembly is means the part of the drilling assembly that is located uphole of the hinge device and the term "lower section" of the drilling assembly is used for the part of the drilling assembly that is located downhole of the hinge device. In another aspect, the deflection device includes a stop that maintains the lower section at a small tilt (for example, about 0.05 degree or greater) to facilitate initiation of the tilt of the lower section relative to the upper section when the drill string is stationary. In another aspect, the stop may allow the lower section to attain a straight position relative to the upper section when the drill string is rotated. In another aspect, the deflection device includes another stop that defines the maximum tilt of the lower section relative to the upper section. The drilling system utilizing the drilling assembly described herein further includes one or more sensors that provide information or measurements relating to one or more parameters of interest, such as directional parameters, including, but not limited to, tool face inclination, and azimuth of at least a part of the drilling assembly. The term "tool face" is an angle between a point of interest such as a direction to which the deflection device points and a reference. The term "high side" is such a reference meaning the direction in a plane perpendicular about the tool axis where the gravitation is the lowest (negative maximum). Other references, such as "low side" and "magnetic north" may also be utilized. Other embodiments may include: sensors that provide measurements relating to the tilt and tilt rate in the deflection device; sensors that provide measurement relating to force applied by the lower section onto the upper section; sensors that provide information about behavior of the drilling assembly and the deflection device; and devices (also referred to as energy harvesting devices) that may utilize electrical energy harvested from motion (e.g. vibration) in the deflection device. A controller in the drilling assembly and/or at the surface determines one or more parameters from the sensor measurements and may be configured to communicate such information in real time via a suitable telemetry mechanism to the surface to enable an operator (e.g. an automated drilling controller or a

human operator) to control the drilling operations, including, but not limited to, selecting the amount and direction of the tilt of the drilling assembly and thus the drill bit; adjusting operating parameters, such as weight applied on the drilling assembly, and drilling fluid pump rate. A controller in the drilling assembly and/or at the surface also may cause the drill bit to point along a desired direction with the desired tilt in response to one or more determined parameters of interest.

[0009] In other aspects, a drilling assembly made according to an embodiment of the disclosure: reduces wellbore spiraling, reduces friction between the drilling assembly and the wellbore wall during drilling of straight sections; reduces stress on components of the drilling assembly, including, but not limited to, a downhole drive (such as a mud motor, an electric drive, a turbine, etc.), and allows for easy positioning of the drilling assembly for directional drilling. For the purpose of this disclosure, the term stationary means to include rotationally stationary (not rotating) or rotating at a relatively small rotational speed (rpm), or angular oscillation between maximum and minimum angular positions (also referred to as "tool-face fluctuations"). Also, the term "straight" as used in relation to a wellbore or the drilling assembly includes the terms "straight", "vertical" and "tangent" and further includes the phrases "substantially straight", "substantially vertical" or "substantially tangent". For example, the phrase "straight wellbore section" or "substantially straight wellbore section" will mean to include any wellbore section that is "perfectly straight" or a section that has a relatively small curvature as described above and in more detail later.

[0010] FIG. 1 shows a drilling assembly 100 in a curved section of a wellbore 101. The drilling assembly 100 includes a deflection device (also referred herein as a flexible device or a deflection mechanism) 120 for drilling curved and straight sections of the wellbore 101. The drilling assembly 100 further includes a downhole drive or drive, such as a mud motor 140, having a stator 141 and rotor 142. The rotor 142 is coupled to a transmission, such as a flexible shaft 143 that is coupled to another shaft 146 (also referred to as the "drive shaft") disposed in a bearing assembly 145. The shaft 146 is coupled to a disintegrating device, such as drill bit 147. The drill bit 147 rotates when the drilling assembly 100 and/or the rotor 142 of the mud motor 140 rotates due to circulation of a drilling fluid, such as mud, during drilling operations. In other embodiments, the downhole drive may include any other device that can rotate the drill bit 147, including, but not limited to an electric motor and a turbine. In certain other embodiments, the disintegrating device may include any another device suitable for disintegrating the rock formation, including, but not limited to, an electric impulse device (also referred to as electrical discharge device). The drilling assembly 100 is connected to a drill pipe 148, which is rotated from the surface to rotate the drilling assembly 100 and thus the drilling assembly 100 and the drill bit 147. In the particular drilling assembly

configuration shown in FIG. 1, the drill bit 147 may be rotated by rotating the drill pipe 148 and thus the drilling assembly 100 and/or the mud motor 140.

The rotor 142 rotates the drill bit 147 when a fluid is circulated through the drilling assembly 100. The drilling assembly 100 further includes a deflection device 120 having an axis 120a that may be perpendicular to an axis 100a of the upper section of the drilling assembly 100. In FIG. 1 the deflection device 120 is below the mud motor 140 and coupled to a lower section, such as housing or tubular 160 disposed over the bearing assembly 145. In various embodiments of the deflection device 120 disclosed herein, the housing 160 tilts a selected or known amount along a selected or known plane defined by the axis of the upper section of the drilling assembly 110a and the axis of the lower section of the drilling assembly 100b in FIG. 1) to tilt the drill bit 147 along the selected plane, which allows drilling of curved borehole sections. As described later in reference to FIGS. 2-6, the tilt is initiated when the drilling assembly 100 is stationary (not rotating) or substantially rotationally stationary. The curved section is then drilled by rotating the drill bit 147 by the mud motor 140 without rotating the drilling assembly 100. The deflection device 120 straightens when the drilling assembly is rotated, which allows drilling of straight wellbore sections. Thus, in aspects, the deflection device 120 allows a selected tilt in the drilling assembly 100 that enables drilling of curved sections along desired wellbore paths when the drill pipe 148 and thus the drilling assembly 100 is rotationally stationary or substantially rotationally stationary and the drill bit 147 is rotated by the drive 140. However, when the drilling assembly 100 is rotated, such as by rotating the drill pipe 148 from the surface, the tilt straightens and allows drilling of straight borehole sections, as described in more detail in reference to FIGS. 2-9. In one embodiment, a stabilizer 150 is provided below the deflection device 120 (between the deflection device 120 and the drill bit 147) that initiates a bending moment in the deflection device 120 and also maintains the tilt when the drilling assembly 100 is not rotated and a weight on the drill bit is applied during drilling of the curved borehole sections. In another embodiment a stabilizer 152 may be provided above the deflection device 120 in addition to or without the stabilizer 150 to initiate the bending moment in the deflection device 120 and to maintain the tilt during drilling of curved wellbore sections. In other embodiments, more than one stabilizer may be provided above and/or below the deflection device 120. Modeling may be performed to determine the location and number of stabilizers for optimum operation. In other embodiments, an additional bend may be provided at a suitable location above the deflection device 120, which may include, but not limited to, a fixed bend, a flexible bend a deflection device and a pin or hinge device.

[0011] FIG. 2 shows a non-limiting embodiment of a deflection device 120 for use in a drilling assembly, such as the drilling assembly 100 shown in FIG. 1. According

to the invention, the deflection device **120** includes a pivot member comprising a pin **210** having an axis **212** that may be perpendicular to the longitudinal axis **214** of the drilling assembly **100**, about which the housing **270** of a lower section **290** of the drilling assembly **100** tilts or inclines a selected amount relatively to the upper section (part of an upper section) about the plane defined by the axis **212**. The housing **270** tilts between a substantially straight end stop **282** and an inclined end stop **280** that defines the maximum tilt. When the housing **270** of the lower section **290** is tilted in the opposite direction, the straight end stop **282** defines the straight position of the drilling assembly **100**, where the tilt is zero or alternatively a substantially straight position when the tilt is relatively small but greater than zero, such as about 0.2 degrees or greater. Such a tilt can aid in initiating the tilt of the lower section **290** of the drilling assembly **100** for drilling curved sections when the drilling assembly is rotationally stationary. The housing **270** tilts along a particular plane or radial direction as defined by the pin axis **212**. One or more seals, such as seal **284**, provided between the inside of the housing **270** and another member of the drilling assembly **100** seals the inside section of the housing **270** below the seal **284** from the outside environment, such as the drilling fluid.

[0012] Still referring to **FIGS. 1** and **2**, when a weight on the bit **147** is applied and drilling progresses while the drill pipe **148** is substantially rotationally stationary, it will initiate a tilt of the housing **270** about the pin axis **212** of the pin **210**. The drill bit **147** and/or the stabilizer **150** below the deflection device **120** initiates a bending moment in the deflection device **120** and also maintains the tilt when the drill pipe **148** and thus the drilling assembly **100** is substantially rotationally stationary and a weight on the drill bit **147** is applied during drilling of the curved wellbore sections. Similarly, stabilizer **152**, in addition to or without the stabilizer **150** and the drill bit, may also determine the bending moment in the deflection device **120** and maintains the tilt during drilling of curved wellbore sections. Stabilizers **150** and **152** may be rotating or non-rotating devices. In one non-limiting embodiment, a dampening device or dampener **240** may be provided to reduce or control the rate of the tilt variation when the drilling assembly **100** is rotated. In one non-limiting embodiment, the dampener **240** may include a piston **260** and a compensator **250** in fluid communication with the piston **260** via a line **260a** to reduce, restrict or control the rate of the tilt variation. Applying a force **F1** on the housing **270** will cause the housing **270** and thus the lower section **290** to tilt about the pin axis **212**. Applying a force **F1'** opposite to the direction of force **F1** on the housing **270** causes the housing **270** and thus the drilling assembly **100** to straighten or to tilt into the opposite direction of force **F1'**. The dampener may also be used to stabilize the straightened position of the housing **270** during rotation of the drilling assembly **100** from the surface. The operation of the dampening device **240** is described in more detail in reference to **FIGS. 6A** and **6B**. Any other

suitable device, however, may be utilized to reduce or control the rate of the tilt variation of the drilling assembly **100** about the pin **210**.

[0013] Referring now to **FIGS. 1-3**, when the drill pipe **148** is substantially rotationally stationary (not rotating) and a weight is applied on the drill bit **147** while the drilling is progressing, the deflection device will initiate a tilt of the drilling assembly **100** at the pivot **210** about the pivot axis **212**. The rotating of the drill bit **147** by the downhole drive **140** will cause the drill bit **147** to initiate drilling of a curved section. As the drilling continues, the continuous weight applied on the drill bit **147** will continue to increase the tilt until the tilt reaches the maximum value defined by the inclined end stop **280**. Thus, in one aspect, a curved section may be drilled by including the pivot **210** in the drilling assembly **100** with a tilt defined by the inclined end stop **280**. If the dampening device **240** is included in the drilling assembly **100** as shown in **FIG. 2**, tilting the drilling assembly **100** about the pivot **210** will cause the housing **270** in section **290** to apply a force **F1** on the piston **260**, causing a fluid **261**, such as oil, to transfer from the piston **260** to the compensator **250** via a conduit or path, such as line **260a**. The flow of the fluid **261** from the piston **260** to the compensator **250** may be restricted to reduce or control the rate of the tilt variation and avoid sudden tilting of the lower section **290**, as described in more detail in reference to **FIGS. 6A** and **6B**. In the particular illustrations of **FIGS. 1** and **2**, the drill bit **147** will drill a curved section upward. To drill a straight section after drilling the curved section, the drilling assembly **100** may be rotated 180 degrees to remove the tilt and then later rotated from the surface to drill the straight section. However, when the drilling assembly **100** is rotated, based on the positions of the stabilizers **150** and/or **152** or other wellbore equipment between the deflection device **120** and the drill bit **147** and in contact with the wellbore wall, bending forces in the wellbore act on the housing **270** and exert forces in opposite direction to the direction of force **F1**, thereby straightening the housing **270** and thus the drilling assembly **100**, which allows the fluid **261** to flow from the compensator **250** to the piston **260** causing the piston to move outwards. Such fluid flow may or may not be restricted, which allows the housing **270** and thus the lower section **290** to straighten rapidly (without substantial delay). The outward movement of the piston **260** may be supported by a spring, positioned in force communication with the piston **260**, the compensator **250**, or both. The straight end stops **282** restricts the movement of the member **270**, causing the lower section **290** to remain straight as long as the drilling assembly **100** is being rotated. Thus, the embodiment of the drilling assembly **100** shown in **FIGS. 1** and **2** provides a self-initiating tilt when the drilling assembly **120** is stationary (not rotated) or substantially stationary and straightens itself when the drilling assembly **100** is rotated. Although the downhole drive **140** shown in **FIG. 1** is shown to be a mud motor, any other suitable drive may be utilized to rotate the drill bit **147**. **FIG. 3** shows

the drilling assembly **100** in the straight position, wherein the housing **270** rests against the straight end stop **282**.
[0014] FIG. 4 shows another non-limiting embodiment of a deflection device **420** that includes a force application device, such as a spring **450**, that continually exerts a radially outward force **F2** on the housing **270** of the lower section **290** to provide or initiate a tilt to the lower section **290**. In one embodiment, the spring **450** may be placed between the inside of the housing **270** and a housing **470** outside the transmission **143** (FIG. 1). In this embodiment, the spring **450** causes the housing **270** to tilt radially outward about the pivot **210** up to the maximum bend defined by the inclined end stop **280**. When the drilling assembly **100** is stationary (not rotating) or substantially rotationally stationary, a weight on the drill bit **147** is applied and the drill bit is rotated by the downhole drive **140**, the drill bit **147** will initiate the drilling of a curved section. As drilling continues, the tilt increases to its maximum level defined by the inclined end stop **280**. To drill a straight section, the drilling assembly **100** is rotated from the surface, which causes the borehole to apply force **F3** on the housing **270**, compressing the spring **450** to straighten the drilling assembly **100**. When the spring **450** is compressed by application of force **F3**, the housing **270** relieves pressure on the piston **260**, which allows the fluid **261** from the compensator **250** to flow through line **262** back to piston **260** without substantial delay as described in more detail in reference to FIGS. 6A and 6B.
[0015] FIG. 5 shows a non-limiting embodiment of a hydraulic force application device **540** to initiate a selected tilt in the drilling assembly **100**. In one non-limiting embodiment, the hydraulic force application device **540** includes a piston **560** and a compensation device or compensator **550**. The drilling assembly **100** also may include a dampening device or dampener, such as dampener **240** shown in FIG. 2. The dampening device **240** includes a piston **260** and a compensator **250** shown and described in reference to FIG. 2. The hydraulic force application device **540** may be placed 180 degrees from device **240**. The piston **560** and compensator **550** are in hydraulic communication with each other. During drilling, a fluid **512a**, such as drilling mud, flows under pressure through the drilling assembly **100** and returns to the surface via an annulus between the drilling assembly **100** and the wellbore as shown by fluid **512b**. The pressure **P1** of the fluid **512a** in the drilling assembly **100** is greater (typically 20-50 bars) than the pressure **P2** of the fluid **512b** in the annulus. When fluid **512a** flows through the drilling assembly **100**, pressure **P1** acts on the compensator **550** and correspondingly on the piston **560** while pressure **P2** acts on compensator **250** and correspondingly on piston **260**. Pressure **P1** being greater than pressure **P2** creates a differential pressure (**P1** - **P2**) across the piston **560**, which pressure differential is sufficient to cause the piston **560** to move radially outward, which pushes the housing **270** outward to initiate a tilt. A restrictor **562** may be provided in the compensator **550** to reduce or control the rate of the tilt variation as described

in more detail in reference to FIGS. 6A and 6B. Thus, when the drill pipe **148** is substantially rotationally stationary (not rotating), the piston **560** slowly bleeds the hydraulic fluid **561** through the restrictor **562** until the full tilt angle is achieved. The restrictor **562** may be selected to create a high flow resistance to prevent rapid piston movement which may be present during tool face fluctuations of the drilling assembly to stabilize the tilt. The differential pressure piston force is always present during circulation of the mud and the restrictor **562** limits the rate of the tilt. When the drilling assembly **100** is rotated, bending moments on the housing **270** force the piston **560** to retract, which straightens the drilling assembly **100** and then maintains it straight as long as the drilling assembly **100** is rotated. The dampening rate of the dampening device **240** may be set to a higher value than the rate of the device **540** in order to stabilize the straightened position during rotation of the drilling assembly **100**.

[0016] FIGS. 6A and 6B show certain details of the dampening device **600**, which is the same as device **240** in FIGS. 2, 4 and 5. Referring to FIG. 2 and FIGS. 6A and 6B, when the housing **270** applies force **F1** on the piston **660**, it moves a hydraulic fluid (such as oil) from a chamber **662** associated with the piston **660** to a chamber **652** associated with a compensator **620**, as shown by arrow **610**. A restrictor **611** restricts the flow of the fluid from the chamber **662** to chamber **652**, which increases the pressure between the piston **660** and the restrictor **611**, thereby restricting or controlling the rate of the tilt. As the hydraulic fluid flow continues through the restrictor **611**, the tilt continues to increase to the maximum level defined by the end inclination stop **280** shown and described in reference to FIG. 2. Thus, the restrictor **611** defines the rate of the tilt variation. Referring to FIG. 6B, when force **F1** is released from the housing **270**, as shown by arrow **F4**, force **F5** on compensator **620** moves the fluid from chamber **652** back to the chamber **662** of piston **660** via a check valve **612**, bypassing the restrictor **611**, which enables the housing **270** to move to its straight position without substantial delay. A pressure relief valve **613** may be provided as a safety feature to avoid excessive pressure beyond the design specification of hydraulic elements.

[0017] FIG. 7 shows an alternative embodiment of a deflection device **700** that may be utilized in a drilling assembly, such as drilling assembly **100** shown in FIG. 1. The deflection device **700** includes a pin **710** with a pin axis **714** perpendicular to the tool axis **712**. The pin **710** is supported by a support member **750**. The deflection device **700** is connected to a lower section **790** of a drilling assembly and includes a housing **770**. The housing **770** includes an inner curved or spherical surface **771** that moves over an outer mating curved or spherical surface **751** of the support member **750**. The deflection device **700** further includes a seal **740** mechanism to separate or isolate a lubricating fluid (internal fluid) **732** from the external pressure and fluids (fluid **722a** inside the drilling assembly and fluid **722b** outside the drilling assembly).

In one embodiment, the deflection device **700** includes a groove or chamber **730** that is open to and communicates the pressure of fluid **722a** or **722b** to a lubricating fluid **732** via a movable seal to an internal fluid chamber **734** that is in fluid communication with the surfaces **751** and **771**. A floating seal **735** provides pressure compensation to the chamber **734**. A seal **772** placed in a groove **774** around the inner surface **771** of the housing **770** seals or isolates the fluid **732** from the outside environment. Alternatively, the seal member **772** may be placed inside a groove around the outer surface **751** of the support member **750**. In these configurations, the center **770c** of the surface **771** is same or about the same as the center **710c** of the pin **710**. In the embodiment of **FIG. 7**, when the lower section **790** tilts about the pin **710**, the surface **771** along with the seal member **772** moves over the surface **751**. If the seal **772** is disposed inside the surface **751**, then the seal member **772** will remain stationary along with the support member **750**. The seal mechanism **740** further includes a seal that isolates the lubrication fluid **732** from the external pressure and external fluid **722b**. In the embodiment shown in **FIG. 7**, this seal includes an outer curved or circular surface **791** associated with the lower section **790** that moves under a fixed mating curved or circular surface **721** of the upper section **720**. A seal member, such as an O-ring **724**, placed in a groove **726** around the inside of the surface **721** seals the lubricating fluid **732** from the outside pressure and fluid **722b**. When the lower section tilts about the pin **710**, the surface **791** moves under the surface **721**, wherein the seal **724** remains stationary. Alternatively, the seal **724** may be placed inside the outer surface **791** and in that case, such a seal will move along with the surface **791**. Thus, in aspects, the disclosure provides a sealed deflection device, wherein the lower section of a drilling assembly, such as section **790**, tilts about sealed lubricated surfaces relative to the upper section, such as section **720**. In one embodiment, the lower section **790** may be configured that enables the lower section **790** to attain perfectly straight position relative to the upper section **720**. In such a configuration, the tool axis **712** and the axis **717** of the lower section **790** will align with each other. In another embodiment, the lower section **790** may be configured to provide a permanent minimum tilt of the lower section **790** relative to the upper section, such as tilt A_{min} shown in **FIG. 7**. Such a tilt can aid the lower section to tilt from the initial position of tilt A_{min} to a desired tilt compared to a no initial tilt of the lower section. As an example, the minimum tilt may be 0.2 degree or greater may be sufficient for a majority of drilling operations.

[0018] **FIG. 8** shows the deflection device **700** of **FIG. 7** when the lower section **790** has attained a full or maximum tilt or tilt angle A_{max} . In one embodiment, when the lower section **790** continues to tilt about the pin **210**, a surface **890** of the lower section **790** is stopped by a surface **820** of the upper section **720**. The gap **850** between the surfaces **890** and **820** defines the maximum

tilt angle A_{max} . A port **830** is provided to fill the chamber **733** with the lubrication fluid **732**. In one embodiment a pressure communication port **831** is provided for to allow pressure communication of fluid **722b** outside the drilling assembly with the chamber **730** and the pressure of the internal fluid chamber **734** via the floating seal **735**. In **FIG. 8**, shoulder **820** acts as the tilt end stop. The internal fluid chamber **734** may also be used as a dampening device. The dampener device uses fluid present at the gap **850** as displayed in **FIG. 8** in a maximum tilt position defined by the maximum tilt angle A_{max} being forced or squeezed from the gap **850** when the tilt is reduced towards A_{min} . Suitable fluid passages are designed to enable and restrict flow between both sides of the gap **850** and other areas of the fluid chamber **734** that exchange fluid volume by movement of the deflection device. To support the dampening, suitable seals, gap dimensions or labyrinth seals may be added. The lubricating fluid **732** properties in terms of density and viscosity can be selected to adjust the dampening parameters.

[0019] **FIG. 9** is a 90 degree rotated view of the deflection device **700** of **FIG. 7** showing a sealed hydraulic section **900** of the deflection device **700**. In one non-limiting embodiment, the sealed hydraulic section **900** includes a reservoir or chamber **910** filled with a lubricant **920** that is in fluid communication with each of the seals in the deflection device **700** via certain fluid flow paths. In **FIG. 9**, a fluid path **932a** provides lubricant **920** to the outer seal **724**, fluid path **932b** provides lubricant **920** to a stationary seal **940** around the pin **710** and a fluid flow path **932c** provides lubricant **920** to the inner seal **772**. In the configuration of **FIG. 9**, seal **772** isolates the lubricant from contamination from the drilling fluid **722a** flowing through the drilling assembly and from pressure **P1** of the drilling fluid **722a** inside the drilling assembly that is higher than pressure **P2** on the outside of the drilling assembly during drilling operations. Seal **724** isolates the lubricant **920** from contamination by the outer fluid **722b**. In one embodiment seal **724** may be a bellows seal. The flexible bellows seal may be used as a pressure compensation device (instead of using a dedicated device, such as a floating seal **735** as described in reference to **FIGS. 7** and **8**) to communicate the pressure from fluid **722b** to the lubricant **920**. Seal **725** isolates the lubricant **920** from contamination by the outer fluid **722b** and around the Pin **710**. Seal **725** allows differential movement between the pin **710** and the lower section member **790**. Seal **725** is also in fluid communication with the lubricant **920** through fluid flow path **932c**. Since the pressure between fluid **722b** and the lubricant **920** is equalized through seal **724**, the pin seal **725** does not isolate two pressure levels, enabling longer service life for a dynamic seal function, such as for seal **725**.

[0020] **FIG. 10** shows the deflection device **700** of **FIG. 7** that may be configured to include one or more flexible seals to isolate the dynamic seals **724** and **772** from the drilling fluid. A flexible seal is any seal that expands and contracts as the lubricant volume inside such a seal re-

spectively increases and decreases and one that allows for the movement between parts that are desired to be sealed.. Any suitable flexible may be utilized, including, but not limited to, a bellow seal, and a flexible rubber seal. In the configuration of **FIG. 10**, a flexible seal **1020** is provided around the dynamic seal **724** that isolates the seal **724** from fluid **722b** on the outside of the drilling assembly. A flexible seal **1030** is provided around the dynamic seal **772** that protects the seal **772** from the fluid **722a** inside the drilling assembly. A deflection device made according to the disclosure herein may be configured: ; a single seal, such as seal **772**, that isolates the fluid flowing through the drilling assembly inside and its pressure from the fluid on the outside of the drilling assembly; a second seal, such as seal **724**, that isolates the outside fluid from the inside fluid or components of the deflection device **700**; one or more flexible seals to isolate one or more other seals, such as the dynamic seals **724** and **772**; and a lubricant reservoir, such as reservoir **920** (**FIG. 9**) enclosed by at least two seals to lubricate the various seals of the deflection device **700**. **[0021]** **FIG. 11** shows the deflection device of **FIG. 9** that includes a locking device to prevent the pin or hinge member **710** of the deflection device from rotating. In the configuration of **FIG. 11**, a locking member **1120** may be placed between the pin **710** and a member or element of the non-moving member **720** of the drilling assembly. The locking member **1120** may be a keyed element or member, such as a pin, that prevents rotation of the pin **710** when the lower section **790** tilts or rotates about the pin **710**. Any other suitable device or mechanism also may be utilized as the locking device, including, but not limited to, a friction and adhesion devices.

[0022] **FIG. 12** shows the deflection device **700** of **FIG. 10** that includes a friction reduction device **1220** between the pin or hinge member **710** of the deflection device **700** and a member or surface **1240** of the lower section **790** that moves about the pin **710**. The friction reduction device **1220** may be any device that reduces friction between moving members, including, but not limited to bearings.

[0023] **FIG. 13** shows the deflection device **700** of **FIG. 7** that in one aspect includes a sensor **1310** that provides measurements relating to the tilt or tilt angle of the lower section **790** relative to the upper section **710**. In one non-limiting embodiment, sensor **1310** (also referred herein as the tilt sensor) may be placed along, about or at least partially embedded in the pin **710**. Any suitable sensor may be used as sensor **1310** to determine the tilt or tilt angle, including, but not limited to, an angular sensor, a hall-effect sensor, a magnetic sensor, and contact or tactile sensor. Such sensors may also be used to determine the rate of the tilt variation. If such a sensor includes two components that face each other or move relative to each other, then one such component may be placed on, along or embedded in an outer surface **710a** of the pin **710** and the other component may be placed on, along or embedded on an inside **790a** of the lower section **790** that moves

or rotates about the pin **710**. In another aspect, a distance sensor **1320** may be placed, for example, in the gap **1340** that provides measurements about the distance or length of the gap **1340**. The gap length measurement may be used to determine the tilt or the tilt angle or the rate of the tilt variation. Additionally, one or more sensors **1350** may be placed in the gap **1340** to provide signal relating to the presence of contact between and the amount of the force applied by the lower section **790** on the upper section **720**.

[0024] **FIG. 14** shows the deflection device **700** of **FIG. 7** that includes sensors **1410** in a section **1440** of the upper section **720** that provide information about the drilling assembly parameters and the wellbore parameters that are useful for drilling the wellbore along a desired well path, sometimes referred to in the art as "geosteering". Some such sensors may include sensors that provide measurements relating to parameters such as tool face, inclination (gravity), and direction (magnetic). Accelerometers, magnetometers, and gyroscopes may be utilized for such parameters. In addition, a vibration sensor may be located at location **1440**. In one non-limiting embodiment, section **1440** may be in the upper section **720** proximate to the end stop **1445**. Sensors **1410**, however, may be located at any other suitable location in the drilling assembly above or below the deflection device **700** or in the drill bit. In addition, sensors **1450** may be placed in the pin **710** for providing information about certain physical conditions of the deflection device **700**, including, but not limited to, torque, bending and weight. Such sensors may be placed in and/or around the pin **710** as relevant forces relating to such parameters are transferred through the pin **710**.

[0025] **FIG. 15** shows the deflection device **700** of **FIG. 7** that includes a device **1510** for generating electrical energy due deflection dynamics, such as vibration, motion and strain energy in the deflection device **700** and the drilling assembly. The device **1510** may include, but is not limited to, piezoelectric crystals, electromagnetic generator, MEMS device. The generated energy may be stored in a storage device, such as battery or a capacitor **1520**, in the drilling assembly and may be utilized to power various sensors, electrical circuits and other devices in the drilling assembly.

[0026] Referring to **FIGS. 13-14**, signals from sensors **1310**, **1320**, **1350**, **1410**, and **1450** may be transmitted or communicated to a controller or another suitable circuit in the drilling assembly by hard wire, optical device or wireless transmission method, including, but limited to, acoustic, radio frequency and electromagnetic methods. The controller in the drilling assembly may process the sensor signals, store such information a memory in the drilling assembly and/or communicate or transmit in real time relevant information to a surface controller via any suitable telemetry method, including, but not limited to, wired pipe, mud pulse telemetry, acoustic transmission, and electromagnetic telemetry. The tilt information from sensor **1310** may be utilized by an operator to control

drilling direction along a desired or predetermined well path, i.e. geosteering and to control operating parameters, such as weight on bit. Information about the force applied by the lower section **790** onto the upper section **720** by sensor **1320** may be used to control the weight on the drill bit to mitigate damage to the deflection device **700**. Torque, bending and weight information from sensors **1450** is relevant to the health of the deflection device and the drilling process and may be utilized to control drilling parameter, such as applied and transferred weight on the drill bit. Information about the pressure inside the drilling assembly and in the annulus may be utilized to control the differential pressure around the seals and thus on the lubricant.

[0027] FIG. 16 is a schematic diagram of an exemplary drilling system **1600** that may utilize a drilling assembly **1630** that includes a deflection device **1650** described in reference to FIGS 2-12 for drilling straight and deviated wellbores. The drilling system **1600** is shown to include a wellbore **1610** being formed in a formation **1619** that includes an upper wellbore section **1611** with a casing **1612** installed therein and a lower wellbore section **1614** being drilled with a drill string **1620**. The drill string **1620** includes a tubular member **1616** that carries a drilling assembly **1630** at its bottom end. The tubular member **1616** may be a drill pipe made up by joining pipe sections, a coiled tubing string, or a combination thereof. The drilling assembly **1630** is shown connected to a disintegrating device, such as a drill bit **1655**, attached to its bottom end. The drilling assembly **1630** includes a number of devices, tools and sensors for providing information relating to various parameters of the formation **1619**, drilling assembly **1630** and the drilling operations. The drilling assembly **1630** includes a deflection device **1650** made according to an embodiment described in reference to FIGS. 2-15. In FIG. 16, the drill string **1630** is shown conveyed into the wellbore **1610** from an exemplary rig **1680** at the surface **1667**. The exemplary rig **1680** is shown as a land rig for ease of explanation. The apparatus and methods disclosed herein may also be utilized with offshore rigs. A rotary table **1669** or a top drive **1669a** coupled to the drill string **1620** may be utilized to rotate the drill string **1620** and thus the drilling assembly **1630**. A control unit **1690** (also referred to as a "controller" or a "surface controller"), which may be a computer-based system, at the surface **1667** may be utilized for receiving and processing data received from sensors in the drilling assembly **1630** and for controlling drilling operations of the various devices and sensors in the drilling assembly **1630**. The surface controller **1690** may include a processor **1692**, a data storage device (or a computer-readable medium) **1694** for storing data and computer programs **1696** accessible to the processor **1692** for determining various parameters of interest during drilling of the wellbore **1610** and for controlling selected operations of the various devices and tools in the drilling assembly **1630** and those for drilling of the wellbore **1610**. The data storage device **1694** may be any suitable device, includ-

ing, but not limited to, a read-only memory (ROM), a random-access memory (RAM), a flash memory, a magnetic tape, a hard disc and an optical disk. To drill wellbore **1610**, a drilling fluid **1679** is pumped under pressure into the tubular member **1616**, which fluid passes through the drilling assembly **1630** and discharges at the bottom **1610a** of the drill bit **1655**. The drill bit **1655** disintegrates the formation rock into cuttings **1651**. The drilling fluid **1679** returns to the surface **1667** along with the cuttings **1651** via the annular space (also referred as the "annulus") **1627** between the drill string **1620** and the wellbore **1610**.

[0028] Still referring to FIG. 16, the drilling assembly **1630** may further include one or more downhole sensors (also referred to as the measurement-while-drilling (MWD) sensors, logging-while-drilling (LWD) sensors or tools, and sensors described in reference to FIGS. 13-15, collectively referred to as downhole devices and designated by numeral **1675**, and at least one control unit or controller **1670** for processing data received from the downhole devices **1675**. The downhole devices **1675** include a variety of sensors that provide measurements or information relating to the direction, position, and/or orientation of the drilling assembly **1630** and/or the drill bit **1655** in real time. Such sensors include, but are not limited to, accelerometers, magnetometers, gyroscopes, depth measurement sensors, rate of penetration measurement devices. Devices **1675** also include sensors that provide information about the drill string behavior and the drilling operations, including, but not limited to, sensors that provide information about vibration, whirl, stick-slip, rate of penetration of the drill bit into the formation, weight-on-bit, torque, bending, whirl, flow rate, temperature and pressure. The devices **1675** further may include tools or devices that provide measurement or information about properties of rocks, gas, fluids, or any combination thereof in the formation **1619**, including, but not limited to, a resistivity tool, an acoustic tool, a gamma ray tool, a nuclear tool, a sampling or testing tool, a coring tool, and a nuclear magnetic resonance tool. The drilling assembly **1630** also includes a power generation device **1686** for providing electrical energy to the various downhole devices **1675** and a telemetry system or unit **1688**, which may utilize any suitable telemetry technique, including, but not limited to, mud pulse telemetry, electromagnetic telemetry, acoustic telemetry and wired pipe. Such telemetry techniques are known in the art and are thus not described herein in detail. Drilling assembly **1630**, as mentioned above, further includes a deflection device (also referred to as a steering unit or device) **1650** that enables an operator to steer the drill bit **1655** in desired directions to drill deviated wellbores. Stabilizers, such as stabilizers **1662** and **1664** are provided along the steering section **1650** to stabilize the section containing the deflection device **1650** (also referred to as the steering section) and the rest of the drilling assembly **1630**. The downhole controller **1670** may include a processor **1672**, such as a microprocessor, a data storage

device **1674** and a program **1676** accessible to the processor **1672**. In aspects, the controller **1670** receives measurements from the various sensors during drilling and may partially or completely process such signals to determine one or more parameters of interest and cause the telemetry system **1688** to transmit some or all such information to the surface controller **1690**. In aspects, the controller **1670** may determine the location and orientation of the drilling assembly or the drill bit and send such information to the surface. Alternatively, or in addition thereto, the controller **1690** at the surface determines such parameters from data received from the drilling assembly. An operator at the surface, controller **1670** and/or controller **1690** may orient (direction and tilt) the drilling assembly along desired directions to drill deviated wellbore sections in response to such determined or computed directional parameters. The drilling system **1600**, in various aspects, allows an operator to orient the deflection device in any desired direction by orienting the drilling assembly based on orientation measurement (for instance relative to north, relative to high side, etc.) that are determined at the surface from downhole measurements described earlier to drill curved and straight sections along desired well paths, monitor drilling direction, and continually adjust orientation as desired in response to the various parameters sensor determined from the sensors described herein and to adjust the drilling parameters to mitigate damage to the components of the drilling assembly. Such actions and adjustments may be done automatically by the controllers in the system or by input from an operator or semi-manually.

[0029] Thus, in certain aspects, the deflection device includes one or more sensors that provide measurements relating to directional drilling parameters or the status of the deflection device, such as an angle or angle rate, a distance or distance rate, both relating to the tilt or tilt rate. Such a sensor may include, but not limited to, a bending sensor and an electromagnetic sensor. The electromagnetic sensor translates the angle change or the distance change that is related to the tilt change into a voltage using the induction law or a capacity change. Either the same sensor or another sensor may measure drilling dynamic parameters, such as acceleration, weight on bit, bending, torque, RPM. The deflection device may also include formation evaluation sensors that are used to make geosteering decisions, either via communication to the surface or automatically via a downhole controller. Formation evaluation sensors, such as resistivity, acoustic, nuclear magnetic resonance (NMR), nuclear, etc. may be used to identify downhole formation features, including geological boundaries.

[0030] In certain other aspects, the drilling assemblies described herein include a deflection device that: (1) provides a tilt when the drilling assembly is not rotated and the drill bit is rotated by a downhole drive, such as a mud motor, to allow drilling of curved or articulated borehole sections; and (2) the tilt straightens when the drilling assembly is rotated to allow drilling of straight borehole sec-

tions. In one non-limiting embodiment, a mechanical force application device may be provided to initiate the tilt. In another non-limiting embodiment, a hydraulic device may be provided to initiate the tilt. A dampening device may be provided to aid in maintaining the tilt straight when the drilling assembly is rotated. A dampening device may also be provided to support the articulated position of the drilling assembly when rapid forces are exerted onto the tilt such as during tool face fluctuations. Additionally, a restrictor may be provided to reduce or control the rate of the tilt. Thus, in various aspects, the drilling assembly automatically articulates into a tilted or hinged position when the drilling assembly is not rotated and automatically attains a straight or substantially straight position when the drilling assembly is rotated. Sensors provide information about the direction (position and orientation) of the lower drilling assembly in the wellbore, which information is used to orient the lower section of the drilling assembly along a desired drilling direction. A permanent predetermined tilt may be provided to aid the tilting of the lower section when the drilling assembly is rotationally stationary. End stops are provided in the deflection device that define the minimum and maximum tilt of the lower section relative to the upper section of the drilling assembly. A variety of sensors in the drilling assembly, including those in or associated with the deflection device, are used to drill wellbores along desired well paths and to take corrective actions to mitigate damage to the components of the drilling assembly. For the purpose of this disclosure, substantially rotationally stationary generally means the drilling assembly is not rotated by rotating the drill string from the surface. The phrase "substantially rotationally stationary" and the term "stationary" are considered equivalent. Also, a "straight" section is intended to include a "substantially straight" section.

[0031] The foregoing disclosure is directed to the certain exemplary embodiments and methods. Various modifications will be apparent to those skilled in the art. It is intended that all such modifications within the scope of the appended claims be embraced by the foregoing disclosure. The words "comprising" and "comprises" as used in the claims are to be interpreted to mean "including but not limited to".

Claims

1. A drilling assembly (100) for drilling a wellbore, comprising:

a drive (140) for rotating a drill bit (147);
a deflection device (120; 700); and
a sensor (1310, 1320, 1350, 1410, 1450) that provides measurements relating a direction of the drilling assembly (100) for drilling the wellbore along a desired direction, wherein the deflection device (120; 700) enables a lower

- section (290; 790) of the drilling assembly (100) to tilt within a selected plane when the drilling assembly (100) is substantially rotationally stationary to allow drilling of a curved section of the wellbore when the drill bit (147) is rotated by the drive (140) and wherein the tilt is reduced when the drilling assembly (100) is rotated to allow drilling of a straighter section of the wellbore, **characterised in that** the lower section (290; 790) of the drilling assembly (100) tilts about a pin (210; 710) of a pivotal connection.
2. The drilling assembly of claim 1, further comprising a controller (1690) that determines a parameter of interest relating to the direction of the drilling assembly (100) from the measurements provided by the sensor, wherein, optionally, the parameter of interest is selected from a group consisting of: inclination; azimuth; and tool face of at least a part of the drilling assembly (100).
 3. The drilling assembly of claim 1, wherein the deflection device (120; 700) comprises at least one seal (284; 724, 735, 740, 772, 940) and, optionally, the deflection device (710) includes at least two seals (724... 940) and a lubricant (732, 790) bounded by the at least two seals (724... 940) to lubricate the at least two seals (724... 940).
 4. The drilling assembly of claim 1, wherein the deflection device (120; 700) includes a first end stop (282; 820; 1445) that defines a minimum tilt angle of the lower section (290; 790) relative to an upper section (720) of the drilling assembly (100).
 5. The drilling assembly of claim 4, wherein the minimum angle is greater than zero.
 6. The drilling assembly of claim 4, wherein the deflection device (120; 700) includes a second end stop (280) that defines the maximum tilt angle of the lower section (290; 790).
 7. The drilling assembly of claim 1 further comprising a dampener (240; 734) that reduces rate of tilt variation of the lower section (290; 790) relative to an upper section (720) when the drilling assembly (100) is substantially rotationally stationary.
 8. A method of drilling a wellbore, comprising:

conveying a drilling assembly (100) in the wellbore that includes: a drive (140) for rotating a drill bit (147); a deflection device (120; 700) that enables a lower section (290; 790) of the drilling assembly (100) to tilt within a selected plane when the drilling assembly (100) is substantially rotationally stationary to allow drilling of a curved
 - section of the wellbore when the drill bit (147) is rotated by the drive (140) and wherein the tilt is reduced when the drilling assembly (100) is rotated to allow drilling of a straighter section of the wellbore, wherein the lower section (290; 790) tilts about a pin (210; 710) of a pivotal connection; and a sensor (1310... 1450) that provides measurements relating the direction of the drilling assembly (100) for drilling the wellbore along a desired direction; drilling a straight section of the wellbore by rotating the drilling assembly (100) from a surface location; causing the drilling assembly (100) to become at least substantially rotationally stationary; determining a parameter of interest relating to a direction of the drilling assembly (100) in the wellbore; and drilling a curved section of the wellbore by the drive (140) in the drilling assembly (100) in response to the determined parameter of interest.
 9. The method of claim 8, wherein the parameter of interest relating to the direction of the drilling assembly (100) is selected from a group consisting of: inclination; azimuth; and tool face of at least a part of the drilling assembly (100).
 10. The method of claim 8, further comprising providing at least one seal (284) in the deflection device (210; 710) and, optionally, providing at least two seals (284) in the deflection device (210; 710) and a lubricant (732, 790) bounded by the at least two seals (284) to lubricate the at least two seals (284).
 11. The method of 8, wherein a surface of the lower section (290; 790) of the drilling assembly (100) moves about a stationary surface of the pivotal connection.
 12. The method of claim 8, further comprising: providing a first end stop (282; 820; 1445) in the deflection device (120; 700) that defines a minimum tilt angle of the lower section (290; 790) of the drilling assembly (100) relative to an upper section (720) of the drilling assembly (100).
 13. The method of claim 12, wherein the minimum angle is greater than zero.
 14. The method of claim 8, further comprising providing a second end stop (280) in the deflection device (120; 700) that defines the maximum tilt angle of the lower section (290; 790).
 15. The method of claim 8, further comprising: providing a dampener (240; 734) that reduces rate of tilt variation of the lower section (290; 790) relative to an upper section (720) when the drilling assembly (100)

is substantially rotationally stationary.

Patentansprüche

1. Bohranordnung (100) zum Bohren eines Bohrlochs, umfassend:

einen Antrieb (140) zum Drehen eines Bohrmeißels (147);
eine Ablenkvorrichtung (120; 700) und
einen Sensor (1310, 1320, 1350, 1410, 1450),
der Messungen bezüglich einer Richtung der
Bohranordnung (100) zum Bohren des Bohr-
lochs entlang einer gewünschten Richtung be-
reitet, wobei
die Ablenkvorrichtung (120; 700) ermöglicht,
dass ein unterer Abschnitt (290; 790) der Bohr-
anordnung (100) sich innerhalb einer ausge-
wählten Ebene neigt, wenn die Bohranordnung
(100) im Wesentlichen drehfest ist, um das Boh-
ren eines gekrümmten Abschnitts des Bohr-
lochs zu ermöglichen, wenn der Bohrmeißel
(147) durch den Antrieb (140) gedreht wird, und
wobei die Neigung reduziert wird, wenn die
Bohranordnung (100) gedreht wird, um das
Bohren eines geraderen Abschnitts des Bohr-
lochs zu ermöglichen, **dadurch gekennzeichnet,**
dass der untere Abschnitt (290; 790) der
Bohranordnung (100) sich um einen Stift (210;
710) einer Schwenkverbindung neigt.

2. Bohranordnung nach Anspruch 1, ferner umfassend
eine Steuerung (1690), die einen Parameter von In-
teresse, der sich auf die Richtung der Bohranord-
nung (100) bezieht, anhand der von dem Sensor be-
reitgestellten Messungen bestimmt, wobei der Pa-
rameter von Interesse optional ausgewählt wird aus
einer Gruppe bestehend aus Neigung, Azimut und
Werkzeugfläche zumindest eines Teils der Bohran-
ordnung (100).

3. Bohranordnung nach Anspruch 1, wobei die Ablenk-
vorrichtung (120; 700) mindestens eine Dichtung
(284; 724, 735, 740, 772, 940) umfasst und die Ab-
lenkvorrichtung (710) optional mindestens zwei
Dichtungen (724... 940) und ein durch die mindes-
tens zwei Dichtungen (724... 940) begrenztes
Schmiermittel (732, 790) zum Schmieren der min-
destens zwei Dichtungen (724... 940) einschließt.

4. Bohranordnung nach Anspruch 1, wobei die Ablenk-
vorrichtung (120; 700) einen ersten Endanschlag
(282; 820; 1445) einschließt, der einen minimalen
Neigungswinkel des unteren Abschnitts (290; 790)
relativ zu einem oberen Abschnitt (720) der Bohra-
nordnung (100) definiert.

5. Bohranordnung nach Anspruch 4, wobei der Min-
destwinkel größer als null ist.

6. Bohranordnung nach Anspruch 4, wobei die Ablenk-
vorrichtung (120; 700) einen zweiten Endanschlag
(280) einschließt, der den maximalen Neigungswin-
kel des unteren Abschnitts (290; 790) definiert.

7. Bohranordnung nach Anspruch 1, ferner umfassend
einen Dämpfer (240; 734), der die Neigungsände-
rungsrate des unteren Abschnitts (290; 790) relativ
zu einem oberen Abschnitt (720) reduziert, wenn die
Bohranordnung (100) im Wesentlichen drehfest ist.

8. Verfahren zum Bohren eines Bohrlochs, umfassend:

Transportieren einer Bohranordnung (100) in
dem Bohrloch, die Folgendes einschließt: einen
Antrieb (140) zum Drehen eines Bohrmeißels
(147); eine Ablenkvorrichtung (120; 700), die es
ermöglicht, dass ein unterer Abschnitt (290;
790) der Bohranordnung (100) sich innerhalb ei-
ner ausgewählten Ebene neigt, wenn die Bohr-
anordnung (100) im Wesentlichen drehfest ist,
um das Bohren eines gekrümmten Abschnitts
des Bohrlochs zu ermöglichen, wenn der Bohr-
meißel (147) durch den Antrieb (140) gedreht
wird, und wobei die Neigung reduziert wird,
wenn die Bohranordnung (100) gedreht wird,
um das Bohren eines geraderen Abschnitts des
Bohrlochs zu ermöglichen, wobei der untere Ab-
schnitt (290; 790) sich um einen Stift (210; 710)
einer Schwenkverbindung neigt;
und einen Sensor (1310..1450), der Messungen
bezüglich der Richtung der Bohranordnung
(100) zum Bohren des Bohrlochs entlang einer
gewünschten Richtung bereitstellt;
Bohren eines geraden Abschnitts des Bohrlochs
durch Drehen der Bohranordnung (100) von ei-
ner Oberflächenposition aus;
Bewirken, dass die Bohranordnung (100) zu-
mindest im Wesentlichen drehfest wird;
Bestimmen eines Parameters von Interesse,
der sich auf eine Richtung der Bohranordnung
(100) in dem Bohrloch bezieht; und
Bohren eines gekrümmten Abschnitts des Bohr-
lochs durch den Antrieb (140) in der Bohranord-
nung (100) als Reaktion auf den bestimmten Pa-
rameter von Interesse.

9. Verfahren nach Anspruch 8, wobei der Parameter
von Interesse, der sich auf die Richtung der Bohra-
nordnung (100) bezieht, aus einer Gruppe ausge-
wählt ist bestehend aus Neigung, Azimut und Werk-
zeugfläche zumindest eines Teils der Bohranord-
nung (100).

10. Verfahren nach Anspruch 8, ferner umfassend Be-

reitestellen mindestens einer Dichtung (284) in der Ablenkvorrichtung (210; 710) und optional Bereitstellen von mindestens zwei Dichtungen (284) in der Ablenkvorrichtung (210; 710) und einem durch die mindestens zwei Dichtungen (284) begrenzten Schmiermittel (732, 790) zum Schmieren der mindestens zwei Dichtungen (284).

11. Verfahren nach 8, wobei sich eine Oberfläche des unteren Abschnitts (290; 790) der Bohranordnung (100) um eine stationäre Oberfläche der Schwenkverbindung bewegt.
12. Verfahren nach Anspruch 8, ferner umfassend: Bereitstellen eines ersten Endanschlags (282; 820; 1445) in der Ablenkvorrichtung (120; 700), der einen minimalen Neigungswinkel des unteren Abschnitts (290; 790) der Bohranordnung (100) relativ zu einem oberen Abschnitt (720) der Bohranordnung (100) definiert.
13. Verfahren nach Anspruch 12, wobei der Mindestwinkel größer als null ist.
14. Verfahren nach Anspruch 8, ferner umfassend Bereitstellen eines zweiten Endanschlags (280) in der Ablenkvorrichtung (120; 700), der den maximalen Neigungswinkel des unteren Abschnitts (290; 790) definiert.
15. Verfahren nach Anspruch 8, ferner umfassend: Bereitstellen eines Dämpfers (240; 734), der die Neigungsänderungsrate des unteren Abschnitts (290; 790) relativ zu einem oberen Abschnitt (720) reduziert, wenn die Bohranordnung (100) im Wesentlichen drehfest ist.


Revendications

1. Ensemble de forage (100) pour forer un puits de forage, comprenant :
 - un entraînement (140) pour mettre en rotation un trépan (147) ;
 - un dispositif de déviation (120 ; 700) ; et
 - un capteur (1310, 1320, 1350, 1410, 1450) qui fournit des mesures relatives à une direction de l'ensemble de forage (100) pour forer le puits de forage le long d'une direction souhaitée, dans lequel
 - le dispositif de déviation (120 ; 700) permet à une section inférieure (290 ; 790) de l'ensemble de forage (100) de s'incliner à l'intérieur d'un plan sélectionné lorsque l'ensemble de forage (100) est sensiblement stationnaire en rotation pour permettre le forage d'une section incurvée du puits de forage lorsque le trépan (147) est

tourné par l'entraînement (140) et dans lequel l'inclinaison est réduite lorsque l'ensemble de forage (100) est tourné pour permettre le forage d'une section droite du puits de forage, **caractérisé en ce que** la section inférieure (290 ; 790) de l'ensemble de forage (100) s'incline autour d'une broche (210 ; 710) d'un raccordement pivotant.

2. Ensemble de forage selon la revendication 1, comprenant en outre un dispositif de commande (1690) qui détermine un paramètre d'intérêt relatif à la direction de l'ensemble de forage (100) à partir des mesures fournies par le capteur, dans lequel, facultativement, le paramètre d'intérêt est choisi dans un groupe constitué de : une inclinaison ; un azimut ; et une face d'outil d'au moins une partie de l'ensemble de forage (100).
3. Ensemble de forage selon la revendication 1, dans lequel le dispositif de déviation (120 ; 700) comprend au moins un joint (284 ; 724, 735, 740, 772, 940) et, facultativement, le dispositif de déviation (710) comporte au moins deux joints (724... 940) et un lubrifiant (732, 790) délimité par les au moins deux joints (724... 940) pour lubrifier les au moins deux joints (724... 940).
4. Ensemble de forage selon la revendication 1, dans lequel le dispositif de déviation (120 ; 700) comporte une première butée d'extrémité (282 ; 820 ; 1445) qui définit un angle d'inclinaison minimal de la section inférieure (290 ; 790) par rapport à une section supérieure (720) de l'ensemble de forage (100).
5. Ensemble de forage selon la revendication 4, dans lequel l'angle minimal est supérieur à zéro.
6. Ensemble de forage selon la revendication 4, dans lequel le dispositif de déviation (120 ; 700) comporte une seconde butée d'extrémité (280) qui définit l'angle d'inclinaison maximal de la section inférieure (290 ; 790).
7. Ensemble de forage selon la revendication 1 comprenant en outre un amortisseur (240 ; 734) qui réduit la variation du taux d'inclinaison de la section inférieure (290 ; 790) par rapport à une section supérieure (720) lorsque l'ensemble de forage (100) est sensiblement stationnaire en rotation.
8. Procédé de forage d'un puits de forage, comprenant :
 - le transport d'un ensemble de forage (100) dans le puits de forage qui comporte : un entraînement (140) pour faire tourner un trépan (147) ;
 - un dispositif de déviation (120 ; 700) qui permet

- à une section inférieure (290 ; 790) de l'ensemble de forage (100) de s'incliner à l'intérieur d'un plan sélectionné lorsque l'ensemble de forage (100) est sensiblement stationnaire en rotation pour permettre le forage d'une section incurvée du puits de forage lorsque le trépan (147) est tourné par l'entraînement (140) et dans lequel l'inclinaison est réduite lorsque l'ensemble de forage (100) est tourné pour permettre le forage d'une section droite du puits de forage, dans lequel la section inférieure (290 ; 790) s'incline autour d'une broche (210 ; 710) d'un raccordement pivotant ;
 et un capteur (1310...1450) qui fournit des mesures relatives à la direction de l'ensemble de forage (100) pour forer le puits de forage le long d'une direction souhaitée ;
 le forage d'une section droite du puits de forage en faisant tourner l'ensemble de forage (100) à partir d'un emplacement de surface ;
 le fait d'amener l'ensemble de forage (100) à devenir au moins sensiblement stationnaire en rotation ;
 la détermination d'un paramètre d'intérêt relatif à une direction de l'ensemble de forage (100) dans le puits de forage ; et
 le forage d'une section incurvée du puits de forage par l'entraînement (140) dans l'ensemble de forage (100) en réponse au paramètre d'intérêt déterminé.
9. Procédé selon la revendication 8, dans lequel le paramètre d'intérêt relatif à la direction de l'ensemble de forage (100) est choisi dans un groupe constitué de : une inclinaison ; un azimut ; et une face d'outil d'au moins une partie de l'ensemble de forage (100).
10. Procédé selon la revendication 8, comprenant en outre la fourniture d'au moins un joint (284) dans le dispositif de déviation (210 ; 710) et, facultativement, la fourniture d'au moins deux joints (284) dans le dispositif de déviation (210 ; 710) et d'un lubrifiant (732, 790) délimité par les au moins deux joints (284) pour lubrifier les au moins deux joints (284).
11. Procédé selon la revendication 8, dans lequel une surface de la section inférieure (290 ; 790) de l'ensemble de forage (100) se déplace autour d'une surface stationnaire du raccordement pivotant.
12. Procédé selon la revendication 8, comprenant en outre : la fourniture d'une première butée d'extrémité (282 ; 820 ; 1445) dans le dispositif de déviation (120 ; 700) qui définit un angle d'inclinaison minimal de la section inférieure (290 ; 790) de l'ensemble de forage (100) par rapport à une section supérieure (720) de l'ensemble de forage (100).
13. Procédé selon la revendication 12, dans lequel l'angle minimal est supérieur à zéro.
14. Procédé selon la revendication 8, comprenant en outre la fourniture d'une seconde butée d'extrémité (280) dans le dispositif de déviation (120 ; 700) qui définit l'angle d'inclinaison maximal de la section inférieure (290 ; 790).
15. Procédé selon la revendication 8, comprenant en outre : la fourniture d'un amortisseur (240 ; 734) qui réduit la variation du taux d'inclinaison de la section inférieure (290 ; 790) par rapport à une section supérieure (720) lorsque l'ensemble de forage (100) est sensiblement stationnaire en rotation.

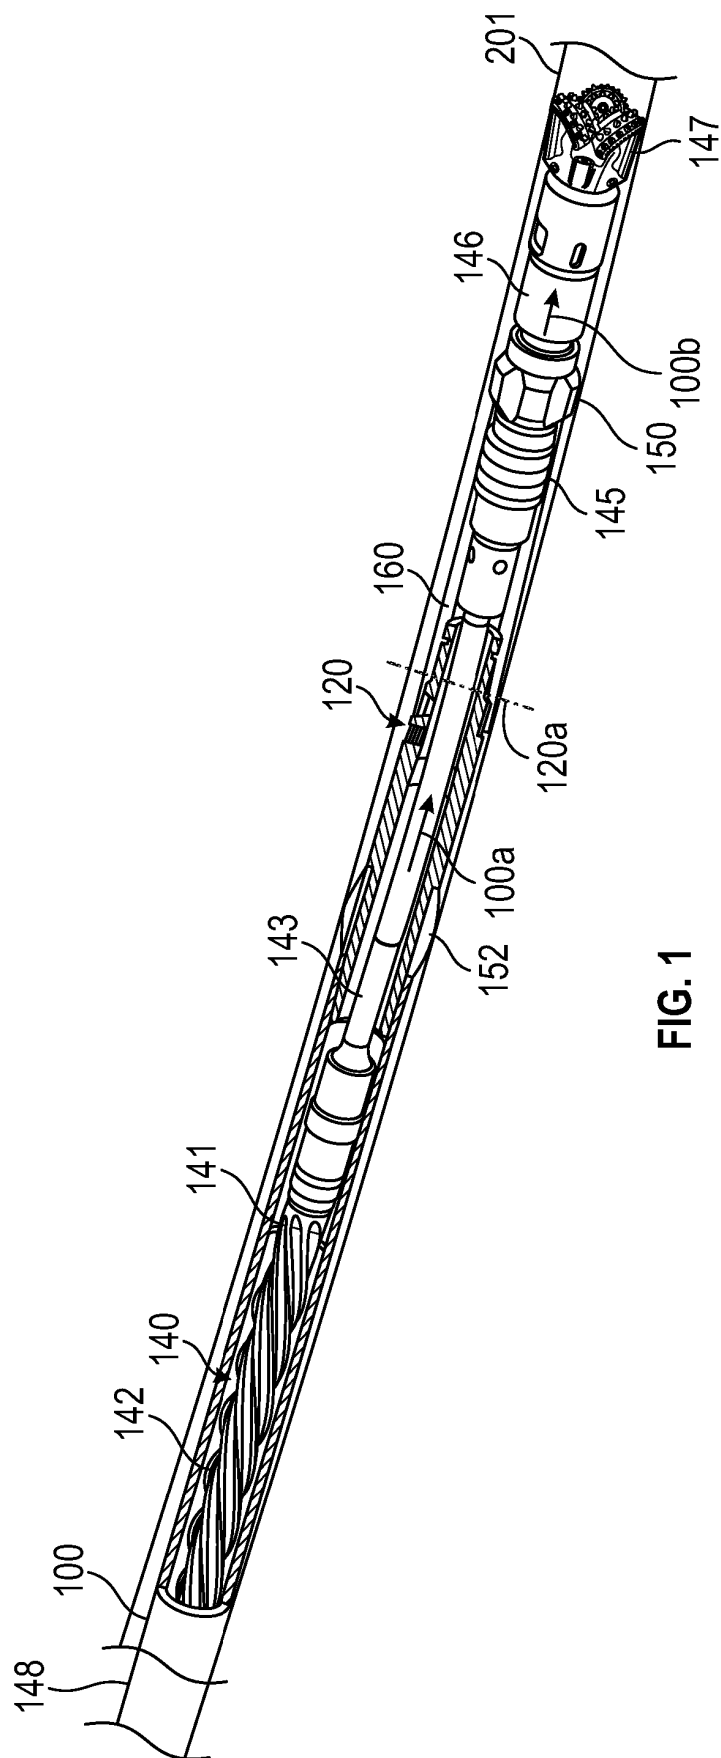

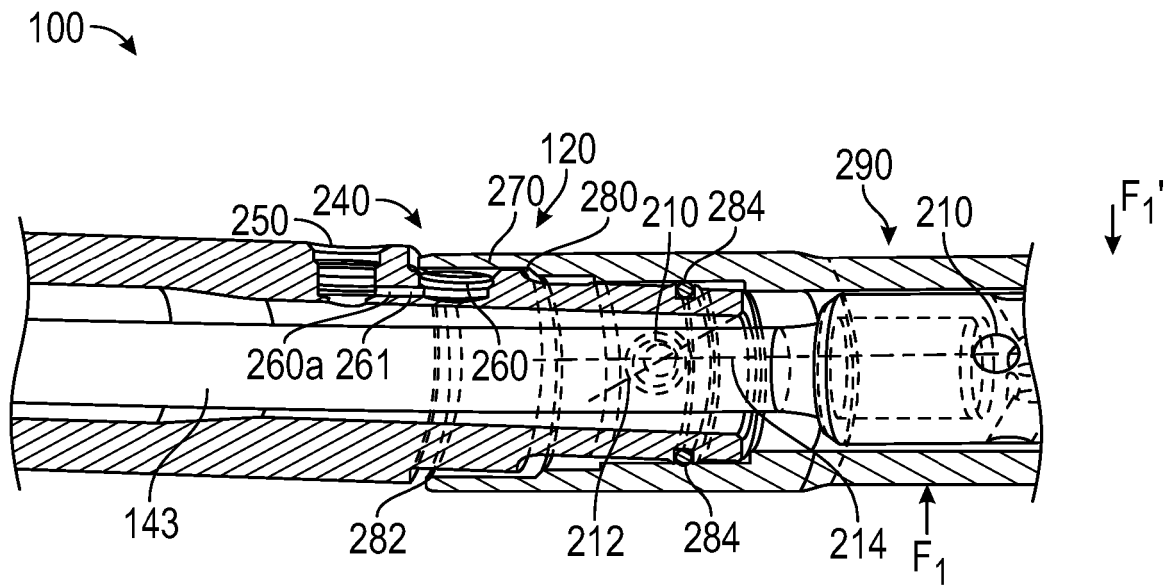


FIG. 2

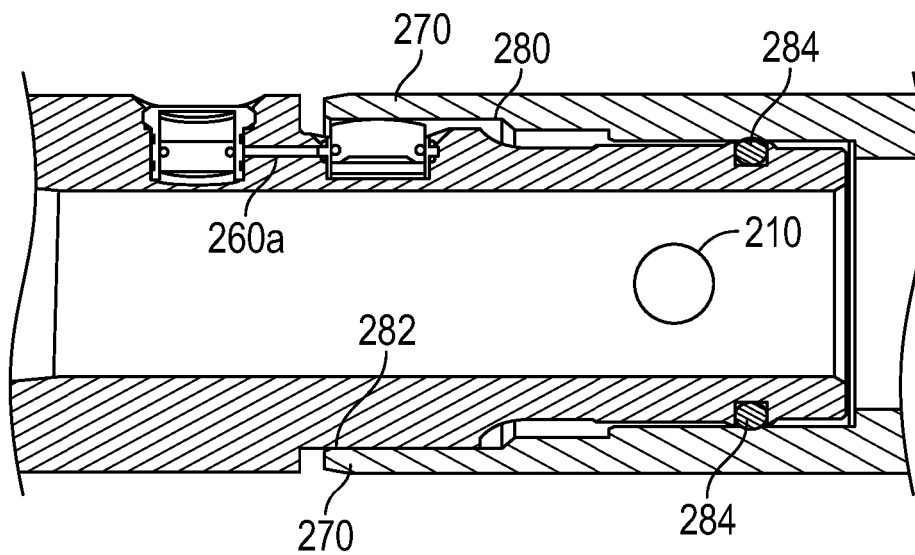


FIG. 3

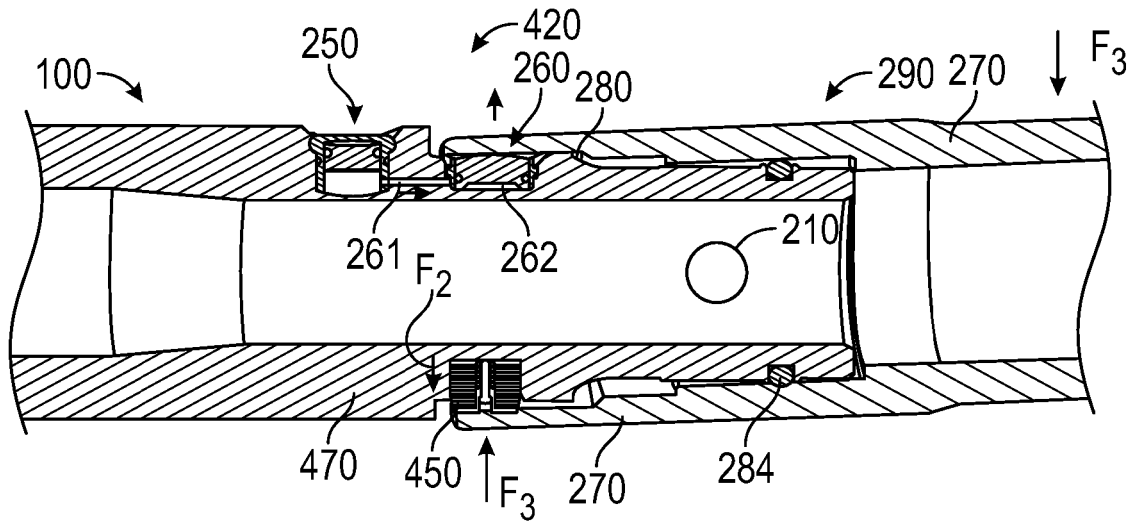


FIG. 4

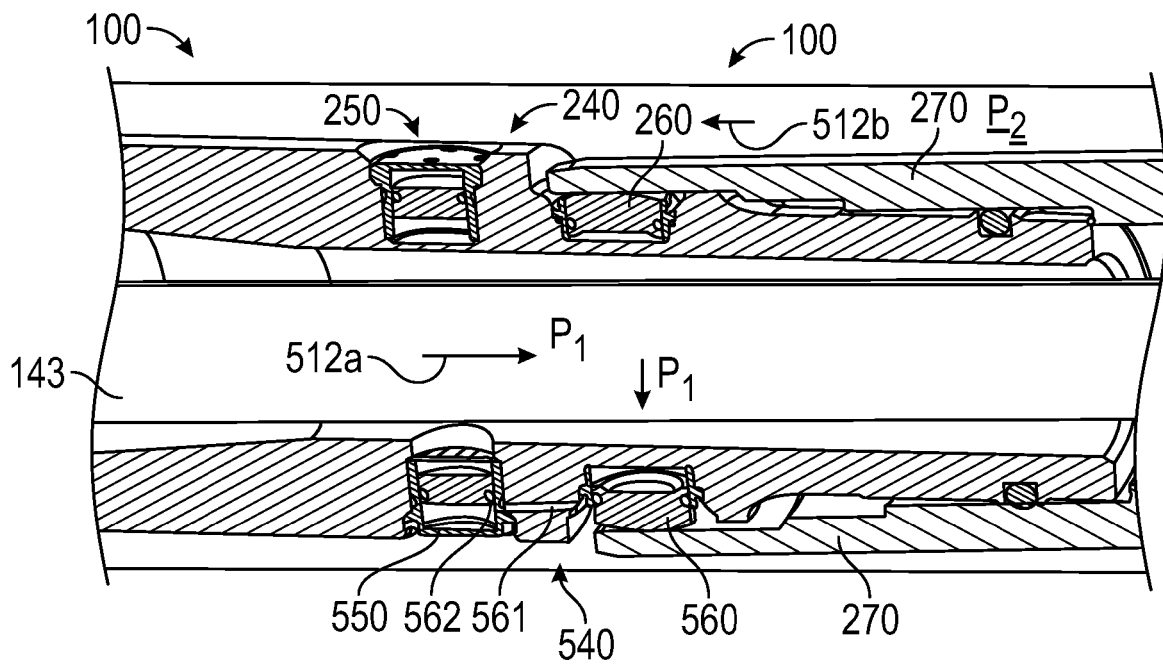


FIG. 5

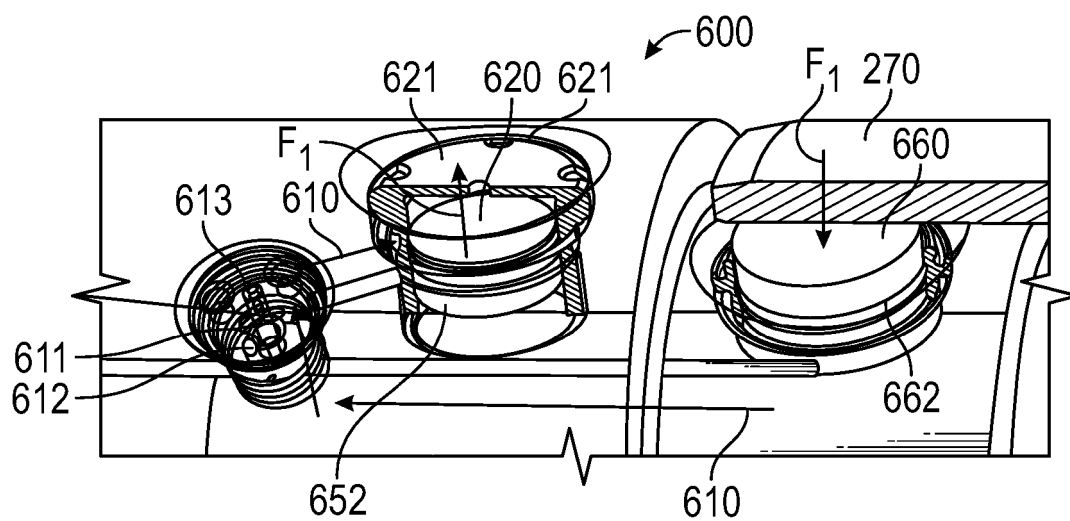


FIG. 6A

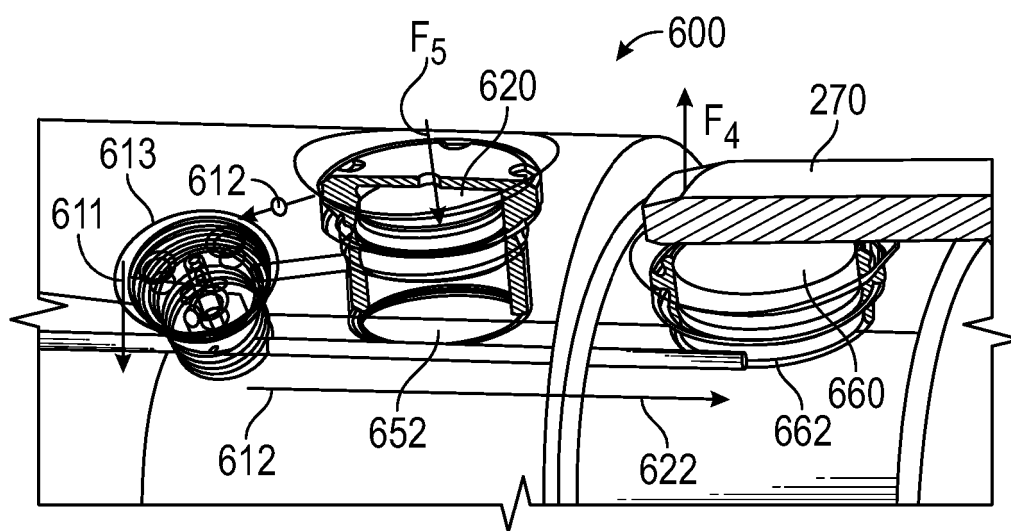


FIG. 6B

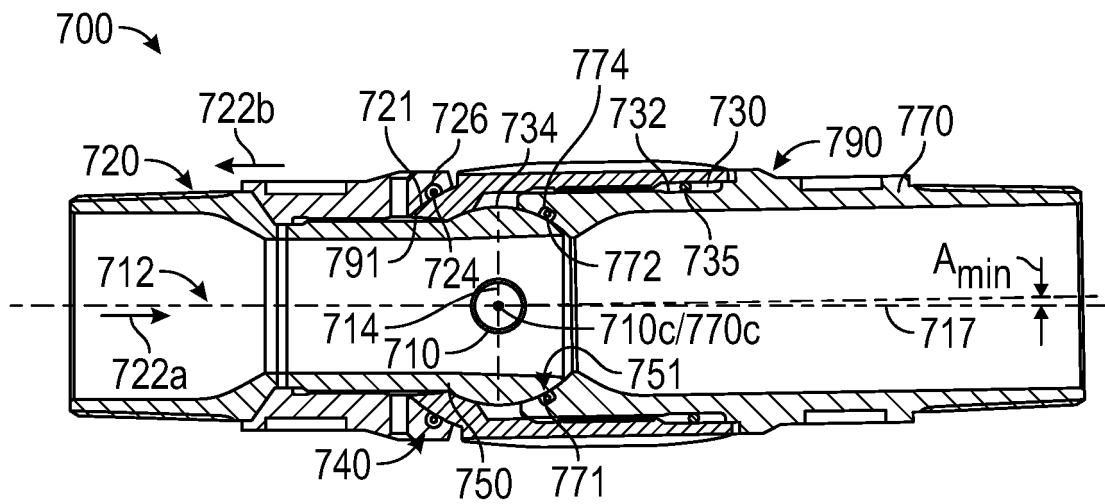


FIG. 7

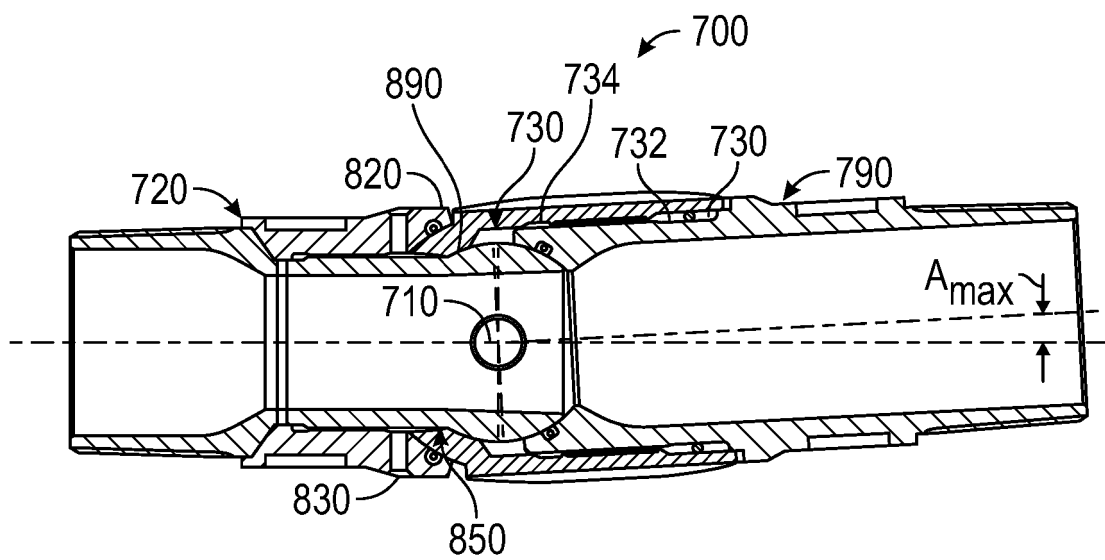


FIG. 8

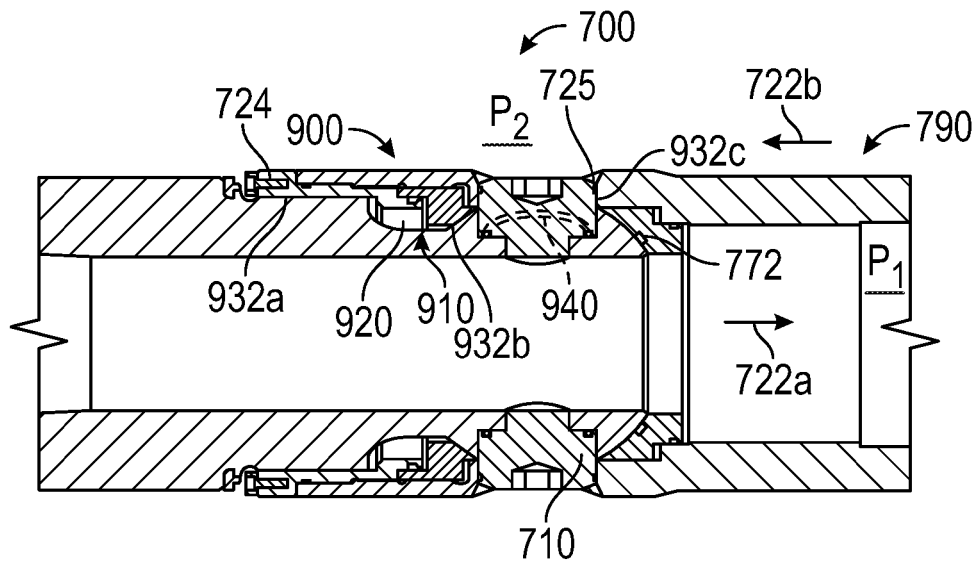


FIG. 9

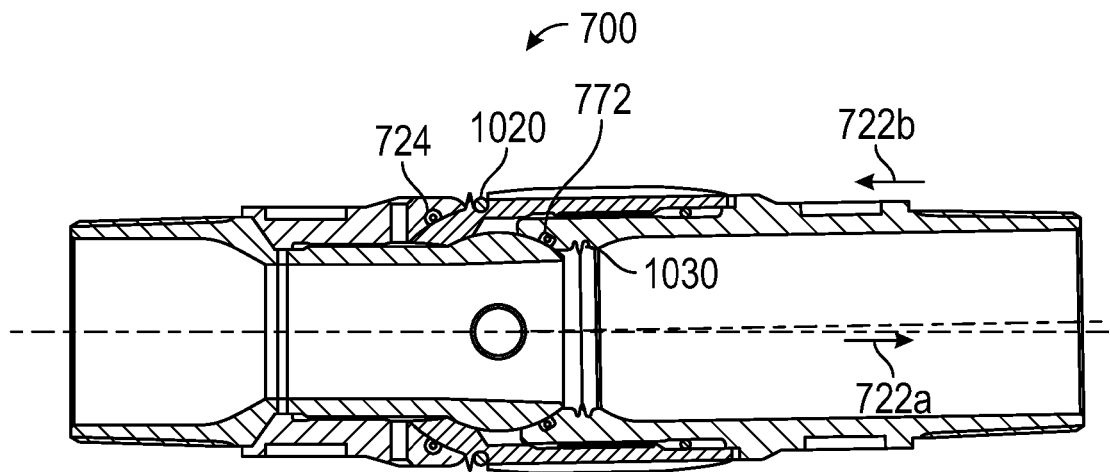


FIG. 10

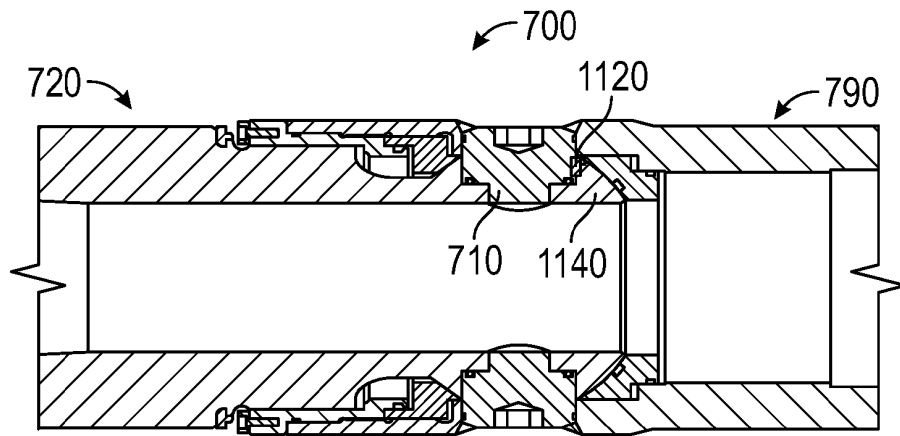


FIG. 11

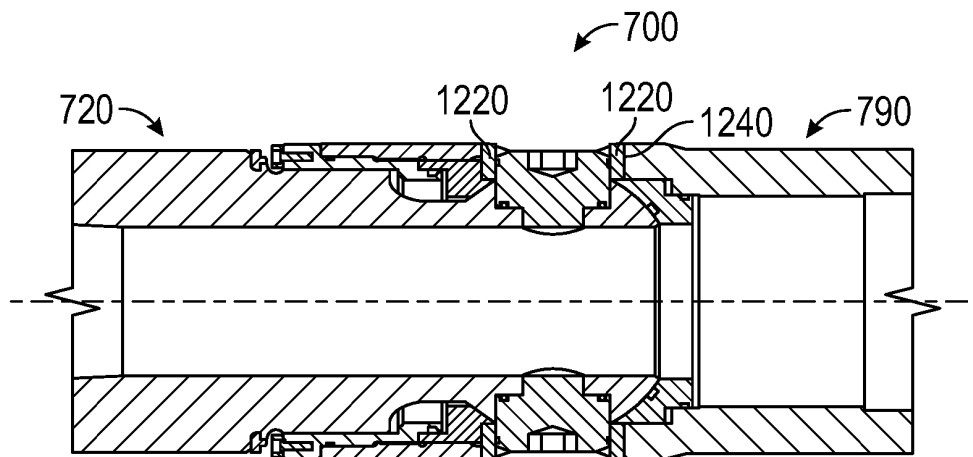


FIG. 12

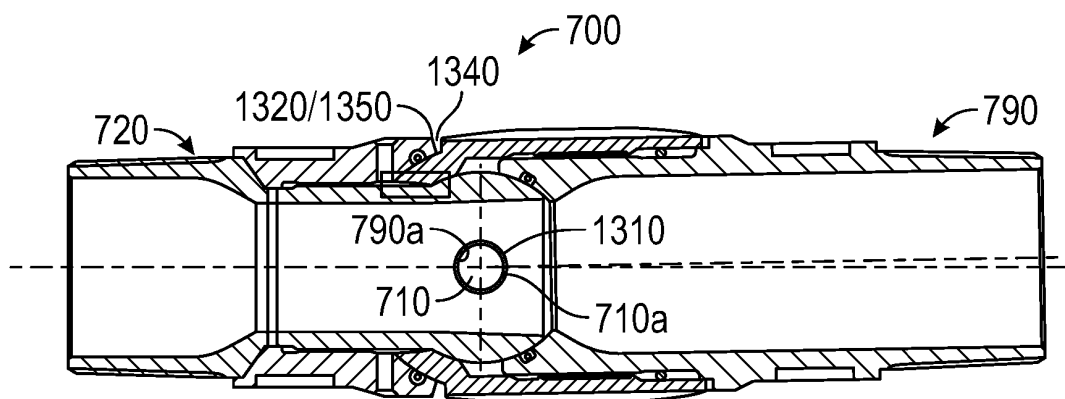


FIG. 13

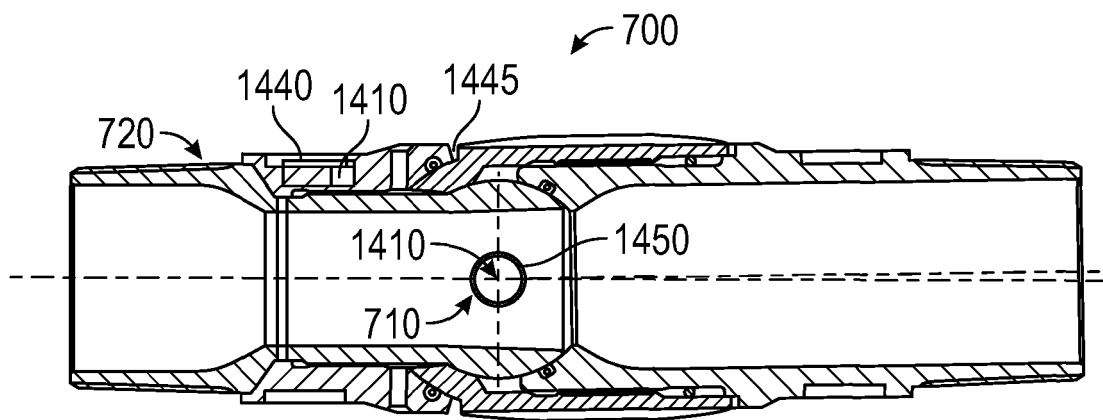


FIG. 14

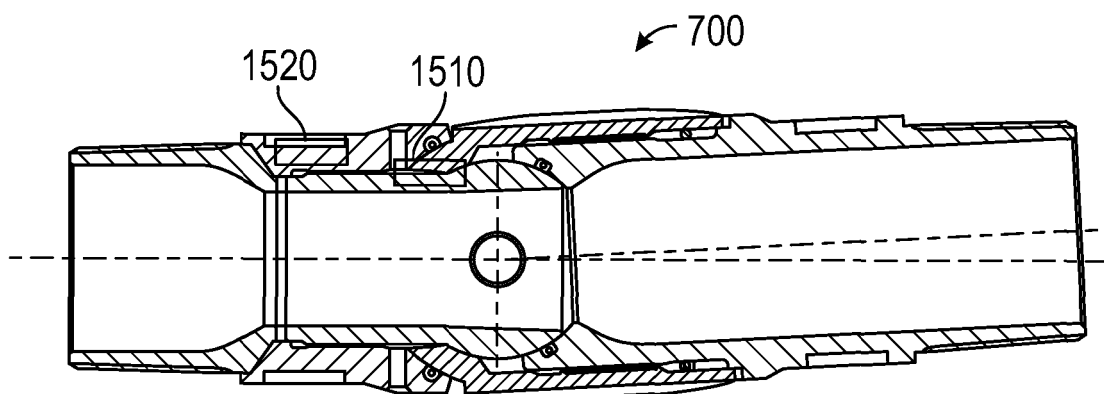


FIG. 15

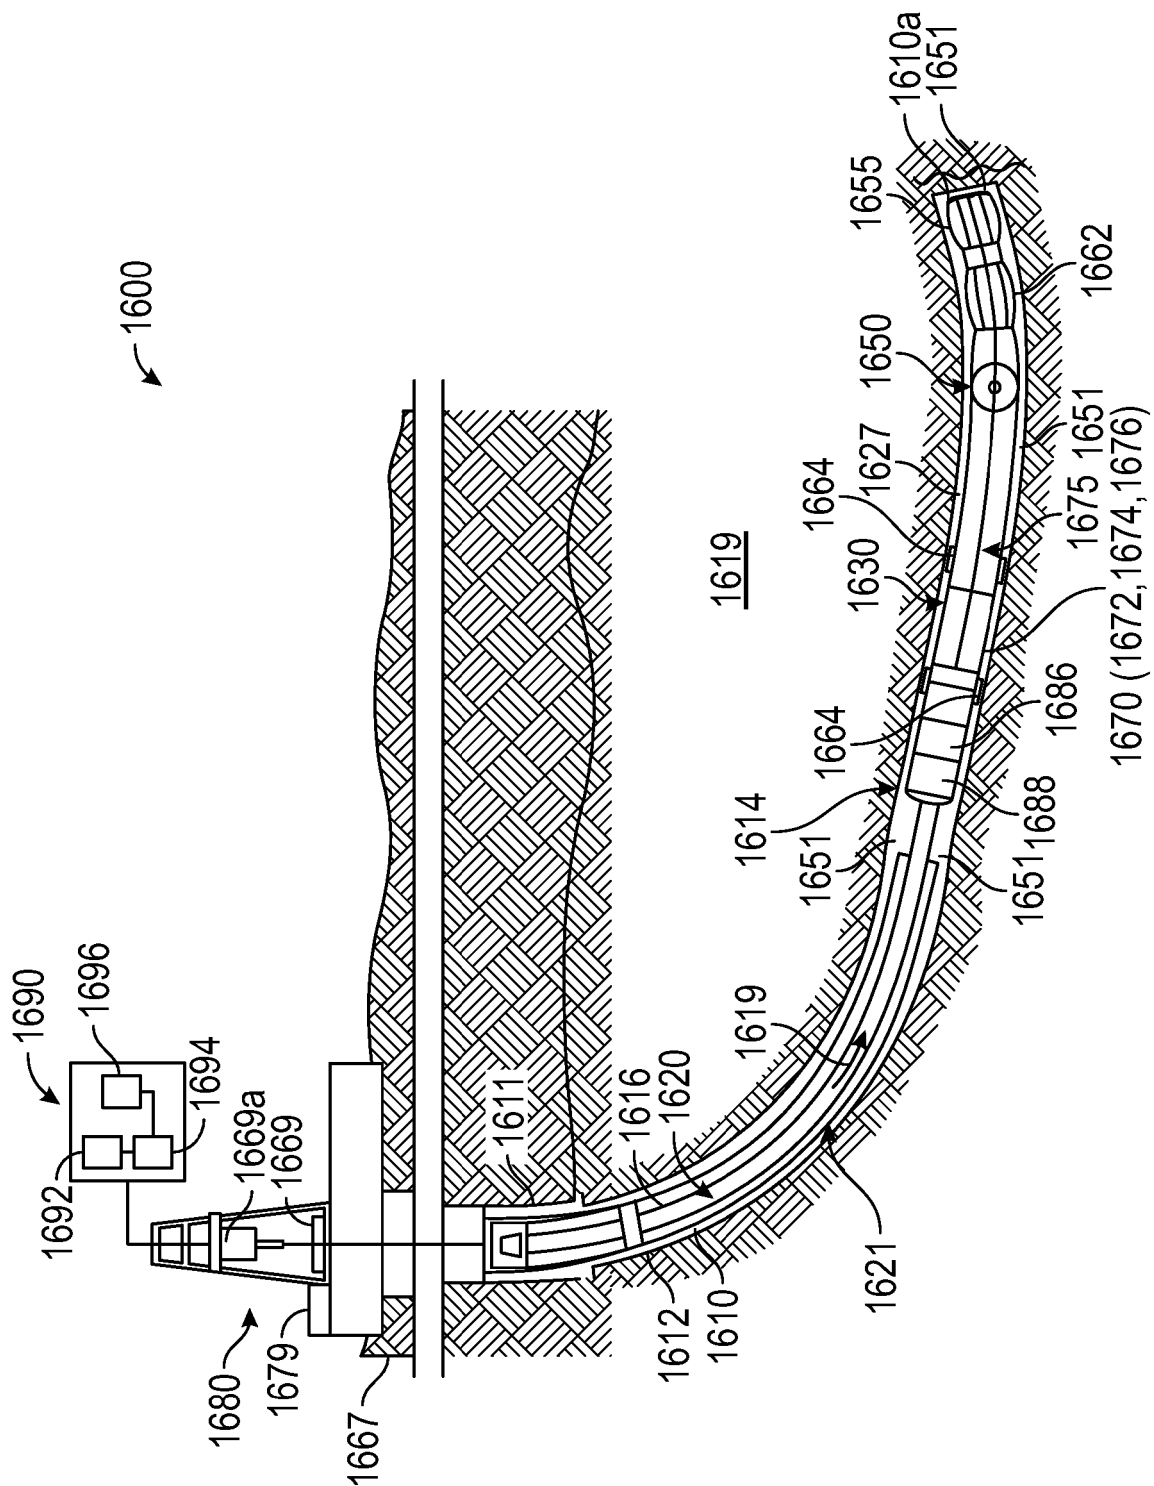


FIG. 16

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2007163810 A1 [0002]
- US 4442908 A [0002]