



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
07.08.2019 Bulletin 2019/32

(51) Int Cl.:
B66F 9/06 (2006.01) B66F 9/075 (2006.01)

(21) Application number: **18154547.6**

(22) Date of filing: **31.01.2018**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
 Designated Extension States:
BA ME
 Designated Validation States:
MA MD TN

(71) Applicant: **Toyota Material Handling Manufacturing Sweden AB**
595 81 Mjölby (SE)
 (72) Inventor: **TENGVERT, Peter**
591 52 Motala (SE)
 (74) Representative: **Zacco Sweden AB**
P.O. Box 5581
114 85 Stockholm (SE)

(54) **MATERIAL HANDLING VEHICLE**

(57) Material handling vehicle (1), comprising, a mast (2) and auxiliary equipment, wherein the auxiliary equipment comprises:
 a first (4) and a second (5) support leg each comprising at least one wheel (10, 13) at least two drive motors (6, 8) each comprising at least one wheel (7,9),
 an energy source device (16) for powering the at least

two drive motors (6, 8), wherein at least two of the wheels are independently steerable, and further a load carrier (19, 19a) is comprised and attached to the mast in a movable manner such that a load can be lifted up along the mast (2), wherein the auxiliary equipment is fixedly attached to the mast (2).

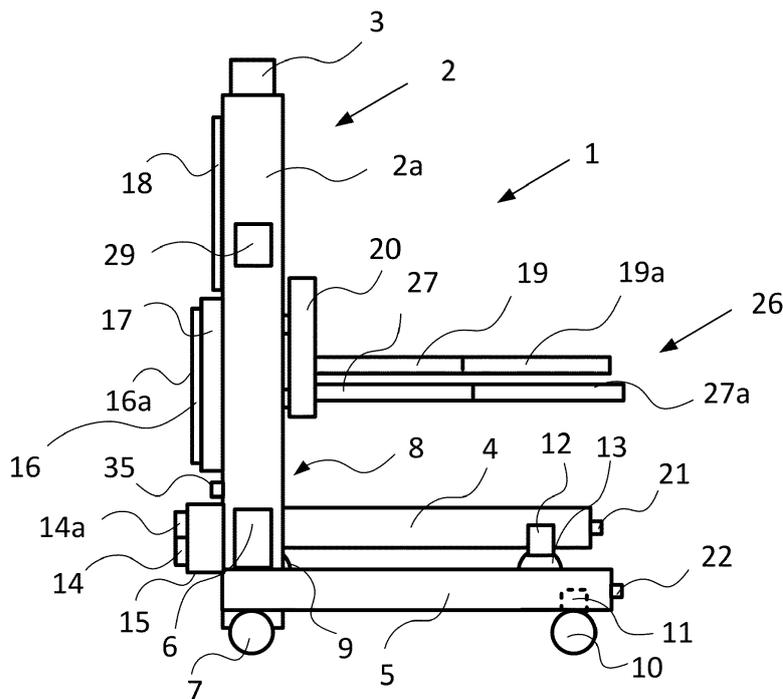


Figure 1

Description

[0001] The present disclosure is related to a material handling vehicle according to the pre-characterizing part of claim 1.

BACKGROUND

[0002] Warehouses are confined spaces which is constantly refined and being optimized for quickest possible material handling of goods. In order to achieve an effective operation of a warehouse it is important to utilise all possible surface for racks and goods. Thus it is desired to the smallest area possible for vehicles that operates in the warehouse. In order to achieve this it is important to have the smallest footprint possible of the vehicles operating in a warehouse.

[0003] One such vehicle is known from the document CN107473140 A. This vehicle discloses a relatively small footprint. However it is complex and has two horizontal beams that can move towards and distance themselves from each other.

SHORT DESCRIPTION OF THE INVENTION

[0004] The present disclosure is related to a material handling vehicle comprising, a mast and auxiliary equipment. The auxiliary equipment comprises: a first and a second support leg each comprising at least one wheel. The material handling vehicle comprises at least two drive motors each comprising at least one wheel. The material handling vehicle further comprises an energy source device for powering the at least two drive motors. At least two of the wheels are independently steerable of the material handling vehicle. Further a load carrier is comprised and attached to the mast in a movable manner such that a load can be lifted up along the mast. The auxiliary equipment is fixedly attached to the mast.

[0005] One advantage with the above material handling vehicle is that it is very compact. Another advantage with the material handling vehicle is that it is very stable in its construction. Another advantage with the material handling vehicle is that it has a very small length. An especially important measure is the so called L2 measure. This is a well-known and accepted definition in this technical field and defines the length from the back end of the load carrier to the back end of the vehicle. A shorter L2 generally provides for a shorter turning radius and allows for a better manoeuvrability in confined spaces. To be more explicit the L2-measure is the definition for the measure of the horizontal length between the end of the material handling vehicle opposite the load carrier and the beginning of the load carrier in a direction from the end of the material handling vehicle and the load carrying back. Another advantage is that it is very simple in its construction; in particular as the mast itself is actually the central part of the vehicle. A further advantage is that by using the mast as the central main unit of the material

handling vehicle a chassis is avoided and no longer necessary.

[0006] According to a further development a material handling vehicle is suggested in claim 2.

5 **[0007]** Hydraulics is particularly advantageous in order to achieve capability for heavy lifting operations. As preferred the attachment of the hydraulic pump to the mast makes the footprint of the material handling vehicle smaller. And also it provides for a stable attachment as the mast needs to be stable in itself for the higher levels of lifting that the material handling vehicle is intended for.

10 **[0008]** According to a further development a material handling vehicle is suggested in claim 3.

15 **[0009]** The material handling vehicle is preferred to be electric. As preferred the attachment of the energy source device to the mast makes the footprint of the material handling vehicle smaller. And also it provides for a stable attachment as the mast needs to be stable in itself for the higher levels of lifting that the material handling vehicle is intended for.

20 **[0010]** According to a further development a material handling vehicle is suggested in claim 4.

25 **[0011]** By arranging the drive motors on the support legs, the complexity of the material handling vehicle is further reduced. The support leg can then function as both support leg and also holder for both drive motors and wheels and gearing for the drive wheels that is powered by the respective drive motor.

30 **[0012]** According to a further development a material handling vehicle is suggested in claim 5.

35 **[0013]** By arranging all wheels with the respective support leg a very easily maintainable material handling vehicle is achieved. As an example wheels and drive motors/steering motors can be switched in a group operation, by detaching the respective support leg if desired. And still normal maintenance is possible as wheels and drive motor can easily be detached from the support leg itself.

40 **[0014]** According to a further development a material handling vehicle is suggested in claim 6.

45 **[0015]** By arranging the drive motors on a respective holder the installation of the drive motors is very flexible. In case the drive motors are experiencing more wear than expected it is easy to modify the holder and apply a different drive motor.

[0016] According to a further development a material handling vehicle is suggested in claim 7.

50 **[0017]** With three steerable wheels it is possible for the material handling vehicle to move in very confined spaces and rotate in position. It is also possible to move in diagonal manner. If all wheels are individually steerable it is possible to control the path of the material handling vehicle very precisely. Also a redundancy can be achieved if a broken steering mechanism can be disengaged and thus it allows for the remaining steerable wheels to control the vehicle. Also diagonal movement will be made possible.

55 **[0018]** According to a further development a material

handling vehicle is suggested in claim 8.

[0019] By introducing sensors it is possible to increase safety and avoid damages of the vehicle in operation.

[0020] According to a further development a material handling vehicle is suggested in claim 9.

[0021] Navigation equipment on the material handling vehicle makes the vehicle able to completely independently perform material handling tasks in a warehouse. A fully automated material handling vehicle with the compactness of the present disclosure is of great advantage in a warehouse environment where all space that can be used for goods storage is of importance.

[0022] According to a further development a material handling vehicle is suggested in claim 10.

[0023] The stabilisation device will make the mast and also the complete vehicle more stable. It will also prevent view through the mast if an operator is operating in the warehouse and thus constitutes very important information for any person in the warehouse as the material handling vehicle is easily identified and any person in its operating area will be more aware where this particular material handling vehicle is.

[0024] According to a further development a material handling vehicle is suggested in claim 11.

[0025] By introducing telescopic forks the material handling vehicle is able to reach goods further away from the vehicle. Thus the material handling vehicle is configured to perform material handling tasks in an environment where a reach truck would normally be operating.

[0026] According to a further development a material handling vehicle is suggest in claim 12.

[0027] A telescopic mast provides for high lifting capacity. The material handling vehicle is thus able to position and handle loads that is positioned high above the floor of the warehouse.

[0028] According to a further development a material handling vehicle is suggest in claim 13.

[0029] A wireless interface for remotely controlling the vehicle can be useful if the vehicle needs to be moved by a remote operator, thus the operator need not operate in the vicinity of the vehicle but can reside in a control room elsewhere.

LIST OF DRAWINGS

[0030]

Figure 1 discloses from the side a material handling vehicle according to the disclosure where the drive motors are mounted to the support legs.

Figure 2 discloses from the side a material handling vehicle according to the disclosure with separate drive motor holders.

Figure 3 discloses from above a material handling vehicle according to the disclosure where the drive motors are mounted to the support legs.

Figure 4 discloses from above a material handling vehicle according to the disclosure with separate drive motor holders.

5 Figure 5 discloses the upper part of the first section of the mast of the material handling vehicle as disclosed, disclosing the stabilisation device.

DETAILED DESCRIPTION

10 **[0031]** The present disclosure is related to a high lifting material handling vehicle. With high lifting is to be understood a vehicle that in general can lift higher than a stacker material handling vehicle. A stacker in general can position a first load onto a second load. The high lifting material handling vehicle can lift much higher than this and position and fetch a load that is positioned in a rack that can be as high as 10 meters or more. In general this requires a mast that has several sections that can telescopically extend the mast with a load carrier for lifting high. In general the material handling vehicle has a load carrier. The load carrier is in generally a pair of forks that is optimal for lifting a load that is positioned on a pallet. The material handling vehicle in general comprises an energy source that can power a drive motor. The energy source may be a battery, and the drive motor an electric motor. Other energy sources are thinkable but not so common in a warehouse environment, such energy sources could be gas or fuel cells. The material handling vehicle is in general not a counter balance vehicle. The material handling vehicle is in general a reach material handling vehicle. This means that it can extend the load carrier in the longitudinal direction of the vehicle that is in the direction of the load carrier. Further the material handling vehicle has support legs that will bear the weight of a load such that the centre of gravity of the load itself is mainly positioned in the inner area of the wheels that bears the material handling vehicle.

35 **[0032]** Figure 1 discloses a high lifting material handling vehicle 1. The vehicle 1 comprises a mast 2. The mast 2 has a first vertical beam 2a. The mast 2 has also a telescopic element 3.

40 **[0033]** The material handling vehicle 1 further comprises auxiliary equipment. The auxiliary equipment is defined as equipment that is attached to the mast 2, in order for the mast to be able to move and perform a material handling task. The auxiliary equipment comprises a first support leg 4 and a second support leg 5, as seen in figure 1 and 3. The support legs 4, 5 have as function to carry weight. This is as opposed to a counter balance truck where the weight of a load is balanced by a counter balance weight. The support legs 4, 5 have a respective wheel 10, 13. The wheels 10, 13 are shown as a single wheel on respective support leg, but can be any type of wheel pair as a boogie or the like. All wheels of the material handling vehicle can be installed to the support legs 4, 5. It is important that the support legs 4, 5 are not movable in relation to each other and in particular in re-

lation to the mast 2. The support legs 4, 5 are fixedly attached to the mast at any moment. This provides for a very stable material handling vehicle that also can be easily controlled without any differing angles to the wheels installed onto the support legs 4, 5. Also the material handling vehicle 1 will be very sturdy and will lower maintenance needs.

[0034] The material handling vehicle 1 has at least two of its wheels steerable. This is preferred to be the drive wheels 7, 9 that are steerable by means of a respective servo motor. Individual steering of the drive wheels 7, 9 is preferred. This provides for a better control and adaptation to any movement of the vehicle.

[0035] The forward wheels 10, 13 of the support legs 4, 5 can be swivel wheels and only the drive wheels 7, 9 steerable. However one or both of the forward wheels 10, 13 may also be a steerable wheel. The steering is made possible by a respective servo motor. The steering is preferred to be individual for each wheel to allow very precise steering and avoid wear on the wheels in curves etc.

[0036] The material handling vehicle 1 comprises at least two drive motors 6, 8. The drive motors 6, 8 may be situated on the support legs 10, 13 and by means of these fixed to the mast 2 on each respective side of the mast 2, as seen in figures 1 and 3. The drive motors 6, 8 may also be fixed to the mast 2 by means of a separate holder 23, 24, as seen in figure 2 and 4. The material handling vehicle 1' from figures 2 and 4 is in all other aspects the same as the vehicle described above and disclosed in figures 1 and 3.

[0037] The material handling vehicle 1 further has a load carrier 26 that is movably attached to the mast 2. The load carrier 26 comprises forks 19, 27. As disclosed in figure 1 the forks 19, 27 have an outer end element 19a, 27a and an inner element. The outer element 19a, 27a is extendable, for reach purposes. This is made possible as preferred by a hydraulic arrangement with hydraulic cylinders. This could also be achieved with an electric adjustment device.

[0038] The material handling vehicle 1 further has a hydraulic system comprising a motor 14 connected to a hydraulic pump 14a. The hydraulic system powers the lifting and lowering functions of the material handling vehicle 1. Hydraulics may also power the extension of forks 19, 27 if desired. A hydraulic cylinder 25 figure 3, 4 is pressurized from the pump 14a for lifting purposes. The hydraulic pump is fixedly attached to the mast 2, preferably by means of a holder 15. The motor 14 and the hydraulic pump 14a are preferred to be dimensioned such that lifting speeds without load can be reached in the excess of 3 m/s in vertical direction. It should be understood that there can be several lifting cylinders for performing lifting tasks. There can be one cylinder for lifting the load carrier 26 up to the top of the first mast element 2a, and a second hydraulic cylinder for lifting a further mast element 3.

[0039] The material handling vehicle 1 has an energy

source device 16. The energy source device 16 comprises a battery pack 16a and a holder 17. The holder is fixedly attached to the mast 2. The battery pack is preferred to be constituted of Li-Ion battery cells.

[0040] The electric system of the material handling vehicle is preferred to be using above 300 Volt. This will be an advantage as the current values can be kept lower and cabling will be simplified. This is in contrast to prior art where much lower Volt values are in general used, for example 24, 36 or 48 Volts.

[0041] The material handling vehicle 1 comprises a control unit. The control unit has processor, memory and software to control the functions and operation of the vehicle.

[0042] All wheels 7, 9, 10, 13 may be steerable. This provides for a very excellent manoeuvrability and also provides for using narrow aisles in a warehouse. Thus the multi wheel steering improves efficiency of the warehouse material handling as a whole. In particular the vehicle 1 can move in diagonal direction and turn very narrowly of more wheels are steerable than one.

[0043] There are sensors 21, 22 provided on the material handling vehicle 1. The sensors provide for that the vehicle 1 can operate in very narrow environment of a warehouse. The sensors 21, 22 can be of a suitable type such as laser, ultra-sound or radio based sensors.

[0044] The material handling vehicle 1 also has navigating equipment 28 for navigating in a warehouse. This is realised in conventional manner.

[0045] So the control unit together with the sensors 21, 22 and the navigation equipment 29 provides for an automated material handling vehicle 1 that can perform tasks in the warehouse without interaction of an operator.

[0046] The material handling vehicle 1 does not comprise any normal operating or control means, such as steering wheel or tiller arm. The material handling vehicle comprises a remote interface, such that it can manually be controlled by a remote operator. The remote interface may comprise a radio receiver and radio emitter. This can be achieved by means of Wi-Fi, GSM or any other wireless interface. The material handling vehicle 1 is arranged such that it can store and perform tasks received over the remote interface. For this reason the material handling vehicle also comprises at least one camera that can send live video to a remote operator.

[0047] Further the mast 2 is the main element of the material handling vehicle 1. This means that no chassis is needed or present in the material handling vehicle 1.

[0048] A stabilization device 18 is preferred to be installed to the mast 2, figure 5 disclosing the upper section of the mast 2 for all described material handling vehicles. The stabilisation device is preferred to be a steel plate. The plate should not have holes for viewing through the mast as this would give lower stabilisation properties. And also as the material handling vehicle 1 shall not be operated directly by an operator at site in the warehouse the stabilisation device provides for detection of the vehicle at distance as being an automated vehicle.

[0049] As already discussed above the material handling vehicle 1' is in all other aspects the same as the vehicle 1 described above and disclosed in figures 1 and 3, except for that the drive motors are mounted to separate holders 23, 24.

[0050] The material handling vehicle 1 may be provided with a wireless interface 35 that provides for that the material handling vehicle can receive order for material handling but also for the possibility of remotely controlling the vehicle manually. This means that an operator that is not on board the vehicle can control the vehicle remotely. For this purpose the material handling vehicle can also be provided with at least one camera capable of sending live video to the operator. As an example, if the vehicle has stopped for any reason, for an example due to an obstacle in its way, the remote operator can take over the control of the vehicle and manually do what is needed to start the vehicle again, for example, steer the vehicle around the obstacle.

Claims

1. Material handling vehicle (1), comprising, a mast (2) and auxiliary equipment, wherein the auxiliary equipment comprises:
 - a first (4) and a second (5) support leg each comprising at least one wheel (10, 13),
 - at least two drive motors (6, 8) each comprising at least one wheel (7,9),
 - an energy source device (16) for powering the at least two drive motors (6, 8),
 - wherein at least two of the wheels are independently steerable,
 - and further a load carrier (19, 19a) is comprised and attached to the mast in a movable manner such that a load can be lifted up along the mast (2),
 - characterized in that**
 - the auxiliary equipment is fixedly attached to the mast (2).
2. Material handling vehicle (1) according to claim 1, wherein further comprised is a hydraulic system comprising a pump motor (14) connected to a hydraulic pump (14a), preferably the hydraulic pump (14a) is attached to the mast (2) by means of a holder (15) fixedly attached to the mast (2).
3. Material handling vehicle (1) according to any of the claims above, wherein further comprised is an energy source device (16), wherein the energy source device comprises a battery pack (16a) and a holder (17) for the battery pack (16a), preferably the holder (17) is fixedly attached to the mast (2).
4. Material handling vehicle (1) according to any of the claims above, wherein each of the drive motors (6, 8) are arranged on or in the support legs (4, 5).
5. Material handling vehicle (1) according to any of the claims above wherein all wheels (7, 9, 10, 13) of the vehicle are arranged in or on, a first and a second support leg (4, 5).
6. Material handling vehicle (1) according to any of the claims 1-3, wherein the drive motors (6, 8) is mounted on a respective holder (23, 24), preferably the holders (23, 24) are attached fixedly to the mast (2).
7. Material handling vehicle (1) according to any of the claims above, wherein at least three of the wheels (7, 9, 10, 13) are individually steerable, preferably all wheels (7, 9, 10, 13) of the material handling vehicle (1) are individually steerable.
8. Material handling vehicle (1) according to any of the claims above, wherein the material handling vehicle (1) further comprises sensors (21, 22) for detecting objects in the surrounding area of the vehicle (1).
9. Material handling vehicle (1) according to claim 8, wherein the vehicle (1) further is provided with navigation equipment (29) for navigating in a warehouse environment, preferably the vehicle (1) is an automated material handling vehicle that independently of direct input from an operator can handle goods in a warehouse environment.
10. Material handling vehicle (1) according to any of the claims above, wherein the mast (2) has a stabilisation device (18) mounted to the mast (2), preferably the mounted device (18) is a plate that at least partly covers the sight through the space that is defined by two main vertical mast beams (30, 31) of the mast (2).
11. Material handling vehicle (1) according to any of the claims above, wherein the load carrier (19, 19a) is arranged with a telescopic ability such that the load carriers (19, 19a) can be extended in a direction away from the mast (2) for reaching operations.
12. Material handling vehicle (1) according to any of the claims above, wherein the mast (2) comprises at least a first (2a) and a second (3) mast elements, thus arranging the mast as being telescopic for lifting loads to a higher level than the height of the first mast element (2a).
13. The material handling vehicle (1) according to any of the claims above, wherein the vehicle (1) is provided with a wireless interface (35) for manually remotely controlling the vehicle (1).

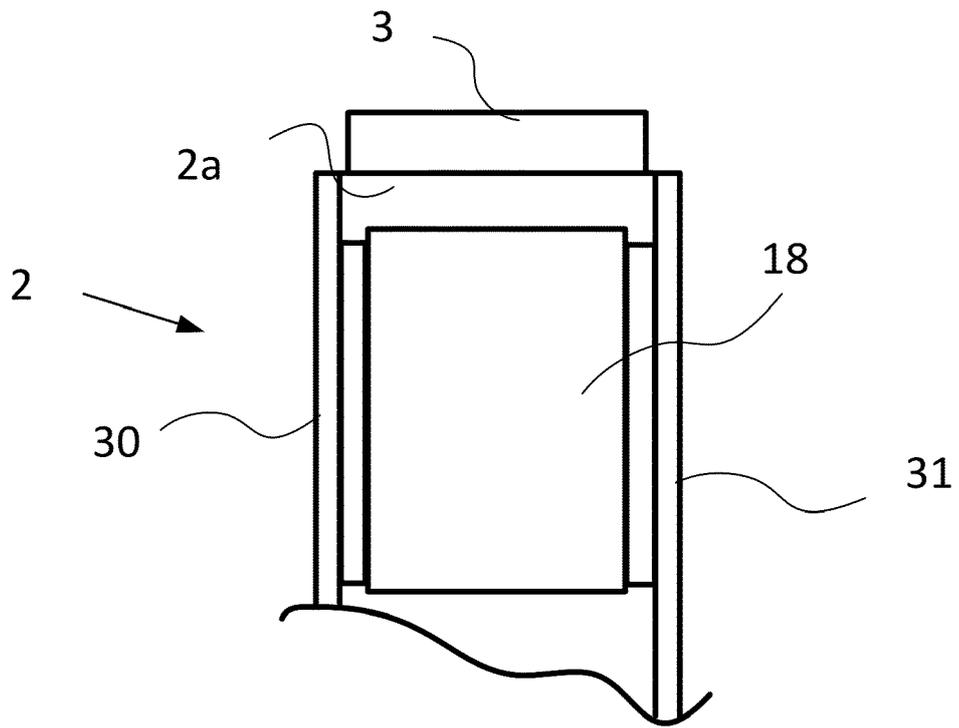


Figure 5



EUROPEAN SEARCH REPORT

Application Number
EP 18 15 4547

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2017/050830 A1 (PODNAR GREGG W [US]) 23 February 2017 (2017-02-23)	1,3,4,6, 7,10,11, 13	INV. B66F9/06 B66F9/075
Y A	* paragraphs [0039], [0045], [0047], [0063], [0061], [0059], [0062], [0068] *	8,9 5	
X	----- US 7 259 662 B2 (RAYMOND CORP [US]) 21 August 2007 (2007-08-21) * column 4, lines 37-58; figure 1 *	1-3,6,12	
A	----- DE 10 2014 000375 A1 (GRENZEBACH MASCHB GMBH [DE]) 16 July 2015 (2015-07-16) * abstract *	8,9	
A	----- US 2015/120125 A1 (THOMSON JACOB JAY [NZ] ET AL) 30 April 2015 (2015-04-30) * abstract *	8,9	
Y	----- DE 10 2010 012749 A1 (KUKA LAB GMBH [DE]) 29 September 2011 (2011-09-29) * abstract; figure 1 *	8,9	
A	----- CN 107 337 153 A (YANCHENG SHENGYANG ELECTRONIC TECH CO LTD) 10 November 2017 (2017-11-10) * abstract *	8,9	
A,D	----- CN 107 473 140 A (SHANDONG BLUESWORD LOGISTICS CO LTD) 15 December 2017 (2017-12-15) * abstract *	8,9	TECHNICAL FIELDS SEARCHED (IPC) B66F
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 30 July 2018	Examiner Serôdio, Renato
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document	

EPO FORM 1503 03/02 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 18 15 4547

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

30-07-2018

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2017050830 A1	23-02-2017	NONE	
US 7259662 B2	21-08-2007	EP 1751049 A1 US 2005270147 A1 WO 2005118457 A1	14-02-2007 08-12-2005 15-12-2005
DE 102014000375 A1	16-07-2015	DE 102014000375 A1 EP 3095016 A1 US 2016313740 A1 WO 2015106755 A1	16-07-2015 23-11-2016 27-10-2016 23-07-2015
US 2015120125 A1	30-04-2015	AU 2014343128 B2 CA 2929120 A1 CN 105874396 A EP 3063598 A1 KR 20160079853 A US 2015120125 A1 WO 2015065207 A1	15-12-2016 07-05-2015 17-08-2016 07-09-2016 06-07-2016 30-04-2015 07-05-2015
DE 102010012749 A1	29-09-2011	CN 102834345 A DE 102010012749 A1 EP 2550227 A1 ES 2584378 T3 HU E030078 T2 US 2013060415 A1 WO 2011117098 A1	19-12-2012 29-09-2011 30-01-2013 27-09-2016 28-04-2017 07-03-2013 29-09-2011
CN 107337153 A	10-11-2017	NONE	
CN 107473140 A	15-12-2017	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CN 107473140 A [0003]