



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
18.09.2019 Bulletin 2019/38

(51) Int Cl.:
F04D 25/06 (2006.01) **F04D 25/08** (2006.01)
F04D 29/32 (2006.01) **H02K 7/14** (2006.01)
H02K 9/06 (2006.01) **H02K 5/10** (2006.01)
H02K 1/32 (2006.01)

(21) Application number: **19162291.9**

(22) Date of filing: **12.03.2019**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
 Designated Extension States:
BA ME
 Designated Validation States:
KH MA MD TN

(72) Inventors:
 • **Okuda, Yusuke**
Tokyo, 170-8451 (JP)
 • **Maruyama, Haruhisa**
Tokyo, 170-8451 (JP)
 • **Yamazaki, Yoshihisa**
Tokyo, 170-8451 (JP)

(30) Priority: **13.03.2018 JP 2018045435**

(74) Representative: **Mathys & Squire**
Mathys & Squire Europe LLP
Maximilianstraße 35
Eingang A
80539 München (DE)

(71) Applicant: **Sanyo Denki Co., Ltd.**
Toshima-ku, Tokyo
170-8451 (JP)

(54) **FAN MOTOR APPARATUS AND PROTECTION COVER OF FAN MOTOR APPARATUS**

(57) A fan motor apparatus is provided, which includes a blade; a rotary shaft; a hub; a rotor integrally molded with the blade, the rotor being fixed to the rotary shaft; and a protection cover including: a lid portion covering a top surface of the rotor; and an intake port configured to take air into the lid portion.

FIG. 1A


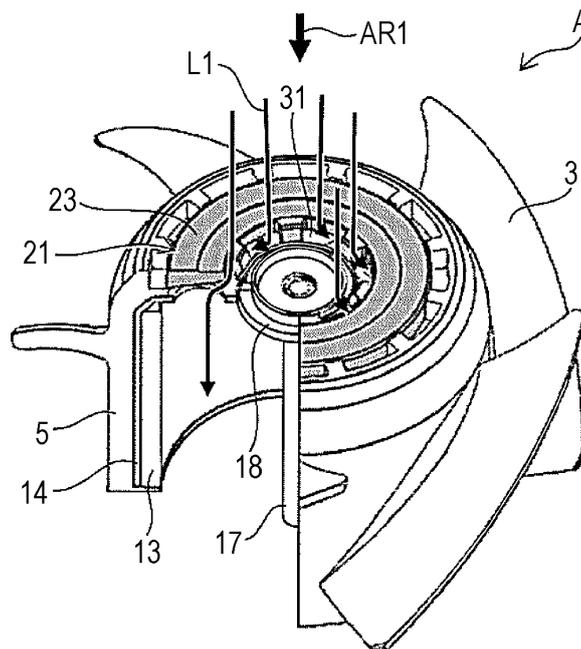


FIG. 1B

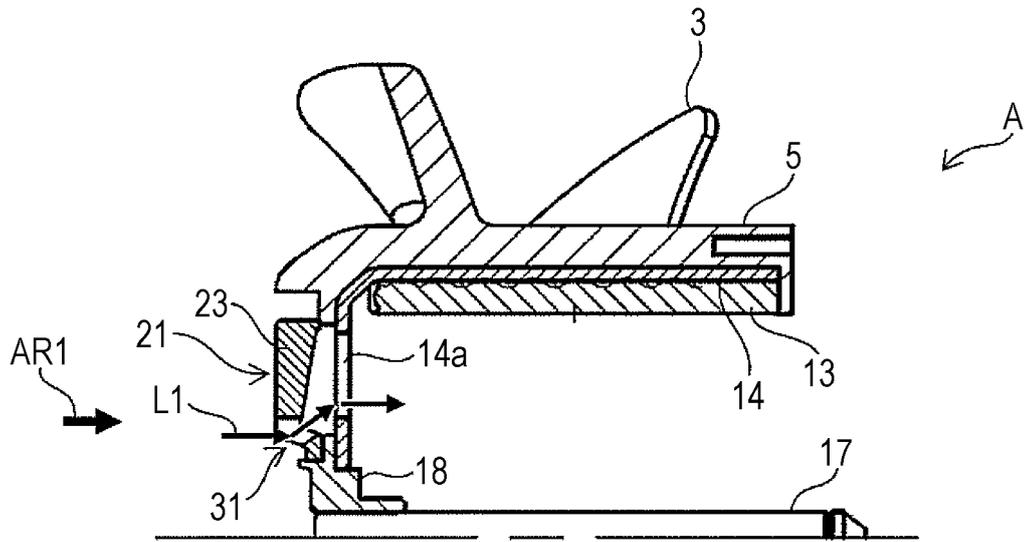

Description

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims priority from Japanese Patent Application No. 2018-045435 filed with the Japan Patent Office on March 13, 2018, the entire content of which is hereby incorporated by reference.

BACKGROUND

1. Technical Field

[0002] The present disclosure relates to a fan motor apparatus and a protection cover of a fan motor apparatus.

2. Related Art

[0003] A resin fan mold included in a fan motor apparatus has a shape that covers a rotor. A top surface of the fan motor apparatus is provided with an air hole for the purpose of encouraging self-cooling of a motor. Furthermore, the top surface of the fan motor apparatus is provided with a weight insertion hole for adjusting balance. Such a fan mold is bonded and fixed to the rotor to assemble blades.

[0004] There is a tendency to increase the rotational speed of the blades due to recent years' increase in performance requested for the fan motor apparatus. Furthermore, for example, the high reliability of the fan motor apparatus is also requested. As one of methods for increasing the reliability of the fan motor apparatus, an integral molding technology (insert molding) of a fan mold and a rotor is employed. In this integral molding technology, a fan mold is formed using a rotor set in a mold (Japanese Patent No. 4542479 and JP-A-2015-139225).

SUMMARY

[0005] A fan motor apparatus according to an embodiment of the present disclosure includes a blade; a rotary shaft; a hub; a rotor integrally molded with the blade, the rotor being fixed to the rotary shaft; and a protection cover including: a lid portion covering a top surface of the rotor; and an intake port configured to take air into the lid portion.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006]

Fig. 1A is a perspective view illustrating a configuration example of a fan motor apparatus according to a first embodiment of the present disclosure. Fig. 1B is a cross-sectional side view thereof; Figs. 2A and 2B are perspective views illustrating a configuration example of a rotor cap of the fan motor

apparatus according to the embodiment. Fig. 2A is a perspective view as viewed from a front surface side. Fig. 2B is a perspective view as viewed from a rear surface side;

Fig. 3 is a perspective view illustrating a configuration example of the fan motor apparatus according to the embodiment, and illustrates an example of including a small balance adjustment hole;

Fig. 4 is a perspective view illustrating a configuration example of the fan motor apparatus according to the embodiment including the balance adjustment hole larger than the configuration of Fig. 3;

Fig. 5A is a perspective view illustrating a configuration example of a fan motor apparatus according to a second embodiment of the present disclosure. Fig. 5B is a cross-sectional side view of an air vent of a rotor cap;

Figs. 5C and 5D are perspective views illustrating a configuration example of the rotor cap of the fan motor apparatus according to the embodiment. Fig. 5C is a perspective view as viewed from a front surface side. Fig. 5D is a perspective view as viewed from a rear surface side;

Figs. 6A and 6B are diagrams illustrating a configuration example of a fan motor apparatus that includes a rotor to which a hub bonded with blades has been attached, and an air inlet port provided on an inner surface of the rotor, and takes air into the motor from the outside. Fig. 6A is a perspective view. Fig. 6B is a cross-sectional side view; and

Fig. 7A is a perspective view illustrating a configuration example of the fan motor apparatus of Fig. 6A including an integrally-molded product of the blades and the hub, which has been integrally molded with the rotor. Fig. 7B is a cross-sectional side view illustrating a configuration example of the fan motor apparatus including the blades integrally molded with the rotor.

DESCRIPTION OF THE EMBODIMENTS

[0007] In the following detailed description, for purpose of explanation, numerous specific details are set forth in order to provide a thorough understanding of the disclosed embodiments. It will be apparent, however, that one or more embodiments may be practiced without these specific details. In other instances, well-known structures and devices are schematically shown in order to simplify the drawing.

[0008] In order to improve the characteristics of a fan motor apparatus, it is necessary to reduce the internal temperature of a motor. For example, a fan motor apparatus X having such a structure as illustrated in Fig. 6A (a perspective view) and Fig. 6B (a cross-sectional side view including a rotary shaft) is known. The fan motor apparatus X includes a rotor 114 fixed to a rotary shaft 117. The rotor 114 has, for example, a substantially L-shape in cross section. Moreover, a hub 115 has been

assembled to an outer side of the rotor 114. Blades 103 have been bonded to the hub 115. Furthermore, a magnet 113 is placed on an inner surface of the rotor 114.

[0009] In the above structure, an air inlet port 114a is provided in such a manner as to take air into an area inside the rotor 114 from an opening 115b of a front surface 115a of the hub 115, avoiding a bushing 118. Consequently, a passage L101 that takes air into the motor from the outside is formed.

[0010] However, it is necessary to increase the strength of the blades 103 to address an increase in rotational speed in the fan motor apparatus X with the above structure illustrated in Figs. 6A and 6B. For example, as illustrated in Figs. 7A and 7B, an integrally-molded product of the blades 103 and the hub 115, which has been integrally molded with the rotor 114, allows an increase in the strength of the blades 103.

[0011] Fig. 7A is a perspective view corresponding to Fig. 6A. Fig. 7A illustrates a structure including the rotor 114 further integrally molded with the integrally-molded product of the blades 103 and the hub 115. Fig. 7B is a cross-sectional side view corresponding to Fig. 6B. The structure illustrated in Figs. 7A and 7B can be compatible with an increase in rotational speed as described above.

[0012] However, as illustrated in Figs. 7A and 7B, a fan motor apparatus Y has the structure including the rotor 114 integrated with the integrally-molded product of the blades 103 and the hub 115. Here, the air inlet port 114a of the rotor 114 of the fan motor apparatus Y is exposed to the outside from the opening 115b of the front surface 115a of the hub 115, which facilitates the entrance of air into the motor (a passage L103). However, there arises a new problem such as facilitating also the entrance of foreign matter.

[0013] Integral molding of the rotor 114 and the blades 103 by supplying a resin material also to a top surface of the rotor 114 included in the structure illustrated in Figs. 7A and 7B is also under study. According to this method, the entrance of foreign matter from the air inlet port 114a on the top surface side can be prevented. However, this method results in blocking the passage of air into the motor. Hence, there arises a problem in that it becomes difficult to prevent heat from being generated in the motor.

[0014] In the embodiments, an object is to achieve compatibility between the prevention of the entrance of foreign matter into a fan motor apparatus and an improvement in internal cooling efficiency.

[0015] One aspect of the present embodiment provides a fan motor apparatus including: a blade; a rotary shaft; a hub; a rotor integrally molded with the blade, the rotor being fixed to the rotary shaft; and a protection cover including: a lid portion covering a top surface of the rotor; and an intake port configured to take air into the lid portion. Consequently, it is possible to prevent the entrance of foreign matter while ensuring an air passage into the rotor.

[0016] The top surface may include an air hole, and

the lid portion may be placed at a position that blocks the air hole. The lid portion may include a fixing hole portion configured to fix the protection cover to the rotary shaft, and the intake port may have been formed radially from the fixing hole portion toward an outer peripheral direction of the lid portion.

[0017] The fan motor apparatus may further include a balance adjustment hole provided on a front surface on an intake side of the hub, the balance adjustment hole being configured to adjust balance for rotation of the blade. An outer peripheral portion of the protection cover may also serve as an inner wall of the balance adjustment hole. The intake port may be placed along an inner periphery of a front surface of the hub on the top surface of the protection cover. A plate-shaped portion of the top surface of the protection cover may be inclined downward below the intake port.

[0018] In addition, a protection cover of a fan motor apparatus according to the present embodiment is configured to be attached to a fan motor apparatus including a blade integrally molded with a rotor fixed to a rotary shaft, the fan motor apparatus protection cover comprising a top surface, wherein the top surface includes: a lid portion configured to cover a top surface of the rotor; and an intake port.

[0019] According to the embodiments, it is possible to achieve compatibility between the prevention of the entrance of foreign matter into a fan motor apparatus and an improvement in internal cooling efficiency.

[0020] A member designated as a "protection cover" in the specification is also designated as a "cover" or a "protection cap." These members described below are not limited by the designations to specific members.

[0021] A fan motor apparatus according to one embodiment of the present disclosure is described in detail hereinafter with reference to the drawings.

(First Embodiment)

[0022] Fig. 1A is a perspective view illustrating a configuration example of a fan motor apparatus according to a first embodiment of the present disclosure. Fig. 1B is a cross-sectional side view illustrating a configuration example of the fan motor apparatus according to the embodiment, the cross-sectional side view including a rotary shaft of the fan motor apparatus. The left side in Fig. 1B corresponds to, for example, an intake side AR1. Figs. 2A and 2B are perspective views illustrating a configuration example of a protection cover (rotor cap) used for the fan motor apparatus according to the embodiment. Fig. 2A is a perspective view as viewed from a front surface side. Fig. 2B is a perspective view as viewed from a rear surface side.

[0023] A fan motor apparatus A according to the embodiment includes a hub 5 to which blades (blades) 3 have been attached, a rotor 14 that has been formed on an inner surface of the hub 5, and a magnet 13 formed as an integral product on an inner surface of the rotor 14.

The rotor 14 has been integrally formed with a rotary shaft 17. Moreover, the rotor 14 has a substantially L-shape in cross-section and has a cup shape as viewed from a distal end direction of the rotary shaft 17. Furthermore, the rotor 14 is connected to the rotary shaft 17 via a rotor bushing 18. In Figs. 1A and 1B, illustration of a stator is omitted.

[0024] A protection cover 21 that covers an exposed surface of a top surface being an intake-side end surface of the rotor 14 has been attached to the top surface. As illustrated in Fig. 2A, the protection cover 21 includes a lid-like member (lid portion) 23 of, for example, a disc shape. A fixing hole portion 25 for fixing the protection cover 21 to the rotary shaft 17 has been formed in, for example, a center portion of the lid portion 23. Furthermore, the lid portion 23 includes, for example, a single or a plurality of hole portions (intake ports) 31 formed radially from the fixing hole portion 25 toward the lid portion 23. The intake port 31 is divided into a plurality of sections by a plurality of support portions 33 extending from the fixing hole portion 25 toward an outer peripheral direction of the lid portion 23.

[0025] The support portion 33 is inclined in the radial direction from the fixing hole portion 25 toward the outer peripheral direction of the lid portion 23. The support portions 33 may be placed parallel in a circumferential direction.

[0026] As illustrated in Fig. 1B, an air hole 14a on the exposed surface has been formed on the top surface being the intake-side end surface of the rotor 14. The protection cover 21 has a shape that the lid portion 23 covers the air hole 14a on the exposed surface of the rotor 14 from a front surface side.

[0027] The protection cover 21 hides the air hole 14a on the top surface of the rotor 14 with the lid portion 23 to prevent the entrance of foreign matter. Moreover, the intake port 31 is provided in a center portion of the protection cover 21. Thought was given to the cap shape so that it allows the formation of an air passage between the intake port 31 and the air hole 14a on the top surface of the rotor 14. Consequently, the inside of the fan motor apparatus A can be cooled. The plurality of intake ports 31 provided on the protection cover 21 ensures an air passage L1. The air passage L1 allows air to be easily taken into the rotor 14.

[0028] The protection cover 21 is detachable from the rotor 14, for example, during the manufacturing process. However, the protection cover 21 is fixed to the rotor 14 in a final product.

[0029] In this manner, in the embodiment, in addition to the hub that has been integrally molded with the rotor 14 including the exposed top surface, the protection cover 21 that covers the top surface of the rotor 14 is newly provided.

[0030] As described above, the disc-shaped protection cover 21 including the air inlet port is attached to the rotor 14 integrally molded with the blades 3, which makes it possible to prevent the entrance of foreign matter while

ensuring the air passage.

[0031] Figs. 3 and 4 are perspective views illustrating a configuration example of the fan motor apparatus according to the embodiment. Figs. 3 and 4 are diagrams explaining a balance adjustment hole 43 provided on a front surface 41 on the intake side of the hub 5 to adjust balance for rotation of the blades.

[0032] As illustrated in Fig. 3, if an attempt is made to form the balance adjustment hole 43 within an area of the front surface 41 of the hub 5, the size of the balance adjustment hole 43 is reduced (a reference numeral 43a) due to a limited space of the area of the front surface 41 of the hub 5. Hence, it is difficult to sufficiently ensure the volume of the balance adjustment hole 43. Hence, as illustrated in Fig. 4, the disc-shaped protection cover 21 including the air inlet port has been attached to the rotor 14 integrally molded with the blades 3. In this structure, an outer peripheral portion 21x of the disc-shaped protection cover 21 also serves as an inner wall forming a balance adjustment hole 43b on the front surface 41 of the hub 5.

[0033] In the structure illustrated in Fig. 4, the outer peripheral portion 21x of the protection cover 21 serves as an inner boundary for delimiting the size of the balance adjustment hole 43b. In other words, the outer peripheral portion 21x of the protection cover 21 also serves as the inner wall of the balance adjustment hole 43b. This makes it possible to increase the size (the width in the radial direction) of the balance adjustment-purpose hole. Therefore, it becomes possible to reduce vibration in the fan motor apparatus.

[0034] The protection cover according to the embodiment includes the air vent placed around the bushing. In other words, the structure that focuses on the prevention of the entrance of foreign matter is realized.

(Second Embodiment)

[0035] Fig. 5A is a perspective view illustrating a configuration example of a fan motor apparatus according to a second embodiment of the present disclosure. Fig. 5B is a perspective view illustrating a configuration example of a protection cover (rotor cap) used for the fan motor apparatus according to the embodiment. Fig. 5C is a perspective view as viewed from a front surface side. Fig. 5D is a perspective view as viewed from a rear surface side. In a fan motor apparatus B according to the embodiment illustrated in Fig. 5A, the structure of the protection cover is different from that of the first embodiment. The structure of the protection cover of the embodiment is described below.

[0036] As illustrated in Fig. 5A and Figs. 5C and 5D, a plurality of hole portions (intake ports) 61 has been formed along an inner periphery of a front surface 41 of a hub 5 on a top surface 53 of a protection cover 51 according to the embodiment. As illustrated in Figs. 5B, 5C, and 5D, for example, a plate-shaped portion 61a of the top surface 53 is inclined downward below the intake

port 61. Moreover, as in the first embodiment, in the illustrated structure, an outer portion 51x of a lid portion 23 of the disc-shaped protection cover 51 also serves as part, here an inner side surface, of a balance adjustment-purpose hole 73. Accordingly, the size of the balance adjustment-purpose hole can be increased. Hence, it becomes possible to reduce vibration and increase productivity.

[0037] The protection cover according to the embodiment has the structure of including the intake port radially placed on the top surface. Hence, a larger amount of ventilation can be obtained. Hence, the protection cover according to the embodiment is more suitable to improve internal cooling efficiency of the fan motor apparatus.

[0038] The above embodiments are not limited to the configurations and the like illustrated in the accompanying drawings. The embodiments can be modified as appropriate within the scope that does not hinder the exertion of the effects of the embodiments. In addition, an appropriately modified embodiment can be carried out without departing from the scope of the object of the embodiments.

[0039] For example, the shape of the protection cover is not limited to the disc shape. Moreover, the shape and the placement of the intake port can be designed as appropriate.

[0040] Moreover, the components of the present disclosure can be selected as appropriate. An embodiment including the selected configuration is also included in the embodiments.

[0041] The present disclosure can be used for a fixing structure of a fan motor apparatus.

[0042] The fan motor apparatus according to the embodiments of the present disclosure may be the following first to sixth fan motor apparatuses:

The first fan motor apparatus is a fan motor apparatus having a rotor integrally molded with a blade, the rotor being fixed to a rotary shaft, the fan motor apparatus including a protection cover having: a lid portion covering an exposed surface of a top surface being an intake port-side end surface of the rotor; and an intake port for taking air into the lid portion. The second fan motor apparatus is the first fan motor apparatus characterized in that the lid portion is placed at a position that blocks an air hole on the top surface of the rotor.

The third fan motor apparatus is the first or second fan motor apparatus wherein the lid portion has a fixing hole portion for fixing the protection cover to the rotary shaft, and the intake port has been formed radially outward from the fixing hole portion toward the lid portion.

The fourth fan motor apparatus is any of the first to third fan motor apparatuses including a balance adjustment hole for adjusting balance for rotation of the blade, the balance adjustment hole being provided on a front surface on an intake side of the rotor,

wherein an outer peripheral portion of the protection cover also serves as an inner wall of the balance adjustment hole.

The fifth fan motor apparatus is the first or second fan motor apparatus wherein the intake port has been formed along an inner periphery of a front surface of the hub on the top surface of the protection cover.

The sixth fan motor apparatus is the fifth fan motor apparatus wherein the intake port has a shape where a plate-shaped portion of the top surface is inclined downward.

[0043] A protection cover according to the embodiments of the present disclosure is a protection cover of a fan motor apparatus having a blade integrally molded with a rotor fixed to a rotary shaft, and may include: a lid portion covering an exposed surface of a top surface being an intake port-side end surface of the rotor; and an intake port on the lid portion.

[0044] The foregoing detailed description has been presented for the purposes of illustration and description. Many modifications and variations are possible in light of the above teaching. It is not intended to be exhaustive or to limit the subject matter described herein to the precise form disclosed. Although the subject matter has been described in language specific to structural features and/or methodological acts, it is to be understood that the subject matter defined in the appended claims is not necessarily limited to the specific features or acts described above. Rather, the specific features and acts described above are disclosed as example forms of implementing the claims appended hereto.

35

Claims

1. A fan motor apparatus comprising:

40 a blade;
a rotary shaft;
a hub;
a rotor integrally molded with the blade, the rotor being fixed to the rotary shaft; and
45 a protection cover including:

a lid portion covering a top surface of the rotor; and
an intake port configured to take air into the lid portion.

50

2. The fan motor apparatus according to claim 1, wherein the top surface includes an air hole, and the lid portion is placed at a position that blocks the air hole.

55

3. The fan motor apparatus according to claim 1 or 2,

wherein
 the lid portion includes a fixing hole portion configured to fix the protection cover to the rotary shaft, and the intake port has been formed radially from the fixing hole portion toward an outer peripheral direction of the lid portion. 5

4. The fan motor apparatus according to any of claims 1 to 3, further comprising a balance adjustment hole provided on a front surface on an intake side of the hub, the balance adjustment hole being configured to adjust balance for rotation of the blade, wherein an outer peripheral portion of the protection cover also serves as an inner wall of the balance adjustment hole. 10 15

5. The fan motor apparatus according to claim 1 or 2, wherein the intake port is placed along an inner periphery of a front surface of the hub on the top surface of the protection cover. 20

6. The fan motor apparatus according to claim 5, wherein a plate-shaped portion of the top surface of the protection cover is inclined downward below the intake port. 25

7. A protection cover of a fan motor apparatus configured to be attached to a fan motor apparatus including a blade integrally molded with a rotor fixed to a rotary shaft, the fan motor apparatus protection cover comprising a top surface, wherein the top surface includes: 30

a lid portion configured to cover a top surface of the rotor; and 35
 an intake port.

40

45

50

55

FIG. 2A

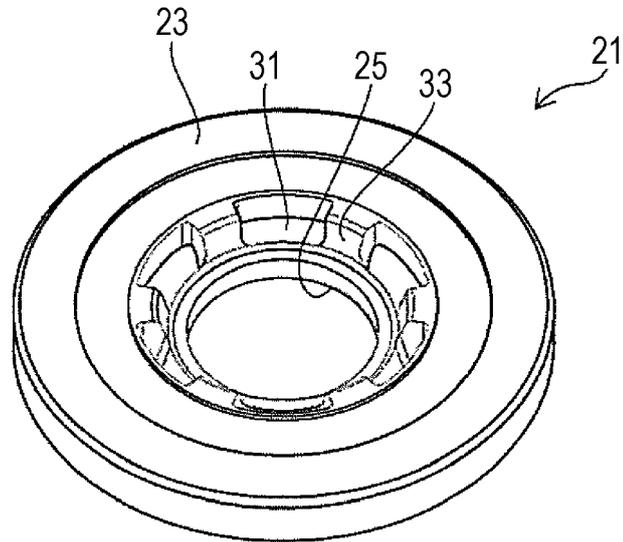


FIG. 2B

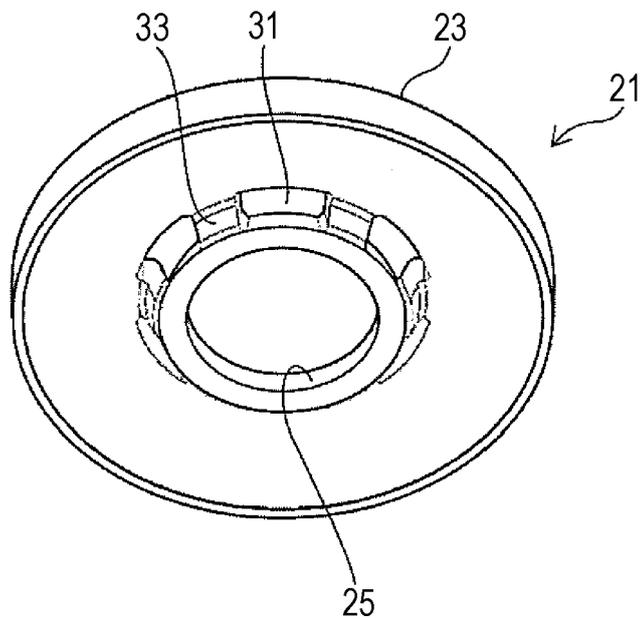


FIG. 3

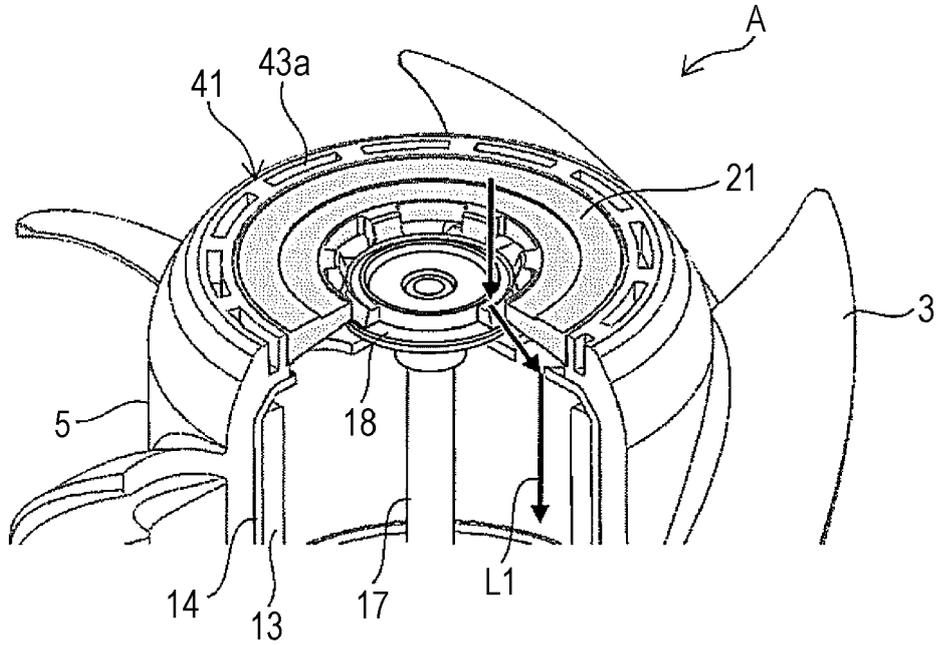


FIG. 4

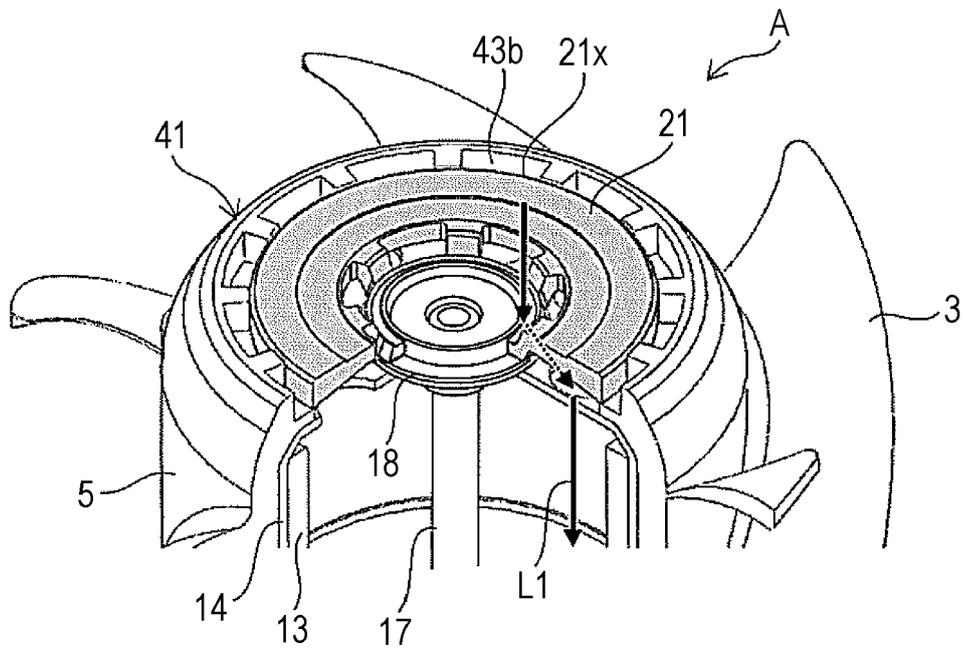


FIG. 5A

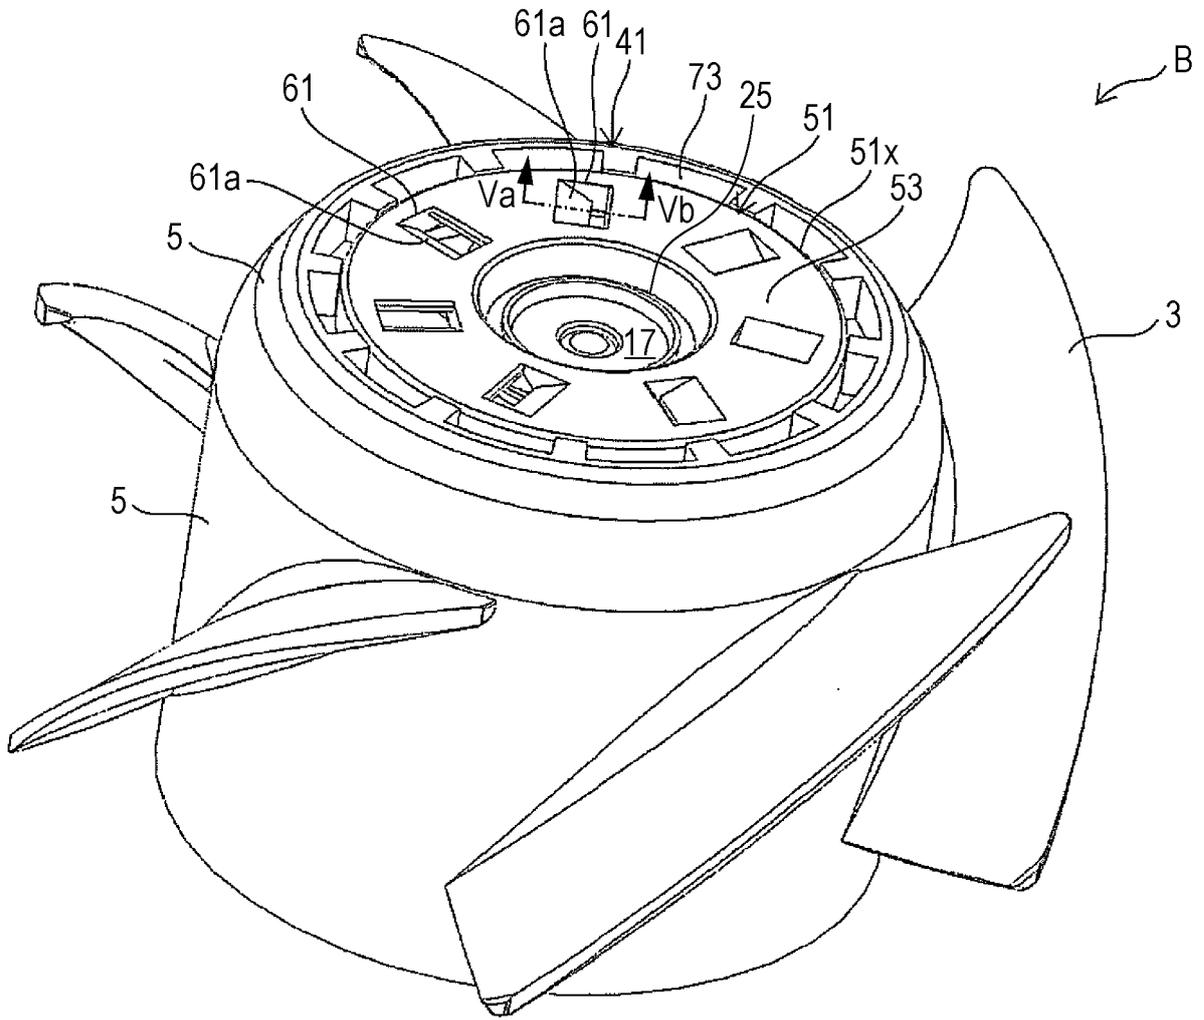


FIG. 5B

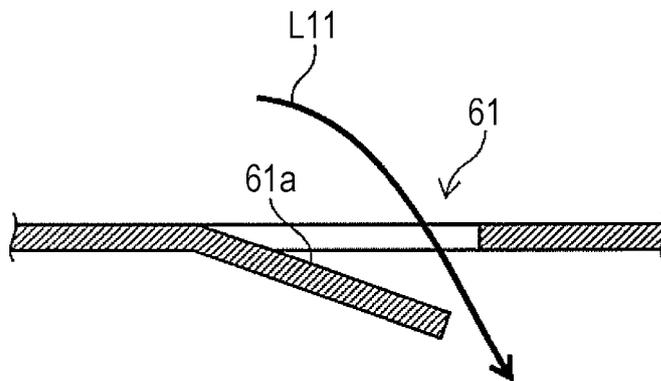


FIG. 5C

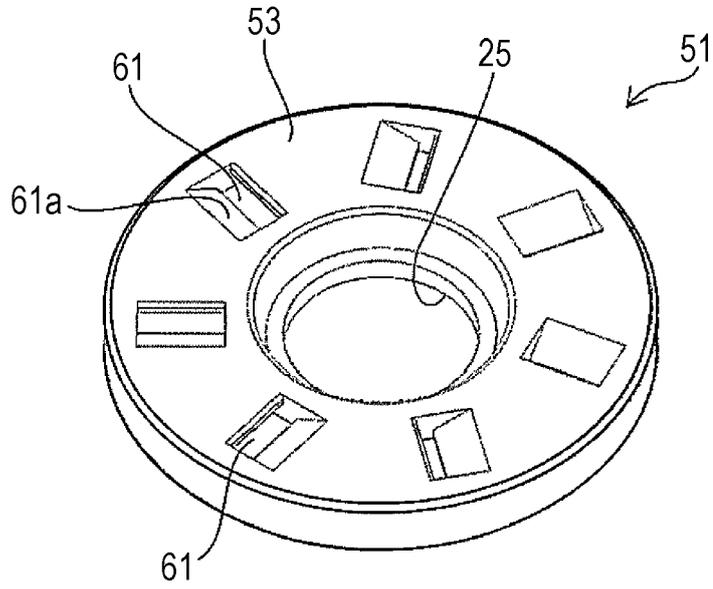


FIG. 5D

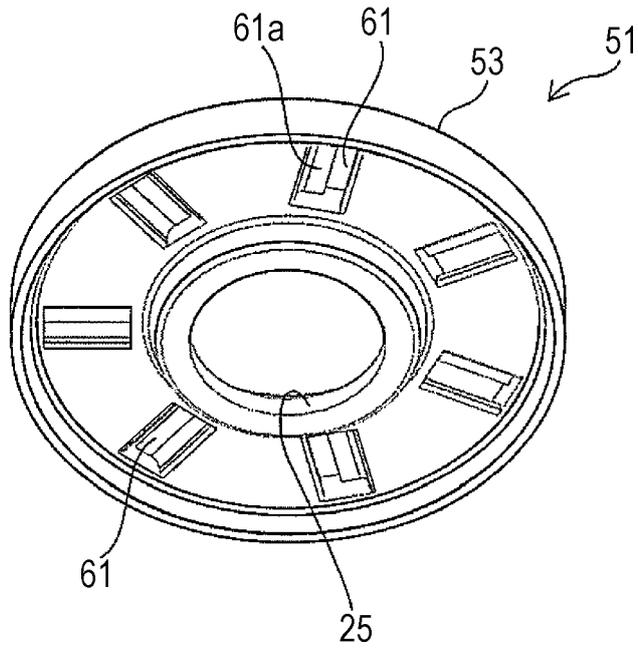


FIG. 6A

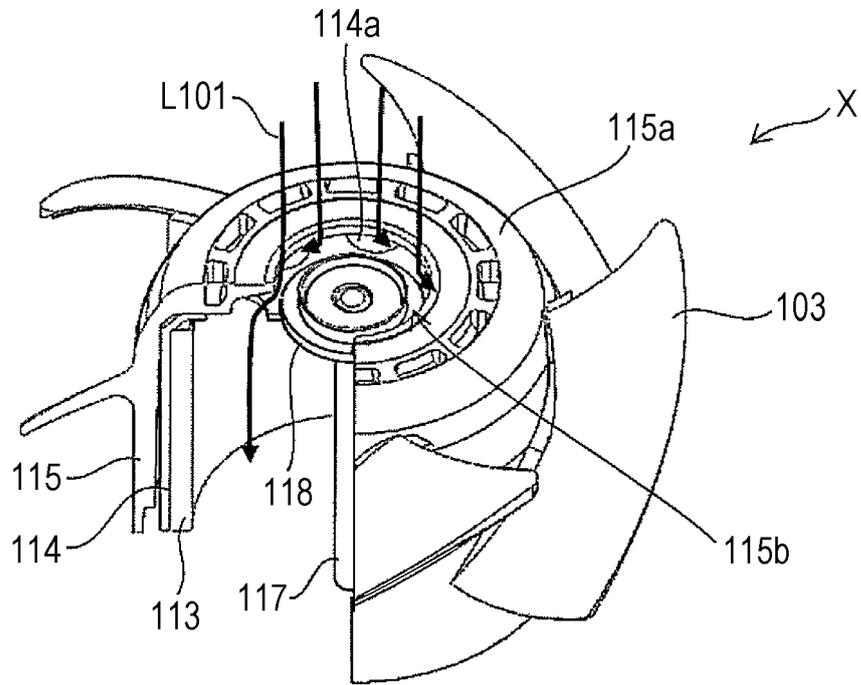


FIG. 6B

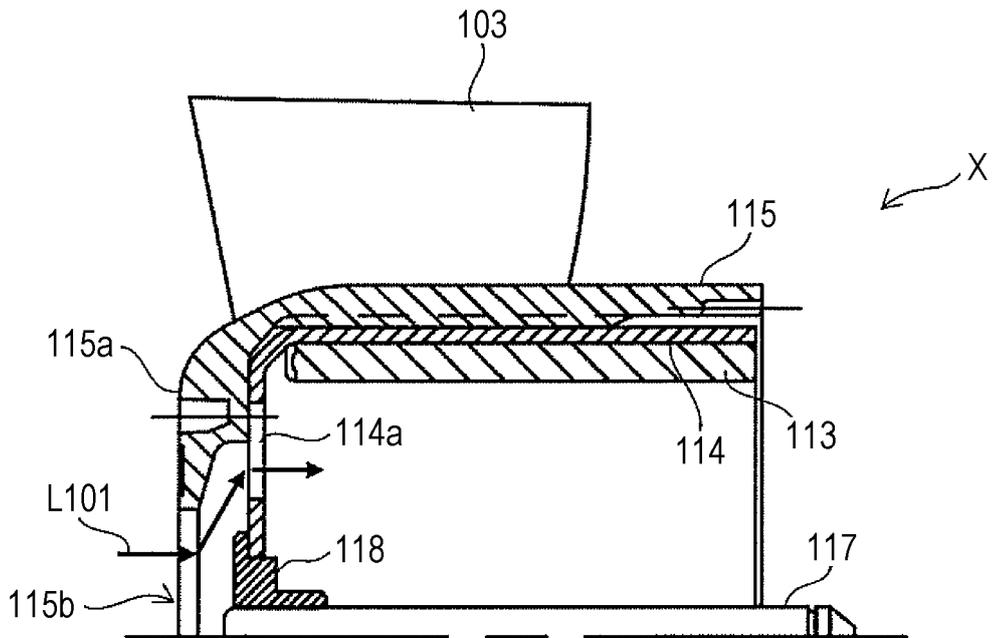


FIG. 7A


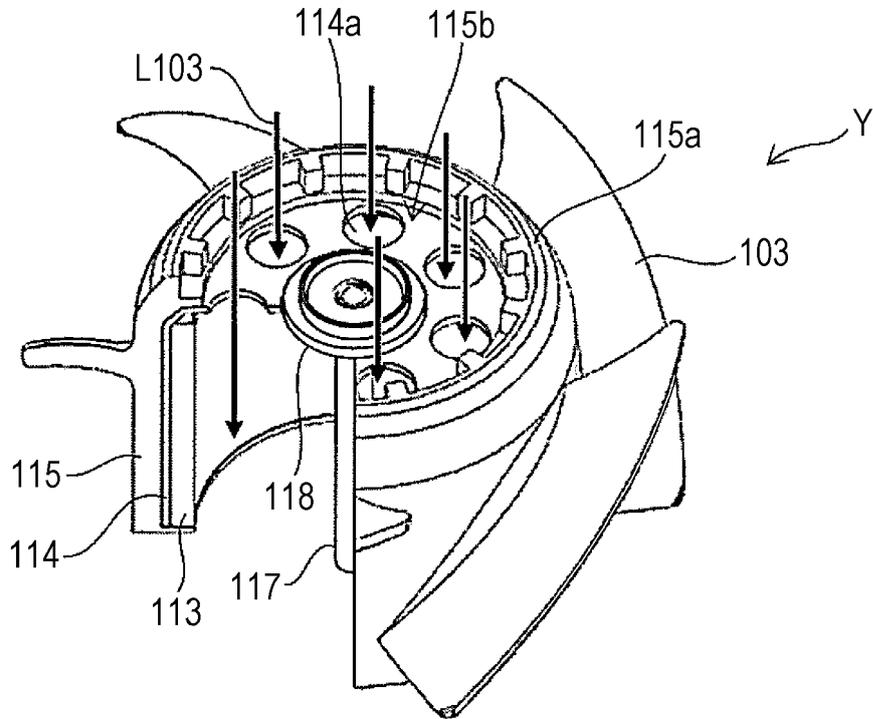


FIG. 7B



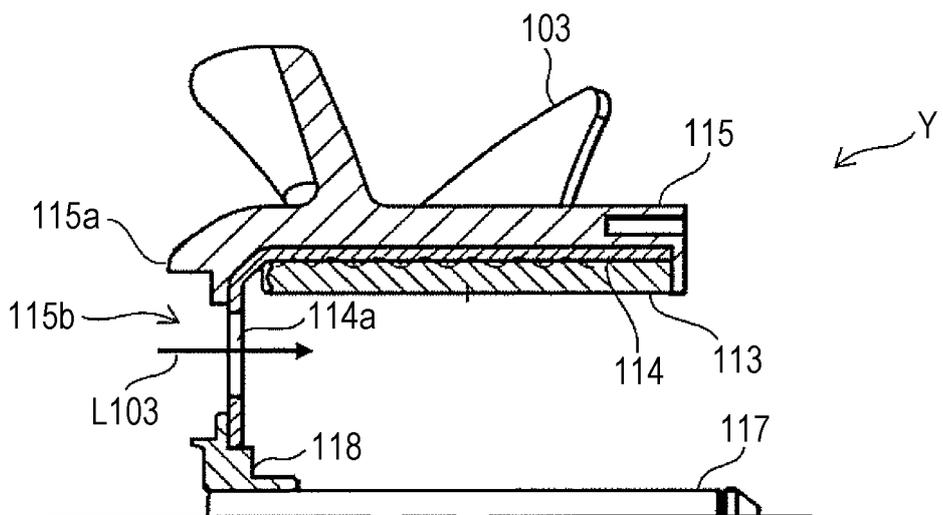

EUROPEAN SEARCH REPORT

Application Number
EP 19 16 2291

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 8 217 540 B2 (BEST DIETER [DE]; MASCHKE MATTHIAS [DE] ET AL.) 10 July 2012 (2012-07-10) * figures 1-3 * * column 3, lines 33, 34 * -----	1,2,7	INV. F04D25/06 F04D25/08 F04D29/32 H02K7/14 H02K9/06 H02K5/10 H02K1/32
X	DE 20 2010 013785 U1 (EBM PAPST ST GEORGEN GMBH & CO [DE]) 17 February 2011 (2011-02-17) * figure 2 * * paragraphs [0060], [0061] * -----	1-5,7	
X	US 2014/010645 A1 (HUANG LI-JIA [TW] ET AL) 9 January 2014 (2014-01-09) * figure 1 * -----	1,2,7	
X	JP S55 2240 U (-) 9 January 1980 (1980-01-09) * figure 1 * -----	1,2,5-7	
X,D	JP 2015 139225 A (NIHON DENSAN KK) 30 July 2015 (2015-07-30) * figures 1, 3, 4 * -----	7	TECHNICAL FIELDS SEARCHED (IPC) F04D H02K
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 5 July 2019	Examiner de Verbigier, L
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.02 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 19 16 2291

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-07-2019

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 8217540 B2	10-07-2012	DE 202009001033 U1 EP 2211444 A2 US 2010187919 A1	24-06-2010 28-07-2010 29-07-2010
DE 202010013785 U1	17-02-2011	DE 202010013785 U1 WO 2011038884 A1	17-02-2011 07-04-2011
US 2014010645 A1	09-01-2014	NONE	
JP S552240 U	09-01-1980	JP S552240 U JP S5757483 Y2	09-01-1980 09-12-1982
JP 2015139225 A	30-07-2015	CN 104795935 A CN 108110953 A CN 204361855 U JP 6260291 B2 JP 2015139225 A	22-07-2015 01-06-2018 27-05-2015 17-01-2018 30-07-2015

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2018045435 A [0001]
- JP 4542479 B [0004]
- JP 2015139225 A [0004]