



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
25.09.2019 Bulletin 2019/39

(51) Int Cl.:
H04W 76/15^(2018.01) *H04W 76/30^(2018.01)*

(21) Application number: **19157893.9**

(22) Date of filing: **16.05.2014**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **16.10.2013 CN 201310486110**

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
14795069.5 / 3 060 001

(71) Applicant: **ZTE Corporation**
Shenzhen, Guangdong 518057 (CN)

(72) Inventors:
• **DAI, Bo**
SHENZHEN, Guangdong 518057 (CN)
• **XIE, Feng**
SHENZHEN, Guangdong 518057 (CN)

• **HUANG, Yada**
GUANGDONG, Guangdong 518057 (CN)
• **LI, YuNgok**
GUANGDONG, Guangdong 518057 (CN)
• **YU, Guanghui**
GUANGDONG, Guangdong 518057 (CN)
• **HU, Liujun**
GUANGDONG, Guangdong 518057 (CN)

(74) Representative: **Vossius & Partner**
Patentanwälte Rechtsanwälte mbB
Siebertstrasse 3
81675 München (DE)

Remarks:


• This application was filed on 19-02-2019 as a divisional application to the application mentioned under INID code 62.
• Claims filed after the date of receipt of the divisional application (Rule 68(4) EPC).

(54) **METHOD, DEVICE, AND COMPUTER STORAGE MEDIUM FOR RADIO CONNECTION**

(57) A method, device and a computer storage medium for wireless connection are provided. The method includes that: a main Transmission Point (TP) sends a connection indication to User Equipment (UE), the con-

nection indication being used to indicate the UE to establish a connection with at least one sub TP on the premise of keeping a current connection with the main TP.

Fig. 1

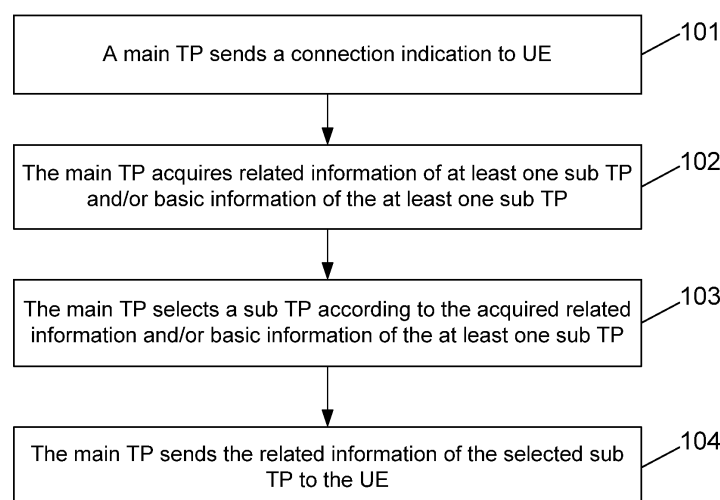

Description

TECHNICAL FIELD

[0001] The disclosure relates to a mobile wireless communication technology, and in particular to a method, device and a computer storage medium for wireless connection.

BACKGROUND

[0002] In a wireless cellular communication system, an Evolved Node B (eNB) or Base Station (BS) is a device providing wireless access for User Equipment (UE) which may also be called a terminal, and the eNB or BS performs wireless communication with the UE through an electromagnetic wave. One eNB or BS may provide one or more serving cells, and a wireless communication system may provide wireless coverage for terminals within a certain geographical range through the serving cells.

[0003] In order to provide wireless communication for users in a large range, a wireless communication system is required to deploy an eNB or BS with a large coverage area, such an eNB or BS is usually called a macro eNB or macro BS, and its serving cell is usually called a macro cell. In addition, in consideration of different requirements of users and different application environments, the wireless communication system is required to provide users with wireless communication service for compensating coverage holes or provide users with wireless communication service having higher quality, so that some small eNBs or BSs with narrow coverage ranges and lower transmitted power are adopted. These small eNBs or BSs include pico eNBs or pico BSs and femto eNBs or femto BSs, wherein the femto eNBs or femto BSs may also be called Home NBs (HNBs) or Home eNBs (HeNBs), cells provided by the pico eNBs or pico BSs are called pico cells, and cells provided by the femto eNBs or femto BSs are called femto cells. Nodes corresponding to small eNBs or BSs are also called Low Power Nodes (LPNs), and cells corresponding to these LPNs are also called small cells. The macro eNBs or BSs, the small eNBs or BSs, the pico eNBs or BSs and the femto eNBs or femto BSs may also be collectively referred to as Transmission Points (TPs).

[0004] When an ideal backhaul link connection is adopted between a macro eNB or BS and a pico eNB or BS, or between a pico eNB or BS and a pico eNB or BS or between a macro eNB or BS and a macro eNB or BS, rapid handover between the eNBs or BSs may be implemented. For example, when an ideal-backhaul link connection is adopted between a macro eNB or BS and a pico eNB or BS, the pico eNB or BS may be considered as a "virtual distributed antenna" of the macro eNB or BS, UE accessing the pico eNB or BS may also be considered to access the macro eNB or BS, and it may also be considered that the UE may be rapidly handed over between the macro eNB or BS and pico eNB or BS which

adopt the ideal-backhaul link connection.

[0005] However, under some circumstances, for example, under limits of an environmental factor or a cost factor, only a non-ideal backhaul link connection may be adopted between eNBs (or BSs), and . When UE is handed over between the eNBs (or BSs) adopting the non-ideal backhaul link connection, data transmission between the eNBs may be delayed, which disables the UE to rapidly switch between the eNBs and influences the performance of the UE. Particularly for a scenario with more small cells, the probability of handover between eNBs or BSs adopting a non-ideal backhaul link connection is higher, and the performance of UE is influenced more by incapability of rapid handover.

SUMMARY

[0006] The embodiments of the disclosure provide a method, device and a computer storage medium for wireless connection, which may implement rapid handover of UE between eNBs or BSs adopting a non-ideal backhaul link.

[0007] The technical solutions of the embodiments of the disclosure are implemented as follows.

[0008] An embodiment of the disclosure provides a method for wireless connection, which may include that: a main TP sends a connection indication to UE, the connection indication being used to indicate the UE to establish a connection with at least one sub TP on the premise of keeping a current connection with the main TP.

[0009] An embodiment of the disclosure provides a method for wireless connection, which may include that:

UE receives a connection indication sent by a main TP; and

a connection is established with at least one sub TP according to the connection indication on the premise of keeping a connection with the main TP.

[0010] An embodiment of the disclosure provides a method for wireless connection, which may include that: a sub TP identifies UE which accesses the sub TP according to access information of the UE, wherein the UE may include single-connection UE and/or multi-connection UE.

[0011] An embodiment of the disclosure provides a method for wireless connection, which may include that: a centralized control node performs multi-connection control on a main TP and a sub TP.

[0012] An embodiment of the disclosure provides a TP, which may include:

a sending unit, configured to send a connection indication to UE, the connection indication being used to indicate the UE to establish a connection with at least one sub TP on the premise of keeping a current connection with the main TP.

[0013] An embodiment of the disclosure provides UE, which may include:

a receiving unit, configured to receive a connection indication sent by a main TP; and

a connection unit, configured to establish a connection with at least one sub TP according to the connection indication on the premise of keeping a current connection with the main TP.

[0014] An embodiment of the disclosure provides a TP, which may include:

a storage unit, configured to store access information of UE which accesses the TP; and

an identification unit, configured to identify the UE according to the access information of the UE, wherein the UE may include single-connection UE and/or multi-connection UE.

[0015] An embodiment of the disclosure provides a node, which may include a control unit, configured to perform multi-connection control on a main TP and a sub TP.

[0016] An embodiment of the disclosure provides a computer storage medium, in which a computer-executable instruction may be stored, the computer-executable instruction being configured to execute any one of the abovementioned method for wireless connections.

[0017] From the above, the technical solutions of the embodiments of the disclosure include that: a main TP sends a connection indication to UE, the connection indication being used to indicate the UE to establish a connection with at least one sub TP on the premise of keeping a current connection with the main TP. The UE receives the connection indication sent by the main TP; and the UE establishes the connection with the at least one sub TP according to the connection indication on the premise of keeping the current connection with the main TP. Therefore, the UE simultaneously accesses multiple TPs adopting non-ideal backhaul links, and then the UE can be rapidly switched between eNBs or BSs adopting the non-ideal backhaul links according to the disclosure. In addition, network communication performance may also be improved in the embodiment of the disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018]

Fig. 1 is a first implementation flowchart of a method for wireless connection according to an embodiment of the disclosure;

Fig. 2 is a second implementation flowchart of a method for wireless connection according to an embodiment of the disclosure;

Fig. 3 is a third implementation flowchart of a method for wireless connection according to an embodiment of the disclosure;

Fig. 4 is a fourth implementation flowchart of a method for wireless connection according to an embodiment of the disclosure;

Fig. 5 is a structure diagram of a TP according to an embodiment of the disclosure;

Fig. 6 is a structure diagram of UE according to an embodiment of the disclosure; and

Fig. 7 is a structure diagram of a TP according to an embodiment of the disclosure.

DETAILED DESCRIPTION

[0019] The disclosure will be further described below with reference to the drawings and specific embodiments in detail.

[0020] An embodiment of the disclosure provides a method for wireless connection, which includes that:

a main TP sends a connection indication to UE, the connection indication being used to indicate the UE to establish a connection with at least one sub TP on the premise of keeping a current connection with the main TP.

[0021] Here, the main TP includes: 1) a node corresponding to a primary serving cell; and 2) any connected TP which may be selected as the main TP; the sub TP includes: 1) a TP in a cell service list of the main TP, 2) a TP selected from TPs to which a centralized control node belongs; and 3) a TP autonomously detected by the UE;

the TPs may be considered as eNBs or BSs, or may be considered as serving cells, and for example: a main TP corresponds to a primary serving cell, a sub TP corresponds to a secondary serving cell, and the sub TP is a TP or a serving cell capable of being independently scheduled and independently receiving a feedback from UE, and is different from a secondary serving cell in a carrier aggregation scenario; or, the main TP corresponds to a macro eNB or BS (macro cell), and the sub TP corresponds to a pico eNB or BS (small cell) and the like;

[0022] in addition, the multiple connections may be connections for specific services (service), different services correspond to different TPs, and different services correspond to different connections; or, the multiple connections may be connections which do not distinguish services.

[0023] Preferably, the method further includes that: the main TP acquires related information of at least one sub TP, and sends related information of a selected sub TP in the acquired related information of the at least one sub TP to the UE.

[0024] Here, the related information of the selected sub TP may be contained in one piece of information for transmission to the UE together with the connection indication, or may also be independently transmitted to the UE.

[0025] Preferably, the method further includes that:

the main TP acquires basic information of the at least one sub TP through the UE, and selects a sub TP according to predefined information, the predefined information including the basic information; or,

the main TP acquires the related information of the at least one sub TP, and selects a sub TP from the at least one sub TP according to predefined information, wherein the predefined information includes the related information of the at least one sub TP.

[0026] Here, the first predefined information may simultaneously include the basic information of the at least one sub TP and the related information of the at least one sub TP; and the second predefined information may simultaneously include the basic information of the at least one sub TP and the related information of the at least one sub TP.

[0027] Preferably, the step that the main TP acquires the related information of the at least one sub TP includes that:

the main TP interacts with the at least one sub TP to obtain the related information of the at least one sub TP; or,

the main TP obtains the related information of the at least one sub TP through the centralized control node.

[0028] Preferably, the method further includes that: the main TP receives a sub TP disconnection request from the UE.

[0029] Preferably, the method further includes that: the main TP executes one of the following operations of:

sending a sub TP reselection indication to the UE; sending sub TP reselection assistance information to the UE; sending a main TP reselection indication to the UE; and sending a sub TP disconnection indication to the UE or sending a confirmation of the sub TP disconnection request to the UE, wherein

the sub TP reselection indication is configured to indicate the UE to reselect a sub TP; the sub TP reselection assistance information is configured to assist the UE in sub TP reselection; the main TP reselection indication is configured to indicate the UE to reselect the main TP; the sub TP disconnection indication is configured to indicate the UE to be disconnected from a target sub TP; and the confirmation of the sub TP disconnection request is a confirmation

which is returned by the TP after receiving the sub TP disconnection request.

[0030] Here, reselection may also be considered as handover, i.e. handover from one TP to another TP, or handover from one serving cell to another serving cell.

[0031] Fig. 1 is an implementation flowchart of a method for wireless connection according to an embodiment of the disclosure, and as shown in Fig. 1, the method includes the following steps.

[0032] Step 101: a main TP sends a connection indication to UE, the connection indication being configured to indicate the UE to establish a connection with a sub TP selected by the main TP on the premise of keeping a current connection with the main TP.

[0033] Here, one sub TP may be selected, or multiple sub TPs may also be selected.

[0034] In a practical application, when multiple sub TPs are selected, the UE may also select one sub TP from the selected sub TPs for connection.

[0035] Step 102: the main TP acquires related information of at least one sub TP and/or basic information of the at least one sub TP.

[0036] Preferably, the step that the main TP acquires the related information of the at least one sub TP includes that:

the main TP interacts with the at least one sub TP to obtain the related information of the at least one sub TP respectively; or,

the main TP obtains the related information of the at least one sub TP through a centralized control node.

[0037] Preferably, the step that the main TP acquires the basic information of the at least one sub TP includes that: the main TP acquires the basic information of the at least one sub TP through the UE.

[0038] Here, the centralized control node is a control node at a higher level compared with the main TP and the sub TP or a Mobility Management Entity (MME); and when the main TP acquires the basic information of the at least one sub TP through the UE, the main TP may perform sub TP selection according to the basic information obtained by downlink measurement of the UE, thereby ensuring downlink transmission from the at least one sub TP to the UE.

[0039] Here, when the main TP interacts with the at least one sub TP to obtain the related information of the at least one sub TP respectively, or when the main TP obtains the related information of the at least one sub TP through the centralized control node, the main TP may perform sub TP selection according to measurement of an uplink signal of the UE, where the measurement is performed by the at least one sub TP, and estimate a downlink channel by virtue of an uplink channel, or, the main TP may directly select a sub TP according to a path loss value. In this way, the UE is not required to measure

a sub TP measurement or send a feedback, thereby reducing the complexity of the UE, and guaranteeing uplink transmission from the UE to the at least one sub TP.

[0040] Here, information exchanged between the main TP and the at least one sub TP includes at least one of: system configuration information of the at least one sub TP; uplink timing offset measured by the at least one sub TP according to the uplink signal of the UE; and uplink path loss, uplink power values, frequency information, cell Identifiers (IDs) and user-specific configuration information measured by the at least one sub TP according to the uplink signal of the UE.

[0041] Here, the information obtained by interaction between the main TP and the at least one sub TP or the related information obtained by the main TP through the centralized control node specifically includes at least one of: frequency information; cell IDs; a system message; user-specific configuration information; uplink timing regulation; the number of connected UE; and whether multiple connections are adopted or not. Therefore, the UE may directly perform blind detection on downlink control information and perform data interaction with the at least one sub TP after downlink synchronization is implemented between the UE and the at least one sub TP. The UE thus may rapidly establish a connection with another TP for data interaction according to the related information, thereby accelerating a system message acquisition process and an uplink synchronization process of the new TP.

[0042] Here, the UE may autonomously select a sub TP and accesses the selected sub TP at a frequency point according to frequency information. The UE accesses a new sub TP. In such a manner, a multi-connection establishment flow may be simplified, and the times of interaction between the main TP and the at least one sub TP may be reduced. In a practical application, the UE may also select a sub TP corresponding to a cell ID and accesses the selected sub TP at the frequency point according to the frequency information and the cell ID. In such a manner, complexity caused by autonomous selection of the UE over the at least one sub TP may be reduced, and centralized management is facilitated.

[0043] Here, the system message includes at least one of: Physical Random Access Channel (PRACH) configuration information of the TP; a downlink system bandwidth; an uplink frequency point; an uplink system bandwidth; a duplex system; information about proportion between uplink and downlink; Multicast Broadcast Single Frequency Network (MBSFN) subframe configuration information; information about a sending indication of other system information block(s); information about subframe configuration for uplink Sounding Reference Signal (SRS) transmission; and Physical Hybrid Automatic Repeat Request Indicator Channel (PHICH) configuration information.

[0044] Here, the user-specific configuration information includes at least one of: Physical configuration information about resource starting position of Uplink Control Channel (PUCCH); uplink power control parameter in-

formation; and Enhanced Downlink Control Channel (eP-DCCH) related configuration information.

[0045] Step 103: the main TP selects a sub TP according to the acquired related information and/or basic information of the at least one sub TP.

[0046] Step 104: the main TP sends the related information of the selected sub TP to the UE.

[0047] Preferably, the method further includes that: the main TP sends a sub TP reselection indication or a main TP reselection indication to the UE, wherein the sub TP reselection indication is configured to indicate the UE to reselect a sub TP; and the main TP reselection indication is configured to indicate the UE to reselect the main TP.

[0048] Here, reselection may also be considered as handover, i.e. handover from one TP to another TP, or handover from one serving cell to another serving cell.

[0049] An embodiment of the disclosure further provides a method for wireless connection, and as shown in Fig. 2, the method includes the following steps:

Step 201: UE receives a connection indication sent by a main TP; and

Step 202: the UE establishes a connection with at least one sub TP according to the connection indication on the premise of keeping a current connection with the main TP.

[0050] Here, the sub TP establishing the connection with the UE may reallocate a user-specific physical layer ID, i.e. a Cell Radio Network Temporary Identifier (C-RNTI), to the UE; or, the UE may report a C-RNTI of the UE in the main TP in a process of uplink synchronization with the sub TP; or, the UE may report its pre-allocated C-RNTI in the sub TP in the process of uplink synchronization with the sub TP.

[0051] A TP of a higher level manages UE which simultaneously accesses the main TP and the sub TP; or, the sub TP confirms a multi-connection identity of the UE according to a Media Access Control (MAC) address of the UE; or, the sub TP confirms the multi-connection identity of the UE according to a proprietary resource (a cell ID corresponding to the main TP, a unique identification code of the UE, identification information allocated by a centralized control node, or multi-connection identification signalling) of the UE.

[0052] Preferably, the method further includes that: the UE receives, from the main TP, related information of a sub TP, and establishes a connection with the sub TP according to the related information of the sub TP.

[0053] Preferably, the method further includes that: the UE measures the sub TP to acquire basic information of the sub TP, and reports the basic information to the main TP.

[0054] Here, one or more, for example, 3 or 6, sub TPs may be reported.

[0055] The basic information, measured by the UE, of

the sub TP may include: the cell ID, and Reference Signal Receiving Power (RSRP) corresponding to the TP.

[0056] For example, the UE may detect at least one of the following signals: each synchronization channel corresponding to each sub TP, each Cell-specific Reference Signal (CRS) corresponding to each sub TP, and each cell Discovery Signal (DS) corresponding to each sub TP; and these signals are measured to obtain the basic information, for example: cell IDs and RSRP, corresponding to the at least one sub TP. The corresponding sub TP(s) is (are) selected and reported.

[0057] Preferably, the sub TP connected with the UE or the sub TP measured by the UE includes at least one of:

a sub TP designated by the centralized control node;

a sub TP designated by the main TP; and

a sub TP autonomously selected by the UE.

[0058] Preferably, the method further includes that:

the UE receives a sub TP reselection indication sent by the main TP;

sub TP reselection is performed in at least one of the following manners that:

the UE keeps the connection with the main TP, quits a connection with a current sub TP, and selects a new sub TP for connection;

the UE keeps the connection with the main TP, and directly performs sub TP handover at the current sub TP; and

the UE keeps the connection with the main TP, and switches from the current sub TP to another sub TP under assistance of the main TP.

[0059] Here, sub TP reselection performed in the manner of directly performing sub TP handover at the current sub TP is similar to inter-cell handover under a single-connection condition in a related technology, which does not require assistance of the main TP or require a sub TP quitting process.

[0060] Sub TP reselection performed in the manner of implementing handover from the current sub TP to another sub TP under assistance of the main TP also does not require a process of quitting from the sub TP.

[0061] Preferably, the method further includes that:

the UE receives a main TP reselection indication sent by the main TP;

main TP reselection is performed in at least one of the following manners that:

the UE quits the connection with the current sub TP, and performs main TP handover; the UE keeps the connection with the current sub TP, and performs main TP handover; the UE keeps the connection with the current sub TP, and the sub TP assists the UE in main TP handover; and the main TP and the sub TP are simultaneously handed over to a pair of new main TP and sub TP.

[0062] In a practical application, the UE may also autonomously send the sub TP reselection indication or the main TP reselection indication to the sub TP or the main TP, and execute sub TP reselection operation after confirmation of the sub TP or the main TP.

[0063] Preferably, when the UE is disconnected from a target sub TP, at least one of the following manners may be adopted:

the UE receives a sub TP disconnection indication from the main TP, and is then disconnected from the target sub TP; the UE receives a sub TP disconnection indication from the sub TP, and then is disconnected from the target sub TP; the UE sends a sub TP disconnection request to the main TP or the sub TP, and then is disconnected from the target sub TP after a confirmation is made by the main TP or the sub TP; and the UE sends a sub TP disconnection request to the main TP or the sub TP, and then is disconnected from the target sub TP.

[0064] An embodiment of the disclosure further provides a method for wireless connection, and as shown in Fig. 3, the method includes the following step: Step 301: a sub TP identifies UE which accesses the sub TP according to access information of the UE, wherein the UE includes single-connection UE and/or multi-connection UE.

[0065] Preferably, the access information of the UE includes at least one of:

a C-RNTI of the UE used in a main TP; a cell ID corresponding to the main TP; a unique identification code (such as an International Mobile Subscriber Identity (IMSI) and an International Mobile Equipment Identity (IMEI)) of the UE, identification information allocated by a centralized control node, and a proprietary resource of the UE; multi-connection identification signalling of the UE; and a C-RNTI of the UE used in the sub TP.

[0066] Here, the proprietary resource includes a specific uplink synchronization channel resource, and the specific uplink synchronization channel resource includes: a specific time-frequency resource and/or a specific sequence.

[0067] Here, the access information may be obtained in a process during which the UE accesses the sub TP access, or may also be obtained after the UE accesses the sub TP.

[0068] Preferably, the method further includes that: the sub TP transmits own related information to the main TP, and/or acquires the access information, transmitted by the main TP, of the multi-connection UE.

[0069] Preferably, the method further includes that:

the sub TP assists the accessing multi-connection UE in implementing main TP handover.

[0070] Preferably, the method further includes that: the sub TP executes one of the following operations:

the sub TP sends a sub TP disconnection indication to the accessing multi-connection UE, the sub TP disconnection indication being used to indicate the UE to be disconnected from a designated sub TP;

the sub TP receives a sub TP disconnection request from the multi-connection UE, and returns a confirmation; and

the sub TP receives a sub TP disconnection request from the multi-connection UE.

[0071] An embodiment of the disclosure further provides a method for wireless connection, and as shown in Fig. 4, the method includes the following step:

Step 401: a centralized control node performs multi-connection control on a main TP and a sub TP.

[0072] Preferably, the multi-connection control is: control over at least one of:

selection of a main TP; selection of a sub TP; selection of multi-connection UE; identification of multi-connection UE accessing the sub TP; sub TP handover for the multi-connection UE; and sub TP disconnection from the multi-connection UE.

[0073] Preferably, the multi-connection control includes: control over transmission of at least one of the following information:

information about selection of a main TP; information about selection of a sub TP; related information of the sub TP; information about selection of multi-connection UE; identification information of the multi-connection UE accessing the sub TP; information about sub TP handover for the multi-connection UE; and information about sub TP disconnection from the multi-connection UE.

[0074] An embodiment of the disclosure further provides a computer storage medium, in which a computer-executable instruction is stored, the computer-executable instruction being configured to execute the method of managing wireless connection as shown in any one of Fig. 1 to Fig. 4.

[0075] An embodiment of the disclosure further provides a TP, and as shown in Fig. 5, the TP includes:

a sending unit 501, configured to send a connection indication to UE, the connection indication being used to indicate the UE to establish a connection with at least one sub TP on the premise of keeping a current connection with the main TP.

[0076] Here, there are one selected sub TP or a plurality of TPs.

[0077] Preferably, the TP further includes: an acquisition unit 502, configured to acquire related information of at least one sub TP; and correspondingly, the sending unit 501 is further config-

ured to send related information of a selected sub TP in the acquired related information of the at least one sub TP to the UE.

[0078] Preferably, the TP further includes a selection unit 503, configured to acquire basic information of the at least one sub TP through the UE, and selects the sub TP according to predefined information, the predefined information including the basic information; or, select the sub TP according to predefined information, wherein the predefined information includes the related information, acquired by the acquisition unit, of the at least one sub TP.

[0079] Preferably, the acquisition unit 502 is configured to interact with the at least one sub TP to obtain the related information of the at least one sub TP; or, obtain the related information of the at least one sub TP through a centralized control node.

[0080] Preferably, the TP further includes a receiving unit 504, configured to receive a sub TP disconnection request sent by the UE.

[0081] Preferably, the sending unit 501 is further configured to execute one of the following operations of: sending a sub TP reselection indication to the UE; sending sub TP reselection assistance information to the UE; sending a main TP reselection indication to the UE; sending a sub TP disconnection indication to the UE; and sending a confirmation of the sub TP disconnection request to the UE, wherein

the sub TP reselection indication is configured to indicate the UE to reselect a sub TP; the sub TP reselection assistance information is configured to assist the UE in reselecting a sub TP; the main TP reselection indication is configured to indicate the UE to reselect the main TP; the sub TP disconnection indication is configured to indicate the UE to be disconnected from a target sub TP; and the confirmation of the sub TP disconnection request is a confirmation which is returned by the TP after receiving the sub TP disconnection request.

[0082] In a practical application, each unit in the TP may be implemented by a Central Processing Unit (CPU), a Digital Signal Processor (DSP) or a Field-Programmable Gate Array (FPGA) in the TP.

[0083] An embodiment of the disclosure provides UE, and as shown in Fig. 6, the UE includes:

a receiving unit 601, configured to receive a connection indication sent by a main TP; and

a connection unit 602, configured to establish a connection with at least one sub TP according to the connection indication on the premise of keeping a current connection with the main TP.

[0084] Preferably, the receiving unit 601 is further configured to receive, from the main TP, related information of the at least one sub TP; and

the connection unit 602 is configured to establish the connection with the at least one sub TP according to the

related information of the at least one sub TP.

[0085] Preferably, the UE further includes: a measurement unit 603, configured to measure the at least one sub TP to acquire basic information of the at least one sub TP, and report the basic information to the main TP.

[0086] Here, one or more, for example, 3 or 6, sub TPs may be reported.

[0087] The related information may include: a cell ID, and a RSRP value corresponding to the TP.

[0088] Preferably, the sub TP connected with the UE or the sub TP measured by the UE includes at least one of:

- a sub TP designated by a centralized control node;
- a sub TP designated by the main TP; and
- a sub TP autonomously selected by the UE.

[0089] Preferably, the receiving unit 601 is further configured to receive a sub TP reselection indication from the main TP;

the UE further includes a sub TP reselection unit 604, configured to perform sub TP reselection in at least one of the following manners of:

- keeping the connection with the main TP, quitting a connection with a current sub TP, and selecting a new sub TP for connection;
- keeping the connection with the main TP, and directly performing handover from the current sub TP to another sub TP; and
- keeping the connection with the main TP, and implementing handover from the current sub TP to another sub TP under assistance of the main TP.

[0090] Preferably, the receiving unit 601 is further configured to receive a main TP reselection indication sent by the main TP;

the UE further includes a main TP reselection unit 605, configured to perform main TP reselection in at least one of the following manners of:

quitting the connection with the current sub TP, and reselecting a main TP; keeping the connection with the current sub TP, and reselecting a main TP; keeping the connection with the current sub TP, and reselecting a main TP under assistance of the sub TP; and simultaneously switching from the main TP and the sub TP to a pair of new main TP and sub TP.

[0091] Preferably, the UE further includes a triggering unit 606, a disconnection unit 607 and a sending unit 608, wherein the triggering unit 606 is configured to trigger the receiving unit 601 to receive sub TP disconnection indication information sent by from the main TP and receive sub TP disconnection indication information from the sub TP, and trigger the disconnection unit 607 to disconnect from a target sub TP according to the indication information received by the receiving unit;

the triggering unit 606 is further configured to trigger the sending unit 608 to send a sub TP disconnection request

to the main TP or the sub TP, and trigger the disconnection unit 607 to disconnect the target sub TP after the receiving unit 601 receives a confirmation from the main TP or the sub TP; and

the triggering unit 606 is further configured to trigger the sending unit 608 to send the sub TP disconnection request to the main TP or the sub TP, and trigger the disconnection unit 607 to directly disconnect the target sub TP.

[0092] In a practical application, each unit in the UE may be implemented by a CPU, a DSP or a FPGA in the UE.

[0093] An embodiment of the disclosure further provides a TP, and as shown in Fig. 7, the TP includes:

a storage unit 701, configured to store access information of UE; and

an identification unit 702, configured to identify the UE according to the access information of the UE, wherein the UE includes single-connection UE and/or multi-connection UE.

[0094] Preferably, the access information of the UE includes at least one of:

a C-RNTI of the UE used in a main TP; an ID of a cell corresponding to the main TP; a unique identification code (such as an IMSI and an IMEI) of the UE; identification information allocated by a centralized control node; a proprietary resource of the UE; multi-connection identification signalling of the UE; and a C-RNTI of the UE used in the sub TP.

[0095] Here, the proprietary resource includes a specific uplink synchronization channel resource, and the specific uplink synchronization channel resource includes: a specific time-frequency resource and/or a specific sequence.

[0096] Here, the access information may be obtained in process during which the UE accesses the sub TP, or may also be obtained after the UE accesses the sub TP.

[0097] Preferably, the TP further includes: an information processing unit 703, configured to transmit own related information to the main TP, and/or acquire the access information of the multi-connection UE from the main TP.

[0098] Preferably, the TP further includes: an assistance unit 704, configured to assist the multi-connection UE in implementing main TP handover.

[0099] Preferably, the information processing unit 703 is further configured to execute one of the following operations of: sending sub TP disconnection indication information to the accessing multi-connection UE, the sub TP disconnection indication information being configured to indicate the UE to be disconnected from a designated sub TP; receiving a sub TP disconnection request of the multi-connection UE, and returning a confirmation; and receiving the sub TP disconnection request of the multi-connection UE.

[0100] In a practical application, each unit in the TP may be implemented by a CPU, a DSP or a FPGA in the TP.

[0101] An embodiment of the disclosure further provides a node, which includes a control unit 801, configured to perform multi-connection control on a main TP and a sub TP.

[0102] Preferably, the control unit 801 is further configured to control at least one of:

main TP selection; sub TP selection; multi-connection UE selection; identification of multi-connection UE accessing the sub TP; sub TP handover for the multi-connection UE; and sub TP disconnection from the multi-connection UE.

[0103] Preferably, the control unit 801 is further configured to control transmission of at least one of the following information:

information about main TP selection; information about sub TP selection; related information of the sub TP; information about multi-connection UE selection; identification information of the multi-connection UE accessing the sub TP; information about sub TP handover for the multi-connection UE; and information about sub TP disconnection from the multi-connection UE.

[0104] In a practical application, the control unit 801 in the node may be implemented by a CPU, a DSP or a FPGA in the node.

[0105] The main TP includes: 1) a node corresponding to a primary serving cell; and 2) any connected TP which may be selected as the main TP;

the sub TP includes: 1) a TP in a cell service list of the main TP, 2) a TP selected from TPs of a centralized control node, and 3) a TP autonomously detected by the UE; the TPs may be considered as eNBs or BSs, or may be considered as serving cells, and for example: a main TP corresponds to a primary serving cell, a sub TP corresponds to a secondary serving cell, and the sub TP is a TP or a serving cell capable of being independently scheduled and independently receiving a feedback from the UE, and is different from a secondary serving cell in a carrier aggregation scenario; or, the main TP corresponds to a macro eNB or BS (macro cell), and the sub TP corresponds to a pico eNB or BS (small cell) and the like;

[0106] in addition, multiple connections may also be connections for specific services (service), different services correspond to different TPs, and different services correspond to different connections; or, multiple connections may also be connections which do not distinguish services.

[0107] From the above, the UE simultaneously accesses multiple TPs adopting non-ideal backhaul links, and then rapid handover of the UE among eNBs(BSs) adopting the non-ideal backhaul links may be implemented according to the disclosure.

[0108] The disclosure will be described below with reference to specific embodiments.

Specific embodiment 1

[0109] A main TP sends indication information to indicate UE to establish another connection on the premise of keeping a current connection.

[0110] In the embodiment, the UE feeds back basic information of at least one sub TP, and the main TP selects a sub TP.

[0111] The UE performs measurement after obtaining the indication information, and reports the information of the sub TP with which a connection is to be established. Or, the UE starts measuring the at least one sub TP according to configuration information of the main TP, and reports a measurement result to the main TP, and the main TP sends the indication information to the UE after selecting the sub TP, wherein the at least one sub TP measured by the UE may be designated by a centralized control node, or designated by the main TP, or autonomously selected by the UE.

[0112] The reported information of the TP includes: a cell ID, an RSRP value corresponding to the TP, a Reference Signal Received Quality (RSRQ) value corresponding to the TP, and the like.

[0113] For example, the UE may measure one of the following information corresponding to each sub TP: a synchronization channel, a CRS and a DS; the UE may obtain the cell ID(s) and RSRP value(s) corresponding to the at least one sub TP according to the measurement result(s), and select and report the best sub TP.

[0114] One or multiple TPs may be reported, for example: 3 or 6.

[0115] The main TP receives the basic information, reported by the UE, of the at least one sub TP, and the main TP selects a sub TP and sends the information of the sub TP to the UE.

[0116] The main TP may select the sub TP from the at least one sub TP reported by the UE or may also select another better sub TP by integrating various conditions, for example: the number of UE that accesses each sub TP and a distribution condition of each sub TP.

[0117] The embodiment has beneficial effects that the main TP may select a sub TP according to downlink measurement of the UE, thereby ensuring downlink transmission from the sub TP to the UE and also improving selectivity of the UE.

Specific embodiment 2

[0118] A main TP sends indication information to indicate UE to establish another connection on the premise of keeping a current connection.

[0119] In the embodiment, the main TP selects a sub TP, and the UE is not required to feed back information of the sub TP before establishing a connection with the sub TP.

[0120] The main TP interacts with the sub TP first to obtain related information of the sub TP; or, the main TP

may also obtain the related information of the sub TP through a centralized control node.

[0121] Here, information exchanged during the interaction includes at least one of: system configuration information of the sub TP; uplink timing offset measured by the sub TP according to an uplink signal of the UE; an uplink path loss or uplink power value measured by the sub TP according to the uplink signal of the UE; frequency information; a cell ID; user-specific configuration information; the number of connected UE; and whether access of multi-connection UE is allowed or not.

[0122] The TP may also send, besides the indication information, the following information: related information of a TP corresponding to another connection, wherein the related information may include at least one of: frequency information; a cell ID; a system message; user-specific configuration information; and uplink timing regulation.

[0123] The another connection may correspond to one TP or multiple TPs (a set of TPs, the UE autonomously select a specific TP for access), for example: 3 or 6.

[0124] The system message includes at least one of: PRACH configuration information of the TP; a downlink system bandwidth; an uplink frequency point; an uplink system bandwidth; a duplex system; information about proportion between uplink and downlink; information about MBSFN subframe configuration; information about a sending indication of other system information block; and information about subframe configuration for SRS transmission ;

the user-specific configuration information includes at least one of: configuration information of a starting position of a PUCCH resource ; uplink power control parameter information; ePDCCH related configuration information; C-RNTI information of the UE used in the sub TP; and PRACH resource information of the UE used in the sub TP, the PRACH resource information including a time-frequency position and sequence information.

[0125] The embodiment has beneficial effects that the UE is not required to measure or feed back a sub TP, so that complexity of the UE is reduced; the main TP may select a sub TP according to measurement performed by the sub TP for the uplink signal of the UE, for example: estimate a downlink channel by an uplink channel, or directly select a sub TP according to a path loss value, so that uplink transmission from the UE to the sub TP can be guaranteed; or, the sub TP is directly selected according to a factor such as the distribution condition of the sub TP, the number of the UE accessing the sub TP and the like.

Specific embodiment 3

[0126] A main TP sends indication information to indicate UE to establish another connection on the premise of keeping a current connection; and the main TP further sends, besides the indication information, information including: related information of a sub TP corresponding

to another connection, the related information including frequency information, a cell ID corresponding to the sub TP, and system configuration information.

[0127] At this moment, the UE autonomously selects a sub TP for access on a frequency point according to information of the frequency point.

[0128] A process during which the UE accesses the sub TP includes that: a downlink synchronization signal is searched at the frequency point of the sub TP, the sub TP with a best signal is selected for synchronization, the system configuration information of the sub TP is acquired, and uplink synchronization is initiated to implement uplink synchronization of the UE and the sub TP.

[0129] In an uplink synchronization process of the UE and the sub TP, the sub TP may reallocate a C-RNTI to the UE.

[0130] A TP of a higher level (such as: a centralized control node and an MME) manages UE which simultaneously accesses the main TP and the sub TP, or, the sub TP confirms a multi-connection identity of the UE according to obtained information of multi-connection UE and a unique ID of the UE.

[0131] The embodiment has the beneficial effects that a multi-connection establishment flow is simplified, and interaction between the main TP and the sub TP is reduced.

Specific embodiment 4

[0132] A main TP sends indication information to indicate UE to establish another connection on the premise of keeping a current connection; and the main TP further sends, besides the indication information, information including: related information of a sub TP corresponding to another connection, the related information includes information of a frequency point and information of a cell ID, and the UE selects the sub TP corresponding to the cell ID at the frequency point for access according to the information of the frequency point and the information of the cell ID.

[0133] An access process of the UE to the sub TP includes that: a downlink synchronization signal corresponding to the sub TP is searched at a frequency point of the sub TP (a cell ID corresponds to a specific sub TP and a cell ID corresponds to a specific downlink synchronization channel) for synchronization, system configuration information of the sub TP is acquired, and uplink synchronization is initiated to implement uplink synchronization of the UE and the sub TP.

[0134] The UE may report a C-RNTI of the UE used in the main TP in a process that the UE performs uplink synchronization with the sub TP, and still uses a user-specific physical layer ID of the main TP in the sub TP; or, in the process of uplink synchronization of the UE and the sub TP, the sub TP may reallocate a C-RNTI to the UE, and the UE may not report its C-RNTI used in the main TP when the UE performs uplink synchronization with the sub TP.

[0135] A TP of a higher level (such as: a centralized control node and an MME) manages UE which simultaneously accesses the main TP and the sub TP, or, the sub TP confirms a multi-connection identity of the UE according to obtained information of multi-connection UE and a unique ID of the multi-connection UE, or, the sub TP confirms its multi-connection identity according to the user-specific physical layer ID reported by the UE and used in the main TP.

[0136] The embodiment has the beneficial effects that complexity caused by autonomous selection of the UE over the sub TP is reduced, and centralized management is facilitated.

Specific embodiment 5

[0137] A main TP sends indication information to indicate UE to establish another connection on the premise of keeping a current connection; and the main TP further sends, besides the indication information, information including: related information of a sub TP corresponding to another connection, the related information including at least one of: information of a frequency point and information of a cell ID; system configuration information; user-specific configuration information; and uplink timing information, wherein the user-specific configuration information includes at least one of: configuration information of a PUCCH resource which bears uplink control information corresponding to a sub TP; power control information of an uplink control channel and/or an uplink data channel; sequence configuration information of an uplink reference signal; sequence configuration information of a downlink reference signal; configuration information of an ePDCCH; and information about a C-RNTI allocated to the UE by the sub TP.

[0138] The UE may directly perform blind detection on downlink control information sent by the sub TP after downlink synchronization with the sub TP, and perform uplink and downlink data interaction with the sub TP according to the downlink control information; or, the UE may perform uplink synchronization according to uplink synchronization channel resource information in the user-specific configuration information after the UE realizes downlink synchronization with the sub TP, and in a process of uplink synchronization of the UE and the sub TP, the sub TP may reallocate a C-RNTI to the UE, and the sub TP identifies the UE to confirm its multi-connection UE identity according to an uplink synchronization channel resource; or, the UE may perform uplink synchronization after downlink synchronization with the sub TP, and report information about the C-RNTI allocated by the sub TP in the process of uplink synchronization of the UE and the sub TP, and the sub TP confirms that the UE is multi-connection UE according to the reported C-RNTI information; or, the UE may perform uplink synchronization after realizing downlink synchronization with the sub TP, and report a

cell ID corresponding to the main TP (a unique identification code of the UE, identification information allocated by the centralized control node and multi-connection identification signalling) in the process of uplink synchronization of the UE and the sub TP, and the sub TP confirms that the UE is multi-connection UE according to the information reported by the UE.

[0139] In the embodiment, the UE may rapidly establish the connection with another sub TP for data interaction according to related information, so that a system message acquisition process and an uplink synchronization process for the new TP are reduced, or, the sub TP may identify the multi-connection UE more easily.

15 Specific embodiment 6

[0140] A process of quitting multi-connection includes at least one of following operations:

20 a main TP indicates UE to be disconnected from a sub TP, for example: the main TP sends an indication to the UE, the indication being used to indicate the UE to be disconnected from the sub TP, and when there are multiple sub TPs connected with the UE, the indication further includes IDs of the disconnected sub TPs;

25 the UE may feed back whether the indication is successfully received or not to the main TP after receiving the indication, and does not receive data of the sub TP any longer after a defined time interval, and then is disconnected from the sub TP; and

30 the UE does not send a feedback to the main TP after receiving the indication, and does not receive the data of the sub TP any longer after the defined time interval, and then is disconnected from the sub TP.

35 **[0141]** The sub TP indicates the UE to be disconnected from the sub TP, for example: the sub TP sends an indication to the UE, the indication being used to indicate the UE to be disconnected from the sub TP; the UE may feed back whether the indication is successfully received or not to the sub TP after receiving the indication, and does not receive data of the sub TP any longer after a defined time interval, and then is disconnected from the sub T; and the UE may also not send a feedback to the sub TP after receiving the indication, does not receive the data of the sub TP directly after the defined time interval, and is disconnected from the sub TP.

40 **[0142]** The UE autonomously sends a disconnection request to the sub TP or the main TP, and is disconnected from the sub TP after confirmation of the TP.

55 Specific embodiment 7

[0143] A sub TP reselection process in a multi-connec-

tion state includes at least one of the following operation that:

a connection with a sub TP is released, and then a connection with a new sub TP is established;

a connection with a main TP is kept, and sub TP handover is directly performed on the current sub TP; such a manner is similar to inter-cell handover under a single-connection condition in the related technology, assistance from the main TP is not required, and a process of quitting from a sub TP is not required; and

a connection with the main TP is kept, handover from the current sub TP to another sub TP is implemented under assistance of the main TP, and such a manner does not require a process of quitting from the sub TP.

Specific embodiment 8

[0144] A main TP reselection (cell handover) process in a multi-connection state includes at least one of the following operation that:

connections with all sub TPs are released, and then single-point handover is performed;

a main TP is independently handed over, and connections with sub TPs are kept;

the connections of the sub TPs are kept, and the sub TPs assist the UE in implementing handover of the main TP; and

a main TP and a sub TP are simultaneously handed over to a pair of new main TP and sub TP.

Specific embodiment 9

[0145] A centralized control node controls a main TP and a sub TP.

[0146] The control includes at least one of: main TP selection; sub TP selection; multi-connection UE selection; identification of multi-connection UE accessing a sub TP; sub TP handover for the multi-connection UE; and sub TP disconnection from the multi-connection UE.

[0147] The control further includes transmission of at least one of the following information:

information about main TP selection; information about sub TP selection; related information of the sub TP; information about multi-connection UE selection; identification information of the multi-connection UE accessing the sub TP; information about sub TP handover for the multi-connection UE; and information about sub TP disconnection from the multi-connection UE.

[0148] The main TP and/or the sub TP establish(es)

multi-connection with UE according to information transmitted by the centralized control node.

[0149] According to the embodiment, the technical solution provided by the embodiment of the disclosure implements connections between the UE and multiple TPs, and solves the problem that handover among the TPs (eNBs or BSs, terminals, cells and TPs) adopting non-ideal backhaul links cannot be performed rapidly. In addition, the disclosure may also improve network communication performance.

Additional Embodiments

[0150]

Embodiment 1. A method for wireless connection, comprising:

sending, by a main Transmission Point (TP), a connection indication to User Equipment (UE), the connection indication being used to indicate the UE to establish a connection with at least one sub TP on the premise of keeping a current connection with the main TP.

Embodiment 2. The method according to embodiment 1, further comprising:

acquiring, by the main TP, related information of the at least one sub TP, and sending relevant information of a sub TP selected according to the acquired related information of the at least one sub TP to the UE.

Embodiment 3. The method according to embodiment 2, further comprising:

acquiring, by the main TP, basic information of the at least one sub TP through the UE, and selecting the sub TP according to first predefined information, the first predefined information comprising the basic information of the at least one sub TP;

or,

acquiring, by the main TP, the related information of the at least one sub TP, and selecting the sub TP according to second predefined information, wherein the second predefined information comprises the related information of the at least one sub TP.

Embodiment 4. The method according to embodiment 2, wherein acquiring, by the main TP, the related information of the at least one sub TP comprises:

performing, by the main TP, interaction with the at least one sub TP to obtain the related infor-

mation of the at least one sub TP; or,

obtaining, by the main TP, the related information of the at least one sub TP through a centralized control node.

Embodiment 5. The method according to embodiment 1, further comprising:
receiving, by the main TP, a sub TP disconnection request sent by the UE.

Embodiment 6. The method according to any one of embodiments 1 to 5, further comprising: executing, by the main TP, one of following operations:

sending a sub TP reselection indication to the UE;

sending sub TP reselection assistance information to the UE;

sending a main TP reselection indication to the UE;

sending a sub TP disconnection indication to the UE; and

sending a confirmation of a sub TP disconnection request to the UE, wherein

the sub TP reselection indication is configured to indicate the UE to reselect a sub TP; the sub TP reselection assistance information is configured to assist the UE in sub TP reselection; the main TP reselection indication is configured to indicate the UE to reselect the main TP; the sub TP disconnection indication is configured to indicate the UE to be disconnected from a target sub TP; and the confirmation of the sub TP disconnection request is a confirmation returned by the TP after receiving the sub TP disconnection request.

Embodiment 7. A method for wireless connection, comprising:

receiving, by User Equipment (UE), a connection indication sent by a main Transmission Point (TP); and

establishing a connection with at least one sub TP according to the connection indication on the premise of keeping a connection with the main TP.

Embodiment 8. The method according to embodiment 7, further comprising:
receiving related information of the at least one sub

TP from the main TP, and establishing the connection with the at least one sub TP according to the related information of the at least one sub TP.

Embodiment 9. The method according to embodiment 7, further comprising:
measuring the at least one sub TP to acquire basic information of the at least one sub TP, and reporting the basic information to the main TP.

Embodiment 10. The method according to embodiment 7, wherein the at least one sub TP connected with the UE or the at least one sub TP measured by the UE comprise at least one of:

a sub TP designated by a centralized control node;

a sub TP designated by the main TP; and

a sub TP autonomously selected by the UE.

Embodiment 11. The method according to embodiment 7, further comprising:

receiving, by the UE, a sub TP reselection indication sent by the main TP; and

performing sub TP reselection in at least one of following manners:

keeping the connection with the main TP, quitting a connection with a current sub TP, and selecting a new sub TP for connection;

keeping the connection with the main TP, and directly performing handover at the current sub TP; and

keeping the connection with the main TP, and implementing handover from the current sub TP to another sub TP under assistance of the main TP.

Embodiment 12. The method according to embodiment 7, further comprising:

receiving, by the UE, a main TP reselection indication sent by the main TP; and

performing main TP reselection in at least one of following manners:

quitting a connection with a current sub TP, and performing main TP handover;

keeping the connection with the current sub TP, and performing main TP handover;

keeping the connection with the current sub TP to enable the current sub TP to assist the UE in main TP handover; and

performing handover simultaneously from the main TP and the current sub TP to a new pair of main TP and sub TP.

Embodiment 13. The method according to any one of embodiments 7 to 12, further comprising: executing, by the UE, one of following operations:

receiving a sub TP disconnection indication from the main TP, releasing a connection with a target sub TP, receiving a sub TP disconnection indication sent by the at least one sub TP, and releasing the connection with the target sub TP;

sending a sub TP disconnection request to the main TP or the sub TP, and releasing the connection with the target sub TP after a confirmation is made by the main TP or the sub TP; and

sending the sub TP disconnection request to the main TP or the sub TP, and releasing the connection with the target sub TP.

Embodiment 14. A method for wireless connection, comprising:
identifying, by a sub Transmission Point (TP), User Equipment (UE) which accesses the sub TP according to access information of the UE, wherein the accessing UE comprises single-connection UE and/or multi-connection UE.

Embodiment 15. The method according to embodiment 14, wherein the access information of the UE comprises at least one of:

a Cell Radio Network Temporary Identifier (C-RNTI) of the UE used in a main TP;

an identifier (ID) of a cell corresponding to the main TP;

a unique identification code of the UE;

identification information allocated by a centralized control node;

a proprietary resource of the UE;

multi-connection identification signalling of the UE; and

a C-RNTI of the UE used in the sub TP.

Embodiment 16. The method according to embodi-

ment 14, further comprising:

transmitting, by the sub TP, own related information to a main TP; and/or,
acquiring access information of the multi-connection UE, which is transmitted by the main TP.

Embodiment 17. The method according to embodiment 14, further comprising:
assisting, by the sub TP, the accessing multi-connection UE in main TP handover.

Embodiment 18. The method according to any one of embodiments 14 to 17, further comprising: executing, by the sub TP, one of following operations:

sending a sub TP disconnection indication to the multi-connection UE, the sub TP disconnection indication being used to indicate the multi-connection UE to be disconnected from a designated sub TP;

receiving a sub TP disconnection request of the multi-connection UE, and returning a confirmation; and

receiving the sub TP disconnection request of the multi-connection UE.

Embodiment 19. A method for wireless connection, comprising:
performing, by a centralized control node, multi-connection control on a main Transmission Point (TP) and a sub TP.

Embodiment 20. The method according to embodiment 19, wherein the multi-connection control comprises control over at least one of:
main TP selection; sub TP selection; multi-connection UE selection; identification of multi-connection User Equipment (UE) accessing the sub TP; sub TP handover for the multi-connection UE; and sub TP disconnection from the multi-connection UE.

Embodiment 21. The method according to embodiment 19 or 20, wherein the multi-connection control comprises: control over transmission of at least one of following information:
information about main TP selection; information about sub TP selection; related information of the sub TP; information about multi-connection UE selection; identification information of the multi-connection UE accessing the sub TP; information about sub TP handover for the multi-connection UE; and information about sub TP disconnection from the multi-connection UE.

Embodiment 22. A Transmission Point (TP), comprising:
a sending unit, configured to send a connection in-

dication to User Equipment (UE), the connection indication being used to indicate the UE to establish a connection with at least one sub TP on the premise of keeping a current connection with the main TP.

Embodiment 23. The TP according to embodiment 22, further comprising: an acquisition unit, configured to acquire related information of the at least one sub TP, wherein the sending unit is further configured to send relevant information of a sub TP selected from the acquired related information of the at least one sub TP to the UE.

Embodiment 24. The TP according to embodiment 22, further comprising a selection unit, configured to acquire basic information of the at least one sub TP through the UE, and select the sub TP according to predefined information, the predefined information comprising the basic information of the at least one sub TP; or, select a sub TP according to predefined information, wherein the predefined information comprises the related information of the at least one sub TP, which is acquired by the acquisition unit.

Embodiment 25. The TP according to embodiment 23, wherein the acquisition unit is further configured to interact with the at least one sub TP to obtain the related information of the at least one sub TP; or, obtain the related information of the at least one sub TP through a centralized control node.

Embodiment 26. The TP according to embodiment 22, further comprising a receiving unit, configured to receive a sub TP disconnection request sent by the UE.

Embodiment 27. The TP according to any one of embodiments 22 to 26, wherein the sending unit is further configured to execute one of following operations:

sending a sub TP reselection indication to the UE;
sending sub TP reselection assistance information to the UE;
sending a main TP reselection indication to the UE;
sending a sub TP disconnection indication to the UE; and
sending a confirmation of a sub TP disconnection request to the UE, wherein the sub TP reselection indication is configured to indicate the UE to reselect a sub TP; the sub TP reselection assistance information is configured to assist the UE in performing sub TP reselection; the main TP reselection indication is

configured to indicate the UE to reselect the main TP; the sub TP disconnection indication is configured to indicate the UE to be disconnected from a target sub TP; and the confirmation of the sub TP disconnection request is a confirmation returned by the TP after receiving the sub TP disconnection request.

Embodiment 28. User Equipment (UE), comprising:

a receiving unit, configured to receive a connection indication sent by a main Transmission Point (TP); and

a connection unit, configured to establish a connection with at least one sub TP according to the connection indication on the premise of keeping a connection with the main TP.

Embodiment 29. The UE according to embodiment 28, wherein the receiving unit is further configured to receive related information of the at least one sub TP from the main TP; and the connection unit is configured to establish the connection with the at least one sub TP according to the related information of the at least one sub TP.

Embodiment 30. The UE according to embodiment 28, further comprising: a measurement unit, configured to measure the at least one sub TP to acquire basic information of the at least one sub TP, and report the basic information to the main TP.

Embodiment 31. The UE according to embodiment 28, wherein the at least one sub TP connected with the UE or the at least one sub TP measured by the UE comprise at least one of:

a sub TP designated by a centralized control node;

a sub TP designated by the main TP; and

a sub TP autonomously selected by the UE.

Embodiment 32. The UE according to embodiment 28, wherein the receiving unit is further configured to receive a sub TP reselection indication sent by the main TP; the UE further comprises a sub TP reselection unit, configured to perform sub TP reselection in at least one of following manners:

keeping the connection with the main TP, quitting a connection with a current sub TP, and selecting a new sub TP for connection;

keeping the connection with the main TP, and directly performing sub TP handover on the current sub TP; and

keeping the connection with the main TP, and implementing handover from the current sub TP to another sub TP under assistance of the main TP. 5

Embodiment 33. The UE according to embodiment 28, wherein the receiving unit is further configured to receive a main TP reselection indication sent by the main TP; the UE further comprises a main TP reselection unit, configured to perform main TP reselection in at least one of following manners: 10

quitting a connection with a current sub TP, and performing main TP handover; 15

keeping the connection with the current sub TP, and performing main TP handover; 20

keeping the connection with the current sub TP to enable the current sub TP to assist the UE in main TP handover; and 25

performing handover simultaneously from the main TP and the current sub TP to a new pair of main TP and sub TP. 30

Embodiment 34. The UE according to any one of embodiments 28 to 33, further comprising a triggering unit, a disconnection unit and a sending unit, wherein the triggering unit is configured to trigger the receiving unit to receive a sub TP disconnection indication from the main TP and receive a sub TP disconnection indication from the sub TP, and trigger the disconnection unit to release the connection with the target sub TP according to the indications received by the receiving unit; 35

the triggering unit is further configured to trigger the sending unit to send a sub TP disconnection request to the main TP or the sub TP, and trigger the disconnection unit to release the connection with the target sub TP after the receiving unit receives a confirmation from the main TP or the sub TP; and 40

the triggering unit is further configured to trigger the sending unit to send the sub TP disconnection request to the main TP or the sub TP, and trigger the disconnection unit to directly release the connection with the target sub TP. 45 50

Embodiment 35. A Transmission Point (TP), comprising: 55

a storage unit, configured to store access infor-

mation of User Equipment (UE) which accesses the TP; and

an identification unit, configured to identify the UE according to the access information of the UE, wherein the UE comprises single-connection UE and/or multi-connection UE.

Embodiment 36. The TP according to embodiment 35, wherein the access information of the UE comprises at least one of:

a Cell Radio Network Temporary Identifier (C-RNTI) of the UE used in a main TP;

an Identifier (ID) of a cell corresponding to the main TP;

a unique identification code of the UE;

identification information allocated by a centralized control node;

a proprietary resource of the UE;

multi-connection identification signalling of the UE; and

a C-RNTI of the UE used in the sub TP.

Embodiment 37. The TP according to embodiment 35, further comprising: an information processing unit, configured to transmit related information of the TP to the main TP, and/or, acquire access information, transmitted by the main TP, of the multi-connection UE.

Embodiment 38. The TP according to embodiment 35, further comprising: an assistance unit, configured to assist the multi-connection UE in main TP handover.

Embodiment 39. The TP according to any one of embodiments 35 to 38, wherein the information processing unit is further configured to execute one of following operations:

sending a sub TP disconnection indication to the multi-connection UE, the sub TP disconnection indication being used to indicate the multi-connection UE to be disconnected from a designated sub TP;

receiving a sub TP disconnection request of the multi-connection UE, and returning a confirmation; and

receiving the sub TP disconnection request of

the multi-connection UE.

Embodiment 40. A node, comprising a control unit, configured to perform multi-connection control on a main Transmission Point (TP) and a sub TP.

Embodiment 41. The node according to embodiment 40, wherein the control unit is configured to control at least one of:

main TP selection; sub TP selection; multi-connection UE selection; identification of multi-connection User Equipment (UE) accessing the sub TP; sub TP handover for the multi-connection UE; and sub TP disconnection from the multi-connection UE.

Embodiment 42. The node according to embodiment 40 or 41, wherein the control unit is configured to control transmission of at least one of following information:

information about main TP selection; information about sub TP selection; related information of the sub TP; information about multi-connection UE selection; identification information of the multi-connection UE accessing the sub TP; information about sub TP handover for the multi-connection UE; and information about sub TP disconnection from the multi-connection UE.

Embodiment 43. A computer storage medium, in which a computer-executable instruction is stored, the computer-executable instruction being configured to execute the method for wireless connection according to any one of embodiments 7 to 13.

Embodiment 44. A computer storage medium, in which a computer-executable instruction is stored, the computer-executable instruction being configured to execute the method for wireless connection according to any one of embodiments 7 to 13.

Embodiment 45. A computer storage medium, in which a computer-executable instruction is stored, the computer-executable instruction being configured to execute the method for wireless connection according to any one of embodiments 14 to 18.

Embodiment 46. A computer storage medium, in which a computer-executable instruction is stored, the computer-executable instruction being configured to execute the method for wireless connection according to any one of embodiments 19 to 21.

[0151] In the embodiments provided by the disclosure, it should be understood that the system, device and method may be implemented in other manners. For example, the device embodiment described above are only schematic, for example, the modules or units are divided logically. In practice, other division manners may also be

adopted, for example, multiple units or components may be combined or integrated into another system, or some characteristics may be ignored, or may be not executed. From another point, coupling or direct coupling or communication connection, as displayed or discussed, may be implemented through interfaces; indirect coupling or communication connection between devices or between units may be electrical, mechanical or the like.

[0152] The units described as separate components may be or may be not physically separated, and components displayed as units may be or may be not physical units, namely, the components may be located in the same place, or may also be distributed to multiple network units. A part or all of units may be selected to implement the solutions of the embodiments according to a practical requirement.

[0153] In addition, each function unit in each embodiment of the disclosure may be integrated into one processing unit, or may also exist independently and physically, or two or more than two units may also be integrated into one unit. The integrated units may be implemented by hardware, or may also be implemented by software function units.

[0154] The integrated units, when implemented in form of software function unit and sold or used as independent products, may be stored in a computer-readable storage medium. Based on such understanding, the technical solutions of the disclosure substantially or the parts making contributions to a conventional art or all or part of the technical solutions may be embodied in form of software product, and the computer software product is stored in a storage medium, including a plurality of instructions configured to enable a computer device (which may be a personal computer, server, network device or the like) or a processor to execute all or part of steps of the method of each embodiment of the disclosure. The storage medium includes: various media capable of storing program codes such as a U disk, a mobile hard disk, a Read-Only Memory (ROM), a Random Access Memory (RAM), a magnetic disk, or a compact disc.

[0155] The above are only the specific implementation modes of the disclosure and not intended to limit the scope of protection of the disclosure. Any variations or replacements apparent to those skilled in the art within the technical scope of the disclosure shall fall within the scope of protection of the disclosure. Therefore, the scope of protection of the disclosure shall be subjected to the scope of protection of the claims.

Claims

1. A method for wireless connection, **characterized in that** the method comprises:

sending, by a main Transmission Point, TP, a connection indication to User Equipment, UE, the connection indication being used to indicate

- the UE to establish a connection with at least one sub TP on the premise of keeping a current connection with the main TP (101);
the method further comprising: acquiring, by the main TP, related information of the at least one sub TP; acquiring, by the main TP, basic information of the at least one sub TP through the UE, and sending the related information of the at least one sub TP to the UE, wherein the related information is sent to the UE together with the connection indication.
2. The method according to claim 1, wherein the basic information includes downlink measurement of the UE.
3. The method according to claim 1 or 2, wherein acquiring, by the main TP, the related information of the at least one sub TP comprises:
performing, by the main TP, interaction with the at least one sub TP to obtain the related information of the at least one sub TP.
4. The method according to any one of claims 1 to 3, further comprising:
receiving, by the main TP, a sub TP disconnection request sent by the UE.
5. A computer storage medium, in which computer-executable instructions are stored, the computer-executable instructions being configured to execute the method of any one of claims 1 to 4.
6. A method for wireless connection, **characterized in that** the method comprises:

receiving, by User Equipment, UE, a connection indication sent by a main Transmission Point, TP, (201);
measuring at least one sub TP to acquire basic information of the at least one sub TP, and reporting the basic information to the main TP;
receiving related information of the at least one sub TP from the main TP; and
establishing a connection with the at least one sub TP according to the related information of the at least one sub TP and the connection indication on the premise of keeping a connection with the main TP (202), wherein the related information is received by the UE together with the connection indication.
7. The method according to claim 6, wherein the basic information includes downlink measurement of the UE.
8. The method according to claim 6 or 7, wherein the at least one sub TP connected with the UE or the at least one sub TP measured by the UE comprise at least one of:

a sub TP designated by the main TP; and
a sub TP autonomously selected by the UE.
9. The method according to any one of claims 6 to 8, further comprising:
executing, by the UE, the following operation:
sending a sub TP disconnection request to the main TP or the sub TP.
10. A computer storage medium, in which computer-executable instructions are stored, the computer-executable instructions being configured to execute the method of any one of claims 6 to 9.

Fig. 1

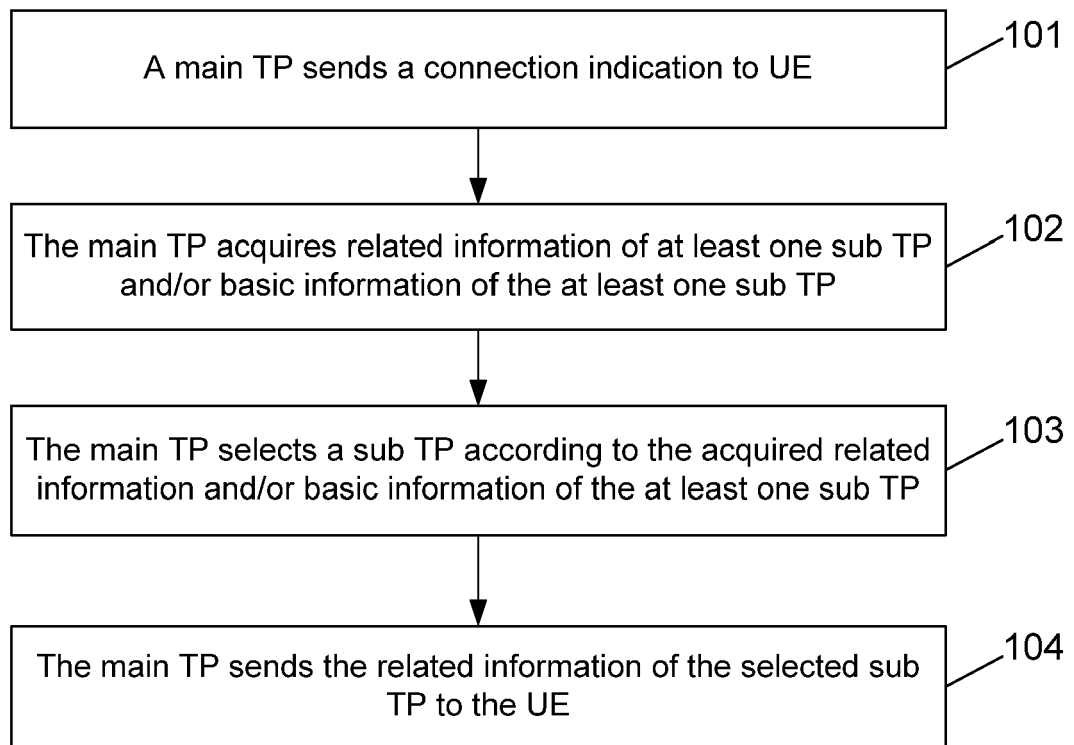


Fig. 2

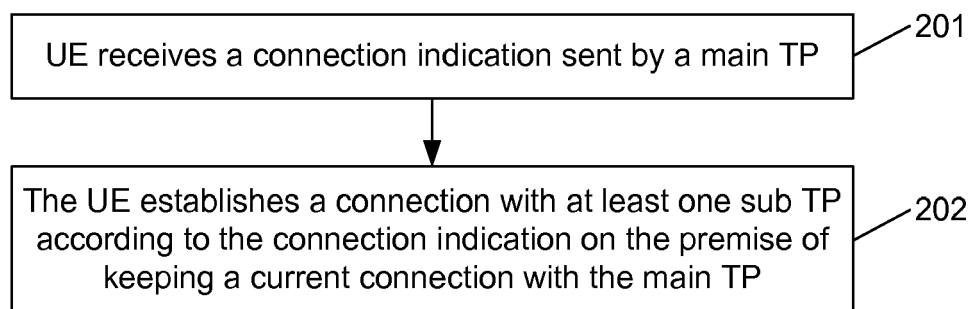


Fig. 3

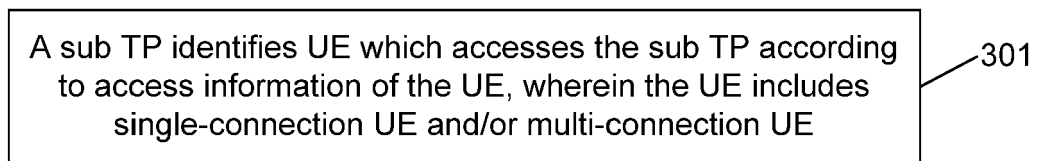


Fig. 4




Fig. 5

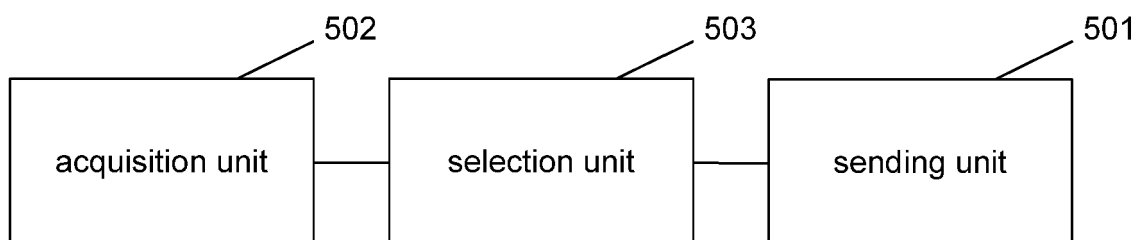


Fig. 6


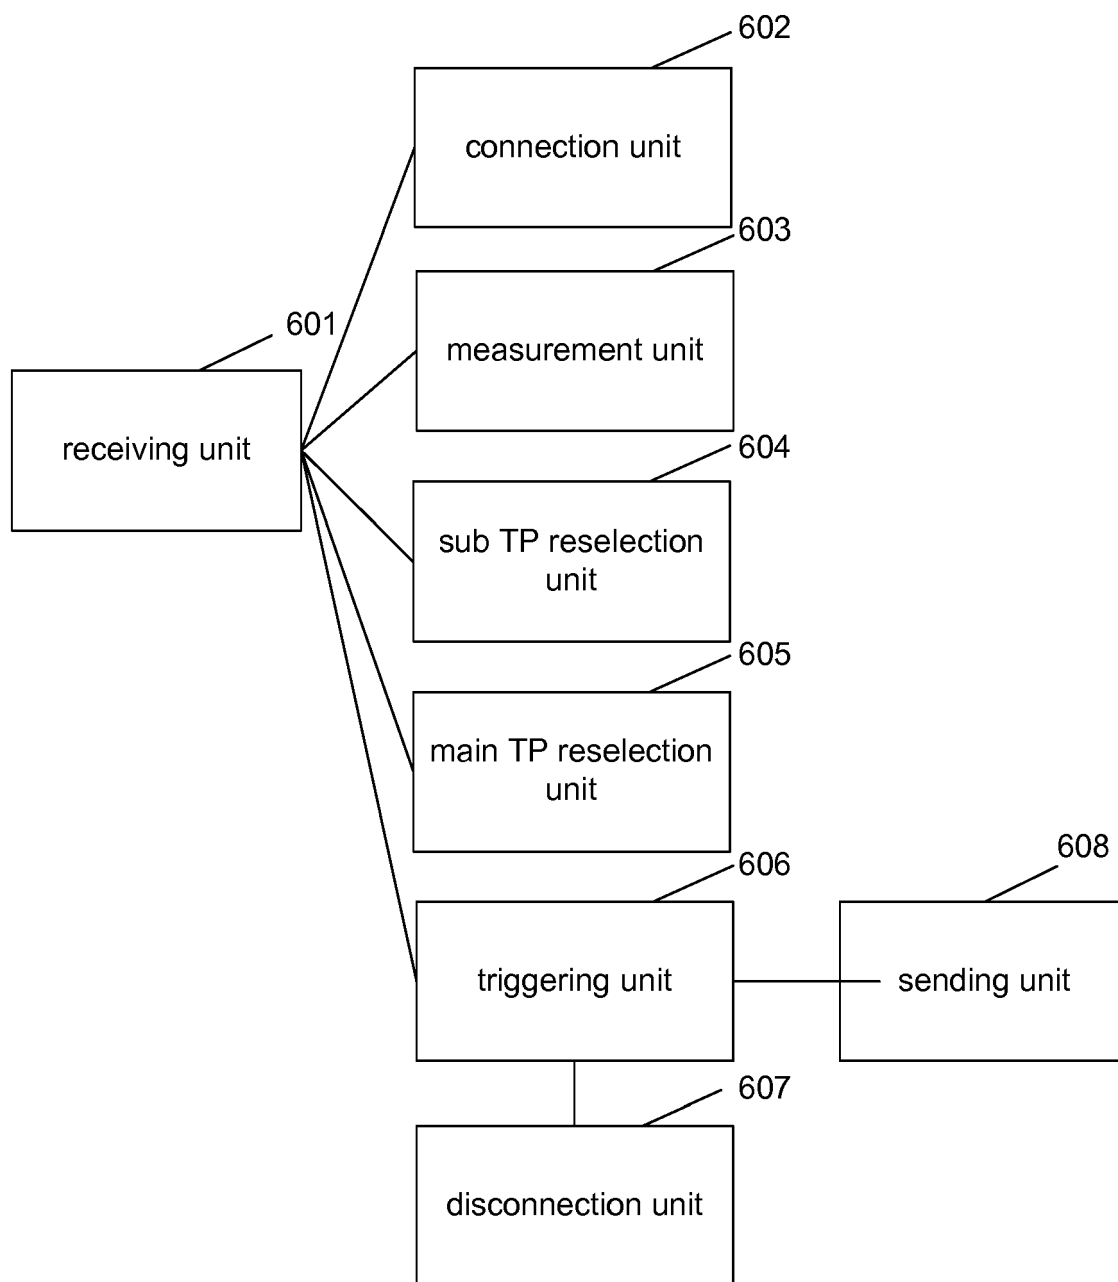


Fig. 7



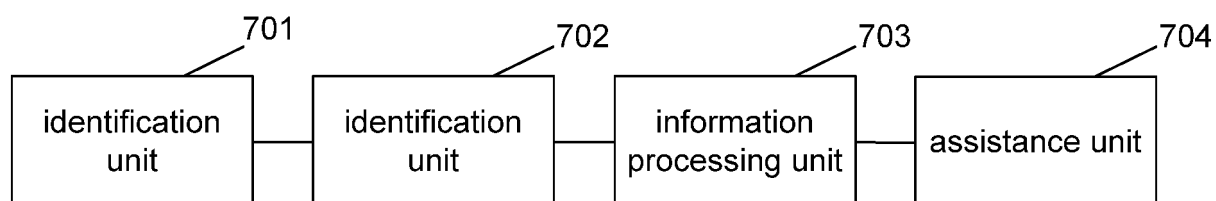

EUROPEAN SEARCH REPORT

Application Number
EP 19 15 7893

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	WO 2008/008964 A2 (QUALCOMM INC [US]; LAROKA RAJIV [US]; DAS ARNAB [US]; SRINIVASAN MURAR) 17 January 2008 (2008-01-17) * paragraph [0007] - paragraph [0008] * * paragraph [0035] - paragraph [0040] * * paragraph [0044] - paragraph [0047] * * paragraph [0059] - paragraph [0061] * -----	1-10	INV. H04W76/15 ADD. H04W76/30
A	WO 2013/010005 A1 (INTERDIGITAL PATENT HOLDINGS [US]; ADJAKPLE PASCAL M [US]; OLVERA-HERN) 17 January 2013 (2013-01-17) * paragraph [0084] - paragraph [0092] * * paragraph [0099] - paragraph [0115] * * paragraph [0122] - paragraph [0123] * * paragraph [0128] * -----	1-10	
A	BROADCOM CORPORATION: "Some feasible scenarios for small cells with dual connectivity", 3GPP DRAFT; R2-130563 SOME FEASIBLE SCENARIOS FOR SMALL CELLS WITH DUAL CONNECTIVITY, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANT , vol. RAN WG2, no. St. Julian; 20130128 - 20130201 19 January 2013 (2013-01-19), XP050668400, Retrieved from the Internet: URL: http://www.3gpp.org/ftp/tsg_ran/WG2_RL2/TSGR2_81/Docs/[retrieved on 2013-01-19] * the whole document * -----	1-10	TECHNICAL FIELDS SEARCHED (IPC) H04W
The present search report has been drawn up for all claims			
Place of search Berlin		Date of completion of the search 12 August 2019	Examiner Rothlübbers, C
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 19 15 7893

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-08-2019

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2008008964 A2	17-01-2008	CN 101502019 A	05-08-2009
		EP 2052466 A2	29-04-2009
		EP 2595446 A1	22-05-2013
		JP 5118137 B2	16-01-2013
		JP 5738810 B2	24-06-2015
		JP 2009544243 A	10-12-2009
		JP 2013017196 A	24-01-2013
		KR 20090045240 A	07-05-2009
		KR 20110026533 A	15-03-2011
		TW 200818935 A	16-04-2008
		TW 201210390 A	01-03-2012
		US 2008014991 A1	17-01-2008
		US 2011122821 A1	26-05-2011
		US 2014233449 A1	21-08-2014
		WO 2008008964 A2	17-01-2008

WO 2013010005 A1	17-01-2013	CN 103650626 A	19-03-2014
		CN 108463005 A	28-08-2018
		EP 2732672 A1	21-05-2014
		EP 3282762 A1	14-02-2018
		JP 2014521267 A	25-08-2014
		KR 20140050659 A	29-04-2014
		KR 20190015606 A	13-02-2019
		NO 2732672 T3	21-04-2018
		TW 201308958 A	16-02-2013
		US 2013016696 A1	17-01-2013
		US 2017332272 A1	16-11-2017
		WO 2013010005 A1	17-01-2013
