



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
23.10.2019 Bulletin 2019/43

(51) Int Cl.:
B66C 13/04 (2006.01) **B66C 13/18** (2006.01)
B66C 13/40 (2006.01) **B66C 13/46** (2006.01)
B66C 23/00 (2006.01)

(21) Application number: **19150837.3**

(22) Date of filing: **08.01.2019**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(72) Inventors:
• **Maffei, Ivan**
24021 Albino (BG) (IT)
• **Biolini, Valentino**
24020 Cene (BG) (IT)
• **Signori, Roberto**
24021 Albino (BG) (IT)
• **Ceresoli, Rossano**
24020 Ranica (BG) (IT)

(30) Priority: **19.04.2018 IT 201800004719**

(71) Applicant: **FASSI GRU S.p.A.**
24021 Albino, BG (IT)

(74) Representative: **Gregorj S.r.l.**
Via L. Muratori, 13/b
20135 Milano (IT)

(54) **SYSTEM FOR AUTOMATICALLY MOVING AN ARTICULATED ARM, PARTICULARLY OF A LOADING CRANE**

(57) The present invention refers to a system for automatically moving an articulated arm (101). The system comprises a plurality of sensors associated to the bodies of the articulated arm, adapted to enable to determine the absolute coordinates of the end-effector (105), and a control unit configured to perform a step of storing a movement of the end-effector (105) and a step of auto-

atically re-performing the stored movement of the end-effector (105). During the storing step, in a plurality of sampling instants, the absolute coordinates of the end-effector (105) and the actuators used for moving the end-effector (105) between two following absolute coordinates, are stored.

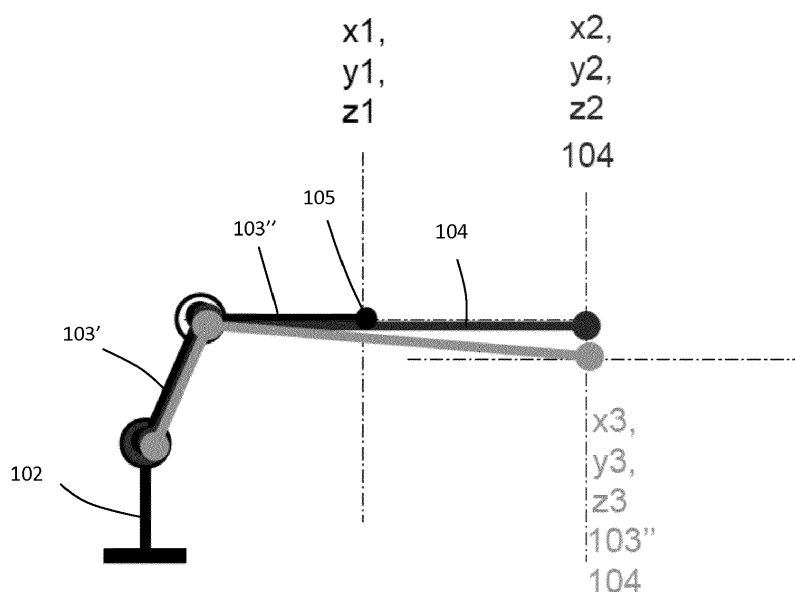


FIG. 2

Description

Technical field of the invention

[0001] The present invention refers to a system for automatically moving an articulated arm, particularly of an articulated crane. The term "articulated arm" means a system provided with a plurality of bodies, consecutively connected to each other, capable of forming an open kinematic chain with a plurality of translative and/or rotative degrees of freedom in the space.

Prior art

[0002] Systems enabling other systems having plural degrees of freedom, to perform previously stored movements, are known. Such systems provide to manually perform a desired movement, store it and then automatically re-perform it. Such mode is particularly useful when identical movements must be cyclically repeated (consider for example the transport of items from a first area to a second area in a yard, in an industrial area, or similar).

[0003] Overhead cranes are often used in a yard for example. An overhead crane comprises a U-inverted frame movable along a track (first degree of freedom), and a trolley transversally movable along the frame (second degree of freedom). Therefore, the absolute position of the trolley depends on the absolute position of the frame and on the position of the trolley with reference to the frame. The absolute position of the trolley is matched by only one configuration of the overhead crane and consequently it can be simply registered and reproduced a sequence of movements.

[0004] With reference to complex articulated arms, for example in the presence of an articulated crane, the position of an end-effector of the crane can be obtained by different configurations of the crane itself. Therefore, simply registering a manual movement and repeating it do not cause the end-effector to follow the same movements. Indeed, if in the start position the crane has a configuration different from the one it had in a step of storing the movement of the end-effector, just simply repeating the movements performed in the storing step will not enable the end-effector to reach the same stored final position.

[0005] Systems according to the known art are described in documents JP 2001 130892 A, EP 2 725 183 A1, JP H10 219731 A and JP 2000 355957 A.

Summary of the invention

[0006] Therefore, it is an object of the present invention to provide a system for automatically moving an articulated arm, particularly of an articulated crane, having a plurality of degrees of freedom, wherein particularly the same absolute position of the end-effector can be obtained by plural configurations of the articulated arm itself.

[0007] This and other objects are obtained by a system for automatically moving an articulated arm according to claim 1.

[0008] The dependent claims define possible advantageous embodiments of the invention.

Brief description of the figures

[0009] For better understanding the invention and appreciating the advantages, some exemplifying non-limiting embodiments thereof will be described in the following with reference to the attached figures, wherein:

Figure 1 is a side view of an articulated crane;

Figure 2 is a schematic illustration of an example of the steps of storing the movements of an articulated arm, based on the invention;

Figure 3 is a schematic illustration of an example of the steps of re-performing the movements of the articulated arm, based on the invention;

Figure 4 is a schematic illustration of a further example of the steps of re-performing the movements of the articulated arm, based on the invention;

Figure 5 is a schematic illustration of a further example of the steps of re-performing the movements of the articulated arm, based on the invention;

Figure 6 is a schematic illustration of a further example of the steps of re-performing the movements of the articulated arm, based on the invention.

Detailed description of the invention

[0010] The present description will illustratively refer to an articulated crane. However, the present invention finds an application in the movements of articulated arms of other types, such as for example robotic arms, or aerial work platforms (PLE).

[0011] Referring to the attached Figure 1, it shows an example of a possible articulated arm, particularly an articulated crane, for example a hydraulic loading crane (commonly known as "loader crane"), generally indicated by the reference 101.

[0012] The crane 101 comprises a column 102 pivoting about its axis, and one or more possibly extendable arms 103', 103". The possibility of extending the arms, if provided, is obtained by a plurality of extensions 104 reciprocally translatingly movable in order to modify the axial length of a respective arm. In the example of Figure 1, only the second arm 103" is extendable by moving the extensions 104. In the following description, the first arm 103', devoid of extensions, will be indicated by the term "main arm", while the second arm 103", provided with the extensions 104, will be indicated by the term "secondary arm". The free end 105 of the last extension of the secondary arm 103" is commonly known as end-effector. A hook 106 movable for example by a rope winch 107 can be provided at the end-effector 105.

[0013] For sake of simplicity, it is illustratively assumed

the presence of only one extension 104, neglecting the movements of the hooks 106, so that the crane 101 has the following degrees of freedom:

- 1) rotation of the column 102 about its axis;
- 2) rotation of the main arm 103' with respect to the column 102 about an axis perpendicular to the plane on which the column 102 and main arm 103' lie;
- 3) rotation of the secondary arm 103" with respect to the main arm 103' about an axis perpendicular to the plane on which the main arm 103' and secondary arm 103" lie;
- 4) translation of the extension 4 with respect to the secondary arm 103".

[0014] The above described crane therefore provides an open kinematic chain, having a plurality of sequentially connected bodies (column, main arm, secondary arm, extensions) and a free end (end-effector).

[0015] The above cited degrees of freedom are matched by the movement of an element of the articulated arm with respect to another one (degrees of freedom 2, 3, 4) or with respect to a reference (degree of freedom 1). In order to perform such movements, the crane 101 comprises a plurality of actuators, at least one actuator corresponding to a specific degree of freedom. With reference to Figure 1, a first hydraulic jack 108, moving the main arm 103' with respect to the column 102, a second hydraulic jack 109, moving the secondary arm 103" with respect to the main arm 103', and an actuator 110 moving the column 102 with respect to a stationary reference, are shown. Obviously, further actuators (not shown in the figures), for example of a hydraulic-type, for moving the extensions 104, are present. Obviously, even though the actuators of the cranes are normally of a hydraulic-type, generally it is possible to provide actuators of a different kind (electric or pneumatic, for example) in the articulated arms.

[0016] The crane 101 comprises a plurality of sensors capable of enabling to determine the absolute coordinates of the end-effector 105, particularly the Cartesian coordinates thereof. For example, it is assumed that the origin of a Cartesian coordinate system, coincides with the base of the column 102, so that the absolute coordinates of the end-effector 105 are expressible by three values: x, y, z.

[0017] According to a possible embodiment, with reference to the crane 101, the plurality of sensors can include, for example:

- 1) an angular sensor for measuring the rotation of the column 102 about its axis;
- 2) an angular sensor for measuring the rotation of the main arm 103'. This measured rotation can be absolute, in other words referred to a stationary reference such as the horizontal, or can be a relative rotation, with respect to the column 102;
- 3) an angular sensor for measuring the rotation of

the secondary arm 103". This measured rotation can be absolute, in other words referred to a stationary reference such as the horizontal, or can be a relative rotation, with respect to the main arm 103';

- 4) a linear sensor for measuring the translation of the extension 104 with reference to the secondary arm 103".

[0018] For example, the sensors can include linear or angular encoders, inclinometers, magnetostrictive position sensors or similar. From the signals output by the above cited sensors, it is possible to determine, by geometrical relationships, the absolute coordinates of the end-effector 105.

[0019] The crane 101 comprises a control unit operatively connected to the actuators, for moving them, and to the sensors, for receiving signals indicative of the above cited magnitudes. Moreover, the control unit comprises a memory module, the operation thereof will be explained in the following.

[0020] In addition, it is provided a user interface device connected to the control unit for enabling an operator to manually move the crane and, possibly, to gain access to other functions. For example, the user interface device can comprise a remote control and the control unit can comprise a transmission module for communicating with this latter (a radio transmission module, for example). The operator, by acting on a joystick of the remote control for example, can visually move the end-effector 105 among subsequent positions. As said in the introductory part, since a position of the end-effector 105 can generally correspond to more than one configuration of the crane, also the movements of the end-effector 105 can be performed in different ways, in other words by sequentially moving several actuators. Consequently, predefined operative logics are generally provided, by which, based on a desired determined movement of the end-effector, corresponding actuators are selected to be operated for obtaining this movement.

[0021] Therefore, the control unit is configured so that, upon a movement instruction of the end-effector received from the user interface device, such movement is obtained as a function of a predetermined logic for actuating the actuators. For example, the actuating logics can be one for minimizing the oil flow rate required for actuating the actuators or can be one for minimizing the energy used for moving them. A further logic can be one of the minimum distance travelled by the end-effector for reaching the desired position. A further criterion, often used for example in combination with one of the above listed ones, consists of maintaining the actuators away from the stop position. The predetermined operative logics are per se known and therefore will not be specifically described.

[0022] Alternatively, the operator can decide which actuators to move: only one or more than one at a time, and consequently can obtain the desired movement of the end-effector.

[0023] By a system configured in this way, it is possible to store a sequence of movements manually imparted by the user interface device, and then automatically repeat the same by modes which will be described in the following.

[0024] The control unit is particularly configured to perform a step of storing a movement of the end-effector 105, comprising:

- receiving instructions of moving the end-effector 105 by the user interface device;
- actuating the actuators so that the end-effector 105 performs a sequence of movements corresponding to the movement instructions. The actuators can be moved based on a predetermined logic (for example for minimizing the flow rate or minimum travelled distance), or the operator himself/herself directly moves certain actuators, by the user interface device, so that the end-effector 105 performs determined movements in the space;
- sensing, during the movement, at a plurality of consecutive sampling instants spaced from each other by a sampling time, the signals from the sensors. The sampling time can be predefined or alternatively can be set by the operator. Preferably, the sampling time is less than one second, still more preferably is in the order of a one tenth of a second;
- determining the absolute coordinates of the end-effector 105 at each sampling instant based on the signals from the sensors;
- storing in the memory module the absolute coordinates of the end-effector 105 determined at each sampling instant, and the actuators used for moving the end-effector 105 between each determined absolute coordinate and the absolute coordinate determined at the following sampling instant. It is observed that, in this step, with reference to the signals from the sensors, just the absolute coordinates of the end-effector are stored, and it is not required to store the configuration of the crane, also obtainable from the signals of the sensors. Moreover, with reference to the actuators, the memory stores only the used actuators, and it is not required to store neither the movement direction, nor the (angular or linear) travelled distance of the actuators themselves.

[0025] Consequently, the real trajectory followed by the end-effector 105, based on the manual instructions of the operator, is divided in a plurality of discrete points, each corresponding to a sampling instant, and further the actuators used in the trajectory segments defined by said following points, are stored.

[0026] Based on such stored information, therefore the control unit can act on the actuators in order to re-perform the stored movement, particularly by automatically moving the crane in the following way.

[0027] Particularly, the command unit is configured to

implement a step of re-performing the movement stored upon an instruction of automatically re-performing the stored movement. For example, such step can be started by the operator by the user interface device.

[0028] Such step of re-performing the stored movement provides to divide the re-performing step into a plurality of partial re-performing periods, each delimited by two consecutive re-performing instants distanced by a re-performing partial time, which, according to a possible embodiment, is equal to the sampling time. Alternatively, the partial re-performing time could be different from the sampling time (it could be selectable by the operator, for example) and in this case the duration of the re-performing step will be different from the duration of the storing step. The re-performing step comprises, during each partial re-performing period:

- sensing, at the initial re-performing instant, the signals from the sensors;
- determining the effective absolute coordinates of the end-effector 105 and the configuration of the articulated arm based on the signals from the sensors. It is observed that, as opposed to the storing step, the step of re-performing the configuration of the articulated arm, is monitored. For example, with reference to Figure 1, it is possible to determine if the secondary arm 103" and main arm 103' are aligned to each other or if they form a determined relative angle;
- comparing the effective absolute coordinates of the end-effector 105 with the absolute coordinates of the end-effector 105 stored in each of the sampling instant. Preferably, such step is performed with a determined tolerance, in other words the effective absolute coordinates are considered equal to the stored absolute coordinates if the effective absolute coordinates are equal to the stored absolute coordinates plus or minus a determined dimensional tolerance;
- if the effective absolute coordinates of the end-effector 105 are equal (preferably plus or minus the above given tolerance) to one of the absolute coordinates of the end-effector stored during one of the sampling instants, actuating the stored actuators for moving the end-effector 105 towards the absolute coordinate stored at the following sampling instant. If the crane has the same configuration which it had in the corresponding position of the end-effector during the storing step, this passage is sufficient to reach the absolute coordinate stored at the following sampling instant;
- if it is determined based on the configuration of the crane that the end-effector 105 is not capable of reaching the absolute coordinate stored at the following sampling instant, preferably further actuating one or more additional actuators according to a predetermined operative logic. Such condition can also happen if, despite the absolute coordinate corresponds to the stored one, the crane has a different

configuration. In this case, further movements will be required for reaching the absolute coordinate stored at the following sampling instant.

[0029] On the contrary, if the effective absolute coordinates of the end-effector 105 are not equal to one of the absolute coordinates of the end-effector, stored at one of the sampling instants, two different conditions can occur: the end-effector 105 lies along the stored trajectory, or the end-effector 105 lies outside the stored trajectory. Advantageously, the control unit is therefore configured to:

- determine the whole stored trajectory of the end-effector. This can be obtained for example as a polygonal chain joining the different stored absolute coordinates of the end-effector or by a (polynomial for example) interpolation of the same.
- If the effective absolute coordinate of the end-effector 105 lies in a segment of the trajectory comprised between a first and second absolute coordinates stored between two following sampling instants, actuate the stored actuators for moving the end-effector 105 between said two absolute coordinates stored between two following sampling instants;
- if the end-effector 105 is determined as not capable of reaching the second stored absolute coordinate based on the configuration of the crane, actuate one or more additional actuators according to a predetermined operative logic.

[0030] If the effective absolute coordinate of the end-effector 105 lies outside the stored trajectory, advantageously the control unit is configured to:

- calculate the point of the stored trajectory nearest to the effective absolute coordinate of the end-effector;
- actuate the actuators according to a predetermined operative logic for moving the end-effector to such point. Such nearest point can be both a beforehand stored point, and a not stored point being anyway comprised between two following stored points. According to one of the two conditions, it is therefore implemented one of the abovementioned modes.

[0031] Advantageously, the movements of the end-effector 105 between two following points, for example between two points whose absolute coordinates were stored, are performed preferably by a closed-loop control of the position of the end-effector (according to the logics P, PI, PD, PI, PID, for example), wherein the reference is the trajectory of the end-effector. For example, if the two desired end points are known, the reference trajectory between these points can be set equal to the segment joining such points.

[0032] From what discussed above it is assumed that the movement is re-performed during the same time used for the storing step.

[0033] However, it is also possible to re-perform the stored trajectory at a different speed, in other words so that the end-effector performs such stored trajectory in a re-performing total time greater or less than the total stored time (given by the summation of the sampling times).

[0034] Therefore, the control unit is advantageously configured to receive, as an input parameter, a total desired re-performing time. Such parameter can be supplied to the control unit by the user interface device, for example.

[0035] Particularly, the control unit is configured to:

- determine the stored trajectory of the end-effector. This step can be performed according to what was previously discussed;
- calculate on the stored trajectory, the equivalent absolute coordinates of the end-effector, corresponding to the absolute coordinates of the end-effector which were sensed during the movement storing step if the end-effector had performed the estimated trajectory in the desired re-performing total time;
- set the stored absolute coordinates of the end-effector equal to said equivalent absolute coordinates.

[0036] Consequently, the stored coordinates are effectively manipulated so that they are substituted with new equivalent coordinates which take into account that the movement re-performing step is done at a speed different from the speed of the storing step.

[0037] At this point, it is required to distinguish the case wherein the desired speed during the performing step is greater or less than the speed of the storing step.

[0038] Advantageously, the control unit is configured to:

- if the total desired re-performing time is greater than the total sampling time (in other words, if it is desired to decrease the performing speed), store, for each equivalent absolute coordinate, the actuators stored in the segment of the trajectory along which the equivalent absolute coordinate lies. Consequently, each equivalent absolute coordinate is matched by the actuators to be used (if the crane configuration enables that) during the re-performing step, which are the same ones stored for the trajectory segment along which the equivalent absolute coordinates lie. Therefore, it is possible to implement what was previously described;
- if the total desired performing time is less than the total sampling time (in other words if it is desired to increase the speed), store for each equivalent absolute coordinate the actuators used along the segment of the trajectory along which the equivalent absolute coordinate lies and along all the previous segments. In other words, since the speed increases, between two following equivalent absolute coordinates, additional segments of the stored trajectory

can be included. So, the actuators stored for each equivalent absolute coordinate will be those stored for all the segments included between it and the previous equivalent absolute coordinate. Then, again, the following will be the same as previously described.

[0039] Some operative examples will be given for further explaining what was hereinbefore discussed.

[0040] Figure 2 illustrates the steps of storing a possible trajectory of an articulated arm. Particularly, the figure schematically shows the articulated arm having the column 102, the main arm 103', the secondary arm 103", and a single extension 104, terminating with the end-effector 105. The initial position of the end-effector 105 is indicated by the coordinates x_1, y_1, z_1 . The stored movements are the following:

- the elapse of the sampling time, from the position x_1, y_1, z_1 (initial position) to the position x_2, y_2, z_2 . The absolute coordinates of both positions are stored. Based on the predetermined operative logic, for example, consisting of minimizing the oil flow rate, or based on a decision of the operator, the second position is reached by projecting the extension 104, which entails the actuation of a corresponding actuator, which is also stored (therefore Figure 2 shows, besides x_1, y_1, z_1 and x_2, y_2, z_2 , also the reference 104 for indicating that during this elapse the extension 104 were moved). Storing the configuration of the arm is not required. For example, storing the angle included between the main arm 103' and secondary arm 103" is not required. Neither storing the direction and length of the movement of the actuator moving the extension 104 are required;
- the elapse of the sampling time from the second position x_2, y_2, z_2 to the third position x_3, y_3, z_3 which is stored. According to the example, the third position is reached by rotating the secondary arm 103" and by a further projection of the extension 104. Using two corresponding actuators of the secondary arm 103" and extension 104 is also stored.

[0041] Now it is made reference to the re-performing step, if the initial position of the end-effector corresponds to the stored initial position x_1, y_1, z_1 , if the initial configuration of the crane is the same as the one the crane had during the step of storing the position x_1, y_1, z_1 and if the desired performing speed is as the speed used in the storing step, the crane will exactly perform the same movements by actuating the same actuators used in the different segments of the trajectory of the storing step, according to what was shown in Figure 2. Checking the configuration performed at the point x_1, y_1, z_1 will confirm that the only projection of the extension 104 enables to reach the coordinate x_2, y_2, z_2 .

[0042] Referring now to Figure 3, if it were tried to follow again a stored trajectory by simply actuating the same

actuators used in the different segments of the trajectory of a storing step (in other words only the actuator of the extension 104) in a case wherein the initial position of the end-effector corresponds to the stored initial position x_1, y_1, z_1 , but the initial configuration of the crane is not the same as the one the crane had in the storing step in the position x_1, y_1, z_1 , the end-effector 105 would not be able to reach the stored position x_2, y_2, z_2 because a rotation is also required. Therefore the control unit, once it verifies by the signals of the sensor that the only stored actuators do not enable to reach the position x_2, y_2, z_2 based for example on the minimum flow rate logic, actuates also actuators also the actuators which moves the secondary arm 103" so that the end-effector 105 effectively reaches the position x_2, y_2, z_2 . Then, even though the effective configuration of the crane in the position x_2, y_2, z_2 is not exactly the same as the stored one, the control unit checks that, in the configuration of the coordinate x_2, y_2, z_2 , the end-effector 105 is anyway capable to move to the position x_3, y_3, z_3 by actuating only the stored actuators between the coordinates x_2, y_2, z_2 and x_3, y_3, z_3 , in other words the actuators moving the secondary arm 103" and extension 104. These latter perform movements which are slightly different from the stored ones. From this example, it is observed that, even though the initial configuration of the crane is different from the one it had in the storing step, as the stored movement is gradually re-performed, the articulated arm tends to approach to the corresponding configuration it had in the storing step.

[0043] Referring now to Figure 4, if the initial position of the end-effector 105 does not correspond to the stored initial position x_1, y_1, z_1 , the control unit moves the end-effector 105, for example according to the minimum flow rate logic, so that this moves to the nearest point along the stored trajectory, a point which does not necessarily coincide with a stored point. In the example, such point, indicated by X, is in the segment between the coordinates x_1, y_1, z_1 and x_2, y_2, z_2 . Therefore, the control unit, during the partial re-performing time, will move the end-effector 105 to such nearest point in the stored trajectory and, after that, it tries to move the end-effector to the point of coordinates x_2, y_2, z_2 by actuating only the actuator moving the extension 104 (which was the stored actuator for moving from coordinates x_1, y_1, z_1 to coordinates x_1, y_1, z_1), however, since is not capable of doing it, it will actuates also a second actuator, in this case the actuator moving the secondary arm 103", according to the predetermined set logic. Then, the step of re-performing the movement continues according to what was discussed with reference to Figure 3. Obviously, if the effective sensed initial point does not coincide with a stored point, but was already present in the trajectory, the end-effector 105 would not be required to be moved to the nearest point of the trajectory since the end-effector is already present in the trajectory.

[0044] With reference now to Figure 5, it is described the case wherein the re-performing step is executed with

a speed different from the speed used during the storing step. For the sake of simplicity, it is considered the case wherein the initial position of the end-effector corresponds to the stored initial position x_1, y_1, z_1 and wherein the initial configuration of the crane is the same as the one the crane had during the step of storing the position x_1, y_1, z_1 .

[0045] For example, if it is desired to halve the performing speed, the total re-performing desired time is twice the total sampling time. Therefore, if it is considered, for example, the segment between the coordinates x_1, y_1, z_1 and x_2, y_2, z_2 , and the time the crane requires, during the storing step, to move between these two positions (such time being equal to the sampling time), during the re-performing step, the end-effector could reach only a position x_{12} intermediate between x_1 and x_2 , which represents an equivalent absolute coordinate. Therefore, the control unit will actuate the same actuator used in the storing step for moving from position x_1, y_1, z_1 to position x_2, y_2, z_2 , in other words the one moving the extension 104 which, due to the sensed configuration of the crane, enables to reach the position x_2, y_2, z_2 without actuating other actuators. Then, it is followed the same logic along all the trajectory.

[0046] Referring now to Figure 6, if, on the other hand, it is desired to increase the performing speed, the total desired performing time is reduced with respect to the total sampling time during the storing step. Consequently, for example, during the time required to the crane, in the storing step, to move from coordinates x_1, y_1, z_1 to x_2, y_2, z_2 , in the re-performing step, the end-effector 105 could simultaneously reach, for example, a position x_{23} intermediate between x_2 and x_3 , which is an equivalent performing coordinate. Therefore, by means of the position x_1, y_1, z_1 , the control unit will actuate the same actuators used in the storing step for moving between the positions x_1, y_1, z_1 and x_2, y_2, z_2 , and between the positions x_2, y_2, z_2 and x_3, y_3, z_3 , in other words the actuators which move the extension 104 and the actuator which moves the secondary arm 103". If the point x_{23} is not reached by means of these actuators due to the sensed configuration, the control unit would further actuate one or more other actuators according to the pre-determined operative logic.

[0047] In the present description and in the attached claims, it is observed that the control unit and also the elements indicated by the expression "module", could be implemented by hardware devices (central units, for example), by software or by a combination of hardware and software.

[0048] From the above given description, a person skilled in the art could appreciate that the system, according to the invention, enables to re-perform stored movements also in the presence of complicated articulated arms, wherein the same position of the end-effector is obtainable by different configurations of the arm itself.

[0049] A person skilled in the art in order to meet contingent specific needs could add several additions, mod-

ifications, or substitutions of elements with other operatively equivalent ones to the described embodiments, without falling out of the scope of the attached claims.

Claims

1. System for automatically moving an articulated arm (101), comprising:

- said articulated arm (101), comprising a plurality of bodies consecutively connected to each other in order to form an open kinematic chain with an end-effector (105), having a plurality of translative and/or rotative degrees of freedom and a plurality of actuators for moving said bodies;
- a plurality of sensors associated to said bodies adapted to supply signals indicative of linear or angular positions such to enable to determine absolute coordinates of the end-effector (105);
- a user interface device configured for commanding the articulated arm by an operator;
- a control unit comprising a memory module and operatively connected to said actuators, said sensors and said user interface device, said control unit being configured for performing:

a step of storing a movement of the end-effector (105), which comprises:

- receiving movement instructions of the end-effector (105) from the user interface device;
- actuating the actuators so that the end-effector (105) performs a sequence of movements corresponding to the movement instructions;
- detecting during the movement, in a plurality of subsequent sampling instances distanced from each other of a sampling time, the signals from said sensors;
- determining, based on the signals from the sensors, the absolute coordinates of the end-effector (105) in each sampling instant;
- storing in the memory module the absolute coordinates of the end-effector (105) determined in each sampling instant and the actuators used for moving the end-effector (105) between each determined absolute coordinate and the absolute coordinate determined in the following sampling instant;

a step of re-performing the movement of the end-effector (105) stored in the storing step upon an instruction of automatically re-performing the stored movement, comprising, in a plurality of partial re-performing periods, each delimited by two subsequent performing instants spaced by a partial re-performing time:

- detecting, at the starting re-performing instant

- of each partial re-performing period, the signals from the sensors;
- determining the effective absolute coordinates of the end-effector (105) and the configuration of the articulated arm based on said signals from the sensors;
 - comparing the effective absolute coordinates of the end-effector (105) with the absolute coordinates of the end-effector (105) stored in each of the sampling instants;
 - if the effective absolute coordinates of the end-effector (105) are the same as one of the absolute coordinates of the end-effector, stored in one of the sampling instants, actuating the stored actuators for performing the movement of the end-effector towards the absolute coordinate stored at the following sampling instant.
2. System according to claim 1, wherein said step of re-performing the movement of the end-effector (105) further comprises:
- if it is determined, based on the configuration of the articulated arm, that the end-effector (105) is not capable of reaching the absolute coordinate stored at the following sampling instant, further actuating one or more additional actuators according to a predetermined operative logic.
3. System according to claim 1 or 2, wherein said step of storing in the memory module the absolute coordinates of the end-effector (105) is performed without storing the configuration of the articulated arm obtainable by the signals from said sensors.
4. System according to anyone of the preceding claims, wherein said step of storing in the memory module the actuators used for moving the end-effector (105) is performed without storing the movement directions and extents of the movements of the actuators.
5. System according to any of the preceding claims, wherein said step of comparing the effective absolute coordinates of the end-effector (105) with the absolute coordinates of the end-effector (105) stored in each of the sampling instants is performed with a predefined tolerance.
6. System according to any of the preceding claims, wherein said step of re-performing the movement of the end-effector (105) further comprises, if the effective absolute coordinates of the end-effector (105) are not the same as one of the absolute coordinates of the end-effector stored in one of the sampling instants:
- determining the overall stored trajectory of the end-effector (105);
 - if the effective absolute coordinate of the end-effector (105) lies in a segment of the trajectory comprised between a first and second stored absolute coordinates between two following sampling instants, actuating the stored actuators for performing the movement of the end-effector (105) between said two stored absolute coordinates between two following sampling instants;
 - if it is determined, based on the configuration of the articulated arm, that the end-effector (105) is not capable of reaching the second stored absolute coordinate, actuating one or more further actuators according to a predetermined operative logic.
7. System according to the preceding claim, wherein said step of re-performing the movement of the end-effector (105) further comprises, if the effective absolute coordinate of the end-effector (105) lies outside the stored trajectory:
- calculating the point of the stored trajectory, nearest to the effective absolute coordinate of the end-effector (105);
 - actuating the actuators according to a predetermined logic for moving the end-effector (105) to said point.
8. System according to any of the preceding claims, wherein the partial re-performing time is equal to the sampling time.
9. System according to any of the preceding claims, wherein the control unit is configured for receiving as an input parameter a desired overall re-performing time, wherein said step of re-performing the movement of the end-effector (105), if the desired overall re-performing time is different from the overall time for moving the end-effector during the storing step, comprises:
- determining the stored trajectory of the end-effector (105);
 - calculating, on the stored trajectory, equivalent absolute coordinates of the end-effector, corresponding to the absolute coordinates of the end-effector which would be detected in the step of storing the movement if the end-effector had performed the determined trajectory in the desired overall re-performing time;
 - setting the absolute stored coordinates of the end-effector equal to said equivalent absolute coordinates.
10. System according to the preceding claim, wherein said step of re-performing the movement of the end-effector (105) further comprises:

- if the overall desired re-performing time is greater than the overall time of moving the end-effector during the storing step, storing for each equivalent absolute coordinate the stored actuators along the segment of the trajectory on which lies the equivalent absolute coordinate; 5
 - if the overall desired performing time is less than the overall time of moving the end-effector during the storing step, storing for each equivalent absolute coordinate the actuators used in the segment of the trajectory on which lies the equivalent absolute coordinate and in all the previous segments. 10
11. System according to any of the preceding claims, wherein said control unit is configured for performing a closed-loop control of the trajectory between a first absolute coordinate and a second absolute coordinate of the end-effector (105). 15
- 20
12. System according to any of the preceding claims, wherein said absolute coordinates of the end-effector (105) are absolute cartesian coordinates in a 3D space. 25
13. System according to any of the preceding claims, wherein said articulated arm (101) comprises an articulated crane.
14. System according to the preceding claim, wherein said articulated crane comprises a column (102) rotating around the axis thereof, a main arm (103') rotating around the column (102), a secondary arm (103'') rotating around the main arm (103') and comprising at least an extension translatingly extendable from the secondary arm itself, and said plurality of sensors comprises an angular sensor for measuring the rotation of the column (102) around the axis thereof, an angular sensor for measuring the rotation of the main arm (103'), an angular sensor for measuring the rotation of the secondary arm (103''), a linear sensor for measuring the translation of the extension (104) from the secondary arm (103''). 30
- 35
- 40
- 45
- 50
- 55

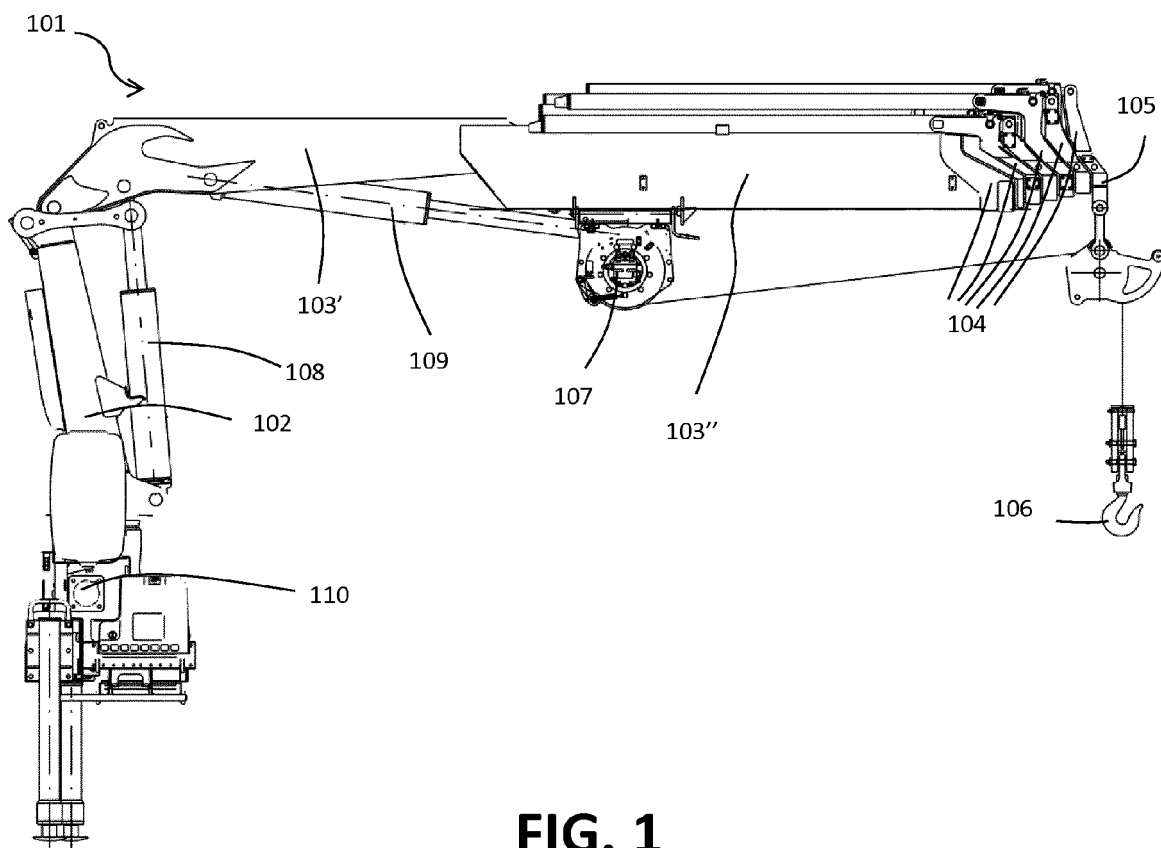


FIG. 1

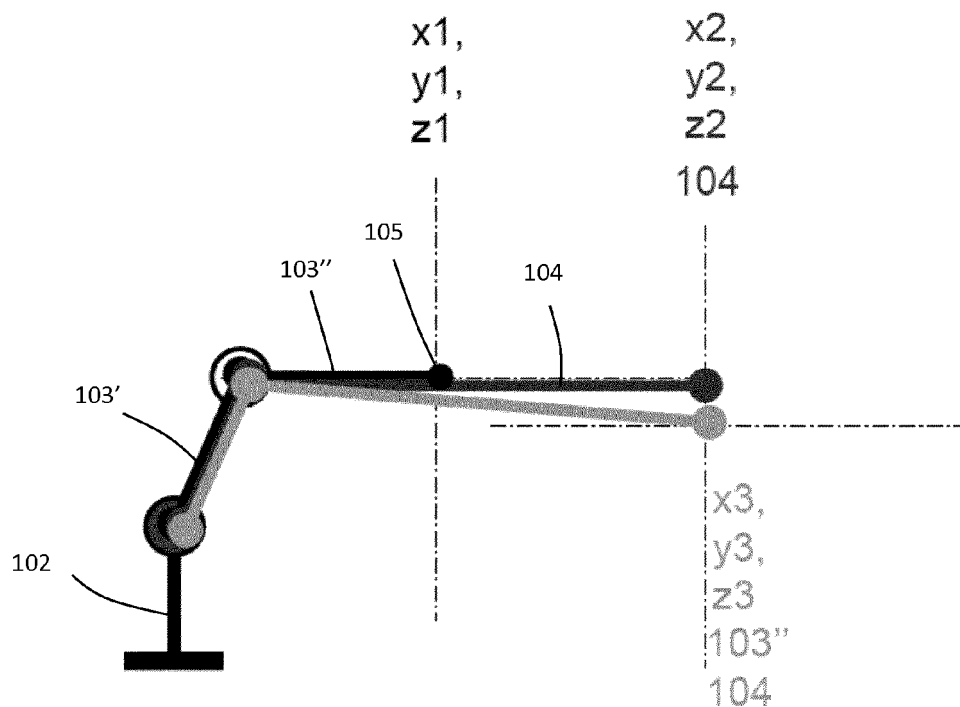
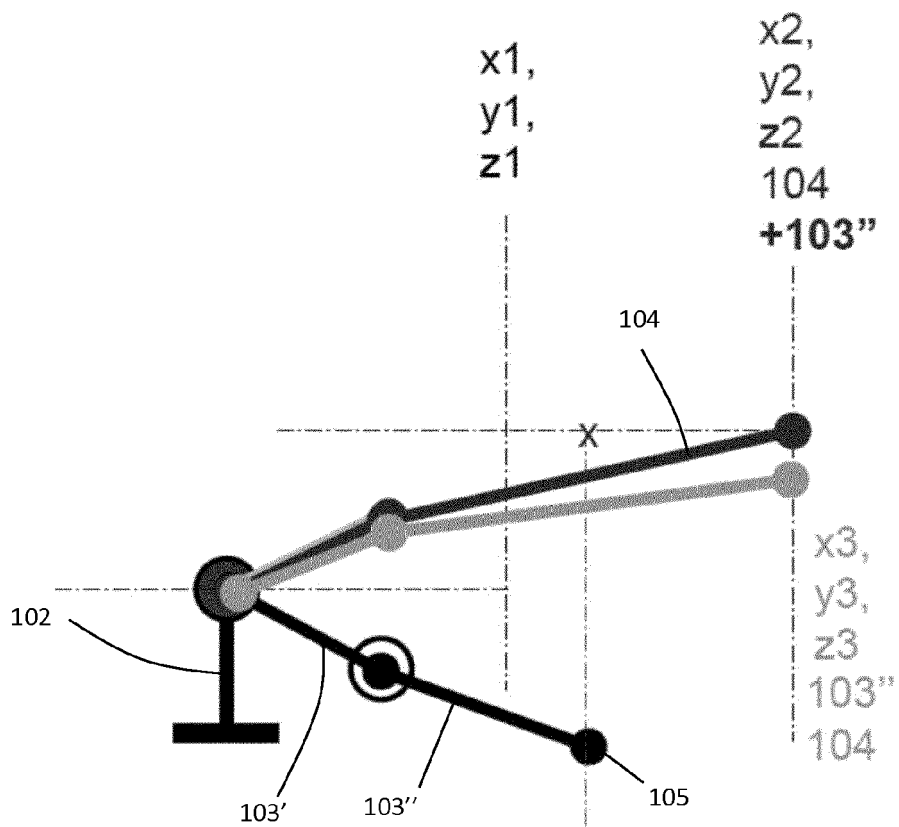
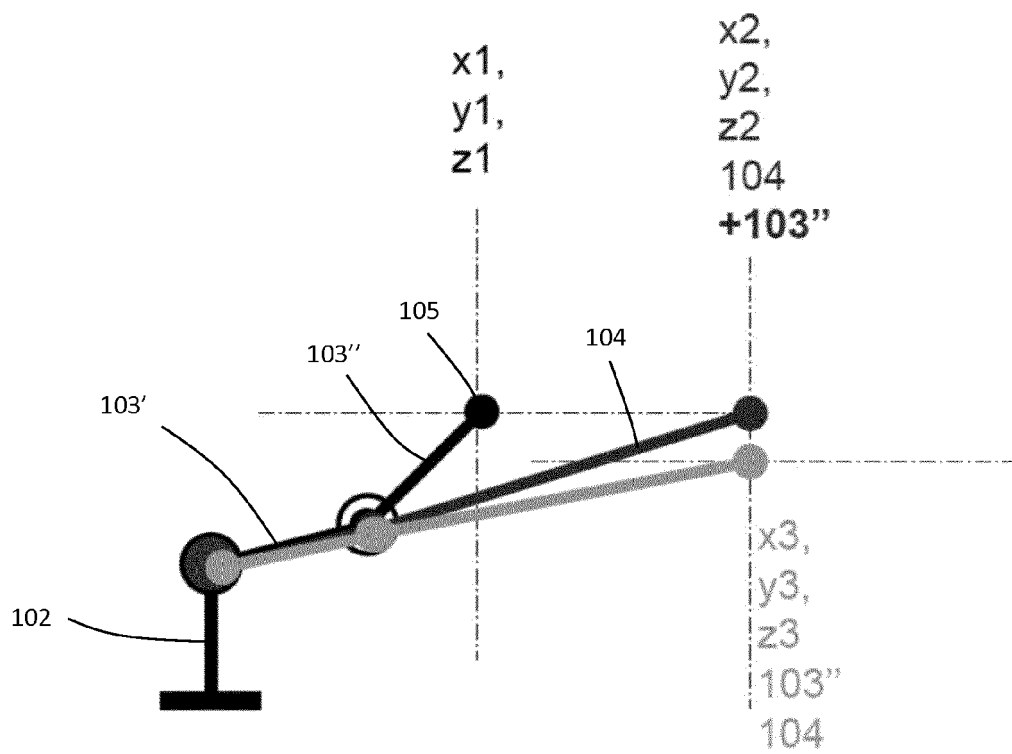


FIG. 2



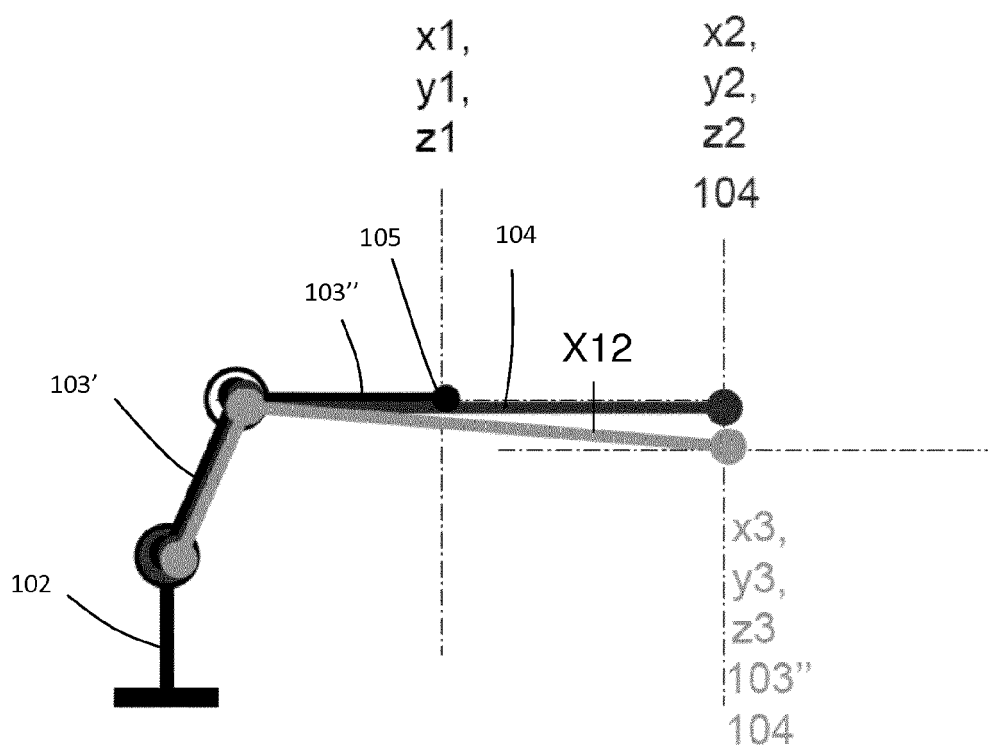


FIG. 5

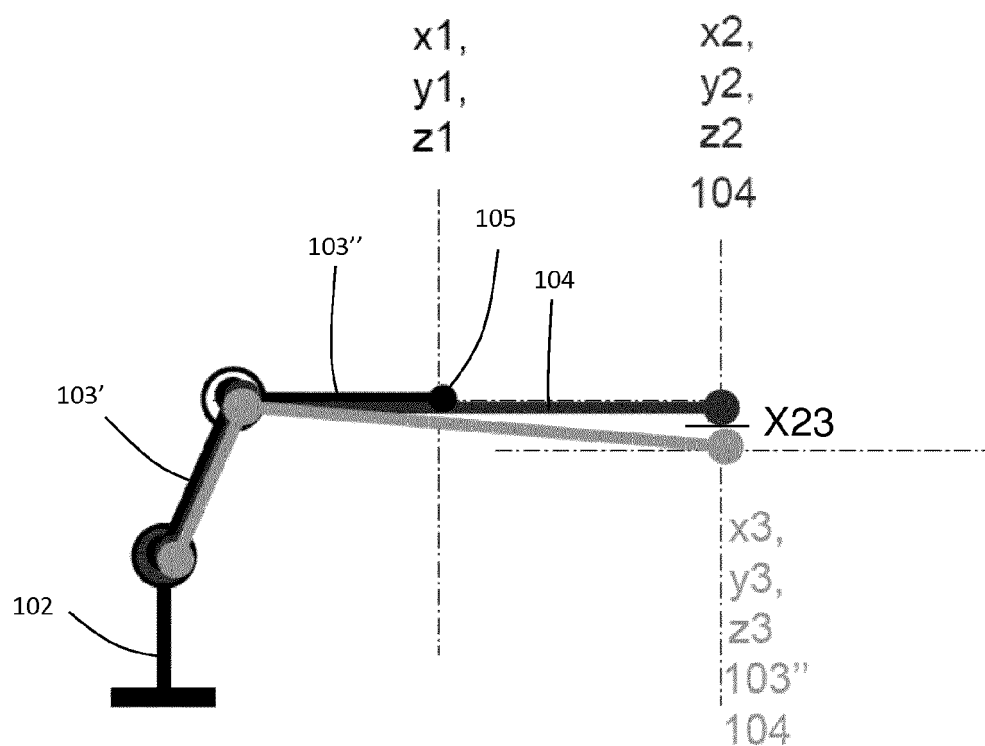


FIG. 6



EUROPEAN SEARCH REPORT

Application Number
EP 19 15 0837

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	JP 2001 130892 A (AICHI CORP KK) 15 May 2001 (2001-05-15) * abstract * * figures * * paragraph [0008] - paragraph [0009] * * paragraph [0016] - paragraph [0018] * * paragraph [0020] - paragraph [0023] * * paragraph [0025] - paragraph [0029] * * paragraph [0031] - paragraph [0032] * * paragraph [0039] * * paragraph [0044] * * paragraph [0046] * * paragraph [0050] - paragraph [0051] * * paragraph [0054] - paragraph [0055] * * paragraph [0058] - paragraph [0059] * * claim 1 & 2 * ----- -/--	1-14	INV. B66C13/04 B66C13/18 B66C13/40 B66C13/46 B66C23/00
			TECHNICAL FIELDS SEARCHED (IPC)
			B66C E04G B66F B25J G05B G01B G01C G01S E02F E21B E21D
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
The Hague		19 June 2019	Guthmuller, Jacques
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)



EUROPEAN SEARCH REPORT

Application Number
EP 19 15 0837

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	EP 2 725 183 A1 (SANDVIK MINING & CONSTR OY [FI]) 30 April 2014 (2014-04-30) * paragraph [0011] - paragraph [0013] * * The boom can be moved under manual control in a desired position and the position can be stored in a memory medium. It is possible to store the current position of one single boom joint, positions of several selected boom joints or all joints of the boom. * * paragraph [0016] * * ...an inverse teaching process is employed when defining a moving sequence for the boom control system. In case a boom moving sequence is needed for moving the boom in a certain way and via specific positions to a target position, an inverse teaching can be employed... * * paragraph [0019] * * paragraph [0025] * * ...the boom can be driven automatically to a predetermined neutral position. The neutral position may be defined by a teaching process or an input device. * * figures *	1	
A	JP H10 219731 A (HITACHI CONSTRUCTION MACHINERY) 18 August 1998 (1998-08-18) * abstract * * paragraph [0007] * * paragraph [0023] - paragraph [0032] * * paragraph [0058] * * paragraph [0067] - paragraph [0068] * * paragraph [0083] * ----- -/--	1	
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
The Hague		19 June 2019	Guthmuller, Jacques
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)



EUROPEAN SEARCH REPORT

 Application Number
 EP 19 15 0837

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	JP 2000 355957 A (HITACHI CONSTRUCTION MACHINERY) 26 December 2000 (2000-12-26) * abstract * * paragraph [0020] * * paragraph [0022] - paragraph [0023] * -----	1	
A	US 2010/096148 A1 (CHIOREAN DIMITRU MIRCEA [FR] ET AL) 22 April 2010 (2010-04-22) * figure 3 * * paragraph [0050] * * paragraph [0063] * -----	1	
A	DE 25 26 504 A1 (CINCINNATI MILACRON INC) 29 January 1976 (1976-01-29) * page 3, the two whole paragraphs * * page 5, from line 1 till the end of second paragraph * * page 18, the whole second paragraph * * page 27, the whole second paragraph * * figures * -----	1	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
Place of search The Hague		Date of completion of the search 19 June 2019	Examiner Guthmuller, Jacques
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

 1
 EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 19 15 0837

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

19-06-2019

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2001130892 A	15-05-2001	JP 3628220 B2	09-03-2005
		JP 2001130892 A	15-05-2001
EP 2725183 A1	30-04-2014	AU 2013248174 A1	08-05-2014
		CN 103770689 A	07-05-2014
		EP 2725183 A1	30-04-2014
		JP 5986058 B2	06-09-2016
		JP 2014084713 A	12-05-2014
		US 2014110168 A1	24-04-2014
JP H10219731 A	18-08-1998	NONE	
JP 2000355957 A	26-12-2000	NONE	
US 2010096148 A1	22-04-2010	NONE	
DE 2526504 A1	29-01-1976	CA 1020651 A	08-11-1977
		DE 2526504 A1	29-01-1976
		GB 1481134 A	27-07-1977
		JP S5125273 A	01-03-1976
		JP S6051121 B2	12-11-1985
		NO 148048 B	18-04-1983
		SE 428977 B	01-08-1983
		US 3920972 A	18-11-1975

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2001130892 A [0005]
- EP 2725183 A1 [0005]
- JP H10219731 A [0005]
- JP 2000355957 A [0005]