



(11)

EP 3 567 299 A1

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art. 153(4) EPC

(43) Date of publication:

13.11.2019 Bulletin 2019/46

(51) Int Cl.:

F21K 9/23 ^(2016.01)

F21K 9/237 ^(2016.01)

F21K 9/238 ^(2016.01)

F21K 9/69 ^(2016.01)

(21) Application number: **17762571.2**

(86) International application number:

PCT/CN2017/083178

(22) Date of filing: **05.05.2017**

(87) International publication number:

WO 2017/152885 (14.09.2017 Gazette 2017/37)

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(72) Inventor: **ZHU, Heng**

ShenZhen

Guangdong 518000 (CN)

(30) Priority: **24.06.2016 CN 201610479318**

24.06.2016 CN 201610478569

24.06.2016 CN 201610479251

(74) Representative: **Kayahan, Senem et al**

Yalciner Patent and Consulting Ltd.

Tunus Cad. No: 85/3-4

Kavaklidere Cankaya

06680 Ankara (TR)

(71) Applicant: **Hunan Yuegang Mookray Industrial
Co., Ltd.**

Changde, Hunan 415106 (CN)

(54) **LED ILLUMINATION DEVICE**

(57) The present invention relates to an LED illuminating device, which includes a lamp cover, a housing, and a base formed in a standardized general modularized manner that can be combined to form the desired appearance of the illuminating device. Also, a lens decorative lighting member, which uses general screw-in manner, is included. The lens decorative lighting member can act as both decorative lighting and lens. The elected lens decorative lighting member can change the light emitting angle and the color temperature arbitrarily. A

plug-in integrated light source module consisting of lamp bead and the heat sink is further included. A plug-in three-dimensional circuit-connecting component, which replaces the existing PCB, is further included to form a general component, which can be arbitrarily bent, fixed, and tailored. A plug-in power supply module is further included, wherein additional functions can be arbitrarily selected and replaced based on demands. Thus, the new LED illuminating device can be realized with modularization, standardization, and diversification.

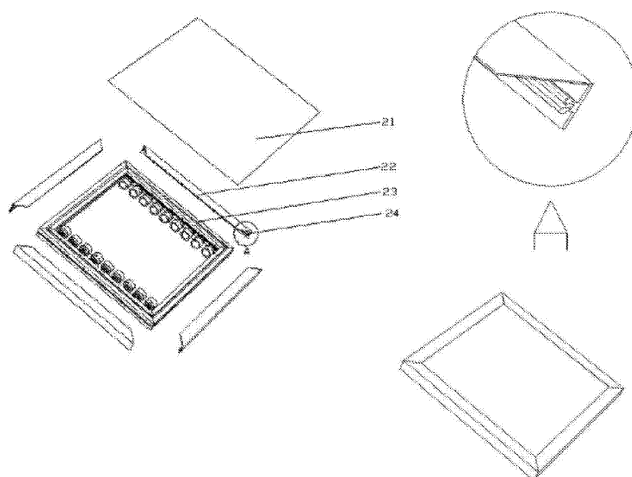


Figure 6

EP 3 567 299 A1

Description

Technical Field

[0001] The present invention relates to the field of illuminating technology and particularly to an LED illuminating device.

Background

[0002] With the development of science and technology, LED solid illuminating light source is used more and more broadly. The LED solid illuminating light source is also used as the illuminating light source with increasing popularity. Currently, there are problems in the field of LED illuminating technology as follows:

1. The LED illuminating device and traditional products are homogenized in terms of appearance and structure. No differentiation has been generated, which results in a direct price competition .

2. All the products are the same in terms of structures and modes. All of them have fatal problems such as the difficulty of heat dissipation of the chip, high cost, and so on.

3. The appearance, the structure, and the design mode are homogenized. However, specific materials used by different producers cannot be replaced by one another.

Summary

[0003] Regarding the defects in the prior art, the present invention provides an LED illuminating device. The specific technical solutions of the LED illuminating device of the present invention are as follows:
An LED illuminating device includes:

a frame member module; the frame member module includes a frame member; the frame member includes a frame member cylindrical plastic metal composite part A and a snap-in connecting part; the outer layer of the cylindrical plastic metal composite part A is plastic, and the core is metal strip; each side surface of the cylindrical plastic metal composite part A has a concave snap-in groove structure; the snap-in connecting part is configured to be a structure to snap in the concave snap-in groove structure;

a housing of the lamp, cover, piece-like internal and external cavity wall module; the housing of the lamp, cover, piece-like internal and external cavity wall module has a flexible metal piece shape, plastic piece-like, fabric film, paper, or a piece-like module with any combination; the piece-like module material is inserted into a concave snap-in groove structure

in the frame member to form an internal or external housing of lamp, or form a closed or unclosed cavity inside the lamp; a design and pattern is carved, coated, sprayed, or printed on a surface of the piece-like material is used as a decoration of the lamp;

a housing supporting and molding member module; the housing supporting and molding member module includes a supporting and molding member; the supporting and molding member has a multilayer piece-like structure; the number of layers is N; N is an odd number which is equal to or greater than 3; the multilayer structure is arranged from top to bottom in an order of one plastic layer and one metal layer in an alternate manner; the uppermost layer and the lowermost layer are plastic layers; the mechanical strength of the supporting and molding member is configured in such a way that the supporting and molding member can be arbitrarily bent or tailored by manpower to form the supporting member of the housing of the lamp, the cover, or the flexible film material of the lamp;

a decorative fastening member module; the decorative fastening member module includes cylindrical plastic metal composite part B, H-shaped snap-in connecting part, L-shaped or U-shaped fastening sealing strip with a snap joint; each side surface of the cylindrical plastic metal composite part B is provided with a concave snap-in groove structure; the H-shaped snap-in connecting part is configured to be a structure snapping in the concave snap-in groove structure of the cylindrical plastic metal composite part B; a middle portion of each H-shaped snap-in connecting part is provided with a via hole; the L-shaped or U-shaped fastening sealing strip with the snap joint is configured to snap in an external side surface of the cylindrical plastic metal composite part B;

further includes a screw-in lens and decorative lighting module in which the lens and decorative lighting can be replaced arbitrarily; the screw-in lens and decorative lighting module includes a screw-in secondary light distribution lens; an internal side of an outer wall of the secondary light distribution lens is fixed to the plug-in integrated light source module in a screw-in manner;

further includes a plug-in integrated light source module consisting of lamp bead and heat sink; the plug-in integrated light source module includes a lamp bead body, an LED chip and circuit, and a plug-in component; wherein the lower part of the lamp bead body is designed as a heat dissipation structure; the upper part of the lamp bead body is packaged with the LED chip and circuit; the plug-in integrated light source module has an integrated whole

packaging structure; the plug-in integrated light source module is plugged on the modular light bar through the plug-in component;

further includes a plug-in three-dimensional circuit connector module which can be bent and fixed arbitrarily; the plug-in three-dimensional circuit connector module includes a connector; the connector includes a plurality of connecting units which can be bent and fixed arbitrarily and is provided with connecting points; the connecting units, which can be bent and fixed arbitrarily, are connected to each other through connecting points; and

further includes a plug-in power supply module; the plug-in power supply module is fixedly plugged in and electrically connected to an electrical connecting port of the plug-in integrated light source module.

[0004] According to a preferred embodiment, the plug-in integrated light source module is an LED lamp with remote fluorescent powder structure in which the color temperature of the light source can be adjusted. The LED lamp with remote fluorescent powder structure in which the color temperature of the light source can be adjusted, includes an LED chip-heat sink integrated lamp bead formed by the lamp bead body, and the LED chip and circuit. A central portion of an upper surface of the integrated lamp bead is provided with a chip illuminating cup cavity. The LED chip is fixed on a metal surface inside the chip illuminating cup cavity. The LED chip and circuit is connected to positive and negative poles and is packaged by adhesive dispensing. A cup cavity wall of the chip illuminating cup cavity is a circular plastic part or a metal part. An internal wall of the chip illuminating cup cavity has an oblique angle. An outer wall of the chip illuminating cup cavity has a right-angled threaded shape. A ring is provided to be fixed to and detached from an outer wall of the chip illuminating cup cavity in a screw-in manner. A center of the ring includes a hole. A diameter of the hole is the same as an external diameter of the chip illuminating cup cavity. An upper portion of the hole is provided with a plastic fluorescent lens. A lower portion of the ring is provided with female threads. The female threads are configured to correspondingly screw in male threads of the cup cavity, such that the plastic fluorescent lens and the chip illuminating cup cavity are attached to each other closely. A layer of transparent silicon resin paste is applied between the plastic fluorescent lens and chip packaging adhesive layer, such that luminous efficacy can be improved. At the same time, the plastic fluorescent lens and the chip illuminating cup cavity attach to each other seamlessly. The light emitted from the LED chip exits through the plastic fluorescent lens at the middle portion of the ring and stimulates the fluorescent powder to emit light with desired color temperature and chromatograph.

[0005] According to a preferred embodiment, the sec-

ondary light distribution lens and the plastic fluorescent lens attach to each other closely. The internal side of the outer wall of the secondary light distribution lens is fixed to the integrated lamp bead in a screw-in manner.

[0006] According to a preferred embodiment, the plastic fluorescent lens includes a bluish white light lens, a true white light lens, and a yellowish white light lens. The formula of the bluish white light lens is white light paste: curing agent: bluish white light fluorescent powder = 1: 1: (0.07 - 0.09). The formula of the true white light lens is white light paste: curing agent: true white light fluorescent powder = 1: 1: (0.085 - 0.12). The formula of the yellowish white light lens is white light solution: curing agent: yellowish white light fluorescent powder = 1: 1: (0.11 - 0.15).

[0007] According to a preferred embodiment, the plug-in integrated light source module is an LED light source module directly, which uses a metal heat sink as positive and negative pole circuits directly. The lamp bead body is a metal body A. The metal body A is formed by n little metal bodies B that are of the same or different shapes, insulative of each other, and connected to each other fixedly, wherein $n \geq 2$. A surface of each little metal body B is provided with m LED chips with the same or different number, wherein $m \geq 1$. Adjacent LED chips are connected to each other in series or in parallel. Each little metal body B is provided with a plurality of circuit connecting points, so as to form a circuit. Except for the circuit connecting points, the surface of the little metal body B is insulative. The LED chip is directly adhered to or fixed to the little metal body B by welding. At the same time, silica gel covers the chip and the connecting circuit. Each little metal body B, based on the design requirement of the entire circuit, is designed to have a plurality of positive poles or negative poles. The plurality of positive poles or negative poles is connected to the chip on the little metal body B either in series, in parallel, or a hybrid serial-parallel manner. The plurality of positive poles or negative poles is connected to positive poles or negative poles on other little metal bodies. The plurality of positive poles or negative poles can be connected to the external circuit to form a desired whole circuit. The metal body A formed by a plurality of little metal bodies B, is used as the heat sink of the LED light source module and further as the positive and negative poles circuit of the LED light source module.

[0008] According to a preferred embodiment, the plug-in integrated light source module is a plug-in LED chip-heat sink integrated light source and lens structure. The lamp bead body is a metal body. The metal body is provided with the chip and the cup cavity. The cup cavity is provided with positive and negative poles. Positive and negative pins corresponding to the positive and negative poles form a male plug by injection molding to directly reach a heat dissipation structure. The male plug is connected to an external female plug to turn on the circuit. The upper portion of the cup cavity is provided with a lens. An external diameter of the lens is the same as that of the cup cavity. The lens and the central hole of the

metal piece are connected and integrated as a whole by injection molding, which is screwed on the cup cavity. The LED illuminating device further includes a metal part. The secondary light distribution lens and the metal part are fixed as a whole by injection molding or in a snap-in manner. A joint surface between the secondary light distribution lens and the metal part is subject to a reflective process. The light that is refracted by the lens can be reflected effectively. A bottom of the metal part is provided with threads and a plastic gasket. The metal part is fixed together to the metal body through threads in a screw-in manner.

[0009] According to a preferred embodiment, the plug-in integrated light source module includes a plurality of cuboid lamp beads and modular light bars. A geometric center of an upper surface of the lamp bead body of each cuboid lamp bead is provided with a projecting lamp cup by injection molding. The lamp cup is an inversed flat-topped quadrangular pyramid groove. The lamp cup is provided with the LED chip. The lens is provided in the illuminating optical path of LED and is configured to diffuse rays. An upper surface the lamp bead body is further provided with two grooves. The two grooves are positioned on both sides of the lamp cup and correspond to each other. The positive and negative poles circuits are provided in the two grooves. The positive and negative pole circuits of the lamp bead are wrapped within the two grooves by injection molding to achieve insulation. One end of the positive and negative pole circuits is connected to the LED chip. The other end of the positive and negative pole circuits is exposed to the outside of the groove. The positive and negative poles on both sides of the lamp bead form male plugs of male and female plug structure by injection molding. The end of the positive and negative pole circuits, which are exposed to the outside of the groove, are positioned in the male plug. A lower part of the lamp bead body is configured to be a heat dissipation structure.

[0010] According to a preferred embodiment, the heat dissipation structure in the plug-in integrated light source module is heat dissipation column, heat dissipation wing, or heat dissipation fin.

[0011] According to a preferred embodiment, the plug-in three-dimensional circuit connector module, which can be bent and fixed arbitrarily, is a circuit connector. The circuit connector includes a flexible circuit board and a piece-like or cavity-shaped fixing component, which can be bent and fixed arbitrarily. The flexible circuit board includes a flexible circuit and a plurality of male plugs or female plugs fixed on the flexible circuit. The plug of the male plug or female plug is provided with a plurality of circuit plug-in points or welding points. A surface of the fixing component is provided with through opening or non-through local concave point or concave surface. A surface of the fixing component is provided with a plurality of location holes. The flexible circuit board and an electronic device provided on the flexible circuit board can be mounted and fixed in the through opening or on the

non-through local concave point or concave surface of the component. The size of the male plug or female plug corresponds to the location of the opening, the concave point, and the concave surface on the surface of the component, such that the flexible circuit board and discrete electronic devices or modular devices provided on the flexible circuit board completely attach to and snap in on the surface of the above fixing component, or is directly provided in an opening space of the fixing component.

[0012] According to a preferred embodiment, the plug-in three-dimensional circuit connector module, which can be bent and fixed arbitrarily, is a circuit connector. The circuit connector includes an insulative flexible circuit board and a plurality of male and female plugs and adaptors. Through different plug-in manners, series circuit, parallel circuit, or hybrid circuit can be formed.

[0013] Compared with the prior art, the present invention has the following advantages:

1. In the present invention, there are three types of general modules, i.e., the frame member module, the housing of lamp, the cover, the piece-like internal and external cavity wall module, and housing supporting and molding member module. The three types of general modules can be combined into any desired light housing arbitrarily. Thus, the generalization, modularization, and diversification of the external structure of the lamp can be achieved. From now on, the traditional mode in which each lamp has its own mold is terminated.
2. The present invention uses the plug-in integrated light source module and the circuit connector that can be bent arbitrarily. Thus, the adaptiveness of the components of the lamp is greatly improved. Therefore, the lamp that is general, optional, replaceable, and modular is realized.

Brief Description of Drawings

[0014]

Figure 1 is the schematic diagram of the frame member module;

Figure 2 is the structural schematic diagram of a snap-in connecting part with different structures of the frame member module;

Figure 3 is the schematic diagram of the housing supporting and molding member module;

Figure 4 is the structural schematic diagram of the onion-shaped housing formed by the housing supporting and molding member module;

Figure 5 is the schematic diagram of the snap-in connection of the piece-like module of the light cover

film cloth and the frame member;

Figure 6 is the structural schematic diagram of the decorative fastening member module;

Figure 7 is the structural schematic diagram of screw-in lens and decorative lighting module in which the lens and decorative lighting can be replaced arbitrarily;

Figure 8 is the structural schematic diagram of the lens and decorative lighting module with different appearances and structures;

Figure 9 is the structural schematic diagram of the plug-in three-dimensional circuit connector module that can be arbitrarily bent and fixed;

Figure 10 is the schematic diagram of annular and linear structures formed by the plug-in three-dimensional circuit connector modules and can be arbitrarily bent and fixed;

Figure 11 is the schematic diagram of the plug-in integrated light source module;

Figure 12 is the structural schematic diagram in which the plug-in power supply module fits the annular three-dimensional circuit;

Figures 13-16 are the structural schematic diagrams of different types of LED illuminating device assembly, such as spherical type, planar type, and candle type;

Figure 17 is the schematic diagram of the plug-in integrated light source module in Embodiment 2;

Figure 18 (a) is the top view of the plastic fluorescent lens which is arc lens in Embodiment 2;

Figure 18 (b) is the side view of the plastic fluorescent lens which is arc lens in Embodiment 2;

Figure 19 (a) is the top view of the plastic fluorescent lens which is Fresnel lens in Embodiment 2;

Figure 19 (b) is the side view of the plastic fluorescent lens which is Fresnel lens;

Figure 20 is the functional schematic diagram of the plug-in integrated light source module in Embodiment 3;

Figure 21 is the structural diagram of the plug-in integrated light source module in which a cylindrical metal body A made up by 8 little metal bodies B is taken as an example of Embodiment 3;

Figure 22 is the structural explosive diagram of the plug-in integrated light source module in Embodiment 4;

Figure 23 is the schematic diagram of the plug-in integrated light source module in Embodiment 4;

Figure 24 is the structural schematic diagram of a flexible circuit board in Embodiment 5;

Figure 25 is the schematic diagram of the fixing component in Embodiment 5;

Figure 26 is the structural schematic diagram of the discrete electronic device in Embodiment 5;

Figure 27 is the schematic diagram of the circuit connector in Embodiment 6.

Detailed Description

[0015] Hereinafter, with reference to the drawings, the present invention is described in detail.

Embodiment 1

[0016] As shown in Figure 1 to Figure 16, the LED illuminating device of the present embodiment includes a frame member module, a housing of the lamp, a cover, a piece-like internal and external cavity wall module, a housing supporting and molding member module, a decorative fastening member module, a screw-in lens and decorative lighting module in which the lens and decorative lighting can be replaced arbitrarily, a plug-in integrated light source module consisting of a lamp bead and a heat sink, a plug-in three-dimensional circuit connector module which can be arbitrarily bent and fixed, and a plug-in power supply module.

[0017] As shown in Figure 1, the frame member module includes a frame member. The frame member includes a cylindrical plastic metal composite part A and a snap-in connecting part. The outer layer of the cylindrical plastic metal composite part A is plastic, and the core is a metal strip. Each side surface of the cylindrical plastic metal composite part A has a T-shaped groove. As shown in Figure 1, which is an entire structural schematic diagram of the frame members, regarding the cylindrical plastic metal composite part, the tetrahedral cylinder is taken as an example but is not limited thereto. In practice, a triangular prism, a quadrangular prism, or a pentagonal prism can be used. That is, the following structure is used, i.e., the number of the side surfaces of the cylindrical plastic metal composite part is N, wherein N is an integer which is equal to or greater than 3. Figure 1 further shows the corresponding cross-sectional diagram and an annular frame member consisting of the cylindrical plastic metal composite part and the snap-in connecting part.

[0018] Figure 2 shows the schematic diagram of some

snap-in connecting parts, which are merely for exemplary description. In the art, the following part can be used, i.e., a snap-in connecting part with a corresponding structure which can snap in the T-shaped groove structure to achieve the snapping-in of the two parts, so as to achieve the frame members with different structures.

[0019] As shown in Figure 3, the housing supporting and molding member module includes a supporting and molding member. The supporting and molding member has a multilayer piece-like structure. The number of layers is N. N is an odd number which is equal to or greater than 3. From top to bottom, the multilayer structure is arranged in an order of one plastic layer and one metal layer in an alternate manner. The uppermost layer and the lowermost layer are plastic layers. The mechanical strength of the supporting and molding member is configured in such a way that the supporting and molding member can be arbitrarily bent or tailored by manpower to form the supporting member of the housing of the lamp, the cover, or the flexible film material of the lamp.

[0020] Figure 3 shows a typical three-layered supporting and molding member. The interlayer is a metal strip, a metal sheet, or a metal net. The upper and lower layers are coated with plastic respectively. The color of plastic can be determined flexibly based on actual needs. The supporting and molding member can be bent, fixed, and tailored (typical and general scissors) by manpower. For example, in Figure 3, the supporting and molding member which is planar at first is cut into strips and further bent into annular shape.

[0021] Figure 4 shows that the supporting and molding member is cut into strips. The strips can form a housing or cover of the lamp in an onion shape. The above descriptions are merely exemplary. In the art, housing or cover with different structures, shapes, and appearances can be made based on ordinary measures in the art.

[0022] Figure 5 shows that the cloth of lamp cover is cut into sectors. The sectors are aligned and adhered to form a circular truncated cone. Annular supporting and molding members are provided on the upper and lower openings of the circular truncated cone, so as to form a housing or cover of the LED lamp in a circular truncated cone shape.

[0023] Figure 6 shows the decorative fastening member module, which includes cylindrical plastic metal composite part B, a H-shaped snap-in connecting part, and a L-shaped or U-shaped fastening sealing strip with a snap joint. With a quadrangular LED lamp formed by four cylindrical plastic metal composite parts 23 as an example, further descriptions are as follows. Four cylindrical plastic metal composite parts 23 form the frame of the quadrangular LED lamp. L-shaped fastening sealing strips 22 with a snap joint are used. Snap joint 24 is provided on an internal side of each L-shaped fastening sealing strip 22. Snap joint 24 snaps in T-shaped groove of cylindrical plastic metal composite part 23 to play roles of snap-in fastening and sealing. Film 21 is provided on the light-exiting surface of the LED lamp to play the role

of transmitting the light and protecting the internal LED light source. It should be noted that, in order to differentiate the cylindrical plastic metal composite part included in the frame member and the cylindrical plastic metal composite part included in the decorative fastening member module, the cylindrical plastic metal composite part included in the frame member is defined as cylindrical plastic metal composite part A, and the cylindrical plastic metal composite part included in the decorative fastening member module is defined as cylindrical plastic metal composite part B, respectively. In the art, with regard to the present application, cylindrical plastic metal composite parts A and B may have the same or different structures.

[0024] As shown in Figure 7, the screw-in lens and decorative lighting module includes screw-in secondary light distribution lens. The outer wall of the secondary light distribution lens and the plug-in integrated light source module are fixed to each other in a screw-in manner. In order to clearly describe the above screw-in lens and decorative lighting module, two types of LED lamps are taken as examples. The LED lamp includes LED chip-heat sink integrated lamp bead 12. The center portion of the upper surface of the integrated lamp bead 12 is provided with chip illuminating cup cavity 13. Chip 11 is fixed on the metal surface inside chip illuminating cup cavity 13. The chip is connected to positive and negative poles of the circuit and is packaged by adhesive dispensing. The cup cavity wall of chip illuminating cup cavity 13 is a circular plastic part or metal part. The internal wall of the chip illuminating cup cavity 13 has an oblique angle. The outer wall of chip illuminating cup cavity 13 has a right-angled threaded shape.

[0025] The LED lamp further includes ring 14 which can be fixed to and detached from the outer wall of chip illuminating cup cavity 13 in a screw-in manner. Ring 14 is metal or opaque plastic material. The center of ring 14 includes a hole. The diameter of the hole is the same as the external diameter of chip illuminating cup cavity 13. The upper portions of the holes are provided with a plastic lens. The lower portion of the ring is provided with female threads. The female threads can screw with the male threads of the cup cavity correspondingly, such that lens and chip illuminating cup cavity 13 are attached to each other closely. A layer of transparent silicon resin paste is applied between the lens and chip packaging adhesive layer, such that the luminous efficacy can be improved. At the same time, lens and chip illuminating cup cavity 13 attach to each other seamlessly. The light emitted from chip 11 exits through the lens in the center of ring 14 and stimulates the fluorescent powder therein to emit the light with desired color temperature and chromatograph. The LED lamp further includes secondary light distribution lens 15. Secondary light distribution lens 15 may have any form, shape, or beam angle. Secondary light distribution lens 15 closely attaches to the lens at the center of ring 14. The internal side of the outer wall of secondary light distribution lens 15 is fixed to integrated

lamp bead 12 in a screw-in manner.

[0026] Figure 8 shows lens and decorative lighting modules with different appearances and structures, such as lotus, peach, leaf, and diamond shape.

[0027] As shown in Figure 9, the above plug-in three-dimensional circuit connector module which can be arbitrarily bent and fixed includes a three-dimensional circuit. The above three-dimensional circuit is connected through three-dimensional circuit connectors. The circuit connector includes a plurality of connecting units that have connecting points and can be arbitrarily bent and fixed. The connecting units that can be arbitrarily bent and fixed are connected to each other through connecting points. The connecting points of interconnected connecting units that can be arbitrarily bent and fixed are connected to each other correspondingly. The three-dimensional circuit connector includes a male plug connecting unit and a female plug connecting unit. The male plug connecting unit includes a male plug terminal connector and a series-parallel converting terminal. The female plug connecting unit includes a female plug terminal connector and an adaptor female plug terminal (not shown in figure 9).

[0028] Figure 10 further shows annular and linear structures formed by plug-in three-dimensional circuit connector modules, which can be arbitrarily bent and fixed.

[0029] Figure 11 further describes the plug-in integrated light source module in detail with the cuboid lamp bead as an example. A plurality of cuboid lamp beads and modular light bars are provided, and the cuboid lamp beads are molded through a single process. Specifically, the process is die casting. The cuboid lamp beads are plugged in the modular light bars. The number of lamp beads can be increased or decreased and can be adjusted based on actual power. A projecting lamp cup 32 is formed by injection molding at the geometric center of the upper surface of the lamp bead body. The lamp cup 32 is an inversed flat-topped quadrangular pyramid groove. Lamp cup 32 is provided with an LED chip. Lens 37 is provided in the illuminating optical path of LED and plays the role of diffusion of rays. The upper surface of the lamp bead body is further provided with two grooves 33. Two grooves 33 are positioned on both sides of lamp cup 32 and correspond to each other. Grooves 33 are provided with positive and negative pole circuits 38. Positive and negative pole circuits 38 of the lamp bead are wrapped within the grooves by injection molding to achieve insulation. One end of each of positive and negative pole circuits 38 is connected to the LED chip, while the other end is exposed to the outside of the groove, so that positive and negative poles are formed on both sides of the lamp bead. Male plugs 34 of male and female plug structure are formed on both sides of the lamp bead where positive and negative poles are located by injection molding. The ends of positive and negative pole circuits 38, which are exposed to the outside of the grooves, are positioned in male plugs 34. The lower part of the

lamp bead body is configured to be heat dissipation plates 31.

[0030] Figure 12 is the structural schematic diagram in which plug-in power supply module fits annular three-dimensional circuit. In order to realize intellectual control, power matching, EMC, etc., a plurality of different standardized plug-in power supply modules are used. The modules are matched and replaced by plugging in. The adaptive scope of the product is further improved to meet personal demands of the consumer.

[0031] Figures 13-16 are different types of LED illuminating devices, such as spherical, planar, or candle types. It should be noted that the above Figures 13-16 are only illustrative. Rather, the corresponding LED illumination is not limited to include all the modules defined in the claims. In the figures, reference numbers are as below:

131 - lamp head base, 132 - circuit connecting module, 133 - lamp head base, 134 - light source module, 135 - decorative lighting lens module;

141 - power supply module, 142 - light source module, 143 - three-dimensional circuit connecting module, 144 - frame module, 145 - whole lamp;

151 - decorative lighting lens module, 152 - light source module, 153 - connector module, 154 - power supply module;

161 - decorative lighting lens module, 162 - light source module, 163 - connector module, 164 - power supply module.

[0032] Based on further descriptions of the above specific embodiments, an LED illuminating device disclosed by the present invention includes a lamp cover, a housing, and a base, wherein the lamp cover, the housing, and the base are formed in a standardized general modularized manner, and can be combined to form the desired appearance of the illuminating device. Also, a lens decorative lighting member that uses a general screw-in manner is included. The lens decorative lighting member can act as both decorative lighting and lens. The elected lens decorative lighting member can change the light emitting angle and the color temperature arbitrarily. A plug-in integrated light source module consisting of a lamp bead and a heat sink is further included. A plug-in three-dimensional circuit connecting component, which replaces the existing PCB, is further included to form a general component, which can be arbitrarily bent, fixed, and tailored. A plug-in power supply module is further included, wherein additional functions can be arbitrarily selected and replaced based on demands. Thus, the new LED illuminating device can be realized with modularization, standardization, and diversification.

[0033] The above descriptions are only preferred embodiments of the present invention. It should be noted

that, for a person of ordinary skill in the art, without departing from the technical principle of the present invention, a plurality of further improvements and variations can be made. Such improvements and variations fall within the protective scope of the present invention.

Embodiment 2

[0034] Main differences between the present embodiment and Embodiment 1 are as follows. The plug-in integrated light source module is an LED lamp with remote fluorescent powder structure in which the color temperature of the light source can be adjusted.

[0035] The LED lamp with remote fluorescent powder structure in which the color temperature of the light source can be adjusted includes a LED chip and heat sink integrated lamp bead consisting of a lamp bead body, an LED chip, and a circuit.

[0036] As shown in Figure 17, the center portion of the upper surface of integrated lamp bead 42 is provided with chip illuminating cup cavity 43. Chip 41 is fixed on the metal surface inside chip illuminating cup cavity 43. The chip is connected to positive and negative poles of the circuit and is packaged by adhesive dispensing. The cup cavity wall of chip illuminating cup cavity 43 is a circular plastic part or metal part. The internal wall of the chip illuminating cup cavity 43 has an oblique angle. The outer wall of chip illuminating cup cavity 43 has a right-angled threaded shape.

[0037] Ring 44, which can be fixed to and detached from the outer wall of chip illuminating cup cavity 43 in a screw-in manner is included. Ring 44 is made of metal or opaque plastic material. The center of ring 44 has a hole. The diameter of the hole is the same as the external diameter of the chip illuminating cup cavity 43. The upper portion of the hole is provided with a plastic lens. Referring to figure 18 and figure 19, the plastic lens is Fresnel planar lens or lens of other forms. The plastic lens is a plastic fluorescent lens. The lens and fluorescent powder are formed as a whole uniformly by injection molding process. Meanwhile, the lens and ring 44 are also fixed on the upper portion of the hole by injection molding process.

[0038] The lower portion of the ring is provided with female threads. The female threads can screw with the male threads of the cup cavity correspondingly, such that lens and chip illuminating cup cavity 43 are attached to each other closely. A layer of transparent silicon resin paste is applied between the lens and chip packaging adhesive layer, such that the luminous efficacy can be improved. At the same time, lens and chip illuminating cup cavity 43 seamlessly attach to each other. The light emitted from chip 41 exits through the lens in the center of ring 44 and stimulates the fluorescent powder therein to emit the light with desired color temperature and chromograph.

[0039] Secondary light distribution lens 55 and plastic fluorescent lens attach to each other closely. Secondary

light distribution lens 55 may have any form, shape, or beam angle. Secondary light distribution lens 55 closely attaches to the lens at the center of ring 44. The internal side of the outer wall of secondary light distribution lens 55 is fixed to integrated lamp bead 42 in a screw-in manner.

[0040] Moreover, the plastic fluorescent lens includes a bluish white light lens, a true white light lens, and a yellowish white light lens.

[0041] The formula of the bluish white light lens is white light paste: curing agent: bluish white light fluorescent powder = 1: 1: (0.07 - 0.09).

[0042] The formula of the true white light lens is white light paste: curing agent: true white light fluorescent powder = 1: 1: (0.085 - 0.12).

[0043] The formula of the yellowish white light lens is white light solution: B curing agent: yellowish white light fluorescent powder = 1: 1: (0.11 - 0.15).

[0044] The rest parts of the present embodiment are the same as those in Embodiment 1.

Embodiment 3

[0045] Main differences between the present embodiment and Embodiment 1 are as follows. The plug-in integrated light source module is a LED light source module, which directly uses the metal heat sink as positive and negative pole circuits.

[0046] The metal body A is formed by n little metal bodies B that are of the same or different shapes, and the little metal bodies B are electrically insulative from each other and fixedly connected to each other, wherein $n \geq 2$. The surface of each little metal body B is provided with m LED chips with the same or different number, wherein $m \geq 1$. Adjacent LED chips are connected to each other in series or in parallel. Each little metal body B is provided with a plurality of circuit connecting points, so as to form the circuit. Except for the circuit connecting points, the surface of the little metal body B is insulative. The LED chips are directly adhered or fixed to the little metal body B by welding. At the same time, silica gel covers the chips and the connecting circuit. Based on the design requirements of the entire circuit, each little metal body B can be designed to have a plurality of positive poles or negative poles. The plurality of positive poles or negative poles can be connected to the chips on the little metal body B in series or in parallel or in hybrid serial-parallel manner. Also, the plurality of positive poles or negative poles can be connected to positive poles or negative poles on other little metal bodies. Moreover, the plurality of positive poles or negative poles can be connected to the external circuit to form a whole desired circuit. The metal body A formed by a plurality of little metal bodies B is used as the heat sink of the LED light source module and further as the positive and negative pole circuits of the LED light source module.

[0047] Specifically, as shown in Figure 20 and Figure 21, in the LED light source module which directly uses

the metal heat sink as positive and negative pole circuits, the lamp bead body is metal body A.

[0048] Metal body A can be regular or irregular shapes and is formed by n little metal bodies B (B1...Bn) that are of the same or different shapes, and the little metal bodies B are insulative of each other and fixedly connected to each other.

[0049] The surface of each little metal body B is provided with a plurality of LED chips C (C1...Cn) with the same or different number. Adjacent chips are connected to each other in series or in parallel.

[0050] Each little metal body B is provided with a plurality of circuit connecting points. Except for circuit connecting points, the surface of the little metal body is insulative.

[0051] Chips C are directly adhered or fixed to the little metal body B by welding. At the same time, silica gel covers the chips and the connecting circuit.

[0052] Based on the design requirements of the entire circuit, each little metal body B can be designed to have a plurality of positive poles or negative poles. The plurality of positive poles or negative poles can be connected to the chips on the little metal body B in series or in parallel. Also, the plurality of positive poles or negative poles can be connected to positive poles or negative poles of other little metal bodies. Moreover, the plurality of positive poles or negative poles can be connected to the external circuit to form a whole desired circuit.

[0053] As shown in Figure 20, four little metal bodies B form the cylindrical metal body A. LED chips c1, c2 are provided on the little metal body B1. LED chips c3, c4 are provided on little metal body B2. LED chips c5, c6 are provided on little metal body B3. LED chips c7, c8 are provided on little metal body B4. LED chips c1, c2, c3, c4 are connected in series to form a first string. LED chips c5, c6, c7, c8 are connected in series to form a second string. Next, the first string and the second string are connected in parallel to form a third string. Two ends of the third string act as the positive pole and the negative pole respectively. The top surface of the metal body A is provided with positive pole B1, negative pole B2, positive pole B3, and negative pole B4, respectively. The bottom surface of the metal body A is provided with two pairs of positive and negative poles correspondingly.

[0054] No matter whether all the chips on the formed large metal body A are connected in full series, full parallel, series-parallel, or parallel-series, the number of chips in each series or parallel circuit finally formed is symmetrical and uniform, so as to ensure the uniformity of the emitting light. Of course, in order to meet the actual demand, under the condition that the power supply meets the normal working of the LED chips, the asymmetrical and nonuniform arrangement can also be used.

[0055] As shown in Figure 21, LED chips 51, eight little metal bodies B52, and fixing or circuit connecting position 53 are combined in a way similar to that shown in Figure 20 to form a cylindrical metal body A. In order to further improve the heat dissipation efficiency, a plurality of heat

dissipation columns (not shown by a reference number) can be additionally provided.

[0056] The rest parts of the present embodiment are the same as those in Embodiment 1.

5

Embodiment 4

10

[0057] Main differences between the present embodiment and Embodiment 1 are as follows. The plug-in integrated light source module is a plug-in LED chip and heat sink integrated light source and lens structure.

15

[0058] In the plug-in LED chip and heat sink integrated light source and lens structure, the lamp bead body is a metal body. The metal body is provided with the chip and cup cavity. The cup cavity is provided with positive and negative poles. The positive and negative pins corresponding to the positive and negative poles form a male plug by injection molding to reach the heat dissipation structure. The male plug is connected to an external female plug, so as to turn on the circuit. The upper portion of the cup cavity is provided with a lens. The external diameter of the lens is the same as that of the cup cavity. The lens and the central hole of the metal piece are connected and integrated as a whole by injection molding, which is screwed on the cup cavity. A metal part is further included. The secondary light distribution lens and the metal part are fixed together as a whole by injection molding or in a snap-in manner. The joint surface between the secondary light distribution lens and the metal part is subject to a reflective process. The light that is refracted by the lens can be reflected effectively. The bottom of the metal part is provided with threads and plastic gasket. The metal part is fixed to the metal body through threads in a screw-in manner.

25

30

35

[0059] Specifically, as shown in Figure 22 and Figure 23, LED chip and heat sink integrated light source and lens structure has a plug-in structure. Metal body 61 is provided with chip 612 and cup cavity 62. The cup cavity is provided with positive and negative poles 610. Positive and negative pins 63 corresponding to positive and negative poles 610 form a male plug 69 by injection molding to directly reach the bottom of the heat dissipation column. Male plug 69 is connected to external female plug 68, so as to turn on the circuit.

40

45

[0060] The upper portion of the cup cavity is provided with lens 64. The external diameter of the lens is the same as that of the chip cup cavity. Lens 64 can be transparent planar resin piece or curved sphere, which is doped with fluorescent powder therein. Lens 64 and the central hole of metal piece 65 are connected and integrated as a whole by injection molding, which is screwed on the chip cup cavity. The light emitted from the chip all exits through lens 64 to reach transparent secondary light distribution lens 66, so as to exit through secondary light distribution lens 66.

50

55

[0061] Metal part 67 is provided outside secondary light distribution lens 66, and secondary light distribution lens 66 is fixed to metal part 67 to form a whole by injection

molding or in a snap-in manner. The joint surface between secondary light distribution lens 66 and metal part 67 is subject to a reflective process. The light that is refracted by the lens can be reflected effectively.

[0062] The bottom of metal part 67 is provided with threads and plastic gasket. Metal part 67 is fixed to metal body 61 through threads 611. Metal part 67 can play the role of heat-conducting and waterproof functions for metal body 61. The heat emitted from the LED chip can be completely dissipated through metal piece 65, metal part 67, metal body 61, and the heat dissipation columns, such that the heat dissipation efficiency is ensured.

[0063] Male plug 69 formed by injection molding is conductive at the terminal portion. The portion among heat dissipation columns is insulative to the heat dissipation columns. In order to further improve the insulative effect, the material that is electrically insulative and heat-dissipating efficient can be used as the material for the heat dissipation columns.

[0064] Male plug 69 can be configured to slightly project from the heat dissipation columns, so as to be electrically connected to female plug 68 in a plug-in manner. The structure of male plug 69 can be configured to be a structure matching any type of female plug based on demands.

[0065] Moreover, the heat dissipation columns can be replaced by heat dissipation wings or heat dissipation fins with regular or irregular structures.

[0066] The rest parts of the present embodiment are the same as those in Embodiment 1.

Embodiment 5

[0067] Main differences between the present embodiment and Embodiment 1, Embodiment 2, Embodiment 3 or Embodiment 4 are as follows. The plug-in three-dimensional circuit connector module, which can be arbitrarily bent and fixed, is a circuit connector.

[0068] As shown in Figure 24, Figure 25, and Figure 26, the circuit connector includes a flexible circuit board and a piece-like or cavity-shaped fixing component that can be arbitrarily bent and fixed. The flexible circuit board includes a flexible circuit and a plurality of male plugs or female plugs fixed thereto. The plug of the male plug or female plug is provided with a plurality of circuit plug-in points or welding points. The surface of the fixing component is provided with through opening or non-through local concave point or concave surface. The surface of the fixing component is also provided with a plurality of location holes. The flexible circuit board and the electronic devices provided on the flexible circuit board can be mounted and fixed in the through opening or on the non-through local concave point or concave surface of the component. The size of the male plug or female plug corresponds to the location of the opening, concave point, or concave surface on the surface of the component. Thus, the flexible circuit board and discrete electronic devices or modular devices provided thereon are

completely attached to or snapped in on the surface of the above fixing component. Also, the flexible circuit board and discrete electronic devices or modular devices provided thereon can be directly positioned in the opening space of the fixing component.

[0069] The rest parts of the present embodiment are the same as those in Embodiment 1, Embodiment 2, Embodiment 3 or Embodiment 4.

Embodiment 6

[0070] Compared with Embodiment 1, Embodiment 2, Embodiment 3, Embodiment 4, or Embodiment 5, in the present embodiment, the plug-in three-dimensional circuit connector module, which can be arbitrarily bent and fixed, is another circuit connector.

[0071] As shown in Figure 27, in the present embodiment, the circuit connector includes an insulative flexible circuit board, a plurality of male and female plugs and adaptors. Through different plug-in manners, series circuit, parallel circuit, or hybrid circuit can be formed.

[0072] The rest part of the present embodiment is the same as that in Embodiment 1, Embodiment 2, Embodiment 3, Embodiment 4, or Embodiment 5.

[0073] It should be noted that all the features, all the steps in the method or the process disclosed in the specification, can be combined in any manner, except for mutually exclusive features and/or steps.

[0074] Moreover, the above specific embodiments are exemplary. A person of ordinary skill in the art can conceive all kinds of solutions under the inspiration of the disclosure of the present invention. Such solutions belong to the disclosure of the present invention and fall within the protective scope of the present invention. A person of ordinary skill in the art should understand that the specification and drawings of the present invention are descriptive, but are not used to limit the claims. The protective scope of the present invention is defined by the claims and the equivalents.

Claims

1. An LED illuminating device, **characterized in that** the LED illuminating device comprises:

a frame member module;
a housing of a lamp, a cover, a piece-like internal and external cavity wall module;
a housing supporting and molding member module;
a decorative fastening member module;
further includes a screw-in lens and decorative lighting module, in which a lens and a decorative lighting can be replaced arbitrarily;
further includes a plug-in integrated light source module, consisting of a lamp bead and a heat sink;

further includes a plug-in three-dimensional circuit connector module, configured to be bent and fixed arbitrarily; and
 further includes a plug-in power supply module; wherein
 the frame member module includes a frame member;
 the frame member includes a cylindrical plastic metal composite part A and a snap-in connecting part;
 an outer layer of the cylindrical plastic metal composite part A is plastic;
 a core of the cylindrical plastic metal composite part A includes a metal strip;
 each side surface of the cylindrical plastic metal composite part A includes a concave snap-in groove structure;
 the snap-in connecting part is configured to be a structure to snap in the concave snap-in groove structure;
 the housing of the lamp, the cover, the piece-like internal and external cavity wall module are flexible metal piece-like, plastic piece-like, fabric film, paper, or a piece-like module with any combination;
 a piece-like module material is inserted into a concave snap-in groove structure in the frame member to form an internal or external housing of lamp, or form a closed or unclosed cavity inside the lamp;
 a design and a pattern carved, coated, sprayed, or printed on a surface of the piece-like material are used as a decoration of the lamp;
 the housing supporting and molding member module includes a supporting and molding member;
 the supporting and molding member has a multilayer piece-like structure;
 the number of layers is N;
 N is an odd number equal to or greater than 3;
 the multilayer piece-like structure is arranged from top to bottom in an order of one plastic layer and one metal layer in an alternate manner;
 an uppermost layer and a lowermost layer of the multilayer piece-like structure are plastic layers;
 a mechanical strength of the supporting and molding member is configured in such a way that the supporting and molding member can be bent or tailored arbitrarily by manpower to form a supporting member of the housing of the lamp, the cover, or a flexible film material of the lamp;
 the decorative fastening member module includes a cylindrical plastic metal composite part B, an H-shaped snap-in connecting part, and an L-shaped or U-shaped fastening sealing strip with a snap joint;
 each side surface of the cylindrical plastic metal composite part B is provided with a concave

snap-in groove structure;
 the H-shaped snap-in connecting part is configured to be a structure snapping in the concave snap-in groove structure of the cylindrical plastic metal composite part B;
 a middle portion of each H-shaped snap-in connecting part is provided with a via hole;
 the L-shaped or U-shaped fastening sealing strip with the snap joint is configured to snap in an external side surface of the cylindrical plastic metal composite part B;
 the screw-in lens and decorative lighting module includes a screw-in secondary light distribution lens;
 an internal side of an outer wall of the secondary light distribution lens is fixed to the plug-in integrated light source module in a screw-in manner;
 the plug-in three-dimensional circuit connector module includes a connector;
 the connector includes a plurality of connecting units;
 each connecting unit is provided with a connecting point;
 each connecting unit can be bent and fixed arbitrarily;
 the plurality of connecting units which can be bent and fixed arbitrarily are connected to each other through the connecting point;
 the plug-in integrated light source module includes a lamp bead body, an LED chip and a circuit, and a plug-in component;
 wherein a lower part of the lamp bead body is designed as a heat dissipation structure;
 an upper part of the lamp bead body is packaged with the LED chip and the circuit;
 the plug-in integrated light source module has an integrated whole packaging structure;
 the plug-in integrated light source module is plugged in a modular light bar through the plug-in component; and
 the plug-in power supply module is fixedly plugged in and electrically connected to an electrical connecting port of the plug-in integrated light source module.

2. The LED illuminating device according to claim 1, characterized in that

the plug-in integrated light source module is an LED lamp with a remote fluorescent powder structure in which a color temperature of the light source can be adjusted;
 the LED lamp with remote fluorescent powder structure in which the color temperature of the light source can be adjusted includes an LED chip-heat sink integrated lamp bead formed by the lamp bead body and the LED chip and the circuit;
 a central portion of an upper surface of the integrated lamp bead is provided with a chip illuminating cup

cavity;
 the LED chip is fixed on a metal surface inside the chip illuminating cup cavity;
 the LED chip is connected to positive and negative poles of the circuit;
 the LED chip is packaged by adhesive dispensing;
 a cup cavity wall of the chip illuminating cup cavity is a circular plastic part or a metal part;
 an internal wall of the chip illuminating cup cavity has an oblique angle;
 an outer wall of the chip illuminating cup cavity has a right-angled threaded shape;
 a removable ring is provided to be fixed to an outer wall of the chip illuminating cup cavity in a screw-in manner;
 a center of the ring includes a hole;
 a diameter of the hole is the same as an external diameter of the chip illuminating cup cavity;
 an upper portion of the hole is provided with a plastic fluorescent lens;
 a lower portion of the ring is provided with female threads;
 the female threads are configured to correspondingly screw in male threads of the cup cavity, such that the plastic fluorescent lens and the chip illuminating cup cavity are attached to each other closely;
 a layer of transparent silicon resin paste is applied between the plastic fluorescent lens and chip packaging adhesive layer, such that luminous efficacy can be improved;
 at the same time, the plastic fluorescent lens and the chip illuminating cup cavity are attached to each other seamlessly; and
 light emitted from the LED chip exits through the plastic fluorescent lens at the middle portion of the ring and stimulates the fluorescent powder to emit light with desired color temperature and chromatograph.

3. The LED illuminating device according to claim 2, **characterized in that**

the secondary light distribution lens and the plastic fluorescent lens are attached to each other closely;
 and
 the internal side of the outer wall of the secondary light distribution lens is fixed to the integrated lamp bead in a screw-in manner.

4. The LED illuminating device according to claim 2 or 3, **characterized in that**

the plastic fluorescent lens includes a bluish white light lens, a true white light lens, and a yellowish white light lens;
 a formula of the bluish white light lens is that white light paste: curing agent: bluish white light fluorescent powder = 1: 1: (0.07 - 0.09);
 a formula of the true white light lens is that white light paste: curing agent: true white light fluorescent powder = 1: 1: (0.085 - 0.12); and

a formula of the yellowish white light lens is that white light solution: B curing agent: yellowish white light fluorescent powder = 1: 1: (0.11 - 0.15).

5. The LED illuminating device according to claim 1, **characterized in that**

the plug-in integrated light source module is an LED light source module which directly uses a metal heat sink as positive and negative pole circuits;
 the lamp bead body is a metal body A;
 the metal body A is formed by n little metal bodies B; the n little metal bodies B are of the same or different shapes, insulative with each other, and fixedly connected to each other, wherein $n \geq 2$;
 a surface of each little metal body B is provided with m LED chips with the same or different number, wherein $m \geq 1$;
 adjacent LED chips are connected to each other in series or in parallel;
 each little metal body B is provided with a plurality of circuit connecting points, so as to form a circuit; except for the circuit connecting points, the surface of each little metal body B is insulative;
 the LED chips are directly adhered to or fixed to each little metal body B by welding;
 at the same time, silica gel covers the chips and connecting circuits;
 each little metal body B, based on design requirements of the entire circuit, is designed to have a plurality of positive poles or negative poles;
 the plurality of positive poles or negative poles are connected to the chips on each little metal body B in series or in parallel or hybrid serial-parallel manner;
 the plurality of positive poles or negative poles are connected to positive poles or negative poles on other little metal bodies;
 the plurality of positive poles or negative poles can be connected to an external circuit to form a desired whole circuit; and
 the metal body A formed by a plurality of little metal bodies B is used as the heat sink of the LED light source module and further as the positive and negative pole circuits of the LED light source module.

6. The LED illuminating device according to claim 1, **characterized in that**

the plug-in integrated light source module is a plug-in LED chip-heat sink integrated light source and lens structure;
 the lamp bead body is a metal body;
 the metal body is provided with the chip and the cup cavity;
 the cup cavity is provided with the positive and negative poles;
 positive and negative pins corresponding to the positive and negative poles form a male plug by injection molding to directly reach a heat dissipation structure;
 the male plug is connected to an external female

plug to turn on the circuit;
the upper portion of the cup cavity is provided with a lens;
an external diameter of the lens and is the same as that of the cup cavity;
the lens and the central hole of the metal piece are connected and integrated as a whole by injection molding;
the whole is screwed on the cup cavity;
the LED illuminating device further includes a metal part;
the secondary light distribution lens and the metal part are fixed as a whole by injection molding or in a snap-in manner;
a joint surface between the secondary light distribution lens and the metal part is subject to a reflective process;
the light that is refracted by the lens can be reflected effectively;
a bottom of the metal part is provided with threads and a plastic gasket; and
the metal part is fixed together to the metal body through threads in a screw-in manner.

7. The LED illuminating device according to claim 1, **characterized in that**
the plug-in integrated light source module includes a plurality of cuboid lamp beads and modular light bars;
a geometric center of an upper surface of the lamp bead body of each cuboid lamp bead is provided with a projecting lamp cup by injection molding;
the lamp cup is an inversed flat-topped quadrangular pyramid groove;
the lamp cup is provided with a LED chip;
the lens is provided in an illuminating optical path of LED and is configured to diffuse rays;
an upper surface the lamp bead body is further provided with two grooves;
the two grooves are respectively positioned on both sides of the lamp cup and correspond to each other;
the positive and negative poles circuits are provided in the two grooves;
the positive and negative pole circuits of the lamp bead are wrapped within the two grooves by injection molding to achieve insulation;
one end of the positive and negative pole circuits is connected to the LED chip, the other end of the positive and negative pole circuits is exposed to an outside of grooves, so that the positive and negative poles are formed on both sides of the lamp bead;
the positive and negative poles on both sides of the lamp bead form a male plug of a male and female plug structure by injection molding;
the end of the positive and negative pole circuits which is exposed to the outside of the grooves is positioned in the male plug; and
a lower part of the lamp bead body is configured to

be a heat dissipation structure.

8. The LED illuminating device according to claim 1, 2, 3, 5, 6, or 7, **characterized in that**
the heat dissipation structure in the plug-in integrated light source module is a heat dissipation column, a heat dissipation wing, or a heat dissipation fin.
9. The LED illuminating device according to claim 1, **characterized in that**
the plug-in three-dimensional circuit connector module which can be bent and fixed arbitrarily is a circuit connector;
the circuit connector includes a flexible circuit board and a piece-like or cavity-shaped fixing component which can be bent and fixed arbitrarily;
wherein the flexible circuit board includes a flexible circuit and a plurality of male plugs or female plugs fixed on the flexible circuit;
each plug of the male plugs or female plugs is provided with a plurality of circuit plug-in points or welding points;
a surface of the fixing component is provided with a through opening or a non-through local concave point or a concave surface;
a surface of the fixing component is provided with a plurality of location holes;
the flexible circuit board and an electronic device provided on the flexible circuit board can be mounted and fixed in the through opening or on the non-through local concave point or concave surface of the component; and
a size of the male plug or female plug corresponds to the location of the opening, the concave point, or the concave surface on the surface of the component, such that the flexible circuit board and discrete electronic devices or modular devices provided on the flexible circuit board are completely attached to and snapped in on the surface of the above fixing component, or is directly provided in an opening space of the fixing component.
10. The LED illuminating device according to claim 1, **characterized in that**
the plug-in three-dimensional circuit connector module which can be bent and fixed arbitrarily is a circuit connector;
the circuit connector includes an insulative flexible circuit board and a plurality of male and female plugs and adaptors; and
through different plug-in manners, a series circuit, a parallel circuit, or a hybrid circuit can be formed.

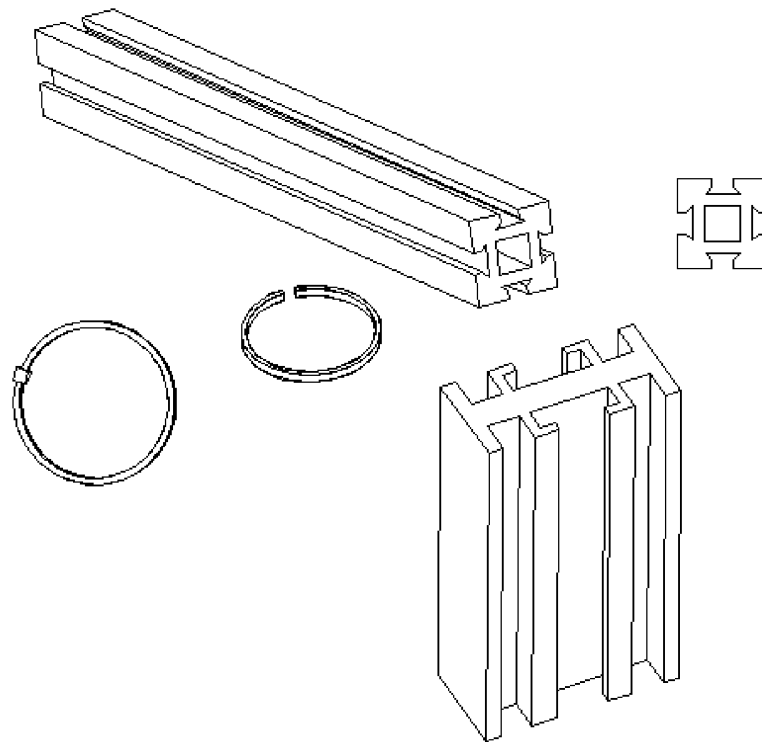


Figure 1

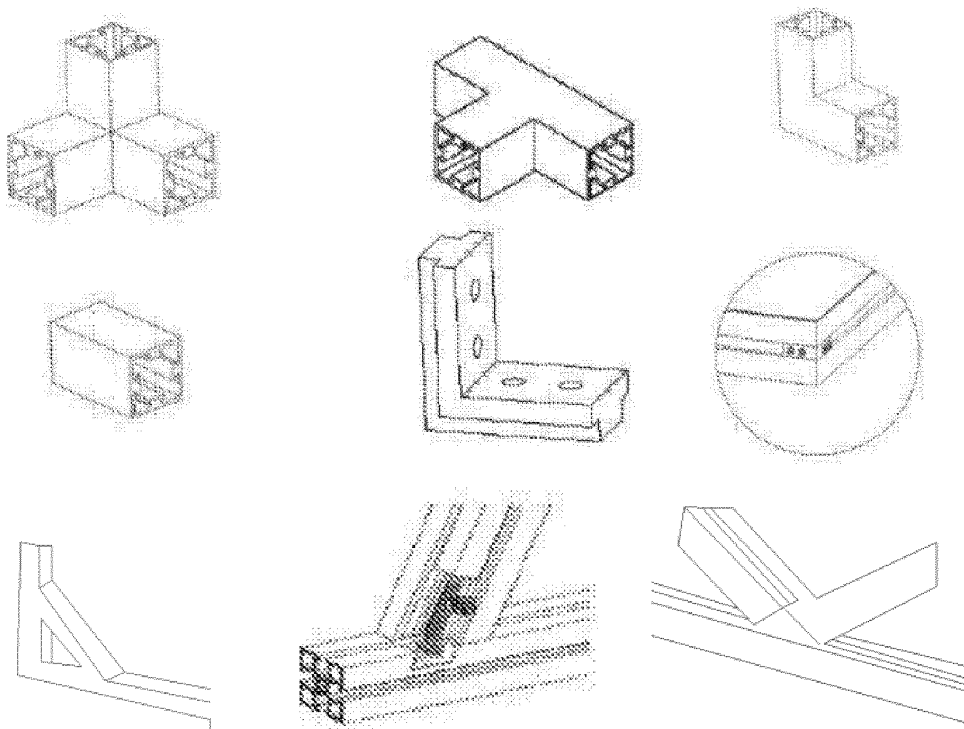


Figure 2

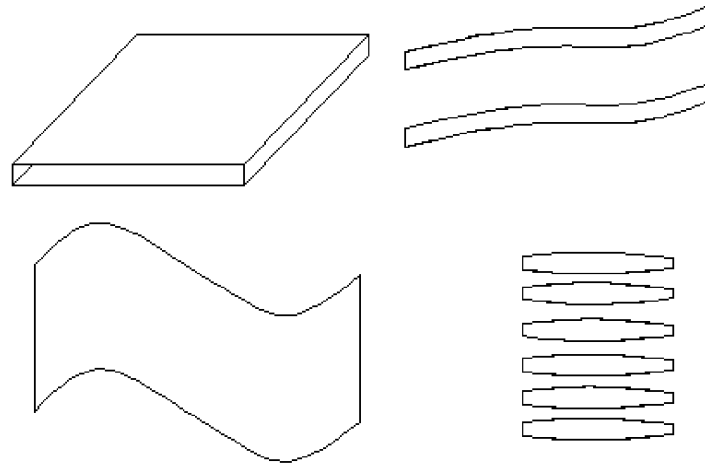


Figure 3

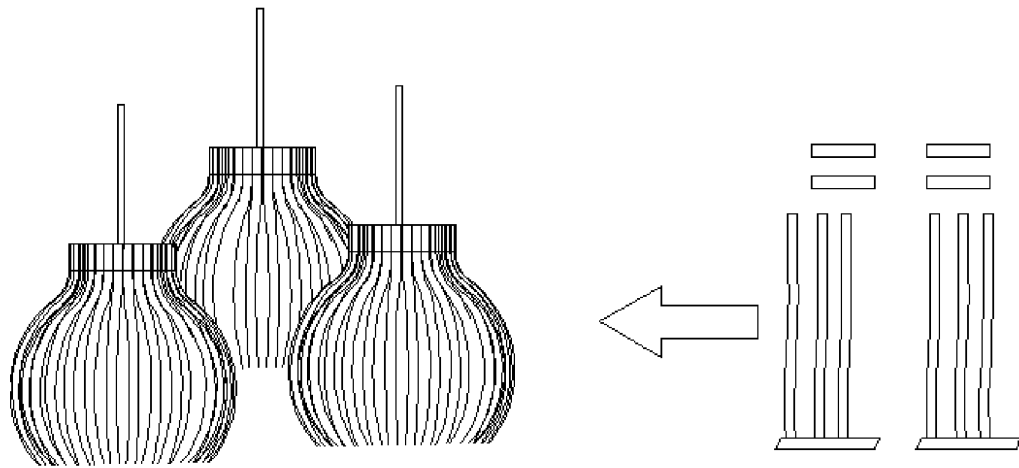


Figure 4

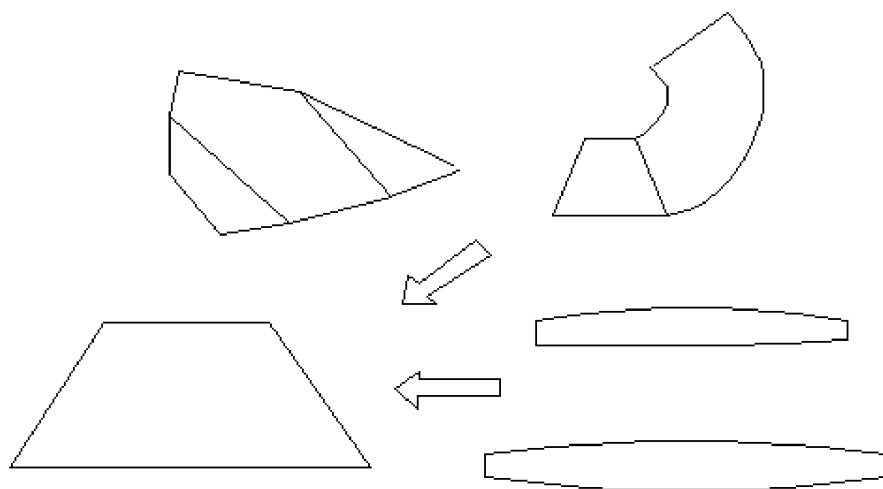


Figure 5

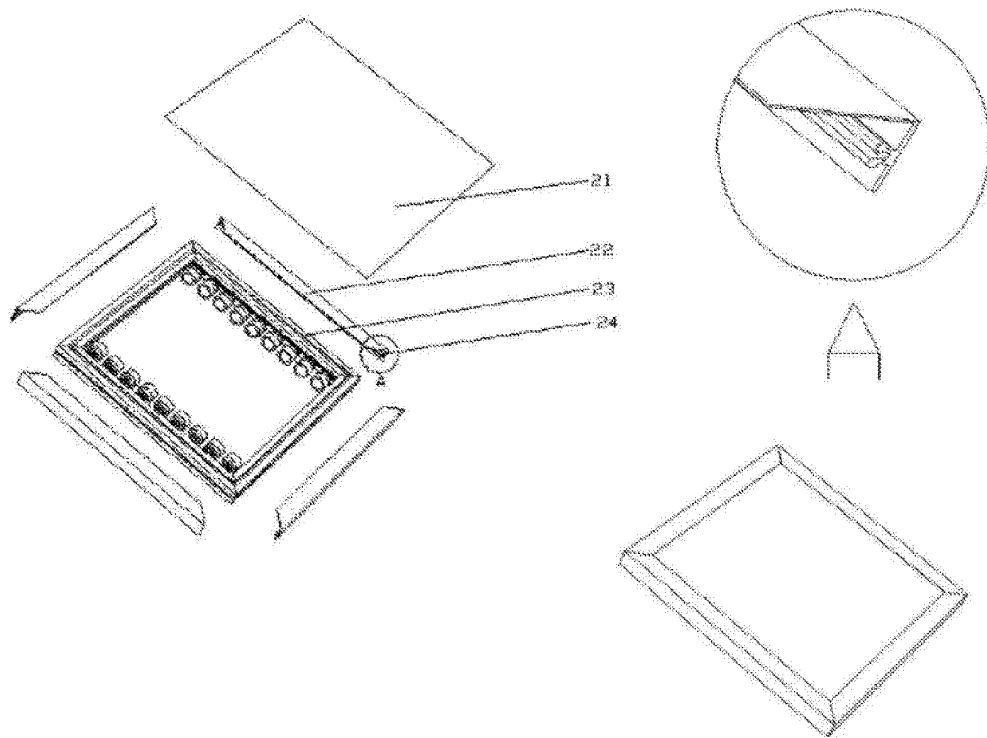


Figure 6

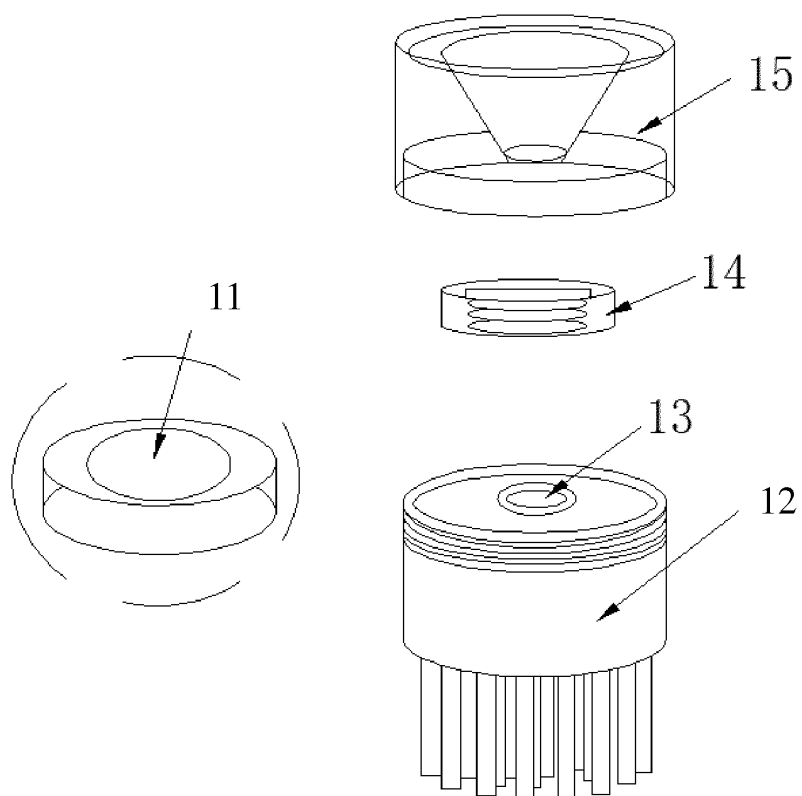


Figure 7

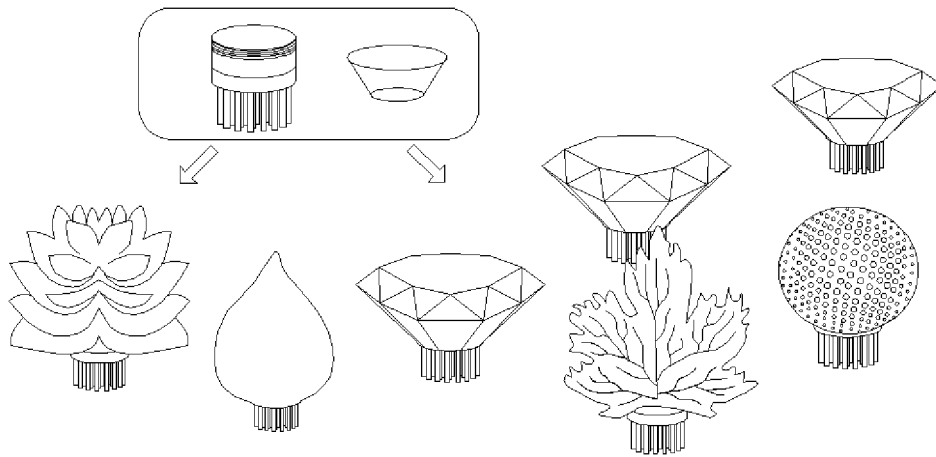


Figure 8

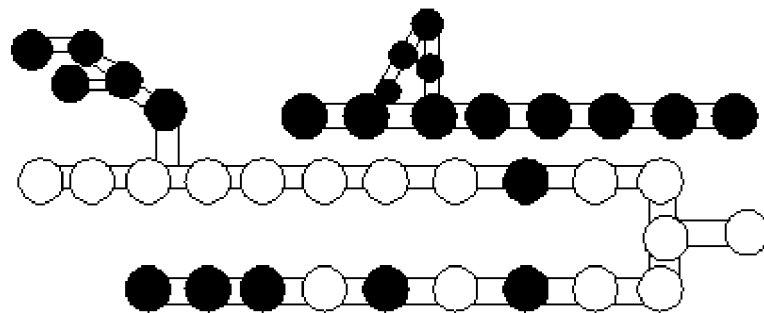


Figure 9

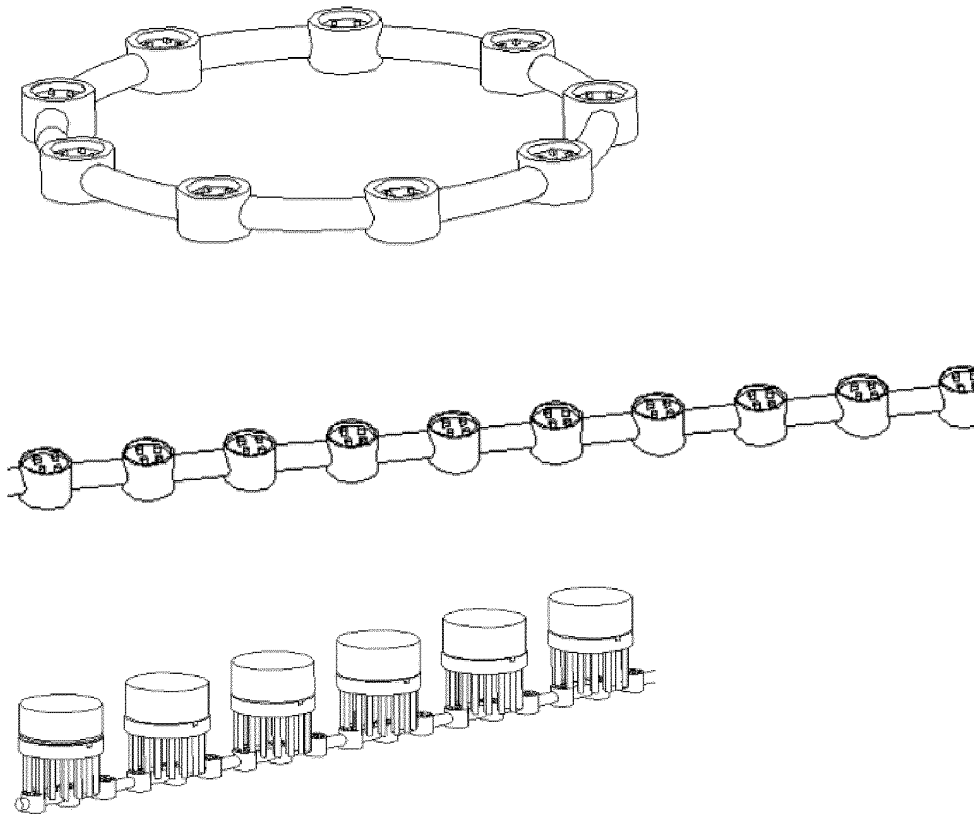


Figure 10

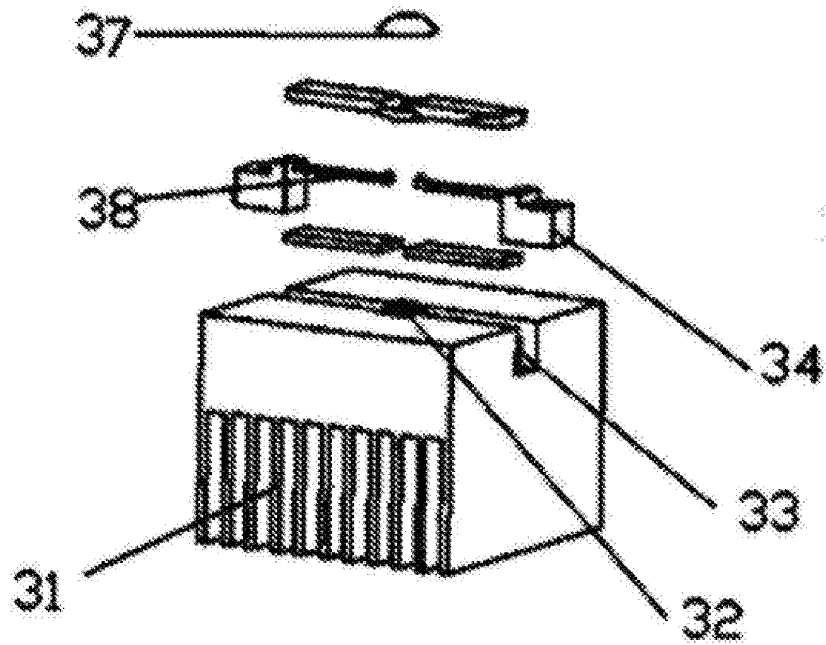


Figure 11

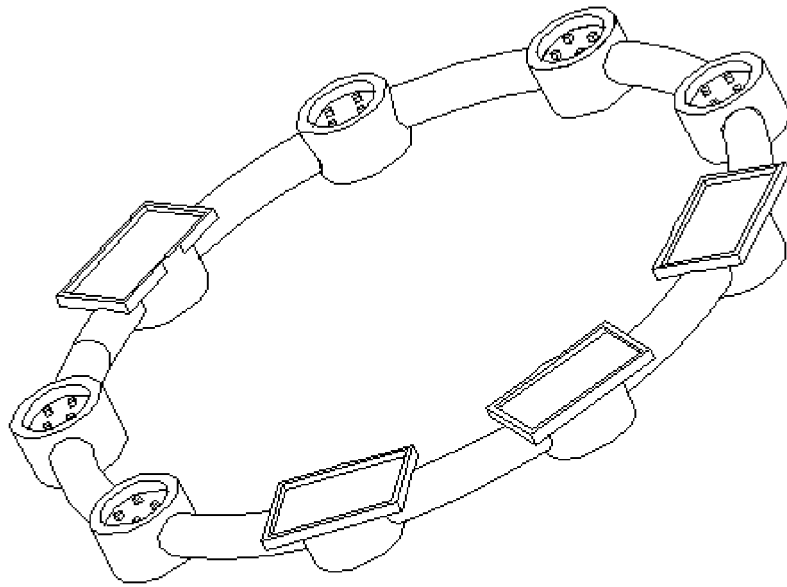


Figure 12

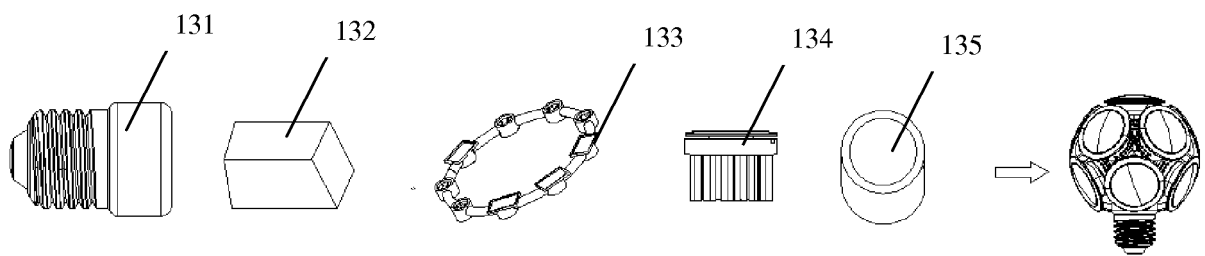


Figure 13

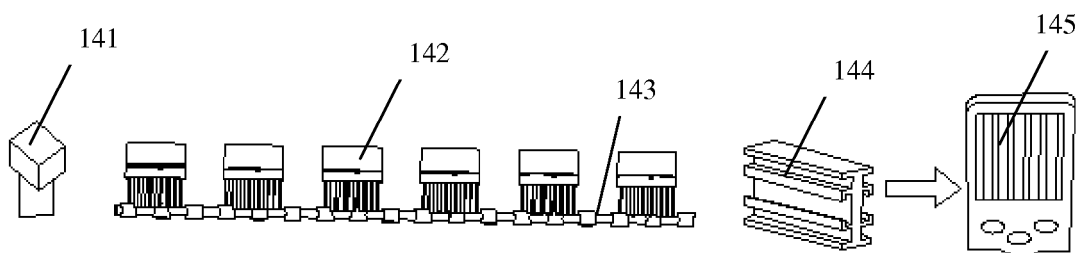


Figure 14

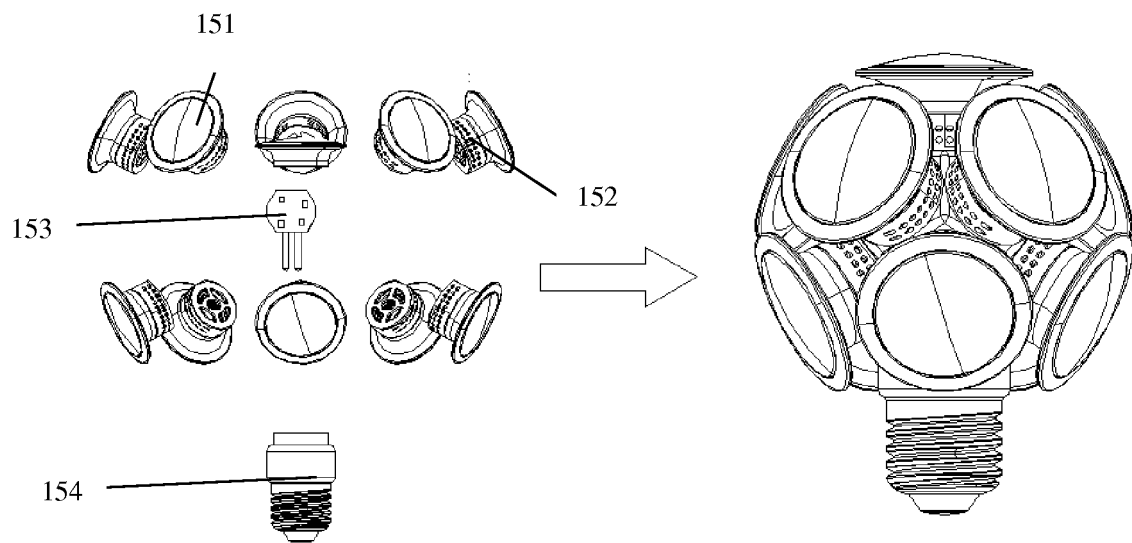


Figure 15

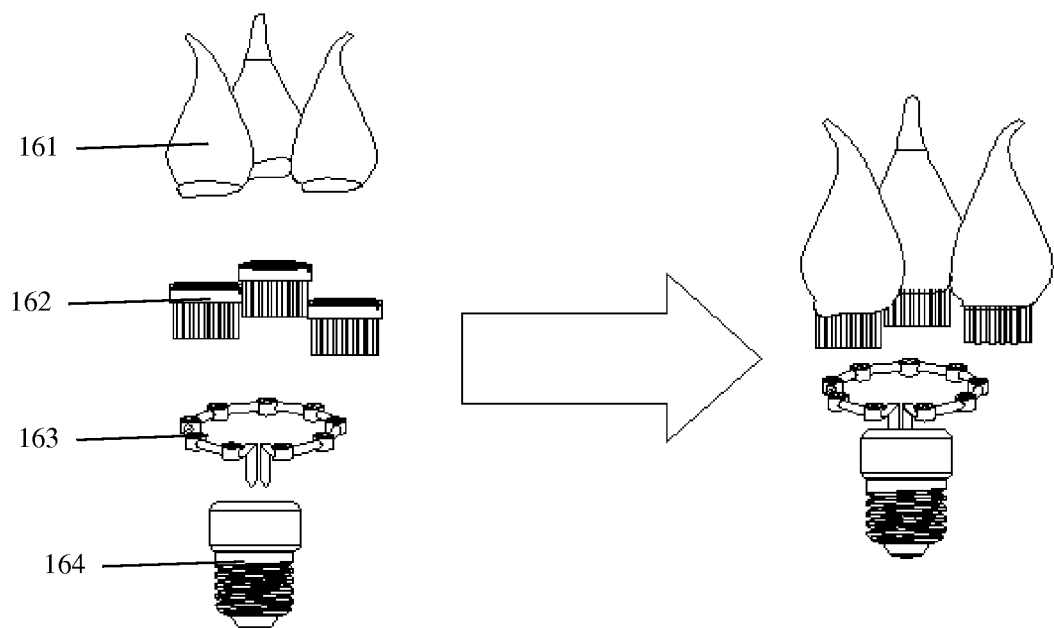


Figure 16

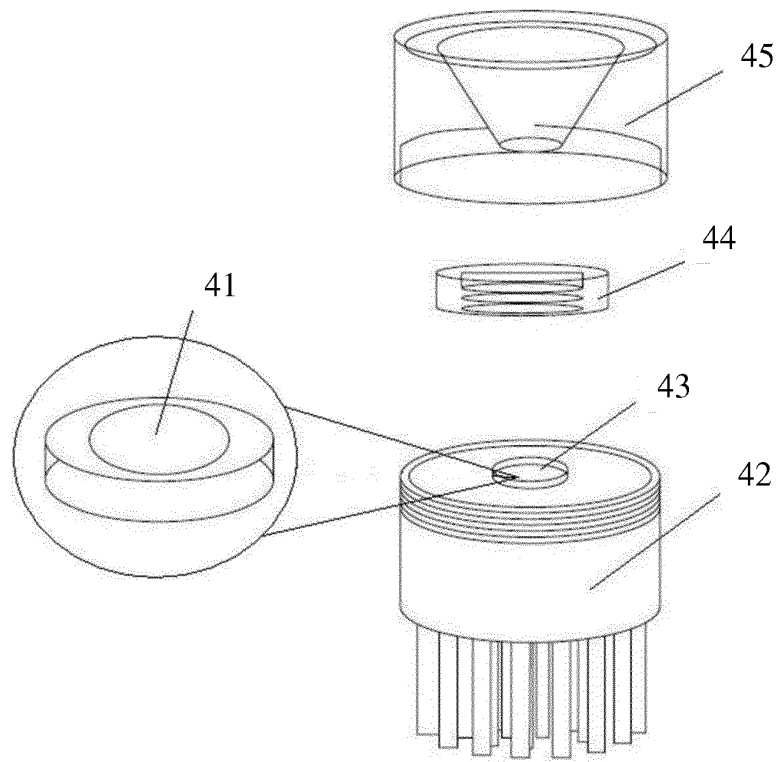


Figure 17

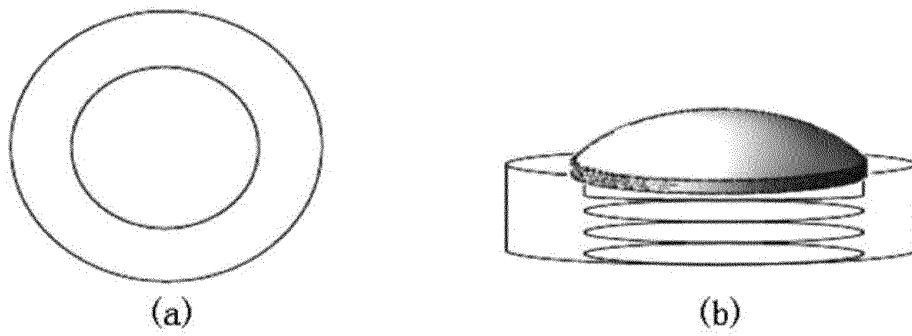


Figure 18

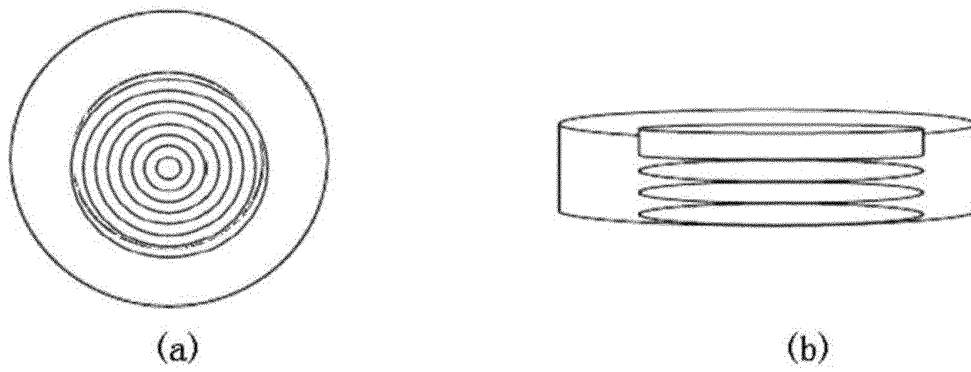


Figure 19

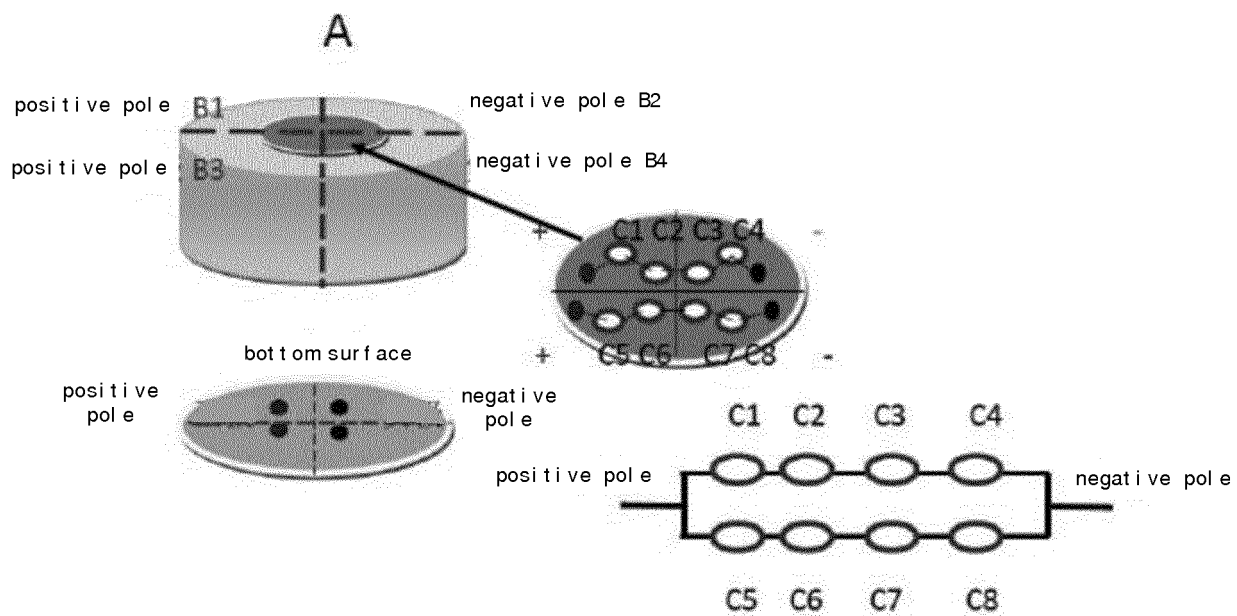


Figure 20

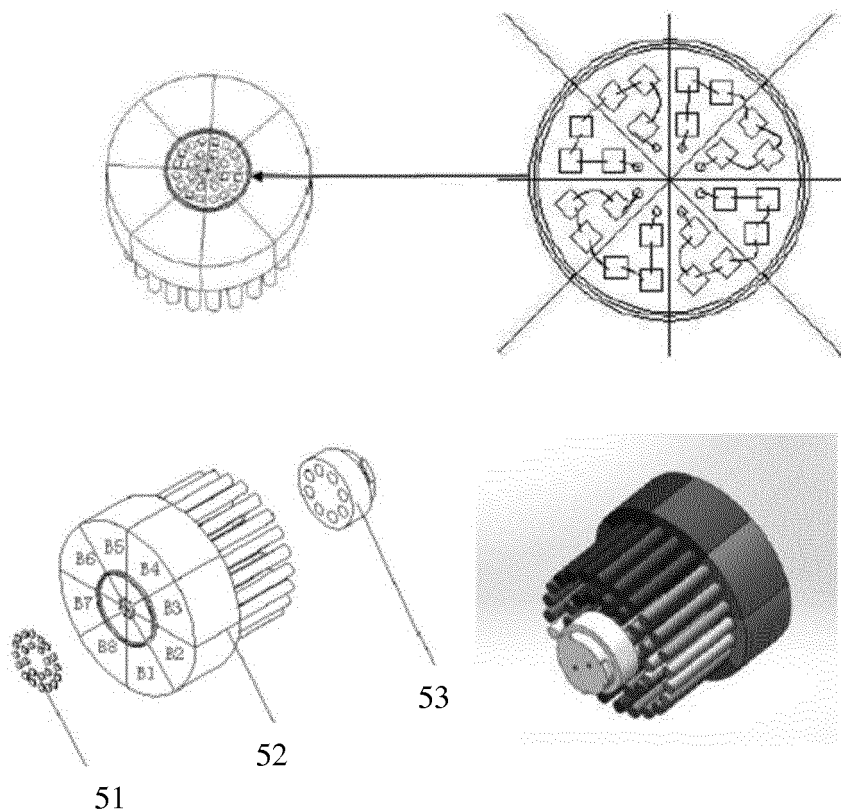


Figure 21

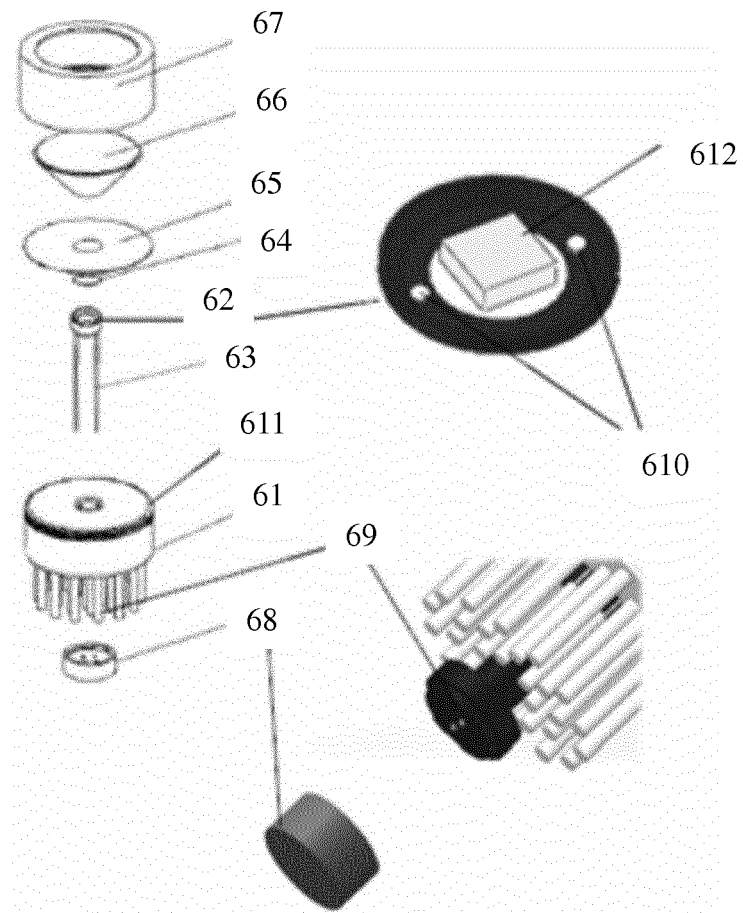


Figure 22

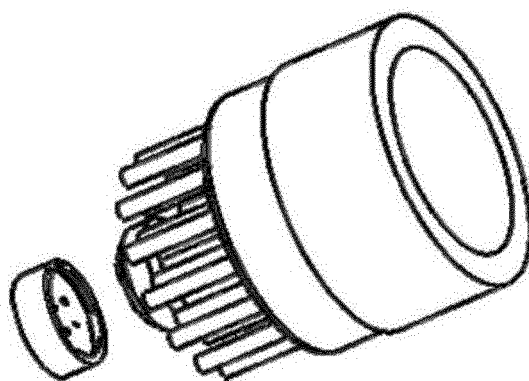


Figure 23

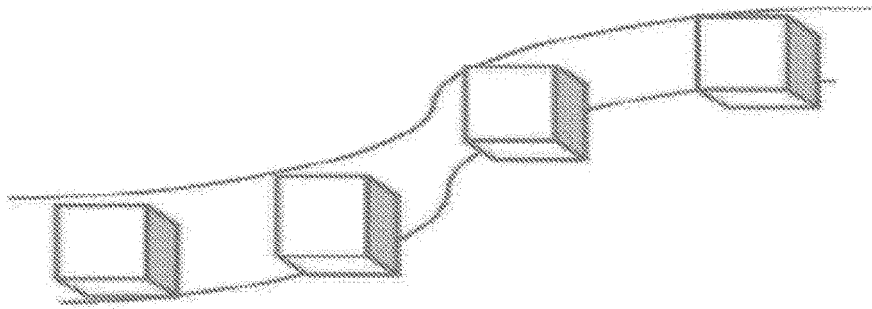


Figure 24

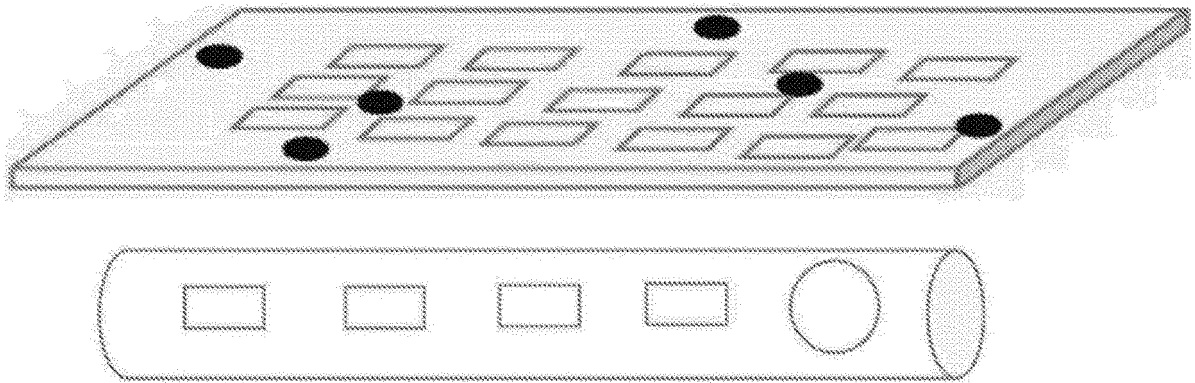


Figure 25

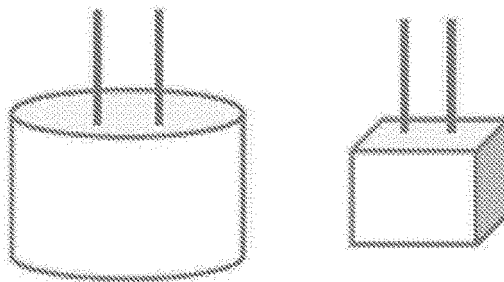


Figure 26

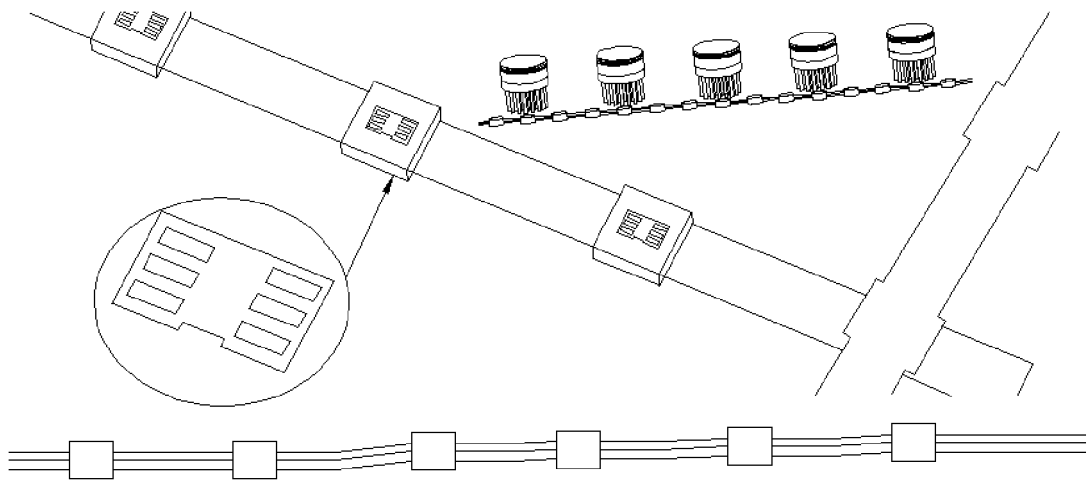


Figure 27

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2017/083178

A. CLASSIFICATION OF SUBJECT MATTER

F21K 9/23 (2016.01) i; F21K 9/237 (2016.01) i; F21K 9/238 (2016.01) i; F21K 9/69 (2016.01) i
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F21K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNPAT, WPI, EPODOC, CNKI: YUEGANG OPTICAL; ZHU, Heng; light emitting diode, hot plug, remove, lens, buckle, slot groove, deform, led, light, emit+, diode?, lamp, illuminat+, module?, flexi+, bent, bend+, slot+, groove?, assembl+, plug+, decorat+

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
PX	CN 106015977 A (ZHU, Heng), 12 October 2016 (12.10.2016), description, paragraphs [0008]-[0028], and figures 1-15	1, 7
PX	CN 205909036 U (ZHU, Heng), 25 January 2017 (25.01.2017), claims 1-2, description, paragraphs [0045]-[0059], and figures 1-14	1, 7
PY	CN 205909036 U (ZHU, Heng), 25 January 2017 (25.01.2017), claims 1-2, description, paragraphs [0045]-[0059], and figures 1-14	2-6, 8-10
PY	CN 105633256 A (ZHU, Heng), 01 June 2016 (01.06.2016), description, paragraphs [0018]-[0021], and figures 1-3	2-4
PY	CN 105627122 A (ZHU, Heng), 01 June 2016 (01.06.2016), description, paragraphs [0003]-[0017], and figures 1-3	5
PY	CN 105674224 A (ZHU, Heng), 15 June 2016 (15.06.2016), description, paragraphs [0006]-[0023], and figures 1-3	6, 8
PY	CN 105979705 A (ZHU, Heng), 28 September 2016 (28.09.2016), description, paragraphs [0004]-[0013], and figures 1-3	9, 10

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	"&" document member of the same patent family

Date of the actual completion of the international search

15 June 2017 (15.06.2017)

Date of mailing of the international search report

29 June 2017 (29.06.2017)

Name and mailing address of the ISA/CN:
State Intellectual Property Office of the P. R. China
No. 6, Xitucheng Road, Jimenqiao
Haidian District, Beijing 100088, China
Facsimile No.: (86-10) 62019451

Authorized officer

CUI, Zhen

Telephone No.: (86-10) 62413563

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2017/083178

C (Continuation).	DOCUMENTS CONSIDERED TO BE RELEVANT	
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	CN 204118132 U (ZHU, Heng), 21 January 2015 (21.01.2015), description, paragraphs [0030]-[0034], and figures 1-8	1-10
A	CN 204268150 U (DONGGUAN CLED OPTOELECTRONIC TECHNOLOGY CO., LTD.), 15 April 2015 (15.04.2015), the whole document	1-10
A	CN 204901392 U (DONGGUAN THAILIGHT SEMICONDUCTOR LIGHTING CO., LTD.), 23 December 2015 (23.12.2015), the whole document	1-10
A	US 2015219328 A1 (LEDIAMMOND OPTO CORP.), 06 August 2015 (06.08.2015), the whole document	1-10

Form PCT/ISA/210 (continuation of second sheet) (July 2009)

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2017/083178

5	Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
	CN 106015977 A	12 October 2016	None	
	CN 205909036 U	25 January 2017	None	
10	CN 105633256 A	01 June 2016	None	
	CN 105627122 A	01 June 2016	None	
	CN 105674224 A	15 June 2016	None	
	CN 105979705 A	28 September 2016	None	
15	CN 204118132 U	21 January 2015	None	
	CN 204268150 U	15 April 2015	None	
	CN 204901392 U	23 December 2015	None	
	US 2015219328 A1	06 August 2015	None	
20				
25				
30				
35				
40				
45				
50				
55				

Form PCT/ISA/210 (patent family annex) (July 2009)