



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
11.12.2019 Bulletin 2019/50

(51) Int Cl.:
B65D 51/20 (2006.01)

(21) Application number: **19180632.2**

(22) Date of filing: **20.04.2015**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(72) Inventor: **Jobse, Pieter Samuel**
2712 HM Zoetermeer (NL)

(74) Representative: **Nederlandsch Octrooibureau**
P.O. Box 29720
2502 LS The Hague (NL)

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
15164282.4 / 3 085 636

(71) Applicant: **N.V. Nutricia**
2712 HM Zoetermeer (NL)

Remarks:


This application was filed on 17-06-2019 as a divisional application to the application mentioned under INID code 62.

(54) **SEALING FOIL WITH TEAR LINE**

(57) A sealing foil 1 for closing a packaging container has a pre-cut first layer 2 and a hermetic second layer 3, connected to the first layer and coextensive therewith over the full extent of the second layer. The first layer is pre-cut with a plurality of tear lines 5A, 5B, 5C defining a tearing path 5 leading from a pull tab 6 to a tear end 7

such that a central portion 8 of the sealing foil can be removed to provide an access opening to the container. A lead-in tear line 5A and a circumferential tear line 5B are contiguous such that uncontrolled ripping of the sealing foil is prevented.

Fig. 5

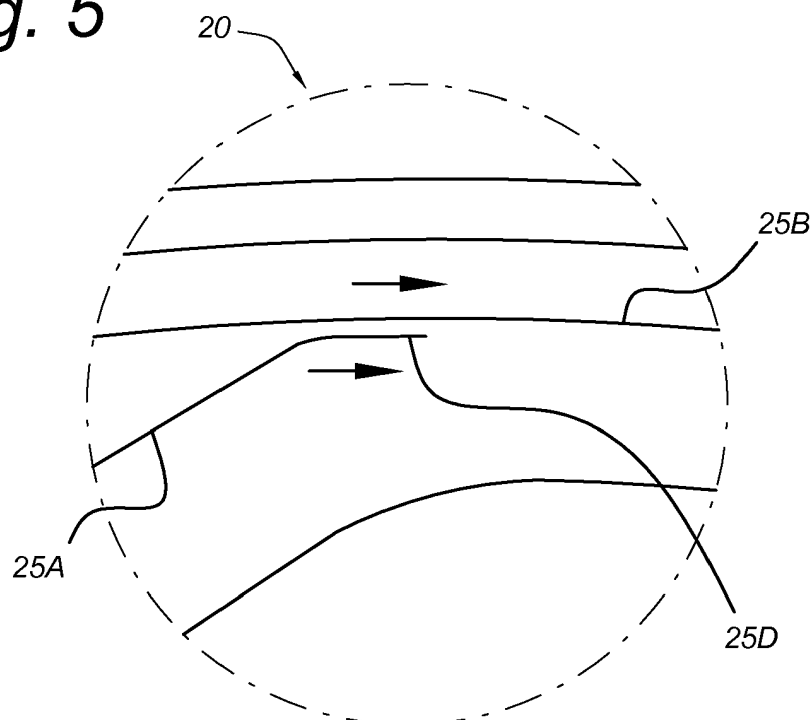

Description

[0001] The present invention relates to sealing foils for use in packaging and in particular to sealing foils having a weakened tear line along which the foil may be torn to open the package. The invention also relates to a method of forming such a sealing foil.

[0002] Packages are available in many forms and sizes according to the product to be contained. In the food packaging industries, the presence of a sealing foil can be of great importance in maintaining a product in sterile or fresh condition prior to use. One form of seal that has been disclosed for such packaging is shown in WO2014062119. The seal comprises two layers welded together, wherein the first layer is an aluminium laminate that can be heat sealed or otherwise welded to the sides of a container e.g. using an induction welding process.

[0003] In order to open such seals, they may be provided with a tear line extending along a tearing path around the lid. The tear line may cut the first layer but may not penetrate a hermetic second layer located beneath the first layer and welded thereto. A pull tab may be provided for a user to grasp and commence tearing the first layer along the tearing path. In order to achieve adequate opening it is important that the tear line is without interruption or that any such interruptions are minimal as these may lead to uncontrolled ripping of the sealing foil in a direction other than along the tearing path. A seal is disclosed in WO2005075314 that has a pull tab, which leads into a tear line that is continuous through a lead-in section and a circumferential section. Although in theory this arrangement ensures a continuous tear, in practice, the manner in which the tear line is produced may lead to undesired discontinuities. Forming of the tear line generally takes place by punching or die-cutting with a series of punches, each having a blade for cutting a portion of the tear line. For production purposes, the circumferential section is cut using a punch that is different from that of the lead-in section. Alignment of one punch with the following punch determines the accuracy with which the different portions of the tear line align to each other. Furthermore, in order that sealing prior to opening is not compromised, the tear line should be confined within the region covered by the hermetic second layer. Since these layers are not always co-extensive, and are assembled together by welding after cutting of the tear line, careful positioning is required. Due to manufacturing tolerances, existing arrangements have lead to at least some sealing foils having discontinuous tear lines that can lead to uncontrolled ripping on opening of the seal.

[0004] It would be desirable to provide an alternative arrangement that allows accurate placement of the tear line and encourages correct opening of the seal without ripping.

[0005] According to the invention there is provided a sealing foil for closing a packaging container comprising: a pre-cut first layer; a hermetic second layer, connected to the first layer and coextensive therewith over the full

extent of the second layer; wherein the first layer is pre-cut with a plurality of tear lines defining a tearing path leading from a pull tab to a tear end such that a central portion of the sealing foil can be removed to provide an access opening to the container and a lead-in tear line is contiguous with a circumferential tear line such that uncontrolled ripping of the sealing foil is prevented. In the present context, contiguous to one another, is intended to require that the portions of the tear line either intersect or run parallel and adjacent to such an extent that a tear is obliged to follow from one portion of the tear line to a following portion, whereby uncontrolled ripping away from the tear path is avoided.

[0006] In one embodiment, the sealing foil is not square shaped. In particular, the sealing foil may be of a rectangular shape with the longer sides of the foil preferably being outwardly bowed. The shorter sides are preferably without a radius between the corners of the foil. Furthermore, the sealing foil has corners that are rounded off. The bowed sides and rounded corners facilitate controlled tearing of the foil. Furthermore, the lead-in tear line should join the circumferential tear line on one of the longer sides, preferably as far from the corner as possible. In one embodiment, the lead-in tear line should join the circumferential tear line at a about the mid-point of the longer side or earlier.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] The features and advantages of the invention will be appreciated upon reference to the following drawings of a number of exemplary embodiments, in which:

Figure 1 shows a prior art sealing foil;

Figure 2 shows a detail of the prior art sealing foil of Figure 1;

Figure 3 shows the detail of Figure 2, during opening of the sealing foil;

Figure 4 shows a detail of part of a sealing foil according to a first embodiment of the invention;

Figure 5 shows a detail of part of a sealing foil according to a second embodiment of the invention; and

Figure 6 shows a detail of part of a sealing foil according to a third embodiment of the invention.

[0008] Figure 1 shows an existing sealing foil 1 as may be used in various types of food packaging such as drinks powders, infant formulas and the like. The foil 1 comprises a first layer 2 and a second layer 3, which are joined together by welding at various points on their surface. The first layer 2 is formed of a heat-sealable aluminium laminate and extends to an outer circumference 4 that

can be joined by heat sealing (such as induction sealing) to an inside wall of a container (not shown). The second layer 3 is slightly smaller than the first layer 2 and is formed of a heat sealable aluminium laminate, with the first and second layers 2, 3 being joined together face to face with the heat sealable surfaces engaged. It will be understood that other appropriate materials may be used for these layers e.g. polymer materials.

[0009] A tear path 5 is formed in the upper first layer leading from a pull tab 6 to a tear end 7. The tear path 5 comprises a series of tear lines 5A, 5B, 5C, pre-cut through the material of the first layer 2. These include a first diagonal, lead-in tear line 5A, a second circumferential tear line 5B and an inner tear line 5C. The pull tab 6 and the diagonal tear line 5A are angled to the circumferential tear line 5B by around 20 degrees. On pulling on the pull tab 6, the sealing foil 1 tears along the tear path 5 whereby the pre-cut first layer 2 causes the underlying second layer 3, which is welded to it, to be torn in a controlled manner. A central portion 8 of the sealing foil 1 is thus removed and an opening formed corresponding to the circumferential tear line 5B.

[0010] Figure 2 shows an enlarged portion of Figure 1 illustrating the intersection of the diagonal tear line 5A with the circumferential tear line 5B. As can be seen, these are formed as separate cuts and they are not contiguous with each other at the point of intersection. This is because the tear line 5B is formed in a separate cutting action to that of the diagonal tear line 5A using a different punch or blade. The accuracy by which the production machine can be set up will determine the size of the gap G. In an existing arrangement, the blade that forms the diagonal tear line 5A is set to avoid the possibility of passing the circumferential tear line 5B. This is to avoid any chance that the diagonal line 5A could extend beyond the outer extent of the second layer 3, once the layers 2, 3 are assembled together.

[0011] Figure 3 shows the detail of Figure 2 during opening of such a conventional foil 1. As a user pulls in the direction P on the pull tab 6, the second layer 3 is caused to tear along the diagonal tear line 5A towards the intersection with the circumferential tear line 5B. Due to the presence of the gap G, the tear does not proceed correctly and instead both the first layer 2 and the second layer 3 rip in the direction R. Such uncontrolled ripping of the sealing foil 1 is undesirable.

[0012] Figure 4 shows a first embodiment of a sealing foil 10 according to the invention, shown in detail view corresponding to Figure 2. Other parts of the sealing foil 10 may be identical to the prior art foil of Figure 1 and are provided with like references preceded by 10. According to Figure 4, the diagonal tear line 15A has a curved end 15D that crosses the circumferential tear line 15B and turns in a tangential direction to it. In this context tangential is intended to include both collinear and parallel i.e. it is sufficient that the curved end has at least a portion that lies parallel to the circumferential tear line 15B and may even terminate in a direction returning to-

wards the circumferential tear line 15B. In this manner, during operation the tear will progress along the diagonal tear line 15A and will either directly join the circumferential tear line 15B or cross over via the curved end 15D and then return to join it subsequently. Uncontrolled ripping is thus eliminated, even if the diagonal tear line 15A and circumferential tear line 15B are cut by different punches in different steps and careful alignment of the respective punches is no longer essential.

[0013] Figure 5 shows a second embodiment of a sealing foil 20 according to the invention in a detailed view similar to Figure 4. Like references in this embodiment are used, preceded by 20. According to this embodiment, the diagonal tear line 25A has an extended curved end 25D that is tangential to the circumferential tear line 25B over an extended length. Again, in this context tangential is intended to include parallel, since these lines 25B, 25D will only coincide if the set-up of the respective punches is accurate. Nevertheless, irrespective of their accuracy, during opening of the sealing foil 20 of Figure 5, the tear progressing along curved end 25D is tearing parallel to the circumferential tear line 25B and will be more likely to continue in this direction since the force as applied in following curved end 25D is in the same direction as the circumferential tear line 25B.

[0014] Figure 6 shows a third embodiment of a sealing foil 30 according to the invention in a detailed view similar to Figure 4. Like references in this embodiment are used, preceded by 30. According to this embodiment, the diagonal tear line 35A extends into the circumferential tear line 35B and continues uninterrupted to the tear end 37. These sections of the tear line 35A, 35B can be cut with a single blade or punch in a single process.

[0015] Although reference is given here and throughout the description to the tear line being uninterrupted, the skilled person will be aware that minor interruption of the cut formed through the first layer may be present. These maintain the integrity of the first layer and prevent the tear line from opening during production and/or prior to use in areas where the first layer and the second layer may not be welded or otherwise connected together.

[0016] Many modifications in addition to those described above may be made to the structures and techniques described herein without departing from the spirit and scope of the invention. In particular, although the pull tab has been shown at a diagonal to the circumferential tear line, it may do so at any angle between perpendicular and 5 degrees and the lead-in tear line may be straight or curved. Accordingly, although specific embodiments have been described, these are examples only and are not limiting upon the scope of the invention.

Claims

1. A sealing foil for closing a packaging container comprising:

a pre-cut first layer;
a hermetic second layer, connected to the first layer and coextensive therewith over the full extent of the second layer;

wherein the first layer is pre-cut with a plurality of tear lines defining a tearing path leading from a pull tab to a tear end such that a central portion of the sealing foil can be removed to provide an access opening to the container and a lead-in tear line is contiguous with a circumferential tear line such that uncontrolled ripping of the sealing foil is prevented.

2. The sealing foil according to claim 1, wherein the lead-in tear line extends from the pull tab outwards to a circumferential tear line defining the access opening and enters or crosses the circumferential tear line . 15
3. The sealing foil according to claim 1 or claim 2, wherein the lead-in tear line extends at an angle of between 90 degrees and 5 degrees to the circumferential tear line preferably at an angle of between 30 degrees and 10 degrees. 20
25
4. The sealing foil according to any preceding claim, wherein the lead-in tear line curves tangentially to the circumferential tear line.
5. The sealing foil according to any preceding claim, wherein the first layer extends beyond the second layer for connection to an inner wall of the container. 30
6. The sealing foil according to any preceding claim, wherein the first layer is a laminate comprising aluminium. 35
7. The sealing foil according to any preceding claim, wherein the second layer comprises an oxygen barrier material. 40
8. A method of manufacture of a sealing foil according to any preceding claim, comprising:
 - providing a quantity of material for forming the first layer; 45
 - pre-cutting the first layer with a series of cuts to define the tearing path;
 - providing a quantity of material for forming the second layer; and 50
 - joining the first and second layers together.
9. The method of claim 8, wherein the first layer is pre-cut using a punch having a first blade portion to form a diagonal cut and a second blade portion to form a circumferential cut and the first and second blade portions are contiguous and join at a sloping T-junction. 55

10. The method of claim 8, wherein the first layer is pre-cut using a punch having a blade having a diagonal portion and a circumferential portion.

- 5 11. The method of any of claims 8 to 10, wherein the first layer is joined to the second layer by induction welding.

10

15

20

25

30

35

40

45

50

55

Fig. 1

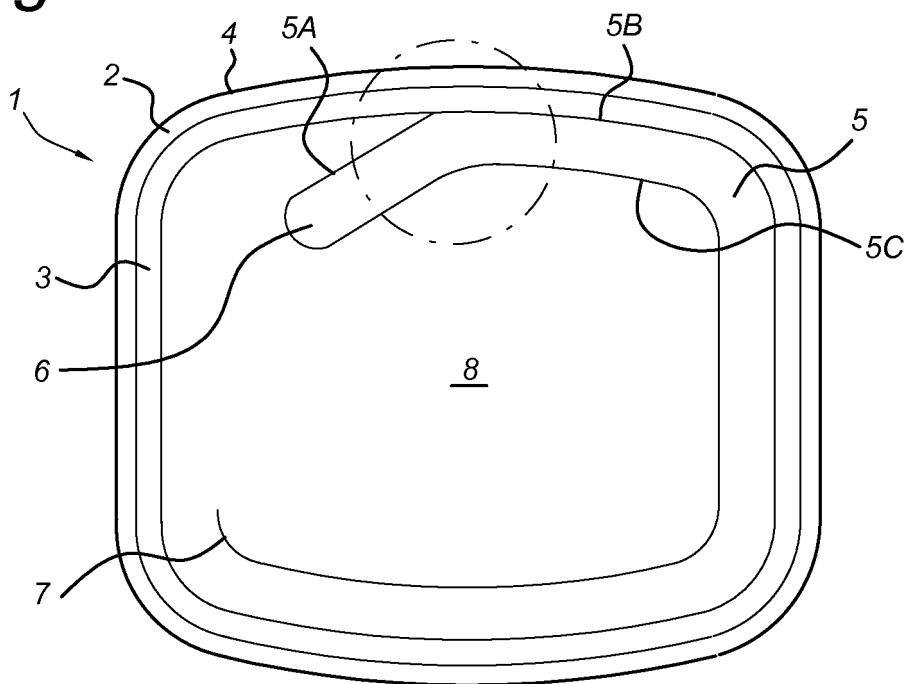


Fig. 2

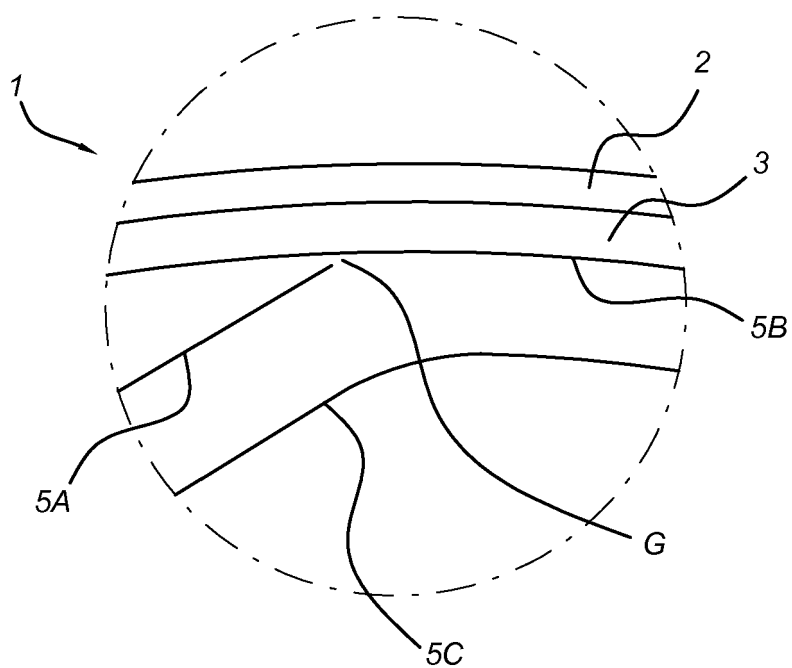


Fig. 3

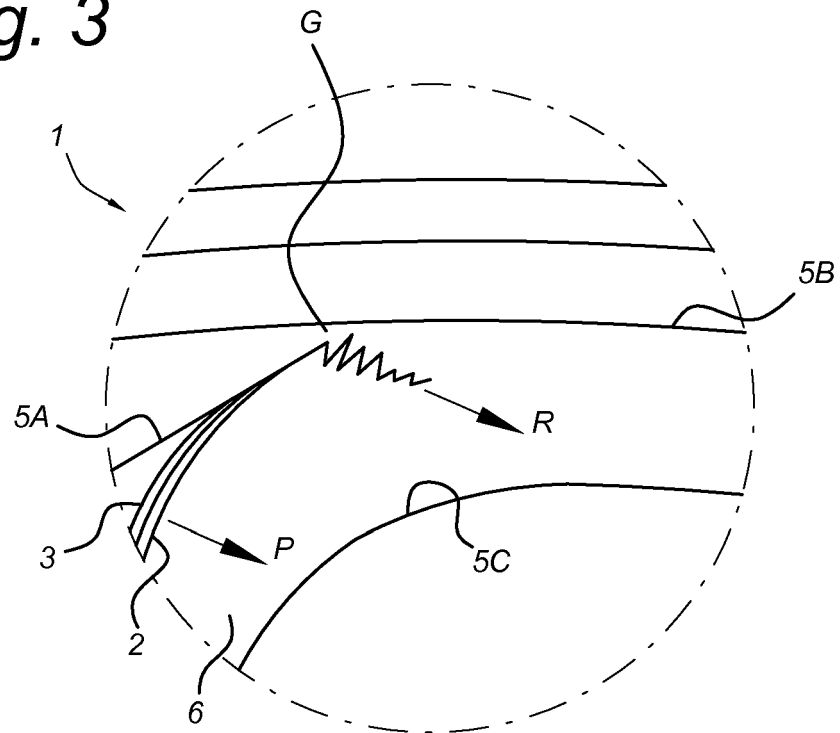


Fig. 4

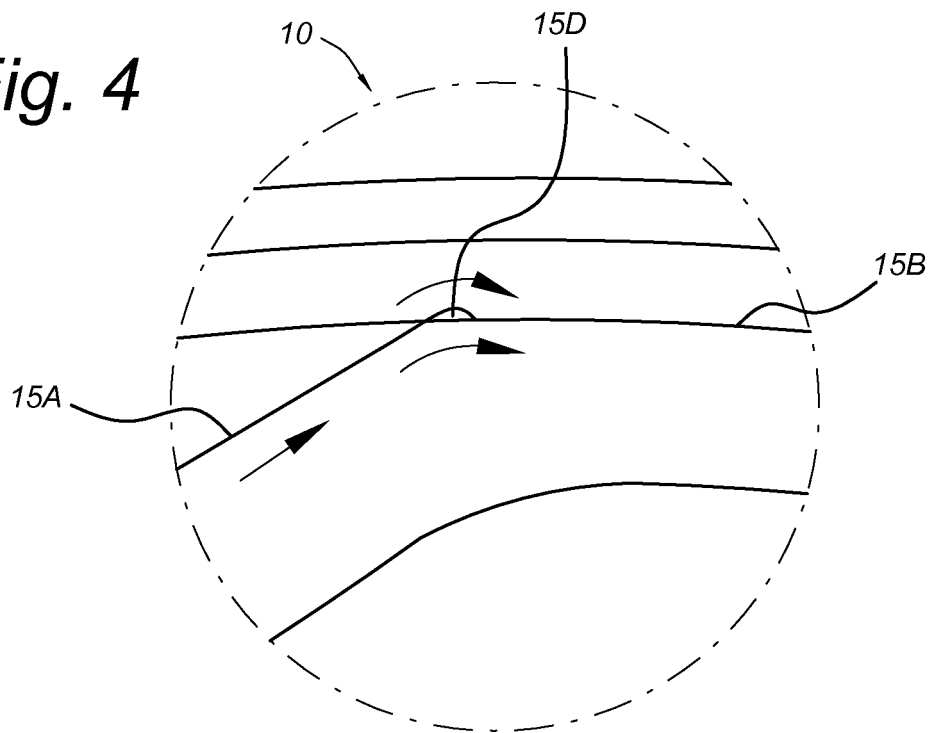


Fig. 5


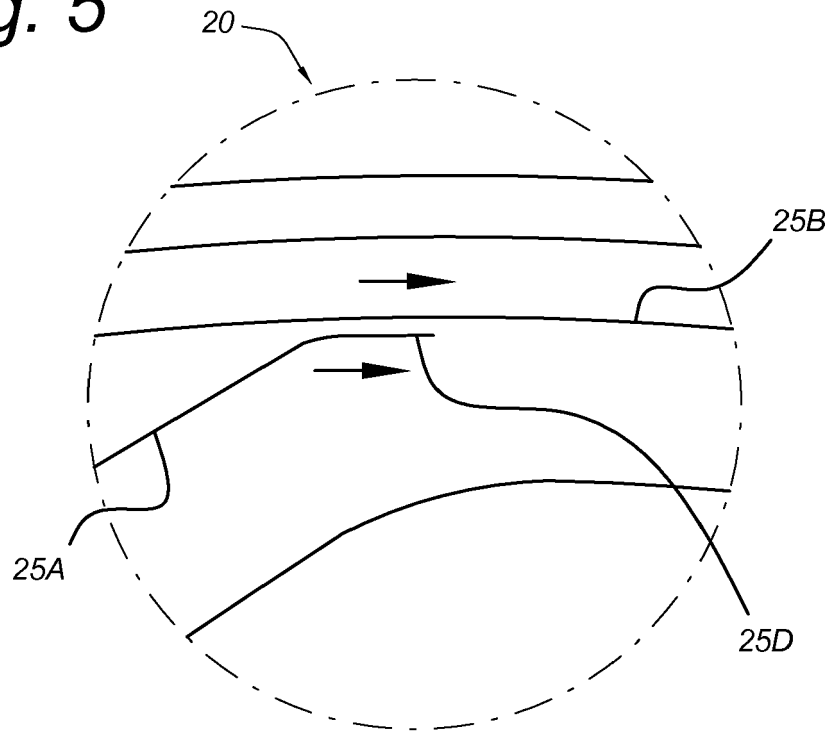


Fig. 6



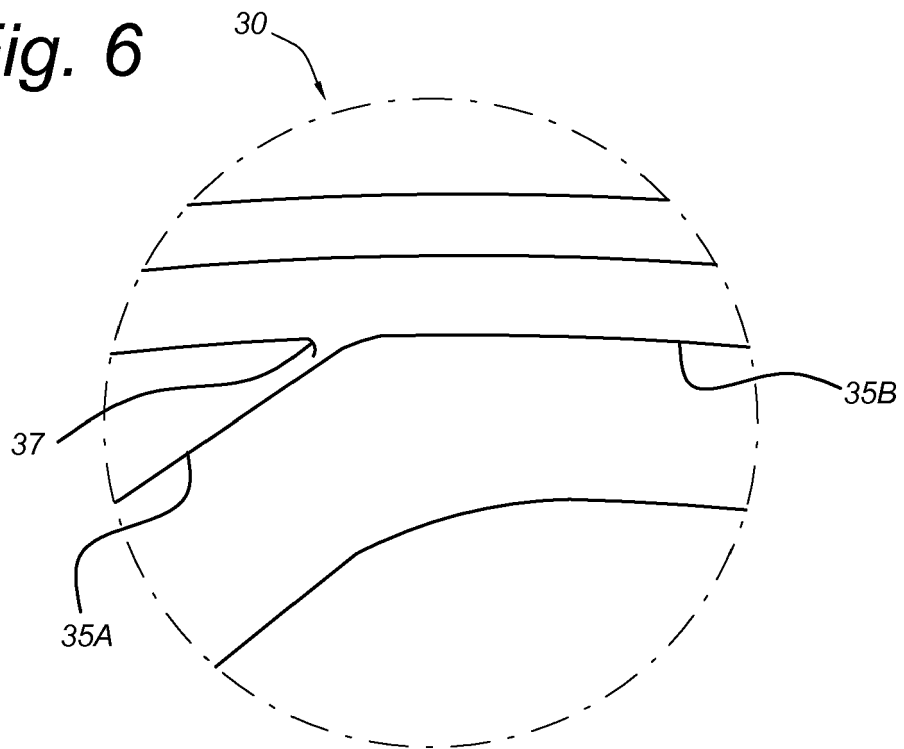

EUROPEAN SEARCH REPORT

 Application Number
 EP 19 18 0632

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 3 776 450 A (CHRISTENSSON O) 4 December 1973 (1973-12-04)	1-3,5-8, 11	INV. B65D51/20
Y	* abstract; figures *	4	
A	* column 2, line 53 - column 3, line 62 * * column 4, line 44 - column 5, line 21 *	9,10	
Y	GB 998 102 A (BRITISH UNITED SHOE MACHINERY) 14 July 1965 (1965-07-14) * page 2, line 109 - page 3, line 58; figures 1,2 *	4	
A,D	US 2008/041861 A1 (CRAWFORD KAREN RITA [GB] ET AL) 21 February 2008 (2008-02-21) * abstract; figures 1,2,4 * * paragraphs [0048], [0053] *	1-11	
A,D	WO 2005/075314 A2 (NUTRICIA NV [NL]; CRAWFORD KAREN RITA [GB]; LUTTIK NICOLAAS [NL]) 18 August 2005 (2005-08-18) * paragraphs [0048], [0053]; figures 2,3 *	1-11	
			TECHNICAL FIELDS SEARCHED (IPC)
			B65D
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 31 October 2019	Examiner Serrano Galarraga, J
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 19 18 0632

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

31-10-2019

10

15

20

25

30

35

40

45

50

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3776450 A	04-12-1973	CA 954052 A	03-09-1974
		CH 532508 A	15-01-1973
		DK 126983 B	10-09-1973
		FI 56350 B	28-09-1979
		FR 2127891 A5	13-10-1972
		GB 1363982 A	21-08-1974
		IT 949776 B	11-06-1973
		JP S5330077 B1	24-08-1978
		NL 7202498 A	05-09-1972
		NO 131065 B	23-12-1974
		SE 350945 B	13-11-1972
		US 3776450 A	04-12-1973
		ZA 7201166 B	29-11-1972
GB 998102 A	14-07-1965	CH 404429 A	15-12-1965
		ES 276476 A1	01-06-1962
		GB 998102 A	14-07-1965
US 2008041861 A1	21-02-2008	AU 2005210583 A1	18-08-2005
		BR PI0507171 A	26-06-2007
		CA 2551407 A1	18-08-2005
		CA 2925840 A1	18-08-2005
		CN 1914096 A	14-02-2007
		CN 101670909 A	17-03-2010
		CN 102190118 A	21-09-2011
		DK 2105387 T3	01-08-2016
		DK 3144240 T3	23-09-2019
		EP 1644259 A2	12-04-2006
		EP 2105387 A2	30-09-2009
		EP 2810893 A1	10-12-2014
		EP 3144240 A1	22-03-2017
		EP 3572345 A1	27-11-2019
		ES 2426188 T3	21-10-2013
		ES 2579446 T3	11-08-2016
		ES 2617044 T3	15-06-2017
		HK 1085179 A1	27-09-2013
		JP 2007520398 A	26-07-2007
		LT 3144240 T	10-10-2019
		MX 345995 B	01-03-2017
		PL 2105387 T3	31-10-2016
		PL 2810893 T3	31-05-2017
		SG 153798 A1	29-07-2009
		US 2008041861 A1	21-02-2008
		US 2016016715 A1	21-01-2016
		WO 2005075314 A2	18-08-2005
		ZA 200605518 B	27-12-2007

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

55

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 19 18 0632

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

31-10-2019

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2005075314 A2	18-08-2005	AU 2005210583 A1	18-08-2005
		BR P10507171 A	26-06-2007
		CA 2551407 A1	18-08-2005
		CA 2925840 A1	18-08-2005
		CN 1914096 A	14-02-2007
		CN 101670909 A	17-03-2010
		CN 102190118 A	21-09-2011
		DK 2105387 T3	01-08-2016
		DK 3144240 T3	23-09-2019
		EP 1644259 A2	12-04-2006
		EP 2105387 A2	30-09-2009
		EP 2810893 A1	10-12-2014
		EP 3144240 A1	22-03-2017
		EP 3572345 A1	27-11-2019
		ES 2426188 T3	21-10-2013
		ES 2579446 T3	11-08-2016
		ES 2617044 T3	15-06-2017
		HK 1085179 A1	27-09-2013
		JP 2007520398 A	26-07-2007
		LT 3144240 T	10-10-2019
		MX 345995 B	01-03-2017
		PL 2105387 T3	31-10-2016
		PL 2810893 T3	31-05-2017
		SG 153798 A1	29-07-2009
		US 2008041861 A1	21-02-2008
		US 2016016715 A1	21-01-2016
		WO 2005075314 A2	18-08-2005
		ZA 200605518 B	27-12-2007

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2014062119 A [0002]
- WO 2005075314 A [0003]