

(19)



Europäisches
Patentamt
European
Patent Office
Office européen
des brevets



(11)

EP 3 594 024 B9

(12)

CORRECTED EUROPEAN PATENT SPECIFICATION

(15) Correction information:

Corrected version no 1 (W1 B1)
Corrections, see
Claims EN 1

(51) Int Cl.:

B60C 13/00 (2006.01)

(48) Corrigendum issued on:

18.08.2021 Bulletin 2021/33

(45) Date of publication and mention
of the grant of the patent:

24.03.2021 Bulletin 2021/12

(21) Application number: **19182862.3**

(22) Date of filing: **27.06.2019**

(54) TIRE

REIFEN

PNEUMATIQUE

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **10.07.2018 JP 2018130911**

(43) Date of publication of application:
15.01.2020 Bulletin 2020/03

(73) Proprietor: **Sumitomo Rubber Industries, Ltd.
Kobe-shi, Hyogo-ken 651-0072 (JP)**

(72) Inventor: **OGIHARA, Sawa**

Kobe-shi, Hyogo 651-0072 (JP)

(74) Representative: **Manitz Finsterwald
Patent- und Rechtsanwaltspartnerschaft mbB
Martin-Greif-Strasse 1
80336 München (DE)**

(56) References cited:
JP-A- 2017 001 438 US-A1- 2011 139 326

Description

BACKGROUND OF THE INVENTION

5 Field of the Invention

[0001] The present invention relates to a tire having a decorative pattern formed on a surface of a sidewall portion.

10 Description of the Background Art

[0002] In general, a sidewall portion of a tire has thin rubber, and, therefore, recesses and projections called dents and bulges become conspicuous due to, for example, residual air and a joint portion of a carcass that is an internal structure. Such recesses and projections deteriorate outer appearance of the tire.

[0003] Japanese Laid-Open Patent Publication No. 7-164831 suggests a tire which has a strip-like design in which 15 multiple ridges are disposed on a surface of a sidewall at a predetermined pitch such that the recesses and projections are unlikely to become conspicuous. Such a strip-like design is formed by groove portions (reversed pattern of the ridges) formed in a molding surface of a vulcanization mold for the tire.

[0004] A tire in accordance with the preamble of claim 1 is known from document JP 2017 001438 A.

20 SUMMARY OF THE INVENTION

[0005] In order to make the recesses and projections less conspicuous, it is important to form a gap between the adjacent ridges so as to make the gap small, form the gap portion so as to be viewed as being dark (black), and clarify contrast of light on the strip-like design.

[0006] However, when the gap formed between adjacent ridges is made small, multiple ridges are formed in the tire circumferential direction. According thereto, a proportion of groove portions formed in a molding surface of a vulcanization mold is also increased. Laser, particles, or the like used for cleaning the molding surface are unlikely to be easily applied into the groove portions. Therefore, a problem arises that efficiency for cleaning the vulcanization mold is reduced. Accordingly, there is room for further improvement in that both outer appearance of the tire and efficiency for cleaning the vulcanization mold are to be improved.

[0007] The present invention is made in view of the aforementioned circumstance, and a main object of the present invention is to provide a tire that allows improvement of both outer appearance of the tire and efficiency for cleaning a vulcanization mold.

[0008] This object is solved by a tire having the features of claim 1.

[0009] Subclaims are directed to preferred embodiments.

[0010] In the tire of the present invention, the decorative pattern is formed on the surface of the sidewall portion. The decorative pattern is formed such that a plurality of ridges that extend in the tire radial direction are aligned in the tire circumferential direction so as to form the gaps. The decorative pattern having such a structure can prevent recesses and projections on the sidewall portion from becoming conspicuous, and can improve outer appearance of the tire.

[0011] The transverse cross-section of the ridge is tapered so as to gradually reduce the length along the surface such that the greater the distance from the surface is, the less the length along the surface is. The decorative pattern is structured so as to satisfy expressions (E1) and (E2).

45 $20 \leq A \leq 40$ \cdots (E1)

$0.15 \leq C \leq 0.25$ \cdots (E2)

50 wherein A represents the taper angle (degree) of the ridge, and C represents the minimum length (mm), of the gap, measured along the surface.

[0012] The decorative pattern is formed such that the taper angle A of the ridge is not greater than 40 degrees. Therefore, an incident angle and a reflection angle of light that is incident so as to be perpendicular to the surface can be reduced at the side surface of the ridge. Thus, the decorative pattern allows reflection from the side surface toward the outside of the tire to be weakened. Furthermore, the decorative pattern is formed such that the minimum length C of the gap is not greater than 0.25 mm, and thus allows reflection from the surface toward the outside of the tire to be weakened. Thus, the decorative pattern allows the gap to be viewed as being darker (black) and allows contrast of light between the ridge and the gap to be clarified. Thus, the recesses and projections can be further inhibited from becoming

conspicuous.

[0013] Meanwhile, the decorative pattern is formed such that taper angle A is not less than 20 degrees, and, thus, the wall surface of the groove portion (reversed pattern of the ridge), of the vulcanization mold, for forming the ridge can be appropriately expanded. Therefore, laser, particles, and the like can be easily applied into the groove portions when the mold is cleaned. Furthermore, the decorative pattern is formed such that the minimum length C of the gap is not less than 0.15 mm, and, thus, the number of the ridges in the tire circumferential direction is prevented from excessively increasing. Thus, in the present invention, the proportion of the groove portions is reduced, and efficiency for cleaning the vulcanization mold can be improved while the recesses and projections are inhibited from becoming conspicuous.

10 BRIEF DESCRIPTION OF THE DRAWINGS

[0014]

15 FIG. 1 is a partial side view of an example of a tire;

FIG 2 is a cross-sectional view taken along a line A-A in FIG 1;

FIG 3 is a partial cross-sectional view of examples of a vulcanization mold and a green tire in a vulcanization step;

FIG. 4 is a cross-sectional view of an example of a decorative pattern according to another embodiment of the present invention; and

20 FIG. 5 is a partial cross-sectional view of examples of a vulcanization mold and a green tire in a vulcanization step, according to another embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0015] Hereinafter, an embodiment of the present invention will be described with reference to the drawings.

25 [0016] FIG. 1 is a partial side view of an example of a tire. A tire 1 of the present embodiment includes: a tread portion 2; a pair of sidewall portions 3 that extend from both side ends of the tread portion 2 in the radially inward direction of the tire; and bead portions 4 that are continuous with inner portions of the sidewall portions 3 in the tire radial direction. In the present embodiment, the tire 1 for a passenger car is described as an example. However, the tire 1 is not limited to such a tire, and may be, for example, a two-wheeled automotive vehicle tire or a heavy duty tire.

30 [0017] In the description herein, unless otherwise specified, dimensions and the like of components of the tire 1 represent values measured in a state (normal state) in which the tire 1 is mounted on a normal rim (not shown) and is inflated to a normal internal pressure, and no load is applied to the tire.

[0018] The "normal rim" represents a rim that is defined by a standard, in a standard system including the standard with which the tire complies, for each tire, and is, for example, the "standard rim" in the JATMA standard, the "Design Rim" in the TRA standard, or the "Measuring Rim" in the ETRTO standard.

35 [0019] The "normal internal pressure" represents an air pressure that is defined by the standard for each tire, and is the "maximum air pressure" in the JATMA standard, the maximum value recited in the table "TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES" in the TRA standard, or the "INFLATION PRESSURE" in the ETRTO standard. In the case of a tire for a passenger car, the normal internal pressure is 180 kPa.

40 [0020] The tire 1 of the present embodiment has a decorative pattern 7 formed on a surface 5 of the sidewall portion 3. In the present embodiment, the decorative pattern 7 is formed so as to be annular as viewed from the side surface of the tire 1. However, the decorative pattern 7 is not limited to such a mode. The decorative pattern 7 may be, for example, formed in a strip-like shape in which both ends in the tire circumferential direction are disconnected, or the decorative patterns 7 may be disposed at intervals in the tire circumferential direction. Furthermore, for example, characters (not shown) representing a logo mark, a brand name, or the like of the tire 1 may be formed on the decorative pattern 7 so as to be, for example, relief. A length L1 of the decorative pattern 7 in the tire radial direction is not particularly limited. In the present embodiment, the length L1 is preferably about 5 to 30% of the tire cross-sectional height.

45 [0021] FIG 2 is a cross-sectional view taken along a line A-A in FIG. 1. FIG 3 is a partial cross-sectional view of an example of a pattern forming portion 24 in a vulcanization mold 21. As shown in FIG. 2, the decorative pattern 7 is formed such that a plurality of ridges 11 that extend in the tire radial direction are aligned in the tire circumferential direction so as to form gaps 12 therebetween. The decorative pattern 7 having such a structure is formed by groove portions (reversed patterns of the ridges 11) 25 of the pattern forming portions 24 in a molding surface 23 of the vulcanization mold 21, shown in FIG. 3, for the tire as in a conventional art.

50 [0022] As shown in FIG. 1 and FIG. 2, each ridge 11 is formed as a raised-line-like projection that projects from the surface 5 of the sidewall portion 3 and extends in the tire radial direction. As shown in FIG. 2, the transverse cross-section of the ridge 11 is tapered so as to gradually reduce a length L2 along the surface 5 such that the greater the distance from the surface 5 of the sidewall portion 3 is, the less the length L2 along the surface 5 is.

[0023] In the present embodiment, the transverse cross-section of the ridge 11 has a top-side shorter base 15 that

extends along the surface 5, at a position that is farthest from the surface 5. Thus, the transverse cross-section of the ridge 11 is formed in a trapezoidal shape which has the top-side shorter base 15 and a pair of side surfaces 16,16 that extend from the top-side shorter base 15 to the surface 5. In the drawings, corner portions 17 of the ridge 11 are illustrated as sharp edges. However, examples of the "trapezoidal shape" include a shape in which the corner portion 17 has a chamfered portion having a small curvature radius, in consideration of the size of the ridge 11 and a rubber molding technique.

[0024] The decorative pattern 7 having such a structure allows the gap 12 between the adjacent ridges 11 and 11 to be viewed as being dark (black), and allows contrast of light between the ridges 11 and the gaps 12 to be clarified. Thus, the decorative pattern 7 can function to hide the recesses and projections (dents and bulges) caused by, for example, residual air and a joint portion of a carcass (not shown) which is an internal structure of the tire 1, so as to inhibit the recesses and projections (dents and bulges) from becoming conspicuous, whereby the decorative pattern 7 contributes to improvement of outer appearance of the tire 1.

[0025] The decorative pattern 7 (shown in FIG. 2) of the present embodiment is structured so as to satisfy the following expressions (E1) and (E2).

15 $20 \leq A \leq 40$... (E1)

20 $0.15 \leq C \leq 0.25$... (E2)

wherein A represents a taper angle (degree) of the ridge 11, and C represents a minimum length (mm), of the gap 12, measured along the surface 5.

[0026] According to expression (E1), the taper angle A of the ridge 11 is set to be not greater than 40 degrees. In general, the outer appearance as viewed from the front thereof is particularly important in order to improve the outer appearance of the sidewall portion 3 of the tire 1. In the decorative pattern of the present embodiment, the taper angle A of the ridge 11 is not greater than 40 degrees, and, thus, an incident angle $\theta 1$ and a reflection angle $\theta 2$ of light 30 (indicated by an alternate long and two short dashes line in FIG. 2) which is incident so as to be perpendicular (along the tire axial direction) to the surface 5 of the sidewall portion 3 can be reduced at the side surface 16 of the ridge 11. Therefore, at the decorative pattern 7, reflection from the side surface 16 of the ridge 11 toward the outside of the tire 1 can be weakened.

[0027] Furthermore, on wall surfaces (that is, side surface forming portions for forming the side surfaces 16 of the ridge 11) 28, 28 of the groove portion 25, of the vulcanization mold 21, for forming the ridge 11 as shown in FIG. 3, incident angles and reflection angles of laser and particles used for cleaning the vulcanization mold 21 can be reduced. Thus, diffuse reflection of laser and particles can be caused in the groove portion 25, whereby dirt attached to the groove portion 25 can be efficiently removed.

[0028] According to expression (E2), the minimum length C of the gap 12 is set to be not greater than 0.25 mm. Thus, the decorative pattern 7 of the present embodiment allows reflection from the surface 5 of the sidewall portion 3 toward the outside of the tire 1 to be weakened. Therefore, the decorative pattern 7 of the present embodiment allows the gap 12 to be viewed as being darker (black), and allows contrast of light between the ridge 11 and the gap 12 to be clarified. Accordingly, the decorative pattern 7 allows the outer appearance of the tire 1 to be improved since the recesses and projections (not shown) formed in the sidewall portion 3 are made less conspicuous.

[0029] Meanwhile, when the taper angle A of the ridge 11 and the minimum length C of the gap 12 are reduced, multiple ridges 11 are formed in the tire circumferential direction. According thereto, a proportion (the number) of the groove portions 25 formed in the molding surface 23 of the vulcanization mold 21 shown in FIG. 3 is also increased. Laser, particles, and the like used for cleaning the molding surface 23 are not easily applied into the groove portions 25, so that efficiency for cleaning the vulcanization mold is reduced.

[0030] In the present embodiment, according to expression (E1), the taper angle A is set to be not less than 20 degrees. Thus, as shown in FIG. 3, in the present embodiment, at least one (in the present embodiment, both) of the wall surfaces 28 and 28 of the groove portion 25, of the vulcanization mold 21, for forming the ridge 11 can be appropriately expanded in the tire circumferential direction. Therefore, in the present embodiment, when the mold is cleaned, laser, particles, and the like can be easily applied into the groove portion 25 of the vulcanization mold 21.

[0031] Furthermore, according to expression (E2), the minimum length C of the gap 12 is set to be not less than 0.15 mm. Thus, in the decorative pattern 7 of the present embodiment, the number of the ridges 11 can be prevented from being excessively increased in the tire circumferential direction. Therefore, in the present embodiment, the proportion of the groove portions 25 of the vulcanization mold 21 can be reduced, thereby improving efficiency for the cleaning.

[0032] Thus, in the tire 1 of the present embodiment, the decorative pattern 7 satisfies expressions (E1) and (E2), whereby both the outer appearance of the tire 1 and efficiency for cleaning the vulcanization mold 21 can be improved.

[0033] When the taper angle A is greater than 40 degrees, the incident angle θ_1 and the reflection angle θ_2 of the light 30 described above are increased at the side surface 16 of the ridge 11. Therefore, reflection from the side surface 16 toward the outside of the tire 1 may not be weakened. Furthermore, on the wall surfaces 28, 28 of the groove portion 25, of the vulcanization mold 21, for forming the ridge 11 as shown in FIG. 3, the incident angles and the reflection angles of laser and particles used for cleaning the vulcanization mold 21 may be increased, and dirt attached to the groove portion 25 may not be efficiently removed.

[0034] Meanwhile, when the taper angle A is less than 20 degrees, the wall surfaces 28, 28 of the groove portion 25 cannot be expanded, and efficiency for the cleaning may be reduced in the case of the mold being cleaned. Furthermore, the wall surfaces 28, 28 of the groove portion 25 contact with a bottom surface 27 for forming the top-side shorter base 15 of the ridge 11, at large angles. Therefore, processability for the groove portion 25 may be reduced, and cost for processing the pattern forming portion 24 may be increased. From such a viewpoint, the taper angle A is preferably not less than 25 degrees and preferably not greater than 35 degrees.

[0035] When the minimum length C of the gap 12 is greater than 0.25 mm, reflection from the surface 5 of the sidewall portion 3 toward the outside of the tire 1 is increased. Therefore, contrast of light between the ridge 11 and the gap 12 cannot be clarified, and the outer appearance of the tire 1 may be deteriorated. Meanwhile, when the minimum length C of the gap 12 is less than 0.15 mm, the proportion of the groove portions 25 of the vulcanization mold 21 shown in FIG. 3 is increased, and efficiency for the cleaning may be reduced in the case of the mold being cleaned. Furthermore, when the width of the molding surface 23 between the adjacent groove portions 25 and 25 is reduced, cost for processing the pattern forming portion 24 may be increased, and the molding surface 23 may be worn early due to the cleaning. From such a viewpoint, the minimum length C of the gap 12 is preferably not less than 0.18 mm and preferably not greater than 0.22 mm.

[0036] In order to further facilitate application of laser, particles, and the like into the groove portions 25 while contrast of light between the ridge 11 and the gap 12 is enhanced, the decorative pattern 7 of the present embodiment is structured so as to satisfy expressions (E1) and (E2) described above, and to satisfy the following expression (E3),

$$0.2 \leq C/D \leq 0.4 \quad \cdots (E3),$$

and is preferably structured so as to further satisfy the following expression (E4),

$$1 \leq B/C \leq 3 \quad \cdots (E4)$$

wherein B represents a length, of the top-side shorter base 15, measured along the surface 5, and D represents an arrangement pitch at which the ridges 11 are arranged in the tire circumferential direction.

[0037] According to expression (E3), a ratio C/D of the minimum length C of the gap 12 to the arrangement pitch D for the ridges 11 as shown in FIG. 2 is set to be not greater than 0.4. Thus, the minimum length C of the gap 12 can be formed so as to be sufficiently small relative to the arrangement pitch D for the ridges 11, and reflection from the surface 5 of the sidewall portion 3 toward the outside of the tire 1 can be further weakened.

[0038] According to expression (E4), a ratio B/C of the length B of the top-side shorter base 15 to the minimum length C of the gap 12 is set to be not greater than 3. Thus, the top-side shorter base 15 can be prevented from being excessively great relative to the gap 12 (surface 5). Therefore, in the decorative pattern 7, the top-side shorter base 15 which is viewed as being bright (white) and the gap 12 which is viewed as being dark (black) are formed in a well-balanced manner. Thus, contrast of light between the ridge 11 and the gap 12 can be further enhanced, and the outer appearance of the tire 1 can be further improved.

[0039] According to expression (E3), the ratio C/D of the minimum length C of the gap 12 to the arrangement pitch D for the ridges 11 is set to be not less than 0.2. Thus, the width of the molding surface 23 between the adjacent groove portions 25 and 25 can be increased, cost for processing the pattern forming portion 24 can be effectively prevented from increasing, and the molding surface 23 can be effectively prevented from being worn early due to the cleaning.

[0040] According to expression (E4), the ratio B/C of the length B of the top-side shorter base 15 to the minimum length C of the gap 12 is set to be not less than 1. Thus, in the present embodiment, the length of the bottom surface 27 of the groove portion 25 of the vulcanization mold 21 can be increased in the tire circumferential direction. Therefore, in the present embodiment, laser, particles, and the like can be more easily applied into the groove portions 25 when the mold is cleaned.

[0041] Thus, the decorative pattern 7 of the present embodiment satisfies expressions (E1) and (E2) and further satisfies expressions (E3) and (E4), whereby both the outer appearance of the tire 1 and efficiency for cleaning the vulcanization mold 21 can be improved at a higher level.

[0042] When the ratio C/D of the minimum length C of the gap 12 to the arrangement pitch D for the ridges 11 is

greater than 0.4, the minimum length C of the gap 12 is increased relative to the arrangement pitch D for the ridges 11. Therefore, reflection from the surface 5 of the sidewall portion 3 toward the outside of the tire 1 may not be sufficiently weakened. Meanwhile, when the ratio C/D is less than 0.2, the width of the molding surface 23 between the adjacent groove portions 25 and 25 is reduced, and cost for processing the pattern forming portion 24 may not be sufficiently prevented from increasing and the molding surface 23 may not be sufficiently prevented from being worn early due to the cleaning. From such a viewpoint, the ratio C/D is preferably not less than 0.25 and preferably not greater than 0.35.

[0043] When the ratio B/C of the length B of the top-side shorter base 15 to the minimum length C of the gap 12 is greater than 3, the top-side shorter base 15 is large in the tire circumferential direction relative to the gap 12 shown in FIG. 2, and contrast of light between the ridge 11 and the gap 12 may not be sufficiently enhanced. Meanwhile, when the ratio B/C is less than 1, the bottom surface 27 of the groove portion 25 of the vulcanization mold 21 shown in FIG. 3 is small, and laser, particles, and the like may not be easily applied into the groove portions 25. Furthermore, cost for processing the pattern forming portion 24 may be increased. From such a viewpoint, the ratio B/C is preferably not less than 1.5 and preferably not greater than 2.5.

[0044] The arrangement pitch D for the ridges 11 is set as appropriate when expression (E3) is satisfied. However, the arrangement pitch D for the ridges 11 is preferably set to be 0.13 to 2.1 mm. When the arrangement pitch D is set to be not less than 0.13 mm, the number of the ridges 11 can be prevented from increasing, and the proportion of the groove portions 25 of the vulcanization mold 21 can be reduced. Therefore, efficiency for the cleaning can be further improved when the mold is cleaned.

[0045] When the arrangement pitch D is set to be not greater than 2.1 mm, at least one of the top-side shorter base 15 and the gap 12 shown in FIG. 2 can be prevented from being large, so that contrast between the ridge 11 and the gap 12 can be further enhanced. From such a viewpoint, the arrangement pitch D is more preferably not less than 0.3 mm and more preferably not greater than 1.9 mm.

[0046] The length B of the top-side shorter base 15 can be set as appropriate when expression (E4) is satisfied. However, the length B of the top-side shorter base 15 is preferably set to be 0.05 to 0.40 mm. When the length B of the top-side shorter base 15 is not less than 0.05 mm, the bottom surface 27 of the groove portions 25 of the vulcanization mold 21 shown in FIG. 3 can be made large, and efficiency for the cleaning can be further improved when the mold is cleaned.

[0047] When the length B of the top-side shorter base 15 is not greater than 0.40 mm, the top-side shorter base 15 and the gap 12 shown in FIG. 2 are formed in a well-balanced manner. Therefore, contrast of light between the ridge 11 and the gap 12 can be further enhanced. From such a viewpoint, the length B of the top-side shorter base 15 is more preferably not less than 0.10 mm and more preferably not greater than 0.35 mm.

[0048] A height E of the ridge 11 from the surface 5 of the sidewall portion 3 can be set as appropriate. However, the height E of the ridge 11 is preferably set to be 0.1 to 0.5 mm. When the height E of the ridge 11 is not less than 0.1 mm, the gap 12 can be viewed as being darker (black). When the height E of the ridge 11 is not greater than 0.5 mm, the groove portions 25 of the vulcanization mold 21 shown in FIG. 3 can be prevented from being deepened. Therefore, efficiency for the cleaning can be further improved. From such a viewpoint, the height E is more preferably not less than 0.15 mm and more preferably not greater than 0.45 mm.

[0049] A case where the transverse cross-section of the ridge 11 has a trapezoidal shape having the top-side shorter base 15 is described as an example in the above-described embodiment. However, the present invention is not limited to such an example. FIG. 4 is a cross-sectional view of an example of the decorative pattern 7 according to another embodiment of the present invention. FIG. 5 is a partial cross-sectional view of an example of the pattern forming portion 24 according to another embodiment of the present invention. In the present embodiment, the same components as in the above-described embodiment are denoted by the same reference numerals, and the description thereof may be omitted.

[0050] In the present embodiment, the transverse cross-section of the ridge 11 is formed in a triangular shape having a vertex 35 at a position farthest from the surface 5 of the sidewall portion 3. Furthermore, the transverse cross-section of the ridge 11 has a pair of side surfaces 16, 16 that extend from the vertex 35 to the surface 5. Examples of the triangular shape include a shape in which a part of the vertex 35 of the triangular shape has a small chamfered portion, in consideration of the size of the ridge 11 and a rubber forming technique.

[0051] The decorative pattern 7 of the present embodiment can function to hide recesses and projections (not shown) formed in the sidewall portion 3 so as to inhibit the recesses and projections from becoming conspicuous, similarly to the decorative pattern 7 of the above-described embodiment. Furthermore, in the decorative pattern 7 of the present embodiment, the ridge 11 has a triangular transverse cross-section, and, thus, the vertex 35 of each ridge 11 can be formed so as to be sharp and have a good appearance. Therefore, the decorative pattern 7 contributes to improvement of the outer appearance of the tire 1.

[0052] The decorative pattern 7 of the present embodiment is structured such that the taper angle A of the ridge 11 and the minimum length C of the gap 12 satisfy expressions (E1) and (E2) described above. Thus, the decorative pattern 7 of the present embodiment allows improvement of both the outer appearance of the tire 1 and efficiency for cleaning

the vulcanization mold 21 shown in FIG. 5, similarly to the decorative pattern 7 of the above-described embodiment. Preferable ranges of the taper angle A and the minimum length C are the same as the preferable ranges of the taper angle A and the minimum length C in the above-described embodiment.

5 [0053] Furthermore, the decorative pattern 7 of the present embodiment is structured so as to satisfy expressions (E1) and (E2) described above, and to satisfy the expression (E3).

$$0.2 \leq C/D \leq 0.4 \cdots (E3)$$

10 wherein D represents an arrangement pitch at which the ridges 11 are arranged in the tire circumferential direction.

[0054] Expression (E3) defines a range of the ratio C/D of the minimum length C of the gap 12 to the arrangement pitch D for the ridges 11, similarly to expression (E3) of the above-described embodiment. Thus, laser, particles, and the like can be more easily applied into the groove portions 25 while contrast of light between the ridge 11 and the gap 12 is further enhanced.

15 [0055] Thus, when the decorative pattern 7 of the present embodiment satisfies expressions (E1) and (E2) described above, and further satisfies expression (E3), both the outer appearance of the tire 1 and efficiency for cleaning the vulcanization mold 21 can be improved at a higher level. Preferable ranges of the ratio C/D of the minimum length C of the gap 12 to the arrangement pitch D for the ridges 11, and the arrangement pitch D for the ridges 11 are the same as the preferable ranges of the ratio C/D and the arrangement pitch D, respectively, of the above-described embodiment.

20 [0056] As shown in FIG. 4, in the ridge 11, one side surface 16a of the paired side surfaces 16a and 16b may be orthogonal to the surface 5 of the sidewall portion 3. Thus, the transverse cross-section of the ridge 11 of the present embodiment is shaped into a right triangle.

25 [0057] The ridge 11 having such a structure allows an incident angle (not shown) and a reflection angle (not shown) of the light 30 (indicated by an alternate long and two short dashes line in FIG 4) described above to be almost zero at the one side surface 16a. Thus, the decorative pattern 7 allows reflection from the one side surface 16a toward the outside of the tire 1 to be effectively weakened. Meanwhile, an incident angle $\theta 1$ and a reflection angle $\theta 2$ of the light 30 can be slightly increased at the other side surface 16b which is not orthogonal to the surface 5, as compared to the above-described embodiment. Thus, the decorative pattern 7 allows reflection from the other side surface 16b toward the outside of the tire 1 to be slightly enhanced. Therefore, the decorative pattern 7 of the present embodiment allows the intensity of the reflection to be made different among the side surfaces 16a and 16b, and the surface 5, to diversify contrast of light. Therefore, the outer appearance of the tire can be improved.

30 [0058] The decorative pattern 7 structured such that the ridge 11 has the trapezoidal transverse cross-section (shown in FIG. 2) and the decorative pattern 7 structured such that the ridge 11 has the triangular transverse cross-section (shown in FIG 4) are illustrated for these embodiments. However, the present invention is not limited thereto. The decorative pattern 7 may be structured by, for example, the ridge 11 having a trapezoidal transverse cross-section and the ridge 11 having a triangular transverse cross-section being used in combination. Thus, the decorative pattern 7 allows diversity of contrast of light to be further improved, thereby further improving the outer appearance of the tire 1.

35 [0059] Although the preferred embodiments of the present invention have been described in detail above, the present invention is not limited to the above-described embodiments shown in the drawings, and various modifications can be made to practice the present invention.

[Examples]

40 [0060] Tires (size: 195/65R15) were produced as sample tires according to specifications indicated in Table 1 such that the decorative patterns were formed on surfaces of the sidewall portions (examples 1 to 8 and comparative examples 1 to 12). The tires of examples and comparative examples were each evaluated for processability for the pattern forming portion (groove) of the vulcanization mold, cost for processing the pattern forming portion of the vulcanization mold, outer appearance of the tire, performance of hiding recesses and projections, efficiency for cleaning the vulcanization mold, and outer appearance of the tire after the pattern forming portion of the vulcanization mold was worn. The evaluation methods are as follows.

<Processability for pattern forming portion (groove) of vulcanization mold, and cost for processing pattern forming portion (groove) of vulcanization mold>

45 [0061] A time and cost required for processing the pattern forming portion (groove) of the vulcanization mold, in the molding surface of the vulcanization mold, were obtained. The evaluation is indicated as an index with the index of example 2 being 100. The greater the value of the index is, the better the evaluation is.

<Outer appearance of tire>

5 [0062] Clarity of contrast of light at the decorative pattern was evaluated through visual inspection by a tester when the tire was viewed from the side surface in a state where each tire was inflated to an internal pressure of 200 kPa. The evaluation is indicated as an index with the index of comparative example 10 being 100. The greater the value of the index is, the better the evaluation is.

<Performance of hiding recesses and projections>

10 [0063] Inconspicuousness of recesses and projections formed in the sidewall portion was evaluated through visual inspection by a tester in a state where each tire was inflated to an internal pressure of 200 kPa. The evaluation is indicated as an index with the index of comparative example 10 being 100. The greater the value of the index is, the better the evaluation is.

15 <Efficiency for cleaning vulcanization mold (laser, shot blasting)>

20 [0064] Easiness of cleaning the pattern forming portion (groove) of the vulcanization mold was evaluated by using a laser cleaning device and shot blasting devices 1, 2 after each tire was vulcanized and molded. In the evaluation, "OK" represents a case where the cleaning was able to be performed, and "NG" represents a case where the cleaning was difficult. Particles and particle diameters in the shot blasting devices 1, 2 are as follows.

Shot blasting device 1: particle: steel, particle diameter: 0.044 to 0.1 mm

Shot blasting device 2: particle: plastic, particle diameter: 0.17 to 0.5 mm

25 <Outer appearance of tire after pattern forming portion of vulcanization mold was worn>

30 [0065] After particles for three years were applied to the pattern forming portion (groove) of the vulcanization mold by using the shot blasting device 1, each tire was produced by using the vulcanization mold. Clarity of contrast of light at the decorative pattern was evaluated through visual inspection by a tester when each tire was viewed from the side surface in a state where the tire was inflated to an internal pressure of 200 kPa. In the evaluation, "OK" represents a case where almost no change occurred between a state where the pattern forming portion was worn and a state where the pattern forming portion was not worn, and "NG" represents a case where change was great therebetween. The results of the test are indicated in Table 1.

35

[Table 1]

40

45

50

55

5
10
15
20
25
30
35
40
45
50
55

	Comp. Ex 1	Comp. Ex 2	Comp. Ex 3	Comp. Ex 4	Comp. Ex 5	Comp. Ex 6	Comp. Ex 7	Comp. Ex 7	Comp. Ex 2
Transverse cross-section of ridge	FIG. 2								
Taper angle A of ridge (degree)	0	20	20	20	20	20	20	30	30
Length B of top-side shorter base (mm)	0.40	0.05	0.05	0.05	0.05	0.05	0.40	0.20	0.30
Minimum length C of gap (mm)	0.60	0.13	0.12	0.08	0.05	0.32	0.20	0.10	0.20
B/C	0.67	0.38	0.42	0.63	1.11	0.16	2.00	2.00	1.50
Arrangement pitch D for ridges (mm)	1.00	0.22	0.24	0.27	0.17	0.44	0.70	0.50	0.70
C/D	0.60	0.60	0.50	0.30	0.27	0.72	0.29	0.20	0.29
Height E of ridge (mm)	0.30	0.10	0.20	0.40	0.20	0.20	0.30	0.30	0.30
Processability for pattern forming portion (groove) (index)	20	100	100	100	100	100	50	100	100
Cost for processing pattern forming portion (groove) (index)	70	30	30	30	30	30	100	100	100
Outer appearance of tire (index)	110	120	150	150	140	120	115	130	120
Performance of hiding recesses and projections (index)	110	110	110	110	110	110	110	110	110
Efficiency for cleaning (laser)	OK	NG	NG	NG	NG	NG	OK	OK	OK
Efficiency for cleaning (shot blasting 1)	OK	NG	NG	NG	NG	NG	OK	OK	OK
Efficiency for cleaning (shot blasting 2)	NG	NG	NG	NG	NG	NG	OK	NG	OK
Outer appearance of tire after wear	OK	NG	NG	NG	NG	NG	OK	OK	OK

5
10
15
20
25
30
35
40
45
50
55

	Comp. Ex 8	Comp. Ex 9	Comp. Ex 10	Comp. Ex 11	Comp. Ex 12	Example 3	Example 4	Example 5
Transverse cross-section of ridge	FIG. 2	FIG. 2	FIG. 2	FIG. 2	FIG. 2	FIG. 2	FIG. 2	FIG. 2
Taper angle A of ridge (degree)	30	60	90	90	40	30	30	30
Length B of top-side shorter base (mm)	0.40	0.30	0.20	0.20	0.30	0.30	0.30	0.30
Minimum length C of gap (mm)	0.70	0.60	0.20	0.00	0.20	0.15	0.25	
B/C	0.57	0.50	1.00	-	1.50	2.00	1.20	
Arrangement pitch D for ridges (mm)	1.30	1.40	1.20	1.00	0.70	0.70	0.70	
C/D	0.54	0.43	0.17	0.00	0.29	0.21	0.36	
Height E of ridge (mm)	0.30	0.40	0.40	0.40	0.30	0.30	0.30	
Processability for pattern forming portion (groove) (index)	100	100	100	100	100	100	100	
Cost for processing pattern forming portion (groove) (index)	100	100	100	100	100	100	100	
Outer appearance of tire (index)	105	100	100	110	115	123	115	
Performance of hiding recesses and projections (index)	105	100	100	110	110	110	110	
Efficiency for cleaning (laser)	OK	OK	OK	OK	OK	OK	OK	
Efficiency for cleaning (shot blasting 1)	OK	OK	OK	OK	OK	OK	OK	
Efficiency for cleaning (shot blasting 2)	OK	OK	OK	OK	OK	OK	OK	
Outer appearance of tire after wear	OK	OK	OK	NG	OK	OK	OK	

	Example 6	Example 7	Example 8
Transverse cross-section of ridge	FIG. 2	FIG. 2	FIG. 4
Taper angle A of ridge (degree)	30	30	30
Length B of top-side shorter base (mm)	0.20	0.60	-
Minimum length C of gap (mm)	0.20	0.20	0.20
B/C	1.00	3.00	-
Arrangement pitch D for ridges (mm)	0.70	0.70	0.70
C/D	0.29	0.29	0.29
Height E of ridge (mm)	0.30	0.30	0.30
Processability for pattern forming portion (groove) (index)	100	100	100
Cost for processing pattern forming portion (groove) (index)	90	100	100
Outer appearance of tire (index)	123	115	130
Performance of hiding recesses and projections (index)	115	110	115
Efficiency for cleaning (laser)	OK	OK	OK
Efficiency for cleaning (shot blasting 1)	OK	OK	OK
Efficiency for cleaning (shot blasting 2)	OK	OK	OK
Outer appearance of tire after wear	OK	OK	OK

[0070] The results of the test indicate that, in each example, performance for hiding recesses and projections was superior, and both outer appearance of the tire and efficiency for cleaning the vulcanization mold were improved as compared to comparative examples. Furthermore, in each example, the outer appearance of the tire was able to be maintained after the pattern forming portion of the vulcanization mold was worn, as compared to comparative examples. Furthermore, in each example, processability for the pattern forming portion (groove) of the vulcanization mold was excellent and cost for the processing was able to be reduced.

Claims

1. A tire (1) comprising a decorative pattern (7) formed on a surface (5) of a sidewall portion (3), wherein the decorative pattern (7) is formed such that a plurality of ridges (11) that extend in a tire radial direction are aligned in a tire circumferential direction so as to form gaps (12), a transverse cross-section of each ridge (11) is tapered so as to gradually reduce a length (L2) parallel to the surface (5) such that the greater a distance from the surface (5) is, the less the length (L2) parallel to the surface (5) is, and the decorative pattern (7) is structured so as to satisfy expression (E1),

$$20 \leq A \leq 40 \quad \cdots \text{(E1)}$$

5 wherein A represents a taper angle of the ridge (11) expressed in degrees,

characterized in that

the decorative pattern (7) is structured so as to further satisfy expressions (E2) and (E3),

$$0.15 \leq C \leq 0.25 \quad \cdots \text{(E2)}$$

10

$$0.2 \leq C/D \leq 0.4 \quad \cdots \text{(E3)}$$

15 wherein C represents a minimum length expressed in mm, of each gap (12), measured along the surface (5), and D represents an arrangement pitch expressed in mm, at which the ridges (11) are arranged in the tire circumferential direction.

2. The tire (1) according to claim 1, wherein
 20 the transverse cross-section of the ridge (11) has a top-side shorter base (15) that extends parallel to the surface, at a position that is farthest from the surface (5), and
 the decorative pattern (7) is structured so as to further satisfy expression (E4),

$$1 \leq B/C \leq 3 \quad \cdots \text{(E4)}$$

25

wherein B represents a length expressed in mm, of the top-side shorter base (15), measured parallel to the surface.

3. The tire (1) according to claim 2, wherein the arrangement pitch D for the ridges (11) is 0.13 to 2.1 mm.

30 4. The tire (1) according to claim 2 or 3, wherein the length B of the top-side shorter base (15) is 0.05 to 0.4 mm.

5. The tire (1) according to claim 1, wherein
 35 the transverse cross-section of the ridge (11) has a triangular shape having a vertex (35) at a position that is farthest from the surface (5).

6. The tire (1) according to claim 5, wherein one of paired side surfaces (16a, 16b) that extend from the vertex (35) to the surface (5) is orthogonal to the surface.

7. The tire (1) according to any one of claims 1 to 6, wherein a height (E) of the ridge (11) from the surface is 0.1 to 0.5 mm.

40 8. The tire (1) according to claim 5, wherein
 the triangular shape is a right triangle.

9. The tire (1) according to claim 1, wherein
 45 the decorative pattern (7) is structured by ridges (11) having a trapezoidal transverse cross-section and ridges (11) having a triangular transverse cross-section being used in combination.

Patentansprüche

50

1. Reifen (1), umfassend

55 ein dekoratives Muster (7), das auf einer Oberfläche (5) eines Seitenwandabschnitts (3) gebildet ist, wobei das dekorative Muster (7) derart gebildet ist, dass eine Vielzahl von Rippen (11), die sich in einer radialen Richtung des Reifens erstrecken, in einer Umfangsrichtung des Reifens ausgerichtet sind, so dass Lücken (12) gebildet sind,
 ein transversaler Querschnitt jeder Rippe (11) verjüngt ist, um eine Länge (L2) parallel zu der Oberfläche (5) allmählich zu verringern, so dass die Länge (L2) parallel zu der Oberfläche (5) umso geringer ist, je größer ein

Abstand von der Oberfläche (5) ist, und
das dekorative Muster (7) derart aufgebaut ist, dass es den Ausdruck (E1) erfüllt,

5 $20 \leq A \leq 40$ --- (E1)

wobei A einen Verjüngungswinkel der Rippe (11), ausgedrückt in Grad, darstellt
dadurch gekennzeichnet, dass

das dekorative Muster (7) derart aufgebaut ist, dass es weiterhin die Ausdrücke (E2) und (E3) erfüllt,

10 $0,15 \leq C \leq 0,25$ --- (E2)

15 $0,2 \leq C/D \leq 0,4$ --- (E3)

wobei C eine Mindestlänge, ausgedrückt in mm, jeder Lücke (12), gemessen entlang der Oberfläche (5), darstellt
und D einen Anordnungsabstand, ausgedrückt in mm, darstellt, in dem die Rippen (11) in der Umfangsrichtung
des Reifens angeordnet sind.

20 2. Reifen (1) nach Anspruch 1, wobei
der transversale Querschnitt der Rippe (11) eine oberseitige kürzere Basis (15), die sich parallel zu der Oberfläche erstreckt, an einer Position, die am weitesten von der Oberfläche (5) entfernt ist, aufweist, und
25 das dekorative Muster (7) derart aufgebaut ist, dass es weiterhin den Ausdruck (E4) erfüllt,

$1 \leq B/C \leq 3$ --- (E4)

30 wobei B eine Länge, ausgedrückt in mm, der oberseitigen kürzeren Basis (15), gemessen parallel zu der Oberfläche, darstellt.

35 3. Reifen (1) nach Anspruch 2, wobei der Anordnungsabstand D für die Rippen (11) 0,13 bis 2,1 mm beträgt.
4. Reifen (1) nach Anspruch 2 oder 3, wobei die Länge B der oberseitigen kürzeren Basis (15) 0,05 bis 0,4 mm beträgt.
5. Reifen (1) nach Anspruch 1, wobei der transversale Querschnitt der Rippe (11) eine dreieckige Form mit einem Scheitelpunkt (35) an einer Position, die am weitesten von der Oberfläche (5) entfernt ist, aufweist.
40 6. Reifen (1) nach Anspruch 5, wobei eine der paarigen Seitenflächen (16a, 16b), die sich von dem Scheitel (35) zu der Oberfläche (5) erstrecken, orthogonal zu der Oberfläche ist.
7. Reifen (1) nach einem der Ansprüche 1 bis 6, wobei eine Höhe (E) der Rippe (11) von der Oberfläche 0,1 bis 0,5 mm beträgt.
45 8. Reifen (1) nach Anspruch 5, wobei die dreieckige Form ein rechtwinkliges Dreieck ist.
9. Reifen (1) nach Anspruch 1, wobei das dekorative Muster (7) durch in Kombination verwendete Rippen (11), die einen trapezförmigen Querschnitt aufweisen, und Rippen (11), die einen dreieckigen Querschnitt aufweisen, aufgebaut ist.

Revendications

55 1. Pneumatique (1) comprenant :

un motif décoratif (7) formé sur une surface (5) d'une portion formant paroi latérale (3), dans lequel
le motif décoratif (7) est formé de sorte qu'une pluralité de nervures (11) qui s'étendent dans une direction

radiale du pneumatique sont alignées dans une direction circonférentielle du pneumatique de manière à former des intervalles (12),
 une section de coupe transversale de chaque nervure (11) est effilée de manière à réduire graduellement une longueur (L2) parallèle à la surface (5) de sorte que, plus une distance par rapport à la surface (5) est grande, plus la longueur (L2) parallèle à la surface est réduite (5), et
 le motif décoratif (7) est structuré de manière à satisfaire une expression (E1),

$$20 \leq A \leq 40 \quad (E1)$$

où A représente un angle incliné de la nervure (11) exprimé en degrés,
caractérisé en ce que
 le motif décoratif (7) est structuré de manière à satisfaire également des expressions (E2) et (E3),

$$0,15 \leq C \leq 0,25 \quad (E2)$$

$$0,2 \leq C/D \leq 0,4 \quad (E3)$$

où C représente une longueur minimum exprimée en mm, de chaque intervalle (12), mesurée le long de la surface (5), et D représente un pas d'agencement, exprimé en mm, auquel les nervures (11) sont agencées dans la direction circonférentielle du pneumatique.

2. Pneumatique (1) selon la revendication 1, dans lequel la section de coupe transversale de la nervure (11) a une base plus courte côté supérieur (15) qui s'étend parallèlement à la surface, à une position qui est la plus éloignée de la surface (5), et
 le motif décoratif (7) est structuré de manière à satisfaire également une expression (E4),

$$1 \leq B/C \leq 3 \quad (E4)$$

où B représente une longueur exprimée en mm, de la base plus courte côté supérieure (15) mesurée parallèlement à la surface.

3. Pneumatique (1) selon la revendication 2, dans lequel le pas d'agencement D pour les nervures (11) est de 0,13 à 2,1 mm.

4. Pneumatique (1) selon la revendication 2 ou 3, dans lequel la longueur B de la base plus courte côté supérieur (15) est de 0,05 à 0,4 mm.

5. Pneumatique (1) selon la revendication 1, dans lequel la section de coupe transversale de la nervure (11) a une forme triangulaire ayant un sommet (35) à une position qui est la plus éloignée de la surface (5).

6. Pneumatique (1) selon la revendication 5, dans lequel une surface parmi des surfaces latérales appariées (16a, 16b) qui s'étendent depuis le sommet (35) jusqu'à la surface (5) est orthogonale à la surface.

7. Pneumatique (1) selon l'une quelconque des revendications 1 à 6, dans lequel une hauteur (E) de la nervure (11) par rapport à la surface est de 0,1 à 0,5 mm.

8. Pneumatique (1) selon la revendication 5, dans lequel la forme triangulaire est un triangle rectangle.

9. Pneumatique (1) selon la revendication 1, dans lequel le motif décoratif (7) est structuré par des nervures (11) ayant une section de coupe transversale trapézoïdale et des nervures (11) ayant une section de coupe transversale triangulaire qui sont utilisées en combinaison.

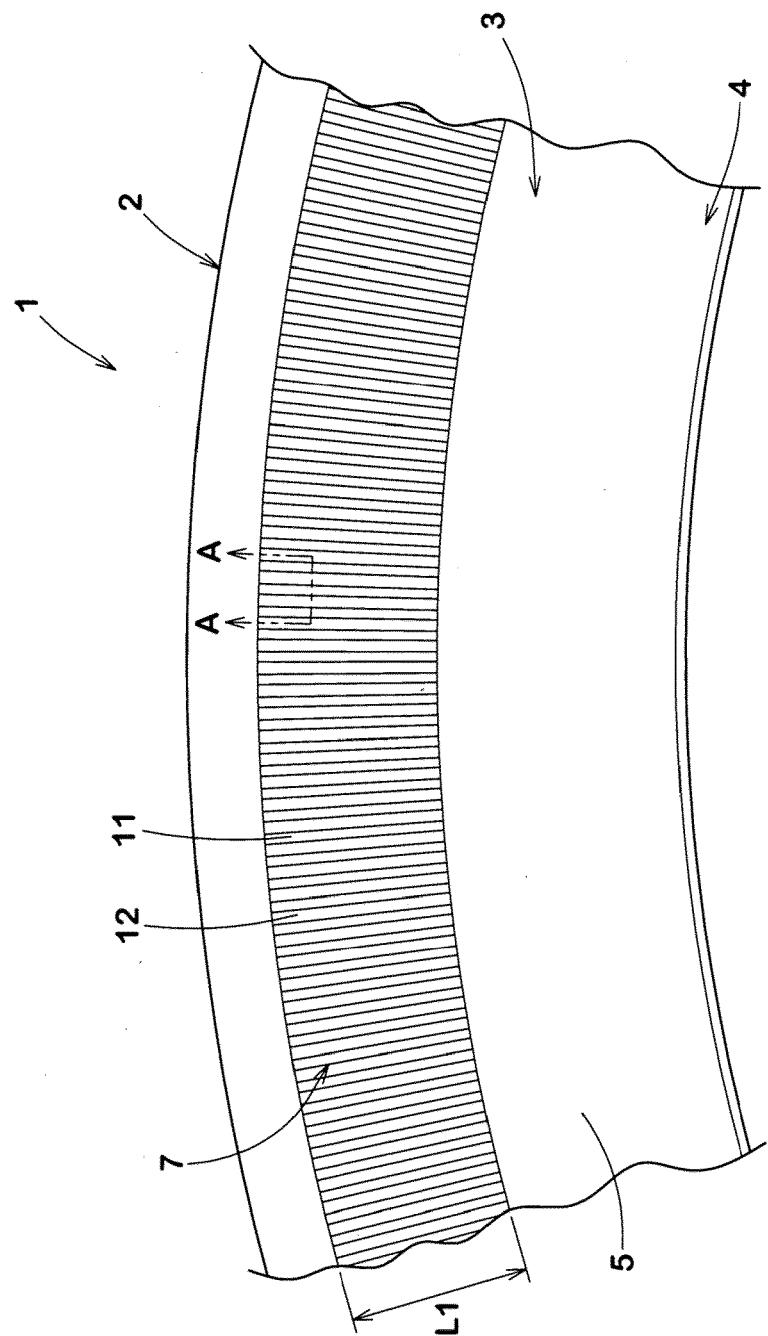


Fig. 1

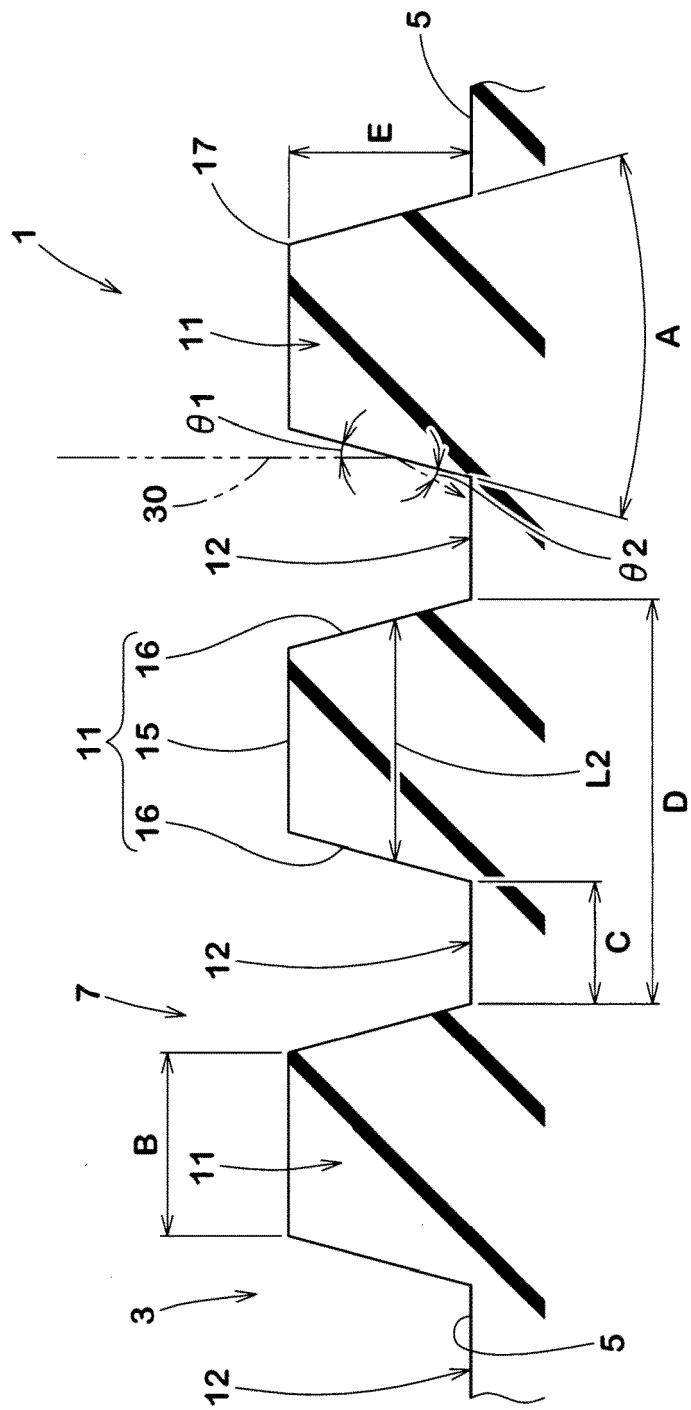


Fig. 2

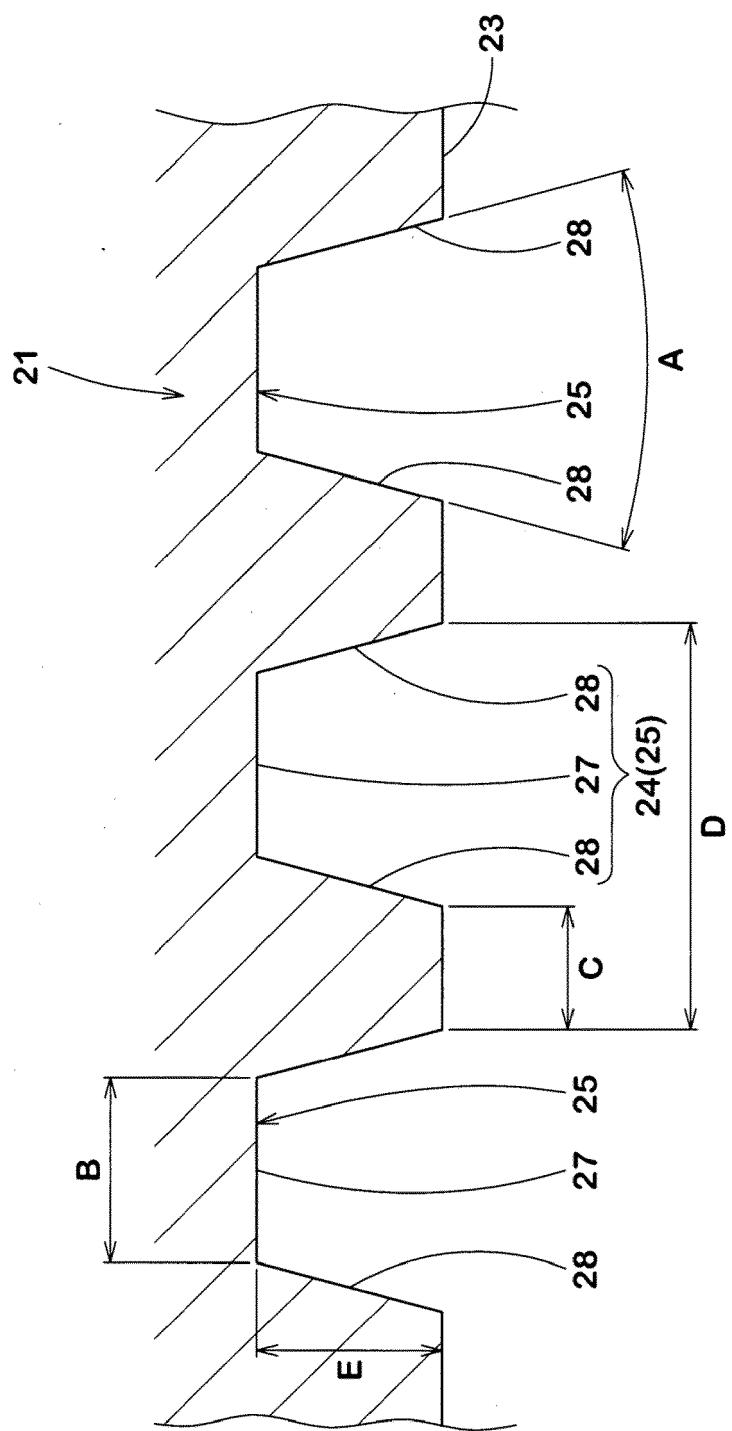


Fig. 3

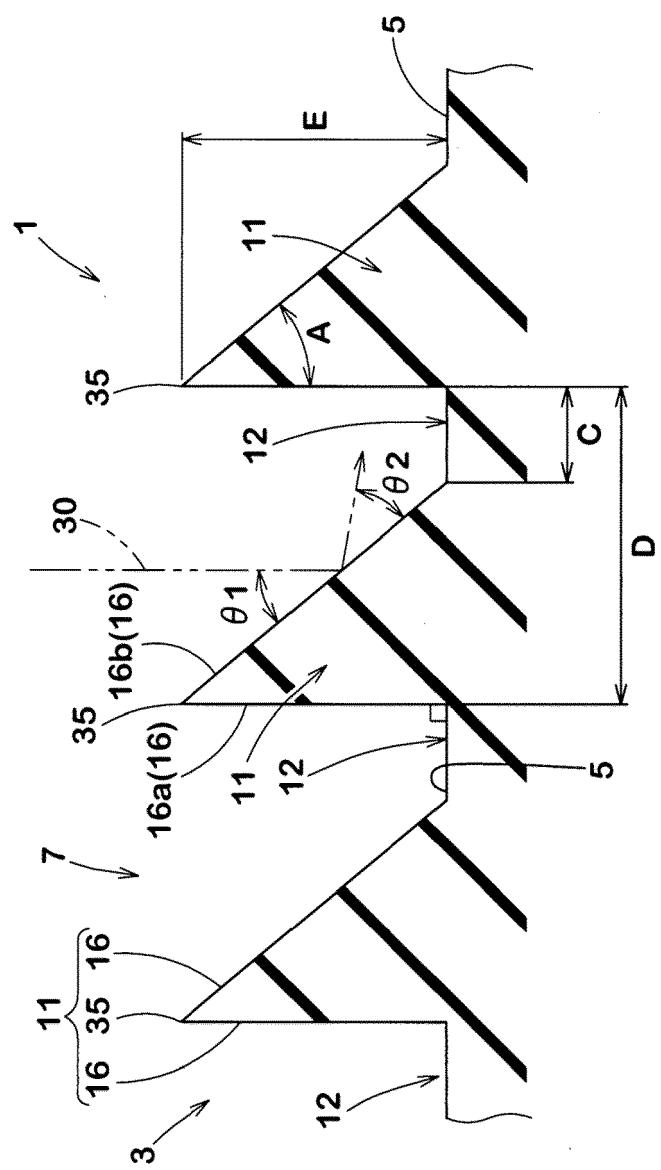


Fig. 4

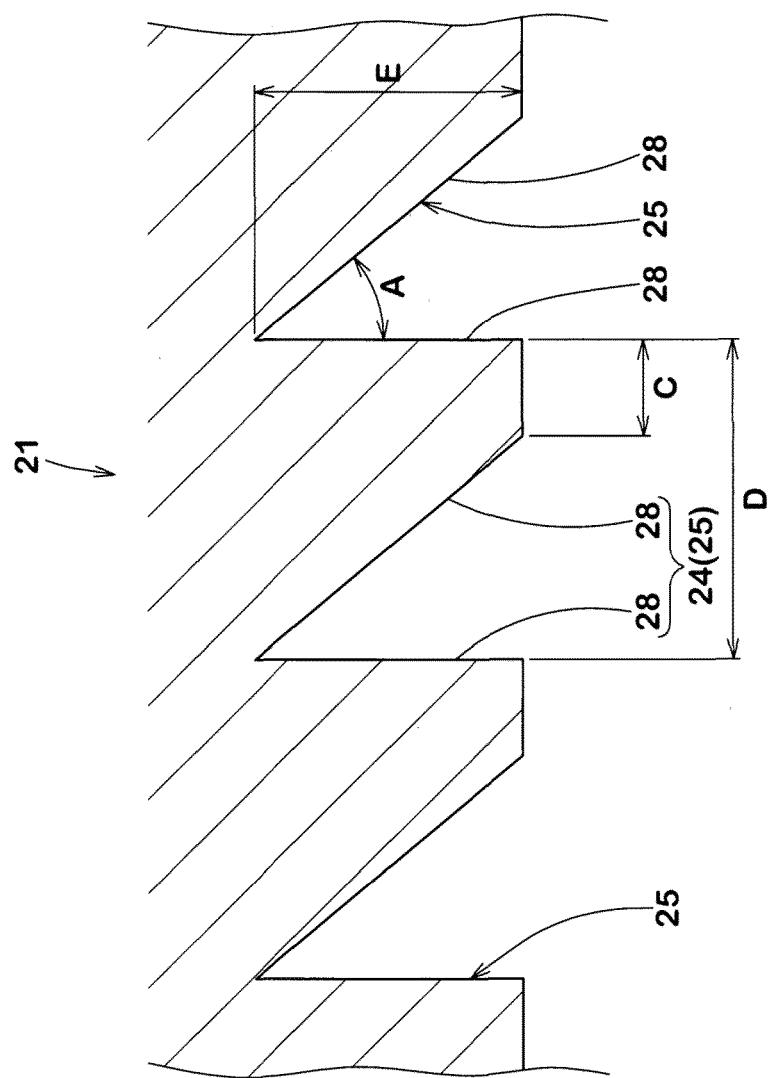


Fig. 5

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 7164831 A [0003]
- JP 2017001438 A [0004]