



(12) **CORRECTED EUROPEAN PATENT APPLICATION**

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 22

(51) Int Cl.:
F21S 41/64 ^(2018.01) **F21S 43/50** ^(2018.01)

(48) Corrigendum issued on:
15.04.2020 Bulletin 2020/16

(43) Date of publication:
22.01.2020 Bulletin 2020/04

(21) Application number: **18425046.2**

(22) Date of filing: **21.06.2018**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(72) Inventors:
• **Antonipieri, Michele**
33028 Tolmezzo (UD) (IT)
• **Manfreda, Giulio**
33028 Tolmezzo (UD) (IT)

(74) Representative: **Bellemo, Matteo et al**
Studio Torta S.p.A.
Via Viotti, 9
10121 Torino (IT)

(71) Applicant: **Automotive Lighting Italia S.p.A.**
10078 Venaria Reale (Torino) (IT)

(54) **AUTOMOTIVE LIGHT**

(57) Automotive light (1) comprising: a substantially basin-shaped rear casing (2); a front half-shell (3) which is arranged to close the mouth of the rear casing (2); one or more lighting assemblies (4, 5, 6) each of which emits light on command, and is located inside the rear casing (2) so as to selectively backlight a corresponding transparent or semi-transparent sector of the front half-shell

(3); an LCD panel (10) that extends skimmed over, or is incorporated into, the front half-shell (3) so as to be crossed by the light also crossing the half-shell (3); and an electronic control unit (11) which is adapted to drive the LCD panel (10) so as to make, on command, the body of the LCD panel (10) transparent or opaque to the incident light.

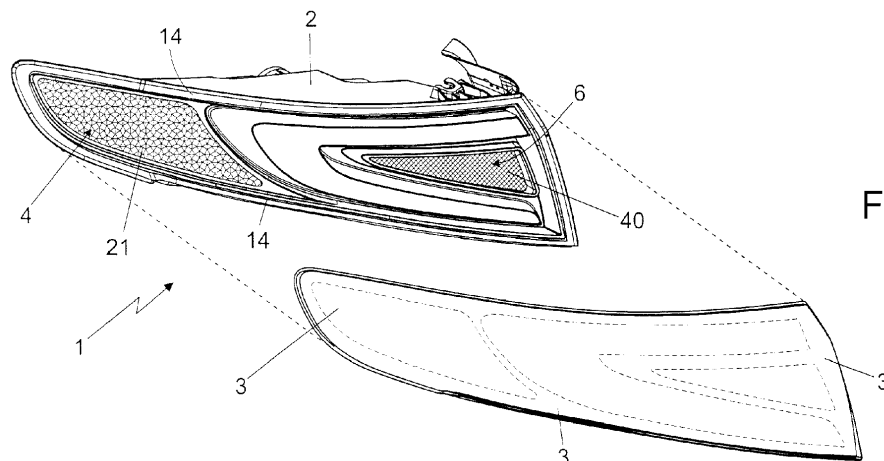


Fig. 1