



(11) **EP 3 598 051 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
27.01.2021 Bulletin 2021/04

(51) Int Cl.:
F28D 9/00 (2006.01) F28F 9/007 (2006.01)

(21) Application number: **18184546.2**

(22) Date of filing: **19.07.2018**

(54) **REINFORCED HEAT EXCHANGER COMPRISING A STACK OF PLATES**

VERSTÄRKTER WÄRMETAUSCHER MIT EINEM STAPEL AUS PLATTEN

ÉCHANGEUR DE CHALEUR RENFORCÉ COMPRENANT UN EMPILEMENT DE PLAQUES

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

- **SEBASTIAN, Daniel**
50011 ZARAGOZA (ES)
- **BRUNA, Pedro**
50011 ZARAGOZA (ES)

(43) Date of publication of application:
22.01.2020 Bulletin 2020/04

(74) Representative: **Tran, Chi-Hai et al**
Valeo Systèmes Thermiques
BG THS - Service Propriété Industrielle THS
ZA L' Agiot, 8 rue Louis Lormand
CS 80517 La Verrière
78322 Le Mesnil Saint Denis Cedex (FR)

(73) Proprietor: **Valeo Termico S.A.**
50011 Zaragoza (ES)

(72) Inventors:

- **PENA, M. Dario**
50011 Zaragoza (ES)
- **LABORDA, Juan**
50011 ZARAGOZA (ES)

(56) References cited:
EP-A2- 0 623 798 EP-A2- 2 267 390
US-A1- 2007 084 809

EP 3 598 051 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] In the field of heat exchangers for automotive vehicles, it is known to use heat exchangers comprising stack of plates for the circulation of two fluids alternately between the adjacent pairs of plates. Such heat exchangers are used for example as oil coolers for the oil of the engine. The oil and coolant circulate along respective sides of each intermediate plate of the stack of plates.

[0002] The heat exchanger may also comprise a fixation plate for fixation of the stack of plates into the automotive vehicle. The stack of plates is for example soldered to the fixation plate which is itself fastened to the vehicle, for example with screws.

[0003] A reinforcement plate between the fixation plate and the stack of plates is also known from US2007084809-A and EP2267390-A.

[0004] However, these designs are costly and may still be improved in terms of mechanical resistance.

[0005] EP0623798-A2 discloses a heat exchanger according to the preamble of claim 1.

[0006] One aspect of the invention relates to a heat exchanger comprising a stack of plates comprising a lower plate onto which the other plates are stacked, the said other plates comprising a base plate immediately adjacent to the lower plate, the heat exchanger also comprising a fixation plate, and a reinforcement plate between the fixation plate and the lower plate, wherein the heat exchanger further comprises reinforcing inserts between the base plate and the lower plate, wherein said reinforcing inserts have an arcuate shape.

[0007] After brazing of the parts together, having reinforcing inserts brings added soldered surface between the top surface of the lower plate and the bottom surface of the said lower plate, thereby reinforcing the heat exchanger.

[0008] It was also found that having reinforcing inserts around only two corners is a good solution.

[0009] In particular embodiments, the heat exchanger may comprise one, several or any combination of the following technical features:

- the reinforcing inserts are frame parts;
- the reinforcing inserts extend along from 45° to 90° of a corner of the lower plate, preferably from 70° to 90°, preferably 90°;
- the reinforcing inserts have a rectangular cross section;
- the reinforcing inserts extend along a peripheral edge of the lower plate;
- the reinforcing inserts are in contact with the peripheral edge of the lower plate;
- the reinforcing inserts extend between a top surface

of the lower plate and a bottom surface of the said lower plate;

- 5 - the reinforcing inserts are only along one or more corners of the lower plate, preferably along only two corners of the lower plate;
- 10 - the reinforcement plate has two holes for the circulation of fluid, the reinforcing inserts being at proximity of the two holes;
- 15 - the lower plate has corresponding holes in regards of the two holes for the circulation of fluid of the reinforcement plate, the two holes of the lower plate being respectively in the two corners of the lower plate that are reinforced by the reinforcing inserts;
- 20 - the fixation plate has a planar surface receiving the reinforcement plate and a protrusion around the reinforcement plate;
- 25 - the protrusion is a peripheral edge of the fixation plate;
- 25 - the stack of plates define two circuits for two respective fluids, the circuits being configured so that the two fluids circulate alternately between the adjacent pairs of plates;

30 **[0010]** Embodiments of the invention will now be described, by way of example, with reference to the following drawings, in which:

- 35 - Figure 1 is a perspective view of a heat exchanger according to an embodiment of the invention, comprising a stack of plates, a fixation plate and a reinforcement plate between the fixation plate and the stack of plates;
- 40 - Figure 2 is a top view of the lower plate present in the heat exchanger of Figure 1, with reinforcing inserts on top of the lower plate;
- Figure 3 is a perspective view showing the fixation plate, the reinforcement plate and the lower plate of the stack of plates present in the heat exchanger of Figure 1, as well as on top of the lower plate, the first base plate of the stack of base plates;
- Figure 4 is a perspective of a reinforcing insert;
- Figure 5 is a section view of the fixation plate, reinforcement plate, lower plate, said base plate and said reinforcing insert.

[0011] Figure 1 shows a heat exchanger 2 typically used for oil cooling. The heat exchanger comprises a stack of plates 4, a fixation plate 6 and a reinforcement plate 8 between the fixation plate 6 and the stack of plates 4.

[0012] The heat exchanger comprises a coolant inlet 10 and coolant outlet 12 going through the top end plate

14 of the stack of plates. The coolant is for example a water and glycol based liquid commonly used for engine cooling. On figures 2 & 3, an oil inlet 16 and an oil outlet 18 can also be seen through the lower plate 20 of the stack of plates 4, through the reinforcement plate 8 and through the fixation plate 6. The heat exchanger 2 is thus intended to be used as an oil cooler, for example for cooling the oil of the engine of the automotive vehicle. However, the heat exchanger could also be used for heat exchange between other fluids, such as for example between water and glycol based liquid and a refrigerant fluid such as for example 1234yf.

[0013] The stack of plates 4 of the heat exchanger is designed so that the two fluids circulate alternately between the adjacent pairs of plates. That is to say, each fluid circulates along respective sides of each intermediate plate 22 (also called "base plates") of the stack of plates. The base plates 22 have holes for the circulation of the two fluids through each base plate. On figures 3 and 5 is shown the first base plate 22' of the stack of plates 4, starting from the side of the lower plate 20.

[0014] This type of stack of base plates 4 is commonly used and known to the person skilled in the art.

[0015] The heat exchanger comprises reinforcing inserts 23 (Figure 2, Figure 4 & Figure 5) between the lower plate 20 and the base plate 22'.

[0016] The reinforcing inserts 23 are frame parts, for example of rectangular cross section. Alternatively, the reinforcing inserts 23 are inserts of any adapted cross section, for example a round cross section.

[0017] The reinforcing inserts 23 extend internally along two corners 26 of the lower plate 20. More generally, the reinforcing inserts 23 extend along only one or more corners of the lower plate. To this end, the reinforcing inserts have an arcuate shape, more precisely a quarter circular shape. More generally, the reinforcing inserts 23 extend along between 45° and 90° of the reinforced corners, preferably 90°.

[0018] The reinforcing insert 23 are sandwiched between the top main planar surface 24 of the lower plate 20 and the bottom main planar surface 26 of the lower plate 22'. The top surface 28 of the reinforcing inserts 23 is thus in contact with the bottom surface 26 of the lower plate 22' and the bottom surface 30 of the reinforcing inserts is in contact with the top surface 24 of the lower plate 20.

[0019] Importantly also, the reinforcing elements have a radial external surface 32 in contact with an internal surface 34 of the peripheral edge 36 of the lower plate 20.

[0020] For each of the two reinforced corners of the lower plate 20, there is preferably only one continuous reinforcing insert 23.

[0021] Preferably also, the reinforcing inserts 23 are in one part (or "continuous") around their respective corners 26. That is to say that each corner 26 is reinforced by only one reinforcing insert 23. It was found a more reliable reinforcement compared to having several reinforcing inserts around a specific corner.

[0022] Preferably again, the reinforced corners are the one at proximity of the holes for fluid communication 16 and 18 for oil. If the inlet and outlet of water and glycol based coolant were also designed through the reinforcement plate 8 and fixation plate 6, which is also a possible alternative, then the reinforcing inserts would be at proximity of the inlet & outlet for oil, and there would be no reinforcing inserts at proximity of the inlet & outlet for water & glycol based coolant.

[0023] The base plates 22,22' are all identical. They have holes 62 for the circulation of oil and holes 64 for the circulation of coolant.

[0024] Also, each base plate is turned 180 degrees in respect of the adjacent base plates. In this way, it is not necessary to make two different kinds of plates, as commonly known.

[0025] A first group of base plates are intended for the circulation of oil above the base plates 22. The holes 62 for the circulation of oil are in the same plane as the main planar surfaces of these plates and the holes 66 for the circulation of coolant are elevated so that they make a tight contact with the bottom planar surface of the base plate above, which is turned 180 degrees.

[0026] The second half of the base plates 22 of the stack of plates have holes 64 for coolant in the plane of the main planar surfaces of these base plates 22 and the holes for the circulation of oil 62 are elevated so that they make a tight contact with the bottom surface of the plates above. Coolant will circulate on the top side of this second type of base plate.

[0027] Importantly, each base plate 22 of the stack of plates 4, the lower plate 20 and the upper plate (not shown) having a peripheral edge 36 of an identical shape. The peripheral edge 36 of each plate receives the external surface of the peripheral edge 36 of the plate above in a tight manner. This design is also called a "tub" design wherein each tub plate receives the tub plate above in a tight manner along the peripheral edges 36.

[0028] The top end plate only has holes 66 & 68 for receiving the inlet & outlet of coolant. Alternatively, as explained above, the inlet & outlet of coolant could also be on the side of the fixation plate 6, in which case, there would be not circulation holes in the top end plate 14.

[0029] The reinforcement plate 8 shown more specifically on Figure 3, is a planar plate having a relatively high thickness.

[0030] The reinforcement plate 8 has fixation holes 70 in regards of corresponding fixation holes 72 of the fixation plate 6, in order to receive for example fixation screws intended to fasten the heat exchanger into the automotive vehicle. Alternatively, the reinforcement plate has no fixation hole and the fixation plate 6 is fastened to the automotive by holes that are external to the reinforcement plate.

[0031] The reinforcement plate 8 also has positioning protrusions 74, or more generally positioning elements, that cooperate with corresponding positioning elements 74 of the lower plate 20. In this specific example, the

positioning elements 74 of the lower plate 20, the reinforcement plate 8 and the fixation plate 6, are protruding plots, the protruding plots of each of the plates 20, 6 and 8 being respectively identical.

[0032] The fixation plate 6 shown on figures 1 3 & 5 is intended to receive the reinforcement plate and to fasten the heat exchanger 2 to the automotive vehicle thanks to fixation holes 72 in regards of the fixation holes 70 of the reinforcement plate 8. Fixation can be done with fixation screws or any other adapted fixation insert such as bolts.

[0033] The fixation plate 6 has top planar surface 76 (Figure 5) receiving the bottom planar surface 78 of the reinforcement plate 8, the two surfaces 76,78 being in contact with each other. Alternatively, the fixation plate 6 and reinforcement plate 8 could have any other adapted geometry.

[0034] The fixation plate 6 has a peripheral edge 80 (Figures 1 & 3) around the reinforcement plate 8 and in contact with the external peripheral surface 62 (Figure 4) of the reinforcement plate 8.

[0035] Preferably the peripheral edge 80 extends along substantially the whole contour of the reinforcement plate 6. In the figures, there is only one small region 82 where the peripheral edge 80 is not present, but the peripheral edge 80 is still present around at least 50% of the contour of the reinforcement plate 8.

Claims

1. Heat exchanger (2) comprising a stack of plates (4) comprising a lower plate (20) onto which the other plates (22) are stacked, the said other plates comprising a base plate (22') immediately adjacent to the lower plate (20), the heat exchanger (2) also comprising a fixation plate (6), and a reinforcement plate (8) between the fixation plate (6) and the lower plate (20), wherein the heat exchanger (2) further comprises reinforcing inserts (23) between the base plate (22') and the lower plate (22), **characterized by** said reinforcing inserts (23) having an arcuate shape.
2. Heat exchanger (2) according to claim 1, wherein the reinforcing inserts (23) are frame parts.
3. Heat exchanger (2) according to the claim 1 or 2, wherein the reinforcing inserts (23) extend along from 45° to 90° of a corner (26) of the lower plate (20), preferably from 70° to 90°, preferably 90°.
4. Heat exchanger (2) according to any of the preceding claims, wherein the reinforcing inserts (23) have a rectangular cross section.
5. Heat exchanger (2) according to any of the preceding claims, wherein the reinforcing inserts (23) extend along a peripheral edge (36) of the lower plate (20).

6. Heat exchanger (2) according to the preceding claim, wherein the reinforcing inserts (23) are in contact with the peripheral edge (36) of the lower plate (20).
7. Heat exchanger (2) according to any of the preceding claims, wherein the reinforcing inserts (23) extend between a top surface (24) of the lower plate (20) and a bottom surface (26) of the said base plate (22').
8. Heat exchanger (2) according to any of the preceding claims, wherein the reinforcing inserts (23) are only along one or more corners (26) of the lower plate (20), preferably along only two corners (26) of the lower plate (20).
9. Heat exchanger (2) according to any of the preceding claims, wherein the reinforcement plate (8) has two holes (16, 18) for the circulation of fluid, the reinforcing inserts (23) being at proximity of the two holes (16, 18).
10. Heat exchanger (2) according to the preceding claim, wherein the lower plate (20) has corresponding holes (58, 60) in regards of the two holes (16, 18) for the circulation of fluid of the reinforcement plate (8), the two holes (16, 18) of the lower plate (20) being respectively in the two corners (26) of the lower plate (20) that are reinforced by the reinforcing inserts (23).
11. Heat exchanger (2) according to any of the preceding claims, wherein the fixation plate (6) has a planar surface receiving the reinforcement plate (8) and a protrusion (80) around the reinforcement plate (8).
12. Heat exchanger (2) according to the preceding claim, wherein the protrusion (80) is a peripheral edge of the fixation plate (6).
13. Heat exchanger (2) according to any of the preceding claims, wherein the stack of plates (4) defines two circuits for two respective fluids, the circuits being configured so that the two fluids circulate alternately between the adjacent pairs of plates (22).

Patentansprüche

1. Wärmetauscher (2), der einen Stapel Platten (4) umfasst, der eine untere Platte (20) umfasst, auf der die anderen Platten (22) gestapelt sind, wobei die anderen Platten eine Grundplatte (22') umfassen, die direkt an die untere Platte (20) angrenzt, wobei der Wärmetauscher (2) außerdem eine Fixierungsplatte (6) und eine Verstärkungsplatte (8) zwischen der Fixierungsplatte (6) und der unteren Platte (20) umfasst, wobei der Wärmetauscher (2) ferner Verstärkungseinsätze (23) zwischen der Grundplatte (22')

- und der unteren Platte (22) umfasst, **dadurch gekennzeichnet, dass** die Verstärkungseinsätze (23) bogenförmig sind.
2. Wärmetauscher (2) nach Anspruch 1, wobei die Verstärkungseinsätze (23) Rahmenteile sind. 5
 3. Wärmetauscher (2) nach Anspruch 1 oder 2, wobei sich die Verstärkungseinsätze (23) von 45° bis 90° einer Ecke (26) der unteren Platte (20) aus erstrecken, vorzugsweise von 70° bis 90°, vorzugsweise von 90°. 10
 4. Wärmetauscher (2) nach einem der vorstehenden Ansprüche, wobei die Verstärkungseinsätze (23) einen rechteckigen Querschnitt aufweisen. 15
 5. Wärmetauscher (2) nach einem der vorstehenden Ansprüche, wobei sich die Verstärkungseinsätze (23) entlang einer Umfangskante (36) der unteren Platte (20) erstrecken. 20
 6. Wärmetauscher (2) nach einem der vorstehenden Ansprüche, wobei die Verstärkungseinsätze (23) die Umfangskante (36) der unteren Platte (20) berühren. 25
 7. Wärmetauscher (2) nach einem der vorstehenden Ansprüche, wobei sich die Verstärkungseinsätze (23) zwischen einer Deckfläche (24) der unteren Platte (20) und einer Bodenfläche (26) der Grundplatte (22') erstrecken. 30
 8. Wärmetauscher (2) nach einem der vorstehenden Ansprüche, wobei sich die Verstärkungseinsätze (23) lediglich entlang einer oder mehrerer Ecken (26) der unteren Platte (20) befinden und vorzugsweise entlang lediglich zweier Ecken (26) der unteren Platte (20). 35
 9. Wärmetauscher (2) nach einem der vorstehenden Ansprüche, wobei die Verstärkungsplatte (8) zwei Bohrungen (16, 18) für die Zirkulation von Fluid aufweist, wobei sich die Verstärkungseinsätze (23) in der Nähe der zwei Bohrungen (16, 18) befinden. 40
 10. Wärmetauscher (2) nach dem vorstehenden Anspruch, wobei die untere Platte (20) zugehörige Bohrungen (58, 60) bezüglich der zwei Bohrungen (16, 18) für die Zirkulation von Fluid der Verstärkungsplatte (8) aufweist, wobei sich die zwei Bohrungen (16, 18) der unteren Platte (20) jeweils in den zwei Ecken (26) der unteren Platte (20) befinden, die durch die Verstärkungseinsätze (23) verstärkt werden. 45
 11. Wärmetauscher (2) nach einem der vorstehenden Ansprüche, wobei die Fixierungsplatte (6) eine ebene Fläche, die die Verstärkungsplatte (8) aufnimmt, 50

und einen Vorsprung (80) um die Verstärkungsplatte (8) aufweist.



12. Wärmetauscher (2) nach einem der vorstehenden Ansprüche, wobei der Vorsprung (80) eine Umfangskante der Fixierungsplatte (6) ist. 5
13. Wärmetauscher (2) nach einem der vorstehenden Ansprüche, wobei der Stapel Platten (4) zwei Kreisläufe für zwei entsprechende Fluide definiert, wobei die Kreisläufe derart ausgelegt sind, dass die zwei Fluide abwechselnd zwischen den angrenzenden Paaren von Platten (22) zirkulieren. 10

Revendications

1. Échangeur de chaleur (2), comprenant un empilement de plaques (4) comprenant une plaque inférieure (20) sur laquelle sont empilées les autres plaques (22), lesdites autres plaques comprenant une plaque de base (22') immédiatement adjacente à la plaque inférieure (20), l'échangeur de chaleur (2) comprenant également une plaque de fixation (6) et une plaque de renfort (8) entre la plaque de fixation (6) et la plaque inférieure (20), l'échangeur de chaleur (2) comprenant en outre des inserts de renfort (23) entre la plaque de base (22') et la plaque inférieure (22), **caractérisé en ce que** lesdits inserts de renfort (23) présentent une forme arquée. 15
2. Échangeur de chaleur (2) selon la revendication 1, dans lequel les inserts de renfort (23) sont des parties de cadre. 20
3. Échangeur de chaleur (2) selon la revendication 1 ou 2, dans lequel les inserts de renfort (23) s'étendent de 45° à 90° le long d'un coin (26) de la plaque inférieure (20), de préférence de 70° à 90°, de préférence 90°. 25
4. Échangeur de chaleur (2) selon l'une quelconque des revendications précédentes, dans lequel les inserts de renfort (23) présentent une section transversale rectangulaire. 30
5. Échangeur de chaleur (2) selon l'une quelconque des revendications précédentes, dans lequel les inserts de renfort (23) s'étendent le long d'un bord périphérique (36) de la plaque inférieure (20). 35
6. Échangeur de chaleur (2) selon la revendication précédente, dans lequel les inserts de renfort (23) sont au contact du bord périphérique (36) de la plaque inférieure (20). 40
7. Échangeur de chaleur (2) selon l'une quelconque des revendications précédentes, dans lequel les in- 45

serts de renfort (23) s'étendent entre une surface de dessus (24) de la plaque inférieure (20) et une surface de dessous (26) de ladite plaque de base (22').

8. Échangeur de chaleur (2) selon l'une quelconque des revendications précédentes, dans lequel les inserts de renfort (23) ne sont présents que le long d'un ou de plusieurs coins (26) de la plaque inférieure (20), de préférence le long uniquement de deux coins (26) de la plaque inférieure (20). 5
10
9. Échangeur de chaleur (2) selon l'une quelconque des revendications précédentes, dans lequel la plaque de renfort (8) est pourvue de deux trous (16, 18) pour la circulation de fluide, les inserts de renfort (23) se trouvant à proximité des deux trous (16, 18). 15
10. Échangeur de chaleur (2) selon la revendication précédente, dans lequel la plaque inférieure (20) est pourvue de trous correspondants (58, 60) en regard des deux trous (16, 18) pour la circulation de fluide de la plaque de renfort (8), les deux trous (16, 18) de la plaque inférieure (20) se trouvant respectivement dans les deux coins (26) de la plaque inférieure (20) qui sont renforcés par les inserts de renfort (23). 20
25
11. Échangeur de chaleur (2) selon l'une quelconque des revendications précédentes, dans lequel la plaque de fixation (6) possède une surface plane recevant la plaque de renfort (8) et une protubérance (80) autour de la plaque de renfort (8). 30
12. Échangeur de chaleur (2) selon la revendication précédente, dans lequel la protubérance (80) consiste en un bord périphérique de la plaque de fixation (6). 35
13. Échangeur de chaleur (2) selon l'une quelconque des revendications précédentes, dans lequel l'empilement de plaques (4) définit deux circuits pour deux fluides respectifs, les circuits étant configurés de façon à ce que les deux fluides circulent en alternance entre les paires adjacentes de plaques (22). 40
45
50
55

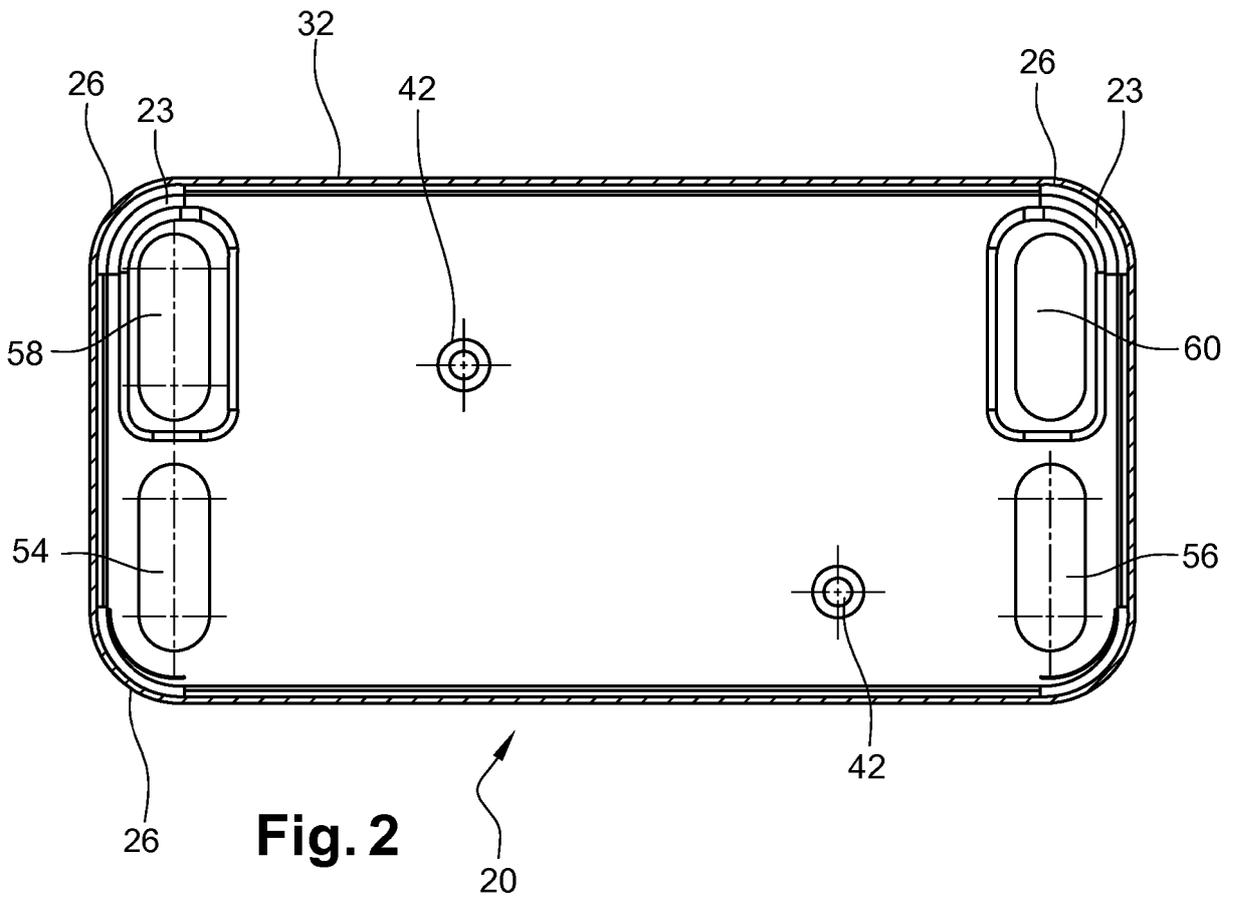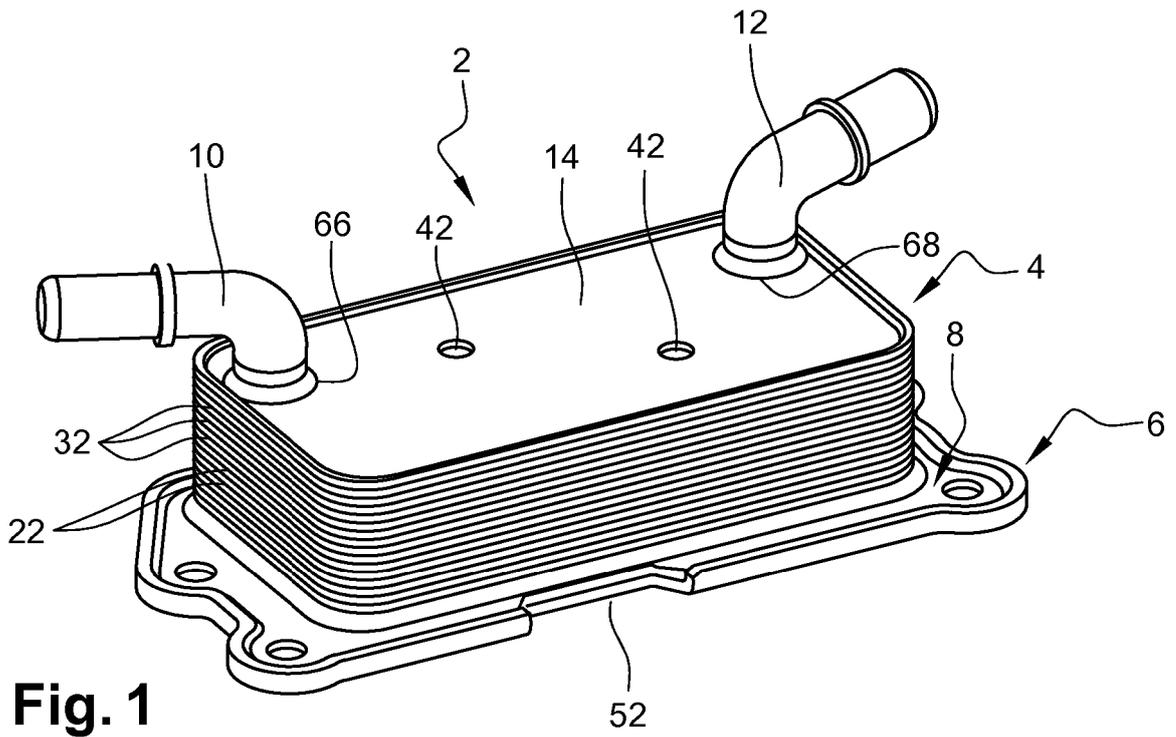

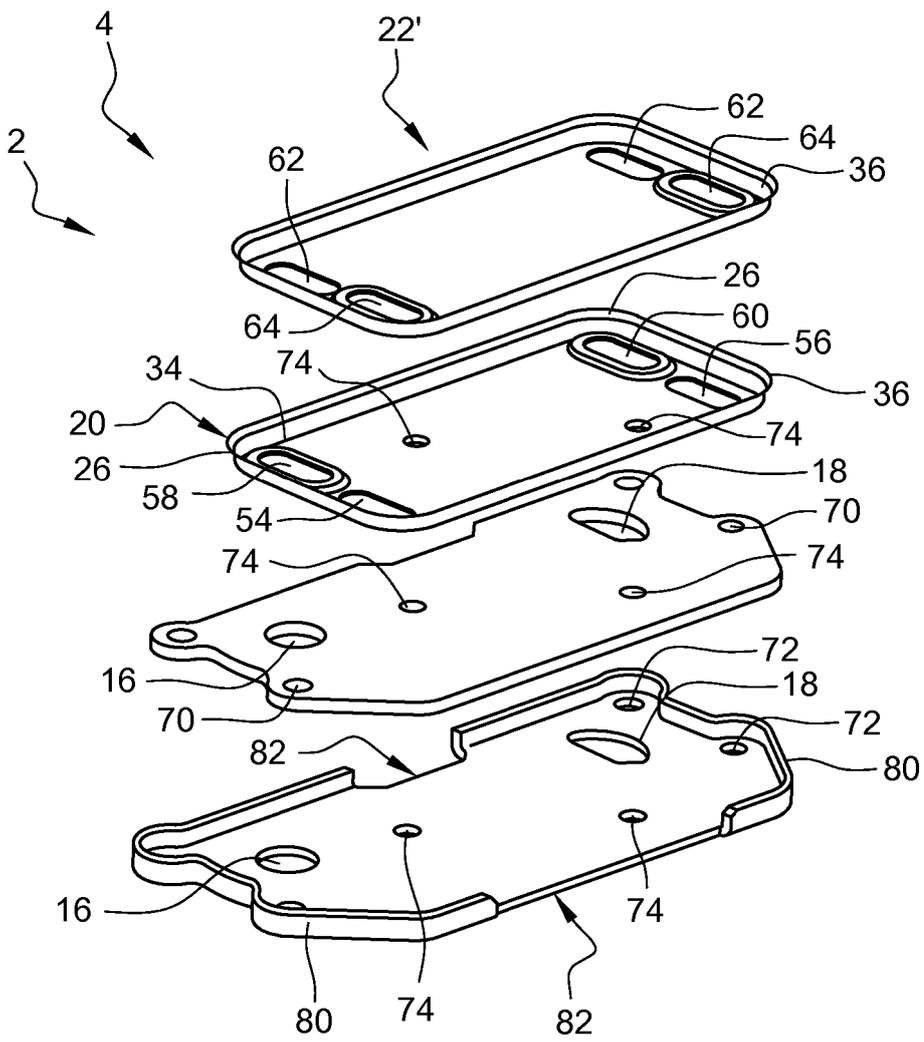


Fig. 3

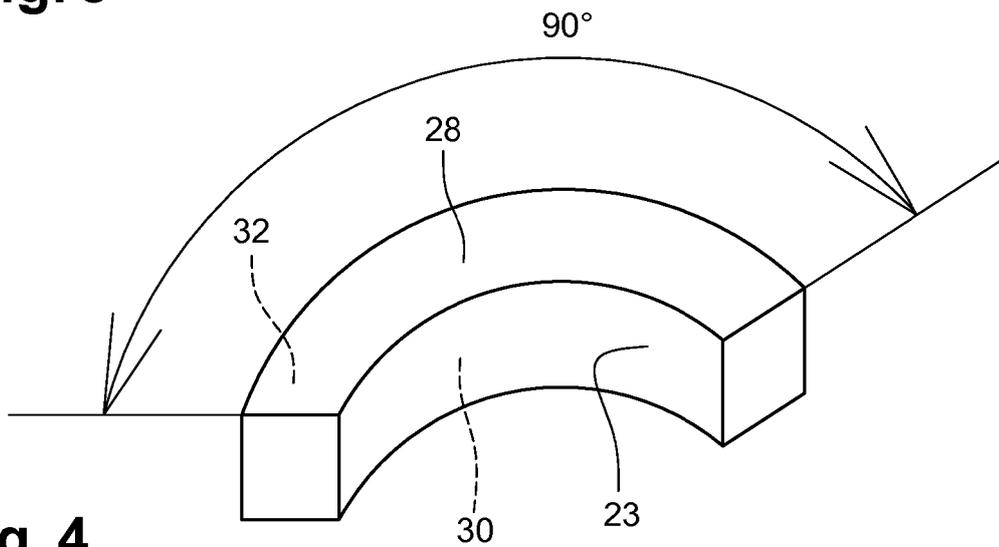


Fig. 4

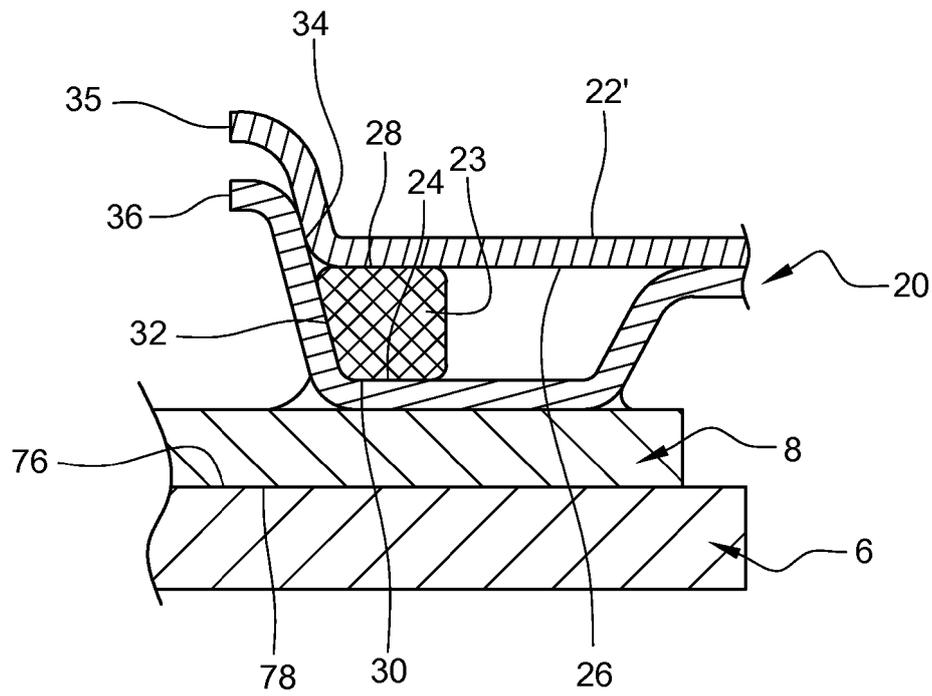


Fig. 5

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2007084809 A [0003]
- EP 2267390 A [0003]
- EP 0623798 A2 [0005]