



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
05.02.2020 Bulletin 2020/06

(51) Int Cl.:
A43B 13/12 (2006.01) **A43B 13/18** (2006.01)
A43B 13/14 (2006.01) **A43B 13/22** (2006.01)

(21) Application number: **19196198.6**

(22) Date of filing: **21.07.2010**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK SM TR

(30) Priority: **21.07.2009 US 506957**
26.03.2010 US 748246
08.07.2010 US 832464

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
16188094.3 / 3 146 862
10170301.5 / 2 277 402

(71) Applicant: **Reebok International Ltd.**
Boston, MA 02210 (US)

(72) Inventors:
• **Callahan, Erica**
Bedford, MA 01730 (US)
• **Montross, Matthew**
Canton, MA 02021 (US)

- **Hardigan, Henry**
Canton, MA 02021 (US)
- **Vestuti, Ricardo**
Canton, MA 02021 (US)
- **Boudreau, Matthew**
Canton, MA 02021 (US)
- **Hobson, Daniel**
Canton, MA 02021 (US)
- **Scott, Daley**
Canton, MA 02021 (US)
- **Bischoff, Bob**
Canton, MA 02021 (US)

(74) Representative: **Wegner, Hans**
Bardehle Pagenberg Partnerschaft mbB
Patentanwälte, Rechtsanwälte
Prinzregentenplatz 7
81675 München (DE)

Remarks:

This application was filed on 09.09.2019 as a divisional application to the application mentioned under INID code 62.

(54) **ARTICLE OF FOOTWEAR HAVING AN UNDULATING SOLE**

(57) An article of footwear is provided which comprises an upper, a plate connected to the upper, and an undulating sole having a top surface connected to the plate and a bottom surface, the sole comprising a plurality of

spaced apart peaks defining a plurality of gaps in the top surface and a plurality of spaced apart troughs defining a plurality of gaps in the bottom surface.

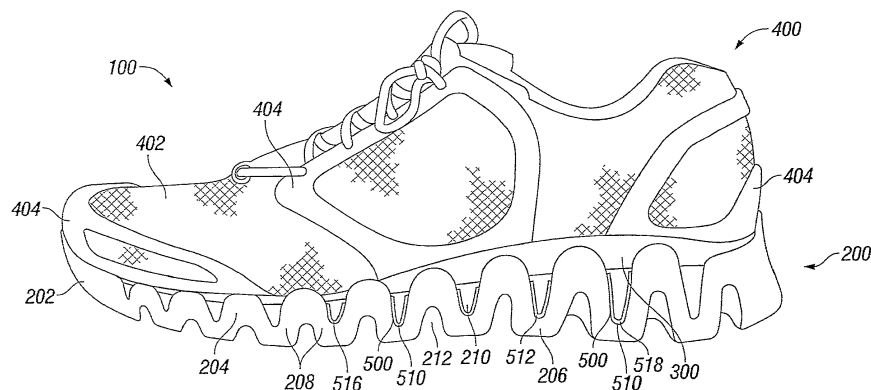


FIG. 24

Description

Field of the Invention

[0001] The present invention is directed to an article of footwear having an undulating sole.

Background Art

[0002] Individuals are often concerned with the amount of cushioning an article of footwear provides, as well as the aesthetic appeal of the article of footwear. This is true for articles of footwear worn for non-performance activities, such as a leisurely stroll, and for performance activities, such as running, because throughout the course of an average day, the feet and legs of an individual are subjected to substantial impact forces. Running, jumping, walking, and even standing exert forces upon the feet and legs of an individual which can lead to soreness, fatigue, and injury.

[0003] The human foot is a complex and remarkable piece of machinery, capable of withstanding and dissipating many impact forces. The natural padding of fat at the heel and forefoot, as well as the flexibility of the arch, help to cushion the foot. Although the human foot possesses natural cushioning and rebounding characteristics, the foot alone is incapable of effectively overcoming many of the forces encountered during every day activity. Unless an individual is wearing shoes which provide proper cushioning and support, the soreness and fatigue associated with every day activity is more acute, and its onset accelerated. The discomfort for the wearer that results may diminish the incentive for further activity. Equally important, inadequately cushioned footwear can lead to injuries such as blisters; muscle, tendon and ligament damage; and bone stress fractures. Improper footwear can also lead to other ailments, including back pain.

[0004] Proper footwear should complement the natural functionality of the foot, in part, by incorporating a sole (typically including an outsole, midsole and insole) which absorbs shocks. Therefore, a continuing need exists for innovations in providing cushioning to articles of footwear.

BRIEF SUMMARY OF THE INVENTION

[0005] In one embodiment, an article of footwear includes an undulating foam sole. The undulating foam sole includes a plurality of spaced apart peaks, wherein at least one pair of adjacent peaks define a gap void of material between adjacent peaks, and a plurality of spaced apart troughs, wherein at least one trough is adapted to engage the ground and wherein at least one pair of adjacent troughs define a gap void of material between adjacent troughs.

[0006] In another embodiment, an article of footwear includes an undulating foam midsole. The undulating midsole includes a first side, a second side, a plurality of

spaced apart peaks extending along a width of the midsole between the first and second sides, and a plurality of spaced apart troughs extending along a width of the midsole between the first and second sides. At least one pair of adjacent peaks define a gap void of material between the adjacent peaks that extends along the width of the midsole with one end at the first side and another end at the second side. At least one pair of adjacent troughs define a gap void of material between the adjacent troughs that extends along the width of the midsole with one end at the first side and another end at the second side.

[0007] In a further embodiment, an article of footwear includes an undulating midsole and a plate. The undulating midsole includes a first side, a second side, a plurality of spaced apart peaks extending along a width of the midsole between the first and second sides, and a plurality of spaced apart troughs extending along a width of the midsole between the first and second sides. The plate is attached to the plurality of spaced apart peaks. Each of the plurality of spaced apart peaks has a greater height at the first and second sides of the midsole than in an area between the first and second sides.

[0008] In a further embodiment, an article of footwear includes an upper; a plate connected to the upper; and an undulating sole having a top surface connected to the plate and a bottom surface, the sole comprising a plurality of spaced apart peaks defining a plurality of gaps in the top surface and a plurality of spaced apart troughs defining a plurality of gaps in the bottom surface. The article of footwear may further comprise one or more support elements coupled to the sole for providing support thereto. The support element may be disposed between the sole and the plate. In one embodiment, the support element may be disposed in a gap in the top surface of the sole.

[0009] In a further embodiment, a sole for an article of footwear includes a midsole having a heel portion, a forefoot portion, a medial sidewall and a lateral sidewall, and wherein the midsole is substantially sinusoidal along at least a portion of the length of the midsole, and wherein the midsole extends along a width of the midsole. It will be appreciated by those of ordinary skill in the art that the terms sinusoidal and sine wave as used herein refer to the undulating shape of the midsole and are not meant to be used in a strict mathematical sense. In one embodiment, the midsole may extend across the entire width of the midsole between the medial sidewall and the lateral sidewall and may have a top surface shaped to receive an upper of an article of footwear. The midsole may be substantially sinusoidal along a portion of, or substantially the entire length of, the midsole. In one embodiment, the lateral sidewall and/or the medial sidewall may be substantially sinusoidal. In another embodiment, the midsole may be substantially sinusoidal across the entire width of the midsole. The lateral and/or medial sidewalls may include a plurality of peaks having rounded top surfaces, flat top surfaces, pointed top surfaces, or combi-

nations thereof. The midsole may comprise foam, and an outsole may be coupled to the midsole.

[0010] In yet a further embodiment, a sole for an article of footwear includes a midsole having a top surface, a bottom surface, a medial sidewall, and a lateral sidewall, wherein the midsole undulates to define a plurality of spaced apart gaps in the top surface and a plurality of spaced apart gaps in the bottom surface. Each of a plurality of top surface gaps may be disposed between adjacent bottom surface gaps. In one embodiment, the top surface gaps and/or the bottom surface gaps may be substantially evenly spaced apart. In one embodiment, one or more gaps extend across the entire width of the midsole. In one embodiment, the lateral and/or medial sidewalls include a plurality of peaks and each peak is disposed between adjacent top surface gaps. The lateral and/or medial sidewalls may include a plurality of peaks having rounded top surfaces, flat top surfaces, pointed top surfaces, or combinations thereof. In one embodiment, the midsole extends across the entire width of the sole between the medial sidewall and the lateral sidewall. In one embodiment, the portion of the midsole between the medial sidewall and the lateral sidewall does not undulate. In one embodiment, one or more gaps extend across the entire width of the midsole and/or only a portion of the width of the midsole.

[0011] In another embodiment, an article of footwear includes an upper; and a foam sole disposed below the upper such that a gap is disposed between the sole and the upper, the sole having a heel portion, a forefoot portion, a medial sidewall and a lateral sidewall, and wherein the sole is substantially sinusoidal along the length of the sole, and wherein the sole extends along a width of the sole. In one embodiment, a plurality of gaps may be disposed between the sole and the upper. The lateral and/or medial sidewall may include a plurality of peaks having rounded top surfaces, flat top surfaces, or pointed top surfaces. In one embodiment the article of footwear may further include a plate disposed intermediate to the upper and the sole. At least a portion of a gap may be disposed intermediate to the sole and the plate.

[0012] In another embodiment, a method of manufacturing a sole for an article of footwear includes the steps of molding an undulating foam midsole in a mold; removing the foam midsole from the mold; placing the foam midsole on a form having a plurality of spaced apart ridges; and cooling the foam midsole. The mold may comprise a plurality of spaced apart ridges and at least one injection site disposed between two adjacent ridges. In one embodiment, the mold may include between one and twenty injection sites. In one embodiment, the mold may include eleven injection sites.

[0013] In another embodiment, an article of footwear includes an undulating foam sole, which includes: a plurality of spaced apart peaks, wherein at least one pair of adjacent peaks define a first gap substantially devoid of material between adjacent peaks, and a plurality of spaced apart troughs, wherein at least one pair of adja-

cent troughs define a second gap substantially devoid of material between adjacent troughs; and a support element coupled to the sole for providing support thereto.

[0014] In a further embodiment, an article of footwear includes an upper; a plate connected to the upper; an undulating sole having a top side connected to the plate and a bottom side, the sole comprising a plurality of spaced apart peaks defining a plurality of gaps in the top side and a plurality of spaced apart troughs defining a plurality of gaps in the bottom side; and a support element disposed in between the sole and the plate for providing support to the sole.

BRIEF DESCRIPTION OF THE DRAWINGS/FIGURES

[0015] The accompanying drawings, which are incorporated herein and form a part of the specification, illustrate the present invention and, together with the description, further serve to explain the principles of the invention and to enable a person skilled in the pertinent art to make and use the invention.

FIG. 1 is a side view of an exemplary article of footwear according to an embodiment of the present invention;

FIG. 2 is bottom view of the exemplary article of footwear of FIG. 1 according to an embodiment of the present invention;

FIG. 3 is a side view of another exemplary article of footwear according to an embodiment of the present invention;

FIG. 4 is a bottom view of the exemplary article of footwear of FIG. 3 according to an embodiment of the present invention;

FIG. 5 is a close up side view of a portion of a midsole of the exemplary article of footwear of FIG. 3 according to an embodiment of the present invention;

FIG. 6 is a side view of another exemplary article of footwear according to an embodiment of the present invention;

FIG. 7 a bottom view of the exemplary article of footwear of FIG. 6 according to an embodiment of the present invention;

FIG. 8 is a side view of another exemplary article of footwear according to an embodiment of the present invention;

FIG. 9 is a bottom view of the exemplary article of footwear of FIG. 8 according to an embodiment of the present invention;

FIG. 10 is a side view of an exemplary midsole according to an embodiment of the present invention; FIG. 11 is a bottom view of an exemplary foot plate according to an embodiment of the present invention; and

FIG. 12 is a partial side view of the exemplary foot plate of FIG. 11 according to an embodiment of the present invention.

FIG. 13 is a schematic view of an exemplary article

of footwear during manufacturing according to an embodiment of the present invention.

FIG. 14 is a side view of an exemplary article of footwear according to an embodiment of the present invention.

FIG. 15 is a bottom view of the exemplary article of footwear of FIG. 14 according to an embodiment of the present invention.

FIG. 16 is a side view of an exemplary article of footwear according to an embodiment of the present invention.

FIG. 17 is a bottom view of the exemplary article of footwear of FIG. 16 according to an embodiment of the present invention.

FIG. 18 is a side view of an exemplary midsole for use in the exemplary article of footwear of FIG. 16 according to an embodiment of the present invention.

FIG. 19 is front perspective cross-sectional view of an exemplary article of footwear according to an embodiment of the present invention.

FIG. 20 is a top perspective view of an insert according to an embodiment of the present invention.

FIG. 21 is a bottom perspective view of the insert shown in FIG. 20 according to an embodiment of the present invention.

FIG. 22 is a side view of the insert shown in FIG. 20 according to an embodiment of the present invention.

FIG. 23 is a top perspective view of a midsole with an insert according to an embodiment of the present invention.

FIG. 24 is a side view of an article of footwear with an insert according to an embodiment of the present invention.

FIG. 25 is a side view of an insert according to an embodiment of the present invention.

FIG. 26 is a side view of an insert according to another embodiment of the present invention.

FIG. 27 is a side view of an insert according to another embodiment of the present invention.

FIG. 28 is a top perspective view of an insert according to another embodiment of the present invention.

FIG. 29 is a bottom perspective view of the insert shown in FIG. 29 according to an embodiment of the present invention.

FIG. 30 is a side view of an insert having solid support elements according to an embodiment of the present invention.

FIG. 31 is a schematic view of an exemplary mold for manufacturing a sole according to an embodiment of the present invention.

FIG. 32 is a schematic view of exemplary post-molding form for manufacturing a sole according to an embodiment of the present invention.

FIG. 33 is a schematic view of an exemplary sole during manufacturing according to an embodiment of the present invention.

FIG. 34 is a side view of an exemplary article of footwear according to an embodiment of the present invention.

FIG. 35 is a bottom view of an exemplary article of footwear and outsole according to an embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0016] The present invention is now described with reference to the Figures, in which like reference numerals are used to indicate identical or functionally similar elements. While specific configurations and arrangements are discussed, it should be understood that this is done for illustrative purposes only. A person skilled in the pertinent art will recognize that other configurations and arrangements can be used without departing from the spirit and scope of the present invention. It will be apparent to a person skilled in the pertinent art that this invention can also be employed in a variety of other applications.

[0017] An article of footwear 100 according to an embodiment of the present invention may have a sole 200 that undulates to provide a different and unique ride and/or feel to article of footwear 100 while also providing a unique aesthetic appeal and providing training for the wearer's muscles in the legs, lower back, and/or abdomen. A foot plate 300 is attached to undulating sole 200 and an upper 400 is attached to foot plate 300.

[0018] Sole 200 may include a midsole 202 having an undulating shape with alternating peaks 204 and troughs 206. In some embodiments, the undulating shape of midsole 202 may be substantially sinusoidal, whereby one or more of the peaks and/or troughs may be rounded. In other embodiments, one or more of the peaks and/or troughs may have a top surface that is substantially flat, as shown for example, in FIG. 34. In other embodiments, the undulating shape of midsole 202 may be zigzagged, whereby one or more of the peaks and/or troughs may be pointed. In some embodiments, peaks 204 may be located substantially equidistant between adjacent troughs 206, and similarly, troughs 206 may be located substantially equidistant between adjacent peaks. Between each peak 204 and each trough 206 may be a wall 208. Gaps 210 devoid of material may be present between adjacent peaks 204 and above a trough 206 and gaps 212 devoid of material may be present between adjacent troughs 206 and below a peak 204. Gaps 210 and gaps 212 may extend across an entire width of midsole 202. In an alternative embodiment, gaps 210 and gaps 212 may extend only along a portion of midsole 202. In one embodiment, the undulating shape of midsole 202 may be substantially similar to a sine wave. A distance between adjacent peaks 204 or adjacent troughs 206 may be substantially similar or may be varied along a length of midsole 202 or combinations thereof.

[0019] Midsole 202 may be designed such that each trough 206 contacts or engages the ground separately when a user is walking, running, or otherwise moving

under his/her own power. As each trough 206 contacts or engages the ground a compressive force is exerted causing distortion of the shape of gap 210 located above trough 206 as a result of vertical buckling of walls 208 connected to trough 206. The compressive forces can also distort the shape of gaps 212 on either side of trough 206 to increase the distance between the trough 206 contacting or engaging the ground and those adjacent to it. Shear forces exerted on midsole 202 may have the same effect of buckling walls 208 and distorting the shape of gaps 210 and 212.

[0020] Accordingly, material for midsole 202 must be sufficiently flexible to allow the buckling and distortions described above so as to provide adequate cushioning. Suitable material for midsole 202 may include, but is not limited to, foam and thermoplastic polyurethane. When midsole 202 is a foam, the foam may be, for example, ethyl vinyl acetate (EVA) based or polyurethane (PU) based and the foam may be an open-cell foam or a closed-cell foam. In other embodiments, midsole 202 may be elastomers, thermoplastic elastomers (TPE), foam-like plastic (e.g., Pebax® foam or Hytrel® foam) and gel-like plastics.

[0021] Individually or in combination, the aspects of midsole 202 that uniquely absorb the compressive and shear forces may include the: (1) tall, thin shape of walls 208, (2) angles between adjacent walls 208 of undulating midsole 202, (3) gaps 210 and 212 void of material on either side of walls 208; and/or (4) compression of the foam itself (aside from distortion of the sole geometry). Buckling may occur due to tall, thin walls 208. The voids of material or gaps 210, 212 may allow for the buckling and/or distention of the material of midsole 202 to occur when loaded. The contact of midsole 202 on the ground in the midfoot region may provide a new ride to the shoe. The heel strike may take a prolonged amount of time compared to a typical running shoe, which can decrease the peak forces. When a force is applied to the midsole, not only does the midsole material compress, but the physical shape of the midsole may also change to absorb the compressive and shear forces. The physical changes in shape, and/or the buckling, which may include walls 208 distending into one of the voids of material or gaps 210, 212 on either side of the wall, may occur because of the tall, thin shape of walls 212, angles between walls 208 of the undulating midsole 202, and/or voids of material or gaps 210, 212 on either side of walls 208. The unique shape, midsole contact with the ground in the midfoot region, and/or material may vary the amount of time spent in each phase of the gait cycle for an individual compared to a more traditional running shoe, possibly decreasing the peak force experienced by that individual.

[0022] The above described effects of the compressive forces and shear forces on midsole 202 may cause the wearer's body to work harder. By forcing the wearer's body to work harder, the shoe may trigger increased training to the muscles, such as those muscles in the wearer's calves, thighs, lower back, buttocks, and/or abdomen.

As a result of this extra work, when a wearer travels a given distance, the affected muscles may feel like they have worked in traversing a distance farther than the given distance, thereby enhancing a wearer's amount of exercise. In another embodiment, forces acting on midsole 202 may cause the wearers' body to work less hard. For example, midsole 202 may be adapted to enhance the natural resiliency and energy return of the foot by storing energy during its compression and returning energy during its expansion. As a result, muscles used during an activity may undergo less wear.

[0023] Walls 208 may be contoured to provide gaps 210 and gaps 212 with a variety of shapes in order to impart varying cushioning effects. In one embodiment, as shown for example in FIGs. 1 and 6, gaps 210 may be substantially v-shaped. The angle provided between adjacent walls 208 may be adapted to provide the desired cushioning properties. For example, in one embodiment the angle between adjacent walls 208 may be in the range of from about 10 degrees to about 50 degrees, such as from about 10 degrees to about 40 degrees or about 15 degrees to about 35 degrees. In one embodiment, the angle between adjacent walls may vary along the length of midsole 202. For example, in one embodiment the angle may be greater between one or more pair of adjacent walls 208 in the heel portion of midsole 202 and lesser between one or more pair of adjacent walls 208 in the forefoot portion. For example, in some embodiments the angle between adjacent walls 208 in the forefoot portion may be from about 30 to about 40 degrees. In some embodiments the angle between adjacent walls 208 in the heel portion may be from about 15 to about 25 degrees. In another embodiment, as also shown for example in FIG. 1, gaps 212 may be substantially shaped as an inverted v.

[0024] The depth of gaps 210 and 212 may also be varied to provide the desired cushioning properties. In one embodiment, as shown for example in FIG. 1, the depth of gaps 210 may vary along the length of midsole 202. For example, gaps 210 may be deeper in the heel region of midsole 202, and become more shallow toward the forefoot region of midsole 202.

[0025] In another embodiment, as shown for example in FIGs. 3 and 5, gaps 212 may be substantially omega-shaped (Ω) such that each gap 212 has a rounded top section and a narrow bottom section wherein the distance d1 between the surface of the two walls 208 forming and facing each gap 212 is shorter at the bottom of gap 212 than a distance d2 in a middle portion of gap 212. The embodiments described above are merely exemplary and gaps 210 and gaps 212 may have any combination of shapes as would be apparent to one of ordinary skill in the art. For example, in one embodiment midsole 202 may include a combination of v-shaped and omega-shaped gaps.

[0026] The number of walls 208, and, correspondingly, the number of gaps 210 and 212 provided in midsole 202 may vary depending upon the desired cushioning char-

acteristics or upon the length and width of midsole 202. In one embodiment, as shown for example in FIG. 1, midsole 202 may include ten gaps 210. In one embodiment, midsole 202 may include in the range of two to fifteen gaps. In another embodiment, midsole 202 may include in the range of five to thirteen gaps. In another embodiment, midsole 202 may include in the range of eight to twelve gaps. In one embodiment, midsole 202 may include at least five gaps. In another embodiment, midsole 202 may include at least eight gaps. In another embodiment, midsole 202 may include at least ten gaps. The number of gaps 210 and 212 may vary depending upon a thickness of walls 208, a frequency of the undulation, and/or the angle between adjacent walls 208.

[0027] One or more troughs 206 of midsole 202 may have an outsole piece 213 attached thereto to provide additional traction. Outsole piece 213 may be rubber or any suitable material typically utilized for an outsole. In one embodiment, as shown for example in FIGs. 2 and 35, a trough 206 may have one or more outsole pieces 213. In another embodiment, as shown for example in FIG. 4, outsole piece 213 may contact one or more troughs 206 and span a portion of gap 212 between adjacent troughs 206. In another embodiment, as shown for example in FIG. 7, midsole 202 may have an outsole piece 213 that covers a periphery of a heel region of midsole 202 and/or another outsole piece 213 that covers a periphery of a forefoot region of midsole 202. Outsole piece 213 spans gaps 212 between adjacent troughs 206 and may include areas of reduced thickness 217 that allow outsole piece 213 to flex and lengthen when gaps 212 lengthen. Outsole pieces 213 may be made from a suitable polymeric material that permits the above-described lengthening and flexing. The above embodiments are merely exemplary and one skilled in the art would readily appreciate the pattern of outsole piece(s) 213 on trough(s) 206 of midsole 202 may have a variety of configurations. In addition, as shown in FIGs. 2, 4, 7, and 9, a bottom surface 215 of each trough 206 may have a contour that varies across a width of midsole 202. Bottom surface 215 of each trough 206 may have the same contour and/or shape, varying contours and/or shapes and combinations thereof. One skilled in the art would readily appreciate that the shape and pattern of outsole piece(s) 213 may correspond to the contour or shape of bottom surfaces 215 of troughs 206.

[0028] Midsole 202 may be a single piece, as shown for example in FIGs. 2 and 4, or may comprise two or more pieces. In one embodiment, as shown for example in FIG. 9, midsole 202 may have a lateral midsole piece 214 extending along a lateral side of article of footwear 100 and a medial midsole piece 216 extending along a medial side of article of footwear 100 with a space 218 located between lateral midsole piece 214 and medial midsole piece 216. A forefoot outsole piece 220 may be attached to both lateral midsole piece 214 and medial midsole piece 216 in a manner such that forefoot outsole piece 220 spans and covers a portion of space 218 at

the forefoot of article of footwear 100. Similarly, a heel outsole piece 222 may be attached to both lateral midsole piece 214 and medial midsole piece 216 in a manner such that heel outsole piece 222 spans and covers a portion of space 218 at the heel of article of footwear 100. Lateral midsole piece 214 and medial midsole piece 216 may have corresponding undulations such that peaks 204 and troughs 206 of each piece are aligned when assembled in article of footwear 100. Having a separate lateral midsole piece 214 and medial midsole piece 216 may have the advantage of providing a ride or cushioning different from a single piece midsole 202.

[0029] As best seen in FIG. 10, midsole 202 may be shaped so that peaks 204 have a greater height at first and second sides 224, 226 of midsole 202 than in an area between first and second sides 224, 226. For example, a top surface 228 of each peak 204 is substantially concave, thereby providing a recess for receiving foot plate 300. In one embodiment, top surface 228 of some peaks 204 may have a groove 230 adjacent first and/or second sides 224, 226 that aids in aligning foot plate 300 in the recess and holding foot plate 300 in place. In one embodiment, the portion of the midsole between the first and second sides 224, 226 does not undulate and only first (e.g., lateral) side 224 and/or second (e.g., medial) side 226 undulate. Portions of gaps 210 and/or 212 between first and second sides 224 and 226 may be filled in.

[0030] Foot plate 300, as best seen in FIGs. 11 and 12, may have a bottom surface 302 with a plurality of ridges 304 extending outward from bottom surface 302. Ridges 304 may be shaped to provide outlines that correspond to the size, shape, and contour of top surfaces 228 of peaks 204 of midsole 202. Ridges 304 may also extend to side surfaces 306 of foot plate 300. Accordingly, ridges 304 aid in aligning foot plate 300 on top surfaces 228 of peaks 204 of midsole 202.

[0031] Foot plate 300 may be any suitable thermoplastic material or composite material and, in some embodiments, may be manufactured through molding or lay-up. In other embodiments, foot plate 300 may be a molded foam, such as a compression molded foam, TPU, or Pebax®. In one embodiment, foot plate 300 may be formed separately from midsole 202 and then attached and joined to midsole 202 through adhesive bonding, welding, or other suitable techniques as would be apparent to one of ordinary skill in the art. Areas 308 of bottom surface 302 that contact top surfaces 228 of peaks 204 may be textured to facilitate attachment of foot plate 300 to midsole 202. In another embodiment, foot plate 300 and midsole 202 may be co-molded and thereby formed together simultaneously.

[0032] Midsole 202 may be used in conjunction with a variety of uppers 400. In one embodiment, upper 400 may have a bootie 402 for receiving the foot of a wearer attached to an upper surface (not shown) of foot plate 300. In some embodiments, plate 300 may be placed inside shoe 100 and midsole 202 may be attached directly to upper 400. Bootie 402 may be any suitable ma-

terial that is lightweight and breathable known to those of ordinary skill in the art for use as an upper. Bootie 402 may be attached to the foot plate through adhesive or other conventional attachment techniques. Upper 400 may also have one or more structural members 404 extending from foot plate 300. Structural members 404 provide structure to bootie 402 and may extend along the lateral and medial sides and be utilized in lacing article of footwear 100. Structural members 404 may also be present at a heel area to provide an internal or external heel counter or at a forefoot area to provide an internal or external toe cap. Structural members 404 may be molded from suitable polymeric materials known to those of ordinary skill in the art. Structural members 404 may also have a variety of shapes and sizes as would be apparent to one of ordinary skill in the art.

[0033] With reference to FIGs. 13 and 31-33, manufacturing of midsole 202 according to embodiments of the present invention will now be described. As will be apparent to those of ordinary skill in the art, midsole 202 may be molded by injection molding using one or more molds 600. The mold 600 may include molds for one or more midsoles 202. With reference to FIGs. 13 and 31, mold 600 may include a plurality of ridges 601 which correspond to the one or more gaps 212 of midsole 202. During molding one or more injection sites or sprue passages 601 may be used to introduce midsole material into the mold. As shown in FIGs. 13 and 31, in one embodiment of the present invention, eleven (11) sprues may be used to introduce material into the mold, thereby resulting in posts 232, which will be subsequently removed, extending from midsole 202 in the areas corresponding to the sprues. In this manner, the material may be distributed evenly throughout the midsole. In the heel portion of midsole 202, one sprue may be used in the area of the rearmost peak, and two sprues may be used at each of the next two peaks in the heel region. Two sprues may also be used at each of the fifth, seventh, and ninth peaks in midsole 202. In another embodiment, one or more sprues may be used at each of the peaks to introduce the midsole material to the mold. The use of sprues for introducing midsole material into the mold may be useful because sprues may provide for even flow of material; may help to provide proper curing of material; may help to provide even temperature distribution after filling which, in turn, may contribute to consistent skin thickness; may help to make midsoles that are consistent left to right; and may help to make sure the mold is fully filled. Other arrangements for introducing material into the molds during manufacture of midsole 202 may be used. In some embodiments, other methods of molding may be utilized including, but not limited to, compression molding, injection molding, and expansion molding, whereby pellets are placed in a mold and expanded.

[0034] During manufacture, because midsole 202 may expand upon removal from its mold, the mold may comprise a smaller size than the desired size of the midsole. For example, in one embodiment of the present invention

using EVA material, the mold may comprise about 65% to about 75% of the size of the finished midsole. Depending on the expansion ratio of the material used, other mold sizes may be used.

[0035] With reference to FIGs. 32 and 33, in one embodiment, one or more post-molding forms 610 may be used after midsole 202 is removed from mold 600 during manufacturing. After removal from mold 600, top surface of midsole 202 may be placed on top of post-molding form 610. Post-molding form 610 may include a plurality of ridges 611 formed on a base 612 which correspond to the one or more gaps 210 of midsole 202. In alternative embodiments, bottom surface of midsole 202 may be placed on top of post-molding form 610, and ridges 611 may correspond to one or more gaps 212 of midsole 202. Post-molding form 610 may facilitate proper cooling and shaping of midsole 202. For example, midsole 202 may contract as it cools and/or finishes curing. Because the form is dimensionally stable, post-molding form 610 may limit and/or direct the contraction of the midsole 202 such that the midsole results in the desired shape. In some but not necessarily all embodiments, portions of midsole 202 may have varying thicknesses and/or may cool at different rates. As a result, midsole 202 may curl or otherwise become misshapen without use of post-molding form 610. In one embodiment, one or more weights 620 may be placed on midsole 202 as it cools to further facilitate proper cooling and shaping. In one embodiment, a weight 620 may be placed on midsole 202 in the heel area and in the forefoot area of the midsole. Post-molding form 610 may comprise plastic, ceramic, metal, wood, bamboo, cast epoxy, or other suitable material.

[0036] Midsole 202 may be molded to tailor to various needs such as, for example, to prevent pronation or supination. In such instances, certain areas of midsole 202 may be imparted with different characteristics in order to achieve such customizations. In instances where a medial side of midsole 202 needs to be customized and not a lateral side or vice versa, it may be preferred to utilize a midsole 202 with lateral midsole piece 214 and medial midsole piece 216, as described above. As an alternative to, or in addition to, modifying midsole 202, inserts may be placed between midsole 202 and plate 300, as discussed in more detail below, or posts may be utilized to connect midsole 202 to upper 400.

[0037] The embodiments of FIGs. 1-4 and 6-10, have illustrated midsole 202 as undulating with peaks 204 and troughs 206 from toe to heel, however this is merely exemplary. In some embodiments, as shown for example in FIGs. 14 and 15, midsole 202 may undulate with peaks 204 and troughs 206 only in a forefoot region. In other embodiments, as shown for example in FIGs. 16-18, midsole 202 may undulate with peaks 204 and troughs 206 only in a heel region. In other embodiments, as shown for example in FIG. 19, midsole 202 may also have one or more rows 334 that undulate with peaks 204 and troughs 206 in a medial to lateral direction. In some embodiments, peaks 204 and troughs 206 of each row 334

may be aligned.

[0038] In certain embodiments, undulating sole 200 may be manufactured to provide a different and unique ride and/or feel to article of footwear 100, while also providing a unique aesthetic appeal and improved cushioning and support.

[0039] With reference to FIGs. 20-22, embodiments of the present invention may include one or more inserts 500 to provide the desired stiffness and/or cushioning properties of midsole 202. For example, one or more inserts 500 may be included to make all or a portion of midsole 202 more stiff. In this manner, for example, insert 500 may help in limiting pronation or supination of the foot of the wearer.

[0040] In one embodiment, insert 500 may include one or more support elements 510 connected by connecting members 520. In one embodiment, support element 510 includes a support surface 511 that is curved such that the support element 510 is substantially u-shaped, as shown, for example, in FIG. 22. As shown in FIG. 20, in one embodiment support element 510 may include a proximate end 512 and a distal end 514. The proximate end 512 may be rounded and the height of support element 510 may gradually decrease from proximate end 512 to distal end 514.

[0041] Each support element 510 may be connected to an adjacent support element 510 by a connecting member 520. In one embodiment, connecting member 520 extends from the distal end 514 of one support element 510 to the distal end 514 of an adjacent support element 510. In alternative embodiments, connecting member 520 may extend from the distal end 514 of a first support element 510 to the proximate end 512 of an adjacent support element. In other embodiments, the connecting member 520 may extend from any point along the length of a first support element 510 to any point along the length of an adjacent support element 510. Connecting member 520 may connect support elements that are not adjacent. In one embodiment, support elements 510 disposed at an end of the insert 500 may include a connecting member 522 that does not connect to an adjacent support element. For example, forefoot end support element 516 and rearfoot end support element 518, as shown in FIG. 20, may include a connecting member 522 that is not connected at one end. Alternatively, insert 500 may not include connecting members 522 extending from end support elements. In one embodiment, as shown, for example in FIGs. 20-22, insert 500 may include five (5) connected support elements 510. As will be discussed in detail below, other combinations of support elements 510 and connecting members 520 for an insert 500 may be used to provide the desired stiffness and/or cushioning of midsole 202.

[0042] With reference to FIGs. 23 and 24, in one embodiment, insert 500 may be disposed between midsole 202 and plate 300 and may be coupled to midsole 202. In particular, in one embodiment, each support element 510 of insert 500 may be disposed within a gap 210 of

midsole 202. For example, as shown in FIG. 23, in an embodiment of an insert 500 having five (5) support elements 510, each of the support elements 510 may be disposed in a gap 210. The support surface 511 of support element 510 is preferably contoured to fit snugly within gap 210 along an interior surface 211 of the gap 210. The support surface 211 may cover all or a portion of the interior surface 211 of the gap 210 where the support element 510 is located. For example, in one embodiment support surface 511 may extend from the bottom 207 of gap 210 partially (e.g., half way) up interior wall 209 or to the top of interior wall 209. In one embodiment, support element 510 may not extend completely into gap 210 such that it does not contact the bottom 207 of gap 210. The support surface 511 may cover only a portion of interior wall 209 between bottom 207 and the top of interior wall 209.

[0043] In one embodiment, support surface 511 is curved such that the support element 510 is substantially u-shaped. In other embodiments, support surface 511 may be square, v-shaped, omega-shaped, or otherwise shaped to fit within gap 210 or other portion of midsole 202. In one embodiment, support element 510 may be secured within gap 210 by adhesive. In other embodiments, adhesive may not be used and the snug fit of the element within the gap may keep it in place.

[0044] In one embodiment, as shown in FIG. 23, insert 500 may be generally disposed in the arch region of midsole 202. In other embodiments, insert 500 may be disposed in the forefoot region, the heel region, and/or along the entire length of midsole 202. Generally, insert 500 may be positioned to provide the desired stiffness and/or cushioning of midsole 202.

[0045] The size of support element 510 also may be adapted such that support element 510 fits within gap 210. In embodiments of the present invention in which the depth of gaps 210 vary along midsole 202, the size of support elements 510 may likewise vary along insert 500. For example, as discussed above, gaps 210 may be deeper in the heel region of midsole 202, and become more shallow toward the forefoot region of midsole 202. Correspondingly, support elements 510 may be larger in the rearward portion of insert 500 and become smaller toward the forward portion of insert 500. For example, forefoot end support element 516 may be smaller than rearfoot end support element 518.

[0046] Insert 500 may be made of a rigid or flexible material to provide the desired stiffness properties of the midsole 202. In one embodiment, the insert 500 comprises TPU. Other suitable materials, including but not limited to, elastomers, thermoplastic elastomers (TPE), foam-like plastics (e.g., Pebax® foam and/or Hytrel® foam), gel-like plastics, foam, metal, or other suitable materials and combinations thereof.

[0047] In one embodiment, insert 500 may be injection molded as a unitary piece. In other embodiments, support elements 510 may be molded separately and then attached. In some embodiments, one support element 510

may be made of a different material than another support element 510. For example, a first support element 510 may be made of a stiffer material than a second support element 510 to provide the desired stiffness or cushioning properties to different areas of midsole 202. In one embodiment, insert 500 may be co-molded with midsole 202. For example, insert 500 may be molded and midsole 202 may be molded under insert 500, or insert 500 may be molded directly on midsole 202. In one embodiment, as shown for example in FIG. 35, support elements 510 may be formed as part of midsole 202 to form a unitary and monolithic structure. Support elements 510 may be formed in gaps 212, as shown, and/or in gaps 210. In one embodiment, two support elements 510 may be formed in the rearmost gap 212 and one support element may be formed in the next gap 212. It will be appreciated that support elements 510 may be formed in other gaps in various combinations. In one embodiment, midsole 202 may be molded around insert 500 such that insert 500 is embedded in the midsole. In one embodiment, insert 500 may be integral with plate 300. The plate 300 may extend partially or completely into support element 510.

[0048] In one embodiment, one or more support elements 510 of insert 500 may extend across a portion of the width of the midsole 202 to provide desired stiffness properties to a portion of midsole 202. For example, as shown in FIG. 23, support elements 510 may extend inwardly from the medial side of the midsole 202 across a portion of the width of midsole 202. During use, support element 510 may provide support to midsole 202 in this area and may limit compression of the midsole. For example, when midsole 202 is under load, support element 510 may limit compression of the walls 208 around the area of the support element. As a result, insert 500 may impart additional stiffness to the medial side of midsole 202 and may limit, for example, supination of the foot.

[0049] In other embodiments, the support elements may extend inwardly from the lateral side of the midsole 202 across a portion of the midsole. In this manner, insert 500 may impart additional stiffness to the lateral side of midsole 202 and may, for example, limit pronation of the foot. In still other embodiments, the insert 500 may extend substantially across the entire width of the midsole 202 such that it may impart desired stiffness or cushioning characteristics across the width of the midsole. In some embodiments, insert 500 may include one or more support elements 510 that extend only across a portion of the width of midsole 202 and one or more support elements 510 that extend across the entire width of midsole 202.

[0050] In one embodiment, connecting member 520 may be substantially flat such that it does not interfere with placement of plate 300 on midsole 202. A groove may be formed in the top of midsole 202 to receive connecting member 520 such that connecting member 520 is flush with the top of midsole 202. As shown in FIG. 23, connecting members 520 of insert 500 may collectively

form a generally curved shape from the perimeter of midsole 202 through an interior portion of the midsole 202. In one embodiment, connecting members 520 may be positioned to provide additional support to the insert 500.

[0051] In one embodiment, as shown in FIG. 24, all or a portion of the insert 500 may be visible from the side of footwear 100. For example, proximate end 512 of one or more support elements 510 may be visible through gaps 210. In other embodiments, insert 500 may not be visible.

[0052] Any number of support elements 510 and connecting members 520 for an insert 500 may be used to provide the desired stiffness or cushioning properties of midsole 202. As shown in FIG. 25, in one embodiment insert 500 may include two (2) support elements 510. The support elements 510 may be sized for use in the heel portion of midsole 202. In one embodiment, as shown in FIG. 26, insert 500 may include two (2) support elements 510 generally sized for use in the forefoot portion of the midsole 202. In one embodiment, as shown in FIG. 27, insert 500 may include one support element. In yet other embodiments, insert 500 may comprise a single support element 510 without connecting members 520. As shown in FIGs. 28-29, in one embodiment insert 500 may include four (4) support elements 510 that extend substantially across the width of the midsole 202. Connecting members 520 may connect adjacent support elements 520 at the middle of the support element. In one embodiment, the number of support elements 510 may be the same as the number of gaps 210 in midsole 202.

[0053] In an alternative embodiment, insert 500 may be disposed on the underside of midsole 202. Each support element 510 of insert 500 may be disposed within gap 212 of midsole 202. The support elements 510 may be sized and shaped accordingly. In other embodiments, insert 500 may include one or more support elements 510 adapted to fit snugly on peak 204.

[0054] In a preferred embodiment, insert 500 may be permanently disposed in midsole 202 during manufacture of footwear 100. In other embodiments, insert 500 may be readily removable from midsole 202. For example, in one embodiment, a support element 510 may be inserted into gap 210 between midsole 202 and plate 300 from the side of footwear 100. The support element 510 may include a tab that may be pulled to subsequently remove the support element 510 from gap 210. In this manner, inserts 500 or support elements 510 may be sold "after-market", and a user may continually customize the stiffness or cushioning properties of footwear 100 depending on desired uses, aging of the shoe, or other conditions of use.

[0055] In one embodiment, one or more support elements 510 may be solid elements. For example, as shown in FIG. 30, a support element 510 may be completely solid, as shown by support element 513, or may be partially solid, as shown by support elements 515 and 517. The solid support elements may be filled with the

same material as the support surface 511 and formed as a unitary piece, or may be filled with a different material, such as, for example, foam or other suitable material. In one embodiment, support element 510 may be filled with a portion of plate 300. The solid support elements may be adapted to provide additional support to midsole 202. In other embodiments, support element 510 may be hollow, fluid filled, or filled with pressurized or ambient air.

[0056] The foregoing description of the specific embodiments will so fully reveal the general nature of the invention that others can, by applying knowledge within the skill of the art, readily modify and/or adapt for various applications such specific embodiments, without undue experimentation, without departing from the general concept of the present invention. Therefore, such adaptations and modifications are intended to be within the meaning and range of equivalents of the disclosed embodiments, based on the teaching and guidance presented herein. It is to be understood that the phraseology or terminology herein is for the purpose of description and not of limitation, such that the terminology or phraseology of the present specification is to be interpreted by the skilled artisan in light of the teachings and guidance.

[0057] The breadth and scope of the present invention should not be limited by any of the above-described exemplary embodiments, but should be defined only in accordance with the following claims and their equivalents.

[0058] In the following, further embodiments are described to facilitate the understanding of the invention:

1. An article of footwear comprising:
an undulating foam sole comprising:

a plurality of spaced apart peaks, wherein at least one pair of adjacent peaks define a gap void of material between adjacent peaks; and
a plurality of spaced apart troughs, wherein at least one trough is adapted to engage the ground and wherein at least one pair of adjacent troughs define a gap void of material between adjacent troughs.

2. The article of footwear of embodiment 1, wherein the plurality of spaced apart peaks extend along a width of the sole in a lateral to medial direction and wherein the plurality of spaced apart troughs extend along the width of the sole in the lateral to medial direction.

3. The article of footwear of embodiment 1, wherein the plurality of spaced apart peaks extend along a length of the sole in a toe to heel direction and wherein the plurality of spaced apart troughs extend along the length of the sole in the toe to heel direction.

4. The article of footwear of embodiment 1, wherein the undulating foam sole is substantially sinusoidal in shape.

5. The article of footwear of embodiment 1, further comprising a plate attached to the plurality of spaced

apart peaks.

6. An article of footwear comprising:

an undulating foam midsole comprising:

a first side;
a second side;
a plurality of spaced apart peaks extending along a width of the midsole between the first and second sides; and
a plurality of spaced apart troughs extending along a width of the midsole between the first and second sides,

wherein at least one pair of adjacent peaks define a gap void of material between the adjacent peaks, the gap between adjacent peaks extending along the width of the midsole with one end at the first side and another end at the second side, and

wherein at least one pair of adjacent troughs define a gap void of material between the adjacent troughs, the gap between adjacent troughs extending along the width of the midsole with one end at the first side and another end at the second side.

7. The article of footwear of embodiment 6, wherein the undulating foam midsole comprises two pieces wherein each piece comprises:

a first side;
a second side;
a plurality of spaced apart peaks extending along a width of the piece between the first and second sides of the piece; and
a plurality of spaced apart troughs extending along a width of the piece between the first and second sides of the piece.

8. The article of footwear of embodiment wherein the two pieces of the midsole comprise a lateral piece and a medial piece.

9. The article of footwear of embodiment 6, wherein at least one trough is adapted to engage the ground.

10. The article of footwear of embodiment 6, wherein the undulating foam midsole is substantially sinusoidal in shape.

11. The article of footwear of embodiment 6, wherein the plurality of spaced apart peaks are substantially v-shaped.

12. The article of footwear of embodiment 6, wherein the plurality of spaced apart peaks are substantially omega-shaped.

13. The article of footwear of embodiment 6, wherein the plurality of spaced apart peaks have a greater height at the first and second sides of the sole than in an area between the first and second sides.

14. The article of footwear of embodiment 13, further comprising a plate attached to the plurality of spaced apart peaks, wherein the plate is disposed on each of the plurality of spaced apart peaks in the area between the first and second sides.

15. An article of footwear comprising:

an undulating midsole comprising:

a first side;
a second side;
a plurality of spaced apart peaks extending along a width of the midsole between the first and second sides; and
a plurality of spaced apart troughs extending along a width of the midsole between the first and second sides; and

a plate attached to the plurality of spaced apart peaks;
wherein the plurality of spaced apart peaks have a greater height at the first and second sides of the midsole than in an area between the first and second sides.

16. The article of footwear of embodiment 15, wherein the plate is disposed on each of the plurality of spaced apart peaks in the area between the first and second sides.

17. The article of footwear of embodiment 15, wherein the undulating midsole is substantially sinusoidal in shape.

18. The article of footwear of embodiment 15, wherein at least one trough is adapted to engage the ground.

19. The article of footwear of embodiment 15, wherein the undulating midsole comprises two pieces wherein each piece comprises:

a first side;
a second side;
a plurality of spaced apart peaks extending along a width of the piece between the first and second sides of the piece; and
a plurality of spaced apart troughs extending along a width of the piece between the first and second sides of the piece.

20. The article of footwear of embodiment 19, wherein the two pieces of the midsole comprise a lateral piece and a medial piece.

21. A sole for an article of footwear, comprising: a midsole having a heel portion, a forefoot portion, a medial sidewall and a lateral sidewall, and wherein the midsole is substantially sinusoidal along at least a portion of the length of the midsole, and wherein the midsole extends along a width of the midsole.

22. The sole of embodiment 21, wherein the midsole

extends across the entire width of the midsole between the medial sidewall and the lateral sidewall.

23. The sole of embodiment 21, wherein the lateral sidewall is substantially sinusoidal.

24. The sole of embodiment 21, wherein the midsole is substantially sinusoidal along substantially the entire length of the midsole.

25. The sole of embodiment 21, wherein the midsole is substantially sinusoidal along the length of the heel portion of the midsole.

26. The sole of embodiment 21, wherein the lateral sidewall includes a plurality of peaks having rounded top surfaces.

27. The sole of embodiment 21, wherein the lateral sidewall includes a plurality of peaks having flat top surfaces.

28. The sole of embodiment 21, wherein the lateral sidewall includes a plurality of peaks having pointed top surfaces.

29. The sole of embodiment 21, wherein the midsole extends across the entire width of the midsole between the medial sidewall and the lateral sidewall and includes a top surface shaped to receive an upper of an article of footwear, and wherein the lateral sidewall includes a plurality of peaks having rounded top surfaces.

30. The sole of embodiment 21, wherein the midsole comprises foam.

31. The sole of embodiment 30, further comprising an outsole coupled to the midsole.

32. A sole for an article of footwear, comprising: a midsole having a top surface, a bottom surface, a medial sidewall, and a lateral sidewall, wherein the midsole undulates to define a plurality of spaced apart gaps in the top surface and a plurality of spaced apart gaps in the bottom surface.

33. The sole of embodiment 32, wherein each of a plurality of top surface gaps is disposed between adjacent bottom surface gaps.

34. The sole of embodiment 32, wherein the top surface gaps are substantially evenly spaced apart.

35. The sole of embodiment 32, wherein the bottom surface gaps are substantially evenly spaced apart.

36. The sole of embodiment 32, wherein the midsole comprises foam.

37. The sole of embodiment 32, wherein the lateral sidewall includes a plurality of peaks, wherein each peak is disposed between adjacent top surface gaps.

38. The sole of embodiment 37, wherein the lateral sidewall peaks include rounded top surfaces.

39. The sole of embodiment 37, wherein the lateral sidewall peaks include flat top surfaces.

40. The sole of embodiment 37, wherein the lateral sidewall peaks include pointed top surfaces.

41. The sole of embodiment 32, wherein the midsole extends across the entire width of the sole between the medial sidewall and the lateral sidewall.

42. The sole of embodiment 41, wherein the portion

of the midsole between the medial sidewall and the lateral sidewall does not undulate.

43. The sole of embodiment 32, wherein the midsole extends along substantially the entire length of the sole.

44. The sole of embodiment 32, wherein at least one gap extends across the entire width of the midsole.

45. An article of footwear, comprising:

an upper; and

a foam sole disposed below the upper such that a gap is disposed between the sole and the upper, the sole having a heel portion, a forefoot portion, a medial sidewall and a lateral sidewall, and wherein the sole is substantially sinusoidal along the length of the sole, and wherein the sole extends along a width of the sole.

46. The article of footwear of embodiment 45, wherein a plurality of gaps are disposed between the sole and the upper.

47. The article of footwear of embodiment 45, wherein the sole extends across the entire width of the sole between the medial sidewall and the lateral sidewall.

48. The article of footwear of embodiment 45, further comprising a plate disposed intermediate to the upper and the sole.

49. The article of footwear of embodiment 48, wherein at least a portion of a gap is disposed intermediate to the sole and the plate.

50. The article of footwear of embodiment 45, wherein the lateral sidewall includes a plurality of peaks having rounded top surfaces.

51. The article of footwear of embodiment 45, wherein the lateral sidewall includes a plurality of peaks having flat top surfaces.

52. The article of footwear of embodiment 45, wherein the lateral sidewall includes a plurality of peaks having pointed top surfaces.

53. A method of manufacturing a sole for an article of footwear, the method comprising the steps of:

molding an undulating foam midsole in a mold; removing the foam midsole from the mold; placing the foam midsole on a form having a plurality of spaced apart ridges; and cooling the foam midsole.

54. The method of embodiment 53, further comprising the step of incorporating the foam midsole into an article of footwear.

55. The method of embodiment 53, wherein the mold comprises a plurality of spaced apart ridges and at least one injection site disposed in between two adjacent ridges.

56. The method of embodiment 55, wherein the mold comprises eleven injection sites.

57. An article of footwear comprising:

an undulating foam sole, comprising:

a plurality of spaced apart peaks, wherein at least one pair of adjacent peaks define a first gap substantially devoid of material between adjacent peaks, and a plurality of spaced apart troughs, wherein at least one pair of adjacent troughs define a second gap substantially devoid of material between adjacent troughs; and

a support element coupled to said sole for providing support thereto.

58. The article of footwear of embodiment 57, wherein the support element is disposed in the first gap.

59. The article of footwear of embodiment 57, wherein the support element is disposed in the second gap.

60. An article of footwear comprising:

an upper;

a plate connected to said upper;

an undulating sole having a top side connected to said plate and a bottom side, the sole comprising a plurality of spaced apart peaks defining a plurality of gaps in the top side and a plurality of spaced apart troughs defining a plurality of gaps in the bottom side; and

a support element disposed in between the sole and the plate for providing support to the sole.

61. The article of footwear according to embodiment 60, wherein the support element is disposed in a gap in the top side of the sole.

62. The article of footwear according to embodiment 61, further comprising a plurality of support elements, each disposed in a gap in the top side of said sole.

63. The article of footwear according to embodiment 62, wherein the plurality of support elements comprises two support elements.

64. The article of footwear according to embodiment 62, wherein the plurality of support elements comprises three support elements.

65. The article of footwear according to embodiment 62, wherein the plurality of support elements comprises four support elements.

66. The article of footwear according to embodiment 62, wherein the plurality of support elements comprises five support elements.

67. The article of footwear according to embodiment 62, wherein a support element is disposed in each of the plurality of gaps in the top side of the sole.

68. The article of footwear according to embodiment 62, wherein the plurality of support elements are connected.

69. The article of footwear of embodiment 60, wherein the support element is disposed on a medial side

of the sole.

70. The article of footwear of embodiment 60, wherein the support element is disposed on a lateral side of the sole.

71. The article of footwear of embodiment 60, wherein the support element extends across only a portion of the width of the sole. 5

72. The article of footwear of embodiment 60, wherein the support element extends across the entire width of the sole. 10

73. The article of footwear of embodiment 60, wherein the support element is substantially u-shaped.

74. The article of footwear of embodiment 61, wherein the support element fits snugly in the gap in the top side of said sole. 15

75. The article of footwear of embodiment 61, wherein the support element is attached to the sole with adhesive.

76. The article of footwear of embodiment 60, wherein the support element is integral with said plate. 20

77. An article of footwear comprising:
an undulating foam sole comprising:

a plurality of spaced apart peaks, wherein at least one pair of adjacent peaks define a gap void of material between adjacent peaks; and
a plurality of spaced apart troughs, wherein at least one trough is adapted to engage the ground and wherein at least one pair of adjacent troughs define a gap void of material between adjacent troughs. 25 30

78. The article of footwear of embodiment 77, wherein the plurality of spaced apart peaks extend along a width of the sole in a lateral to medial direction and wherein the plurality of spaced apart troughs extend along the width of the sole in the lateral to medial direction. 35

79. The article of footwear of embodiment 77, wherein the plurality of spaced apart peaks extend along a length of the sole in a toe to heel direction and wherein the plurality of spaced apart troughs extend along the length of the sole in the toe to heel direction. 40

80. The article of footwear of embodiment 77, wherein the undulating foam sole is substantially sinusoidal in shape. 45

81. An article of footwear comprising:

an undulating foam midsole comprising:

a first side;
a second side;
a plurality of spaced apart peaks extending along a width of the midsole between the first and second sides; and
a plurality of spaced apart troughs extending along a width of the midsole between the first and second sides, 50 55

wherein at least one pair of adjacent peaks define a gap void of material between the adjacent peaks, the gap between adjacent peaks extending along the width of the midsole with one end at the first side and another end at the second side, and

wherein at least one pair of adjacent troughs define a gap void of material between the adjacent troughs, the gap between adjacent troughs extending along the width of the midsole with one end at the first side and another end at the second side.

82. The article of footwear of embodiment 81, wherein the undulating foam midsole comprises two pieces wherein each piece comprises:

a first side;
a second side;
a plurality of spaced apart peaks extending along a width of the piece between the first and second sides of the piece; and
a plurality of spaced apart troughs extending along a width of the piece between the first and second sides of the piece.

83. The article of footwear of embodiment 82, wherein the two pieces of the midsole comprise a lateral piece and a medial piece.

84. The article of footwear of embodiment 81, wherein at least one trough is adapted to engage the ground.

85. An article of footwear comprising:

an undulating midsole comprising:

a first side;
a second side;
a plurality of spaced apart peaks extending along a width of the midsole between the first and second sides; and
a plurality of spaced apart troughs extending along a width of the midsole between the first and second sides; and

a plate attached to the plurality of spaced apart peaks;
wherein the plurality of spaced apart peaks have a greater height at the first and second sides of the midsole than in an area between the first and second sides.

86. The article of footwear of embodiment 85, wherein the plate is disposed on each of the plurality of spaced apart peaks in the area between the first and second sides.

87. The article of footwear of embodiment 85, wherein the undulating midsole is substantially sinusoidal

in shape.

88. The article of footwear of embodiment 85, wherein at least one trough is adapted to engage the ground.

89. An article of footwear comprising: 5

an upper;
a plate connected to the upper; and
an undulating sole having a top surface connected to the plate and a bottom surface, the sole comprising a plurality of spaced apart peaks defining a plurality of gaps in the top surface and a plurality of spaced apart troughs defining a plurality of gaps in the bottom surface. 10

90. The article of footwear of embodiment 89, further comprising a support element coupled to the sole for providing support thereto. 15

91. The article of footwear of embodiment 90, wherein the support element is disposed in a gap in the top surface of the sole. 20

92. An article of footwear comprising:
an undulating foam sole comprising:

a plurality of spaced apart peaks, wherein at least one pair of adjacent peaks define a gap void of material between adjacent peaks; and
a plurality of spaced apart troughs, wherein at least one trough is adapted to engage the ground and wherein at least one pair of adjacent troughs define a gap void of material between adjacent troughs. 25 30

93. The article of footwear of embodiment 92, wherein the plurality of spaced apart peaks extend along a width of the sole in a lateral to medial direction and wherein the plurality of spaced apart troughs extend along the width of the sole in the lateral to medial direction. 35

94. The article of footwear of embodiment 92, wherein the plurality of spaced apart peaks extend along a length of the sole in a toe to heel direction and wherein the plurality of spaced apart troughs extend along the length of the sole in the toe to heel direction. 40

95. The article of footwear of embodiment 92, wherein the undulating foam sole is substantially sinusoidal in shape. 45

96. The article of footwear of embodiment 92, further comprising a plate attached to the plurality of spaced apart peaks. 50

97. The article of footwear of embodiment 92, wherein the undulating foam sole is an undulating foam midsole that further comprises:

a first side and a second side;
wherein the plurality of spaced apart peaks extends along a width of the midsole between the first and second sides, and wherein the plurality 55

of spaced apart troughs extends along a width of the midsole between the first and second sides; and further

wherein the gap void of material between adjacent peaks extends along the width of the midsole with one end at the first side and another end at the second side, and

wherein the gap void of material between adjacent troughs extends along the width of the midsole with one end at the first side and another end at the second side.

98. The article of footwear of embodiment 97, wherein the undulating foam midsole comprises two pieces wherein each piece comprises:

a first side;
a second side;
a plurality of spaced apart peaks extending along a width of the piece between the first and second sides of the piece; and
a plurality of spaced apart troughs extending along a width of the piece between the first and second sides of the piece.

99. The article of footwear of embodiment 98, wherein the two pieces of the midsole comprise a lateral piece and a medial piece.

100. An article of footwear comprising:

an upper;
a plate connected to the upper; and
an undulating sole having a top surface connected to the plate and a bottom surface, the sole comprising a plurality of spaced apart peaks defining a plurality of gaps in the top surface and a plurality of spaced apart troughs defining a plurality of gaps in the bottom surface.

101. The article of footwear of embodiment 100, further comprising a support element coupled to the sole for providing support thereto.

102. The article of footwear of embodiment 101, wherein the support element is disposed in a gap in the top surface of the sole.

103. The article of footwear of embodiment 100, further comprising a plurality of support elements for providing support to the sole, wherein each support element is disposed in a gap in the top surface of the sole.

104. The article of footwear of embodiment 103, wherein the plurality of support elements are connected.

105. The articles of footwear of embodiment 101, wherein the support element is substantially u-shaped.

106. The article of footwear of embodiment 101, wherein the support element fits snugly in the gap in

the top surface of the sole.

Claims

1. An article of footwear comprising:
 - an upper;
 - a plate connected to the upper; and
 - an undulating sole having a top surface connected to the plate and a bottom surface, the sole comprising a plurality of spaced apart peaks defining a plurality of gaps in the top surface and a plurality of spaced apart troughs defining a plurality of gaps in the bottom surface.
2. The article of footwear of claim 1, further comprising a support element coupled to the sole for providing support thereto.
3. The article of footwear of claim 2, wherein the support element is disposed in between the sole and the plate.
4. The article of footwear of claim 2 or 3, wherein the support element is disposed in a gap in the top surface of the sole.
5. The article of footwear of one of claims 1 - 4, comprising a plurality of support elements for providing support to the sole, wherein each support element is disposed in a gap in the top surface of the sole.
6. The article of footwear of claim 5, wherein the plurality of support elements are connected.
7. The article of footwear of one of claims 2 - 6, wherein the support element is substantially u-shaped.
8. The article of footwear of one of claims 4 - 7, wherein the support element fits snugly in the gap in the top surface of the sole.
9. The article of footwear of one of claims 2 - 8, wherein the support element is disposed on a medial side of the sole.
10. The article of footwear of one of claims 2 - 9, wherein the support element is disposed on a lateral side of the sole.
11. The article of footwear of one of claims 2 - 10, wherein the support element extends across only a portion of the width of the sole.
12. The article of footwear of one of claims 2 - 10, wherein the support element extends across the entire width of the sole.
13. The article of footwear of one of claims 5 - 10, wherein one or more support elements extend only across a portion of the width of sole and one or more support elements extend across the entire width of the sole.
14. The article of footwear of one of claims 2 - 13, wherein the support element is attached to the sole with adhesive.
15. The article of footwear of one of claims 2 - 14, wherein the support element is integral with the plate.

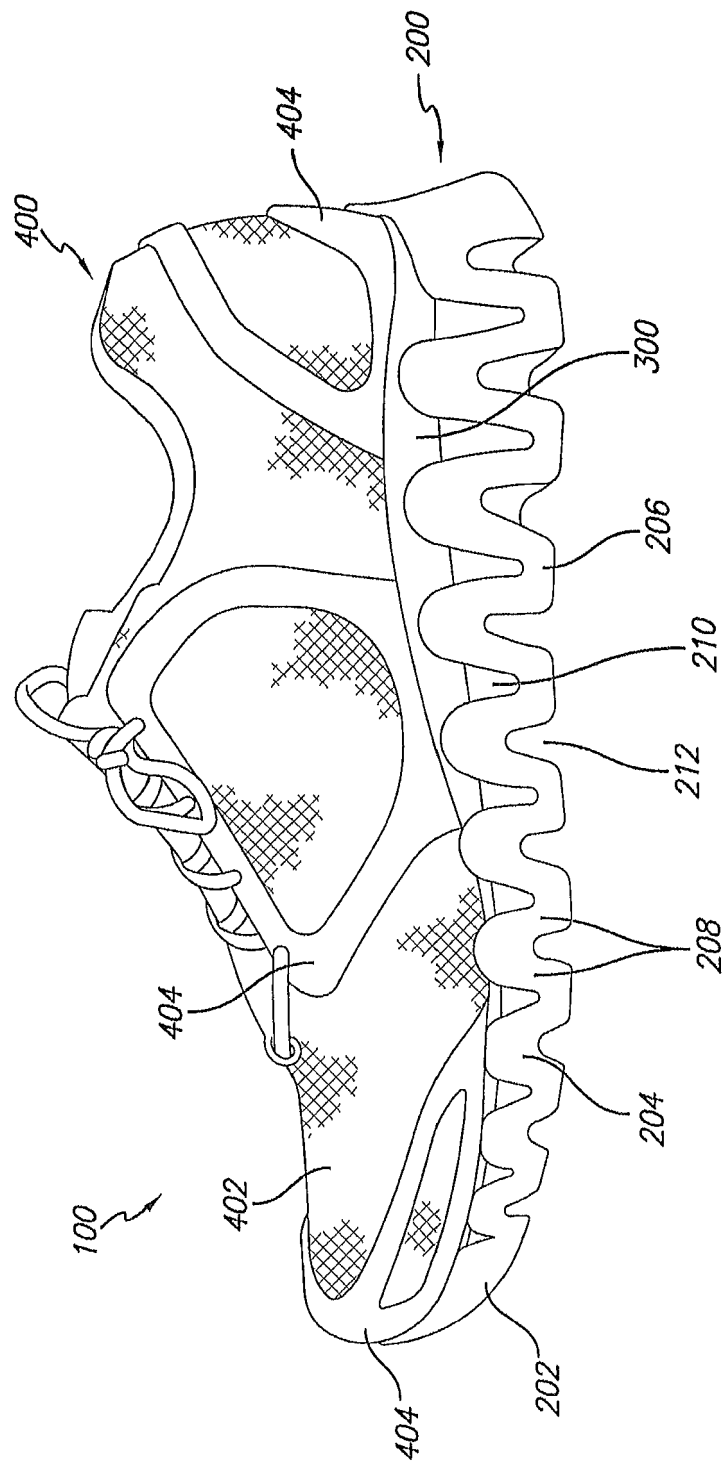


FIG. 1

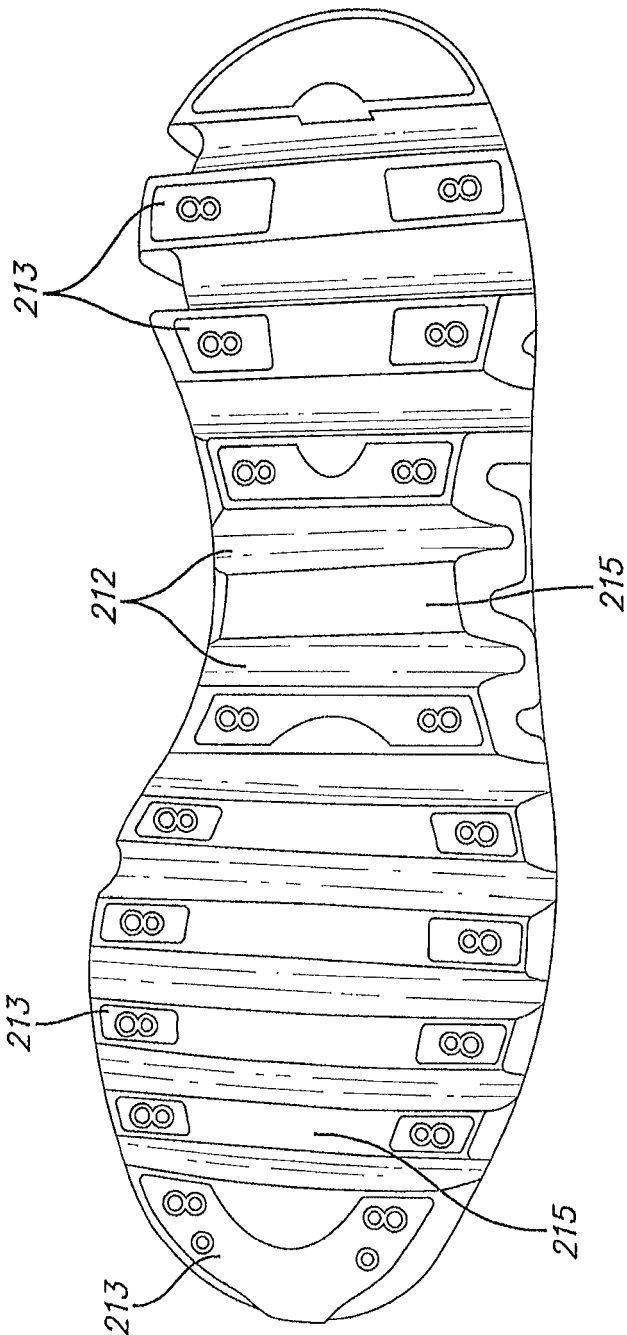


FIG. 2

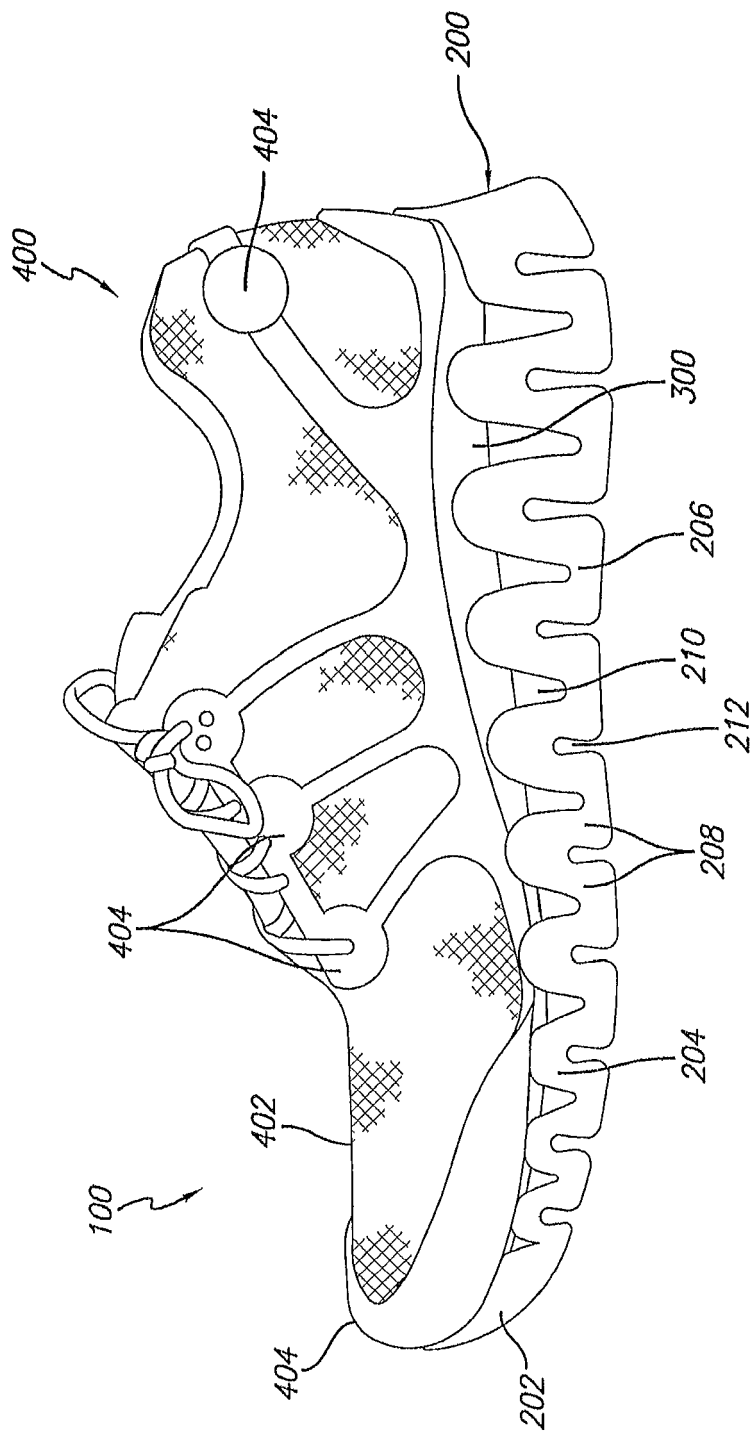


FIG. 3

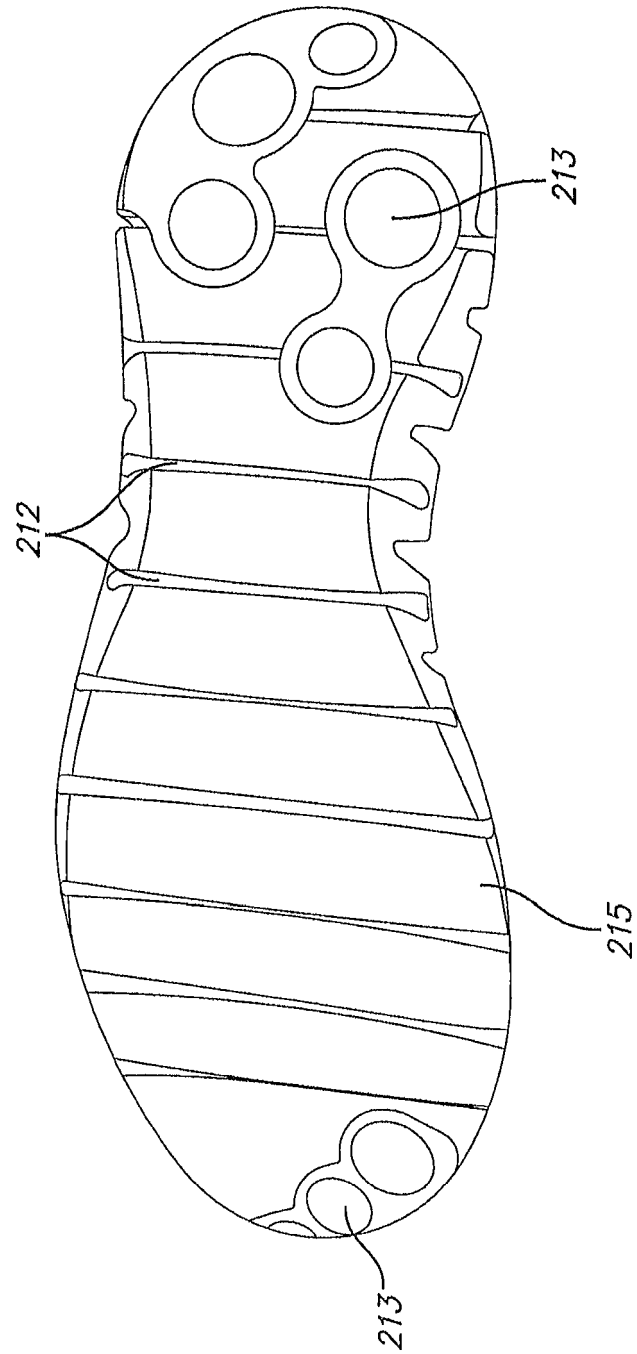


FIG. 4

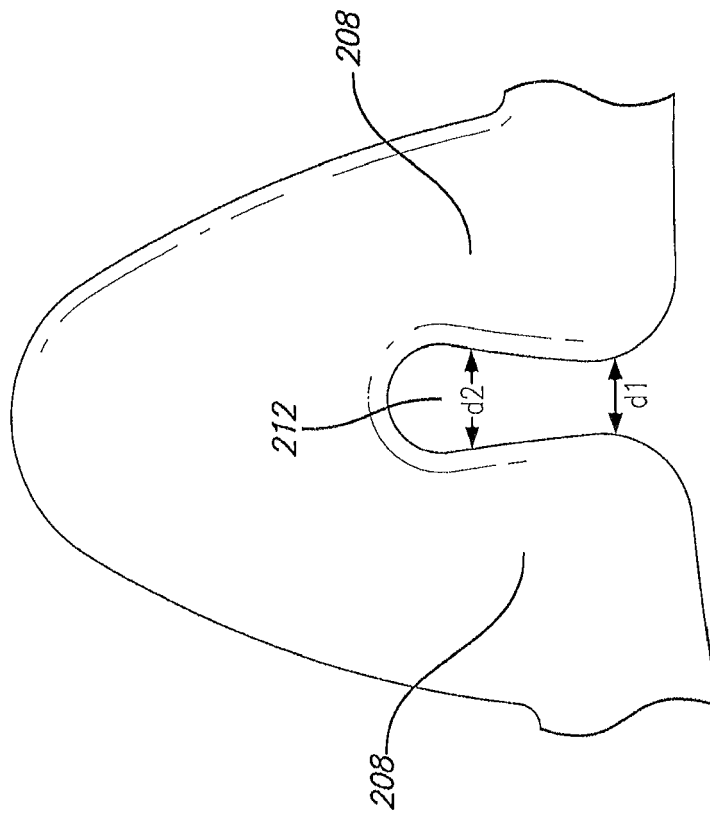


FIG. 5

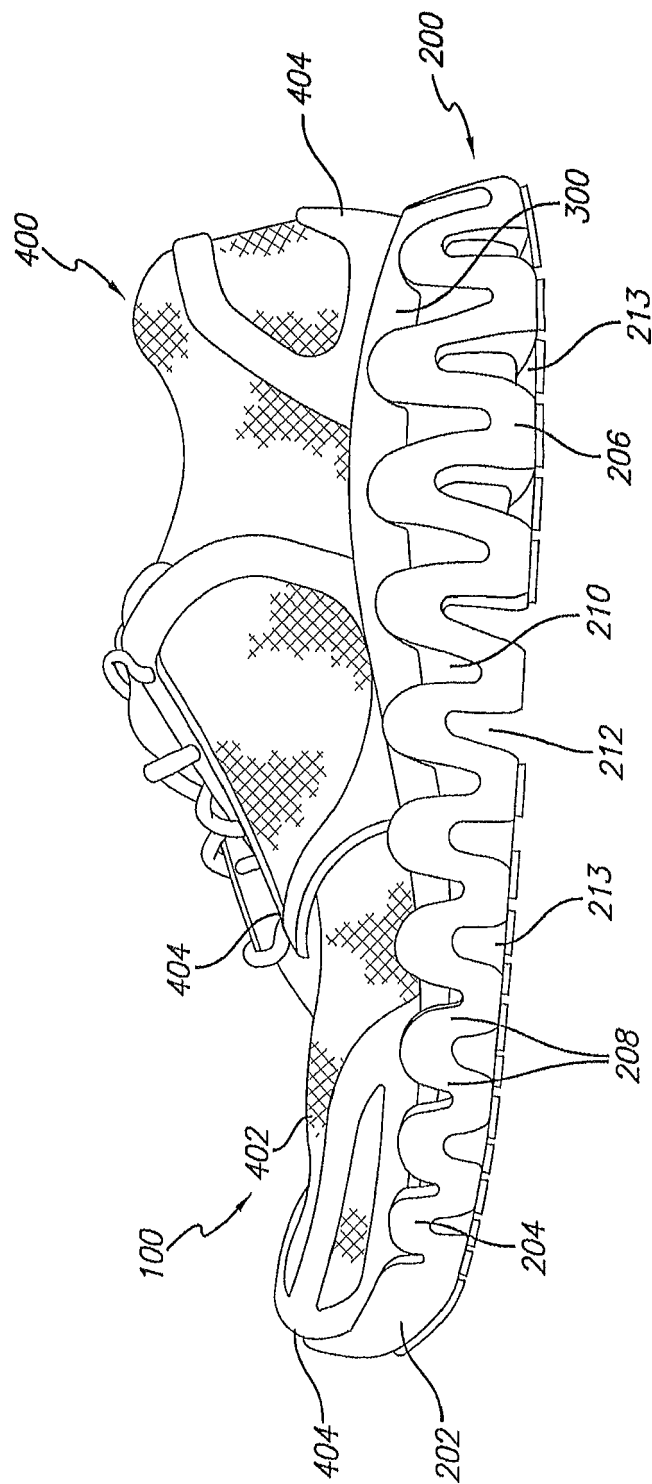


FIG. 6

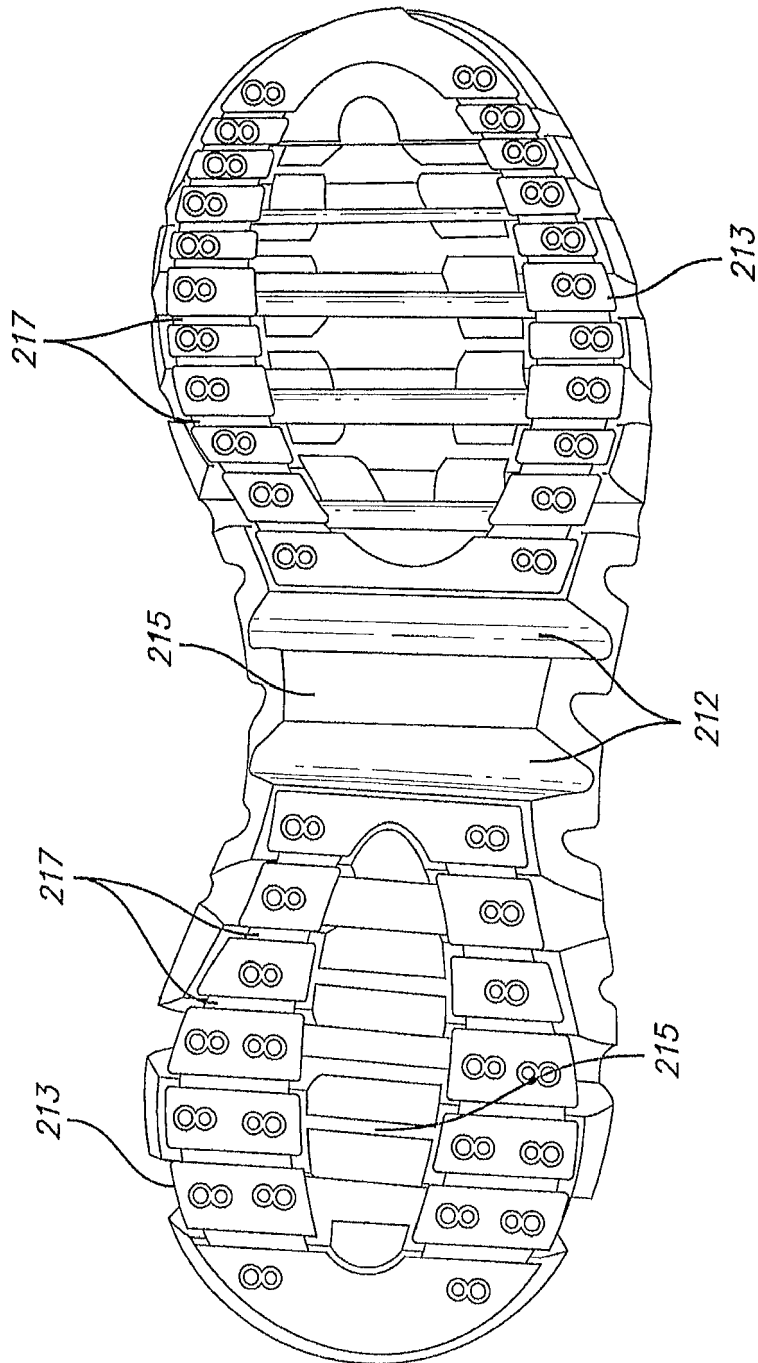


FIG. 7

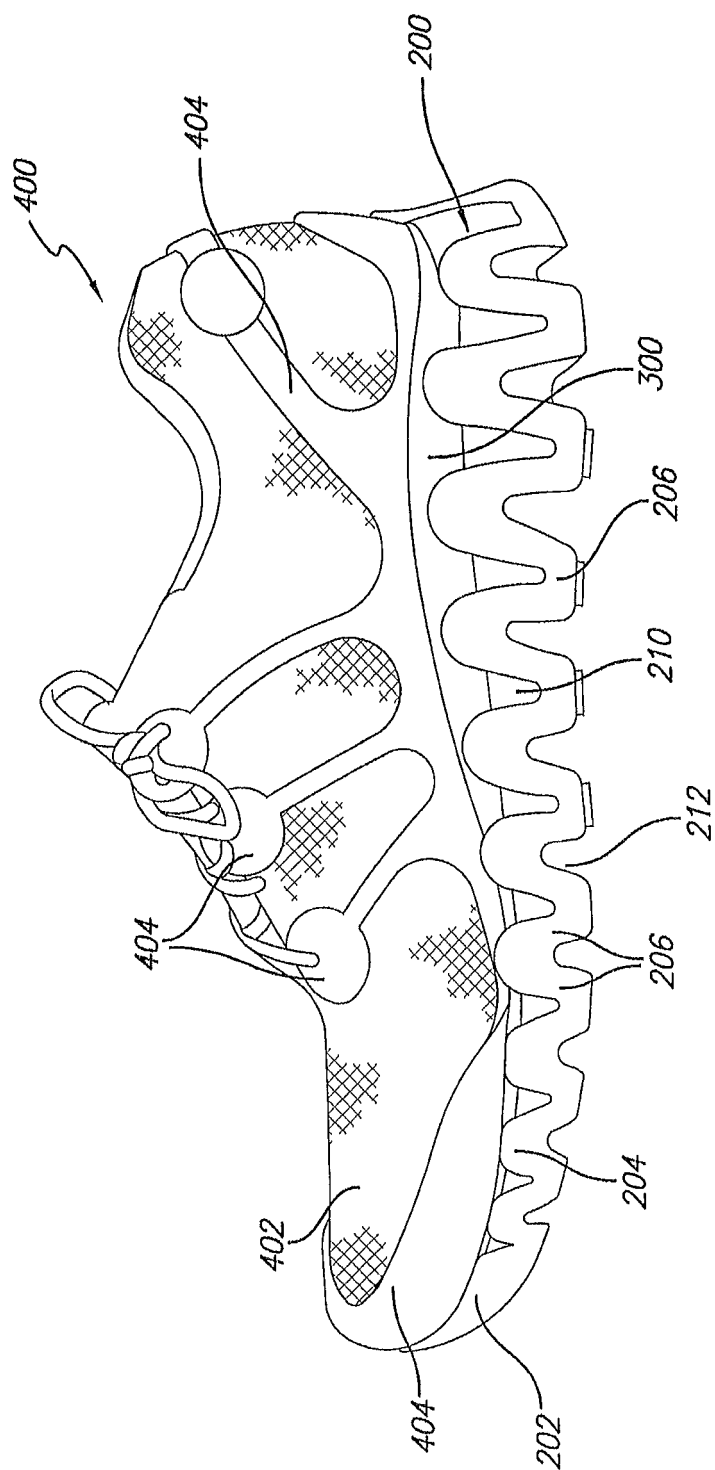


FIG. 8

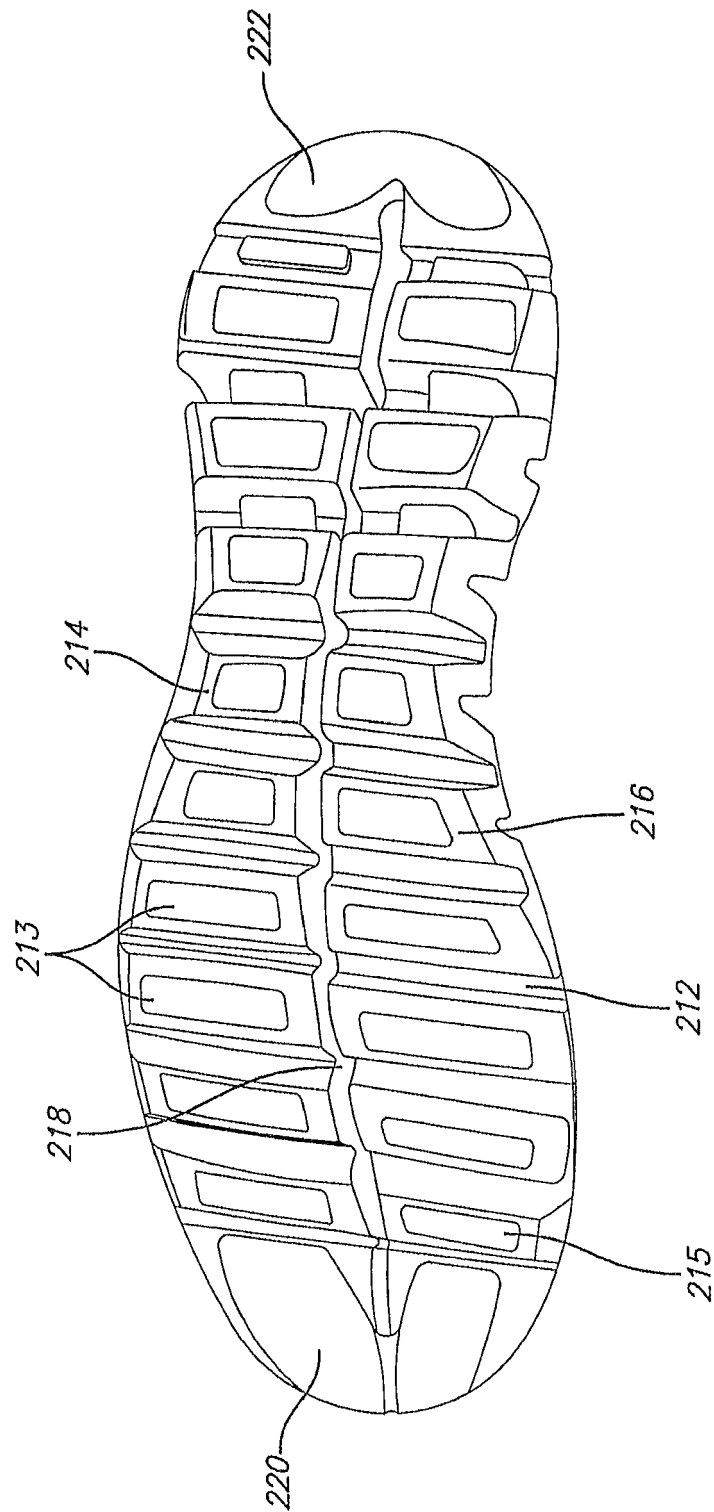


FIG. 9

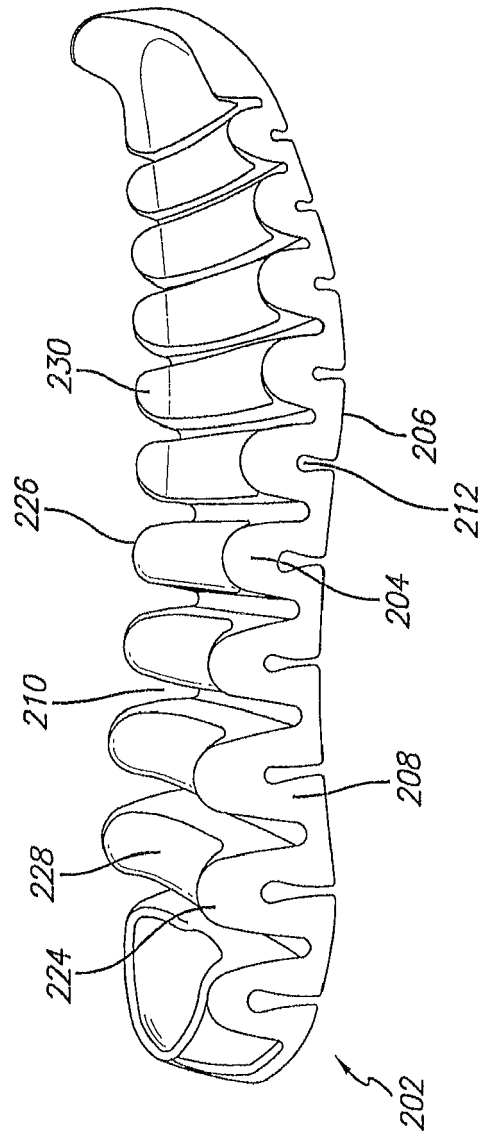


FIG. 10

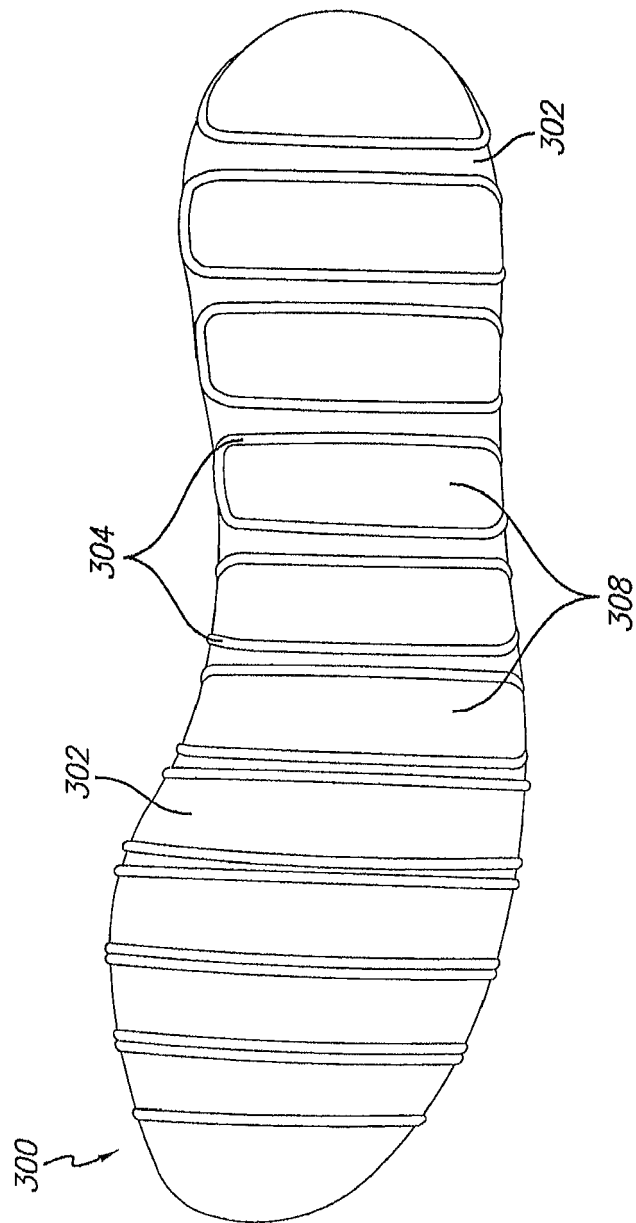


FIG. 11

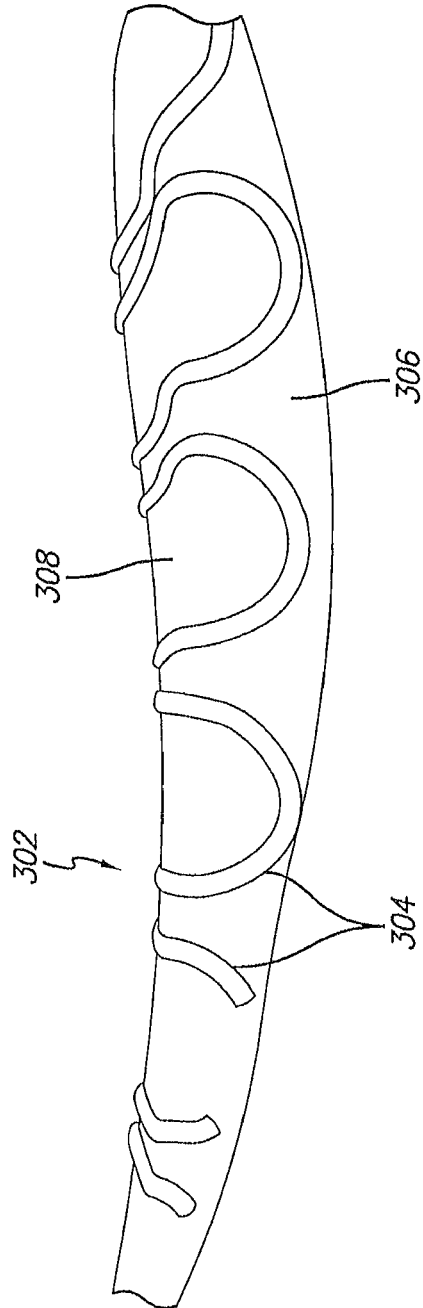


FIG. 12

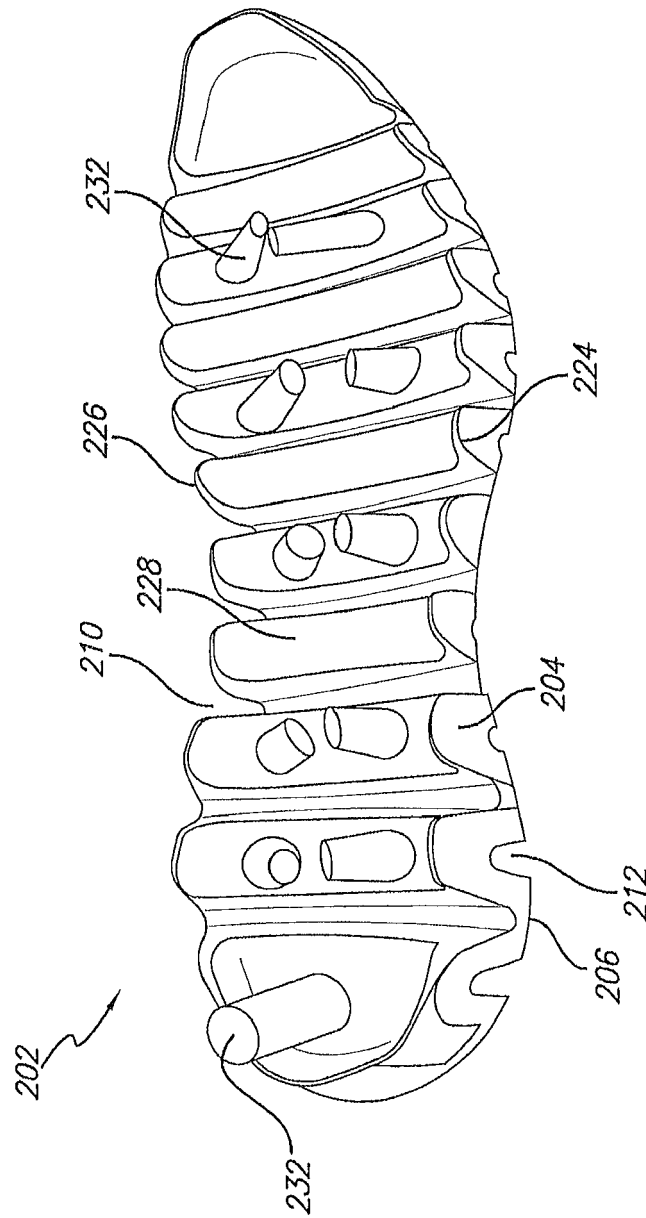


FIG. 13

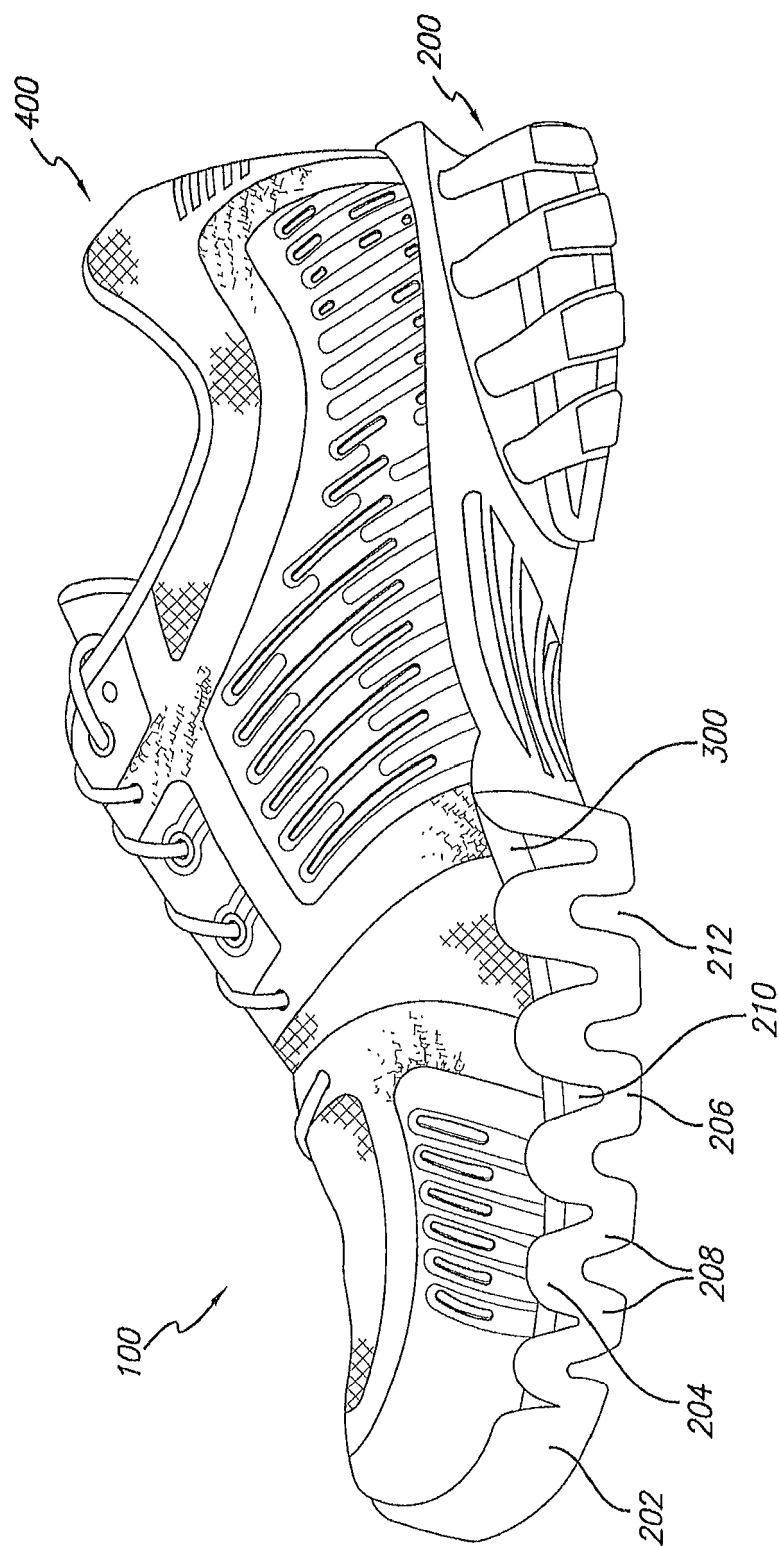


FIG. 14

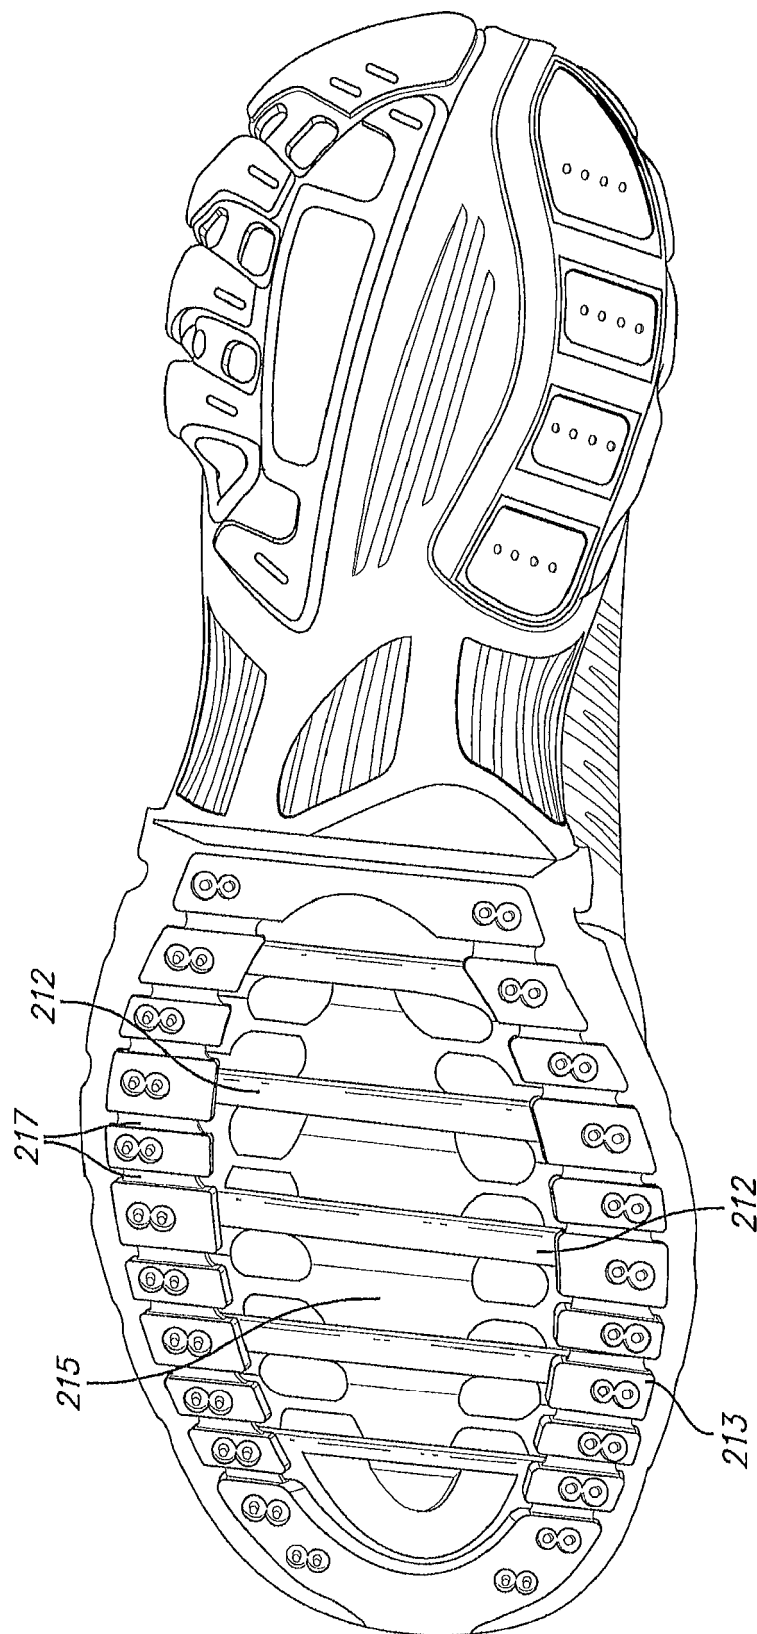


FIG. 15

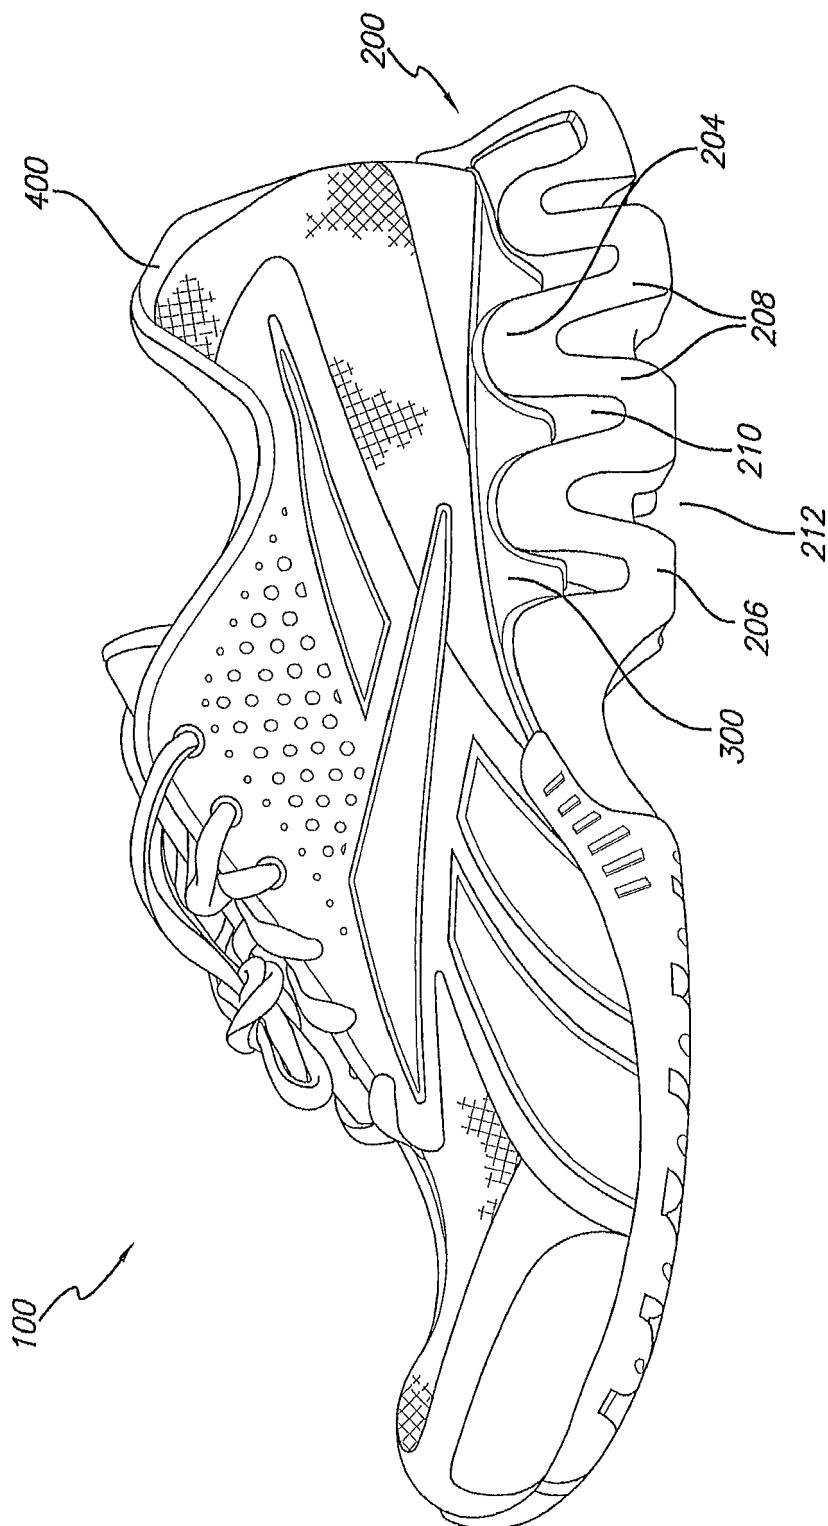


FIG. 16

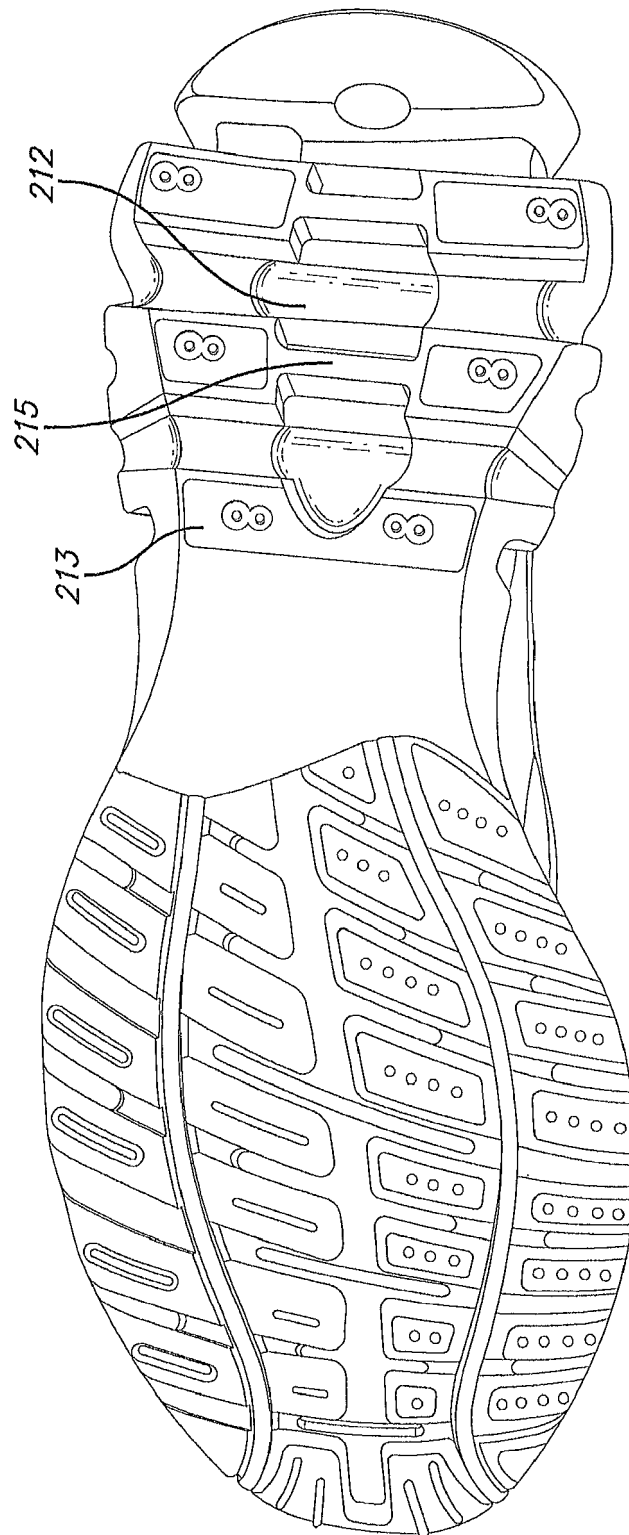


FIG. 17

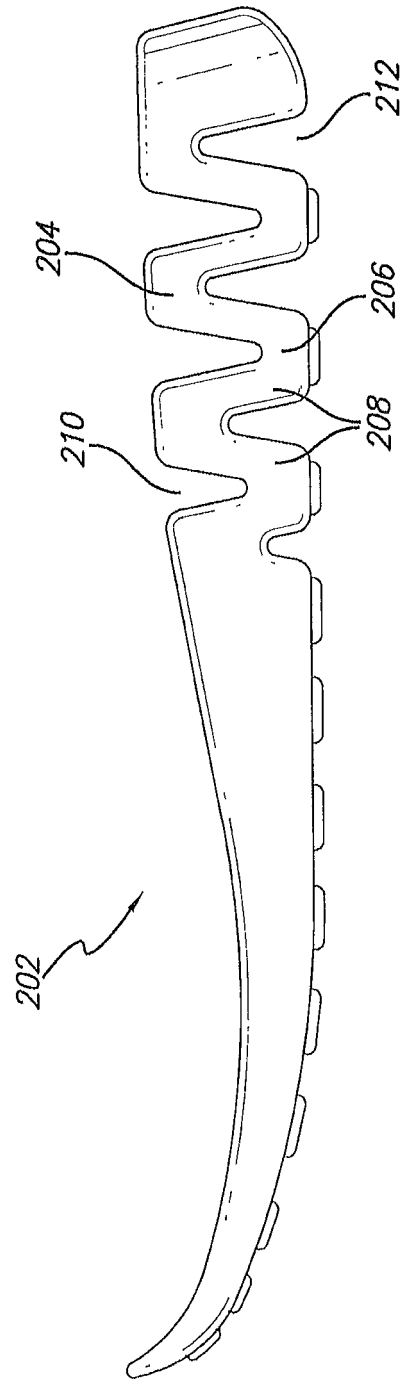
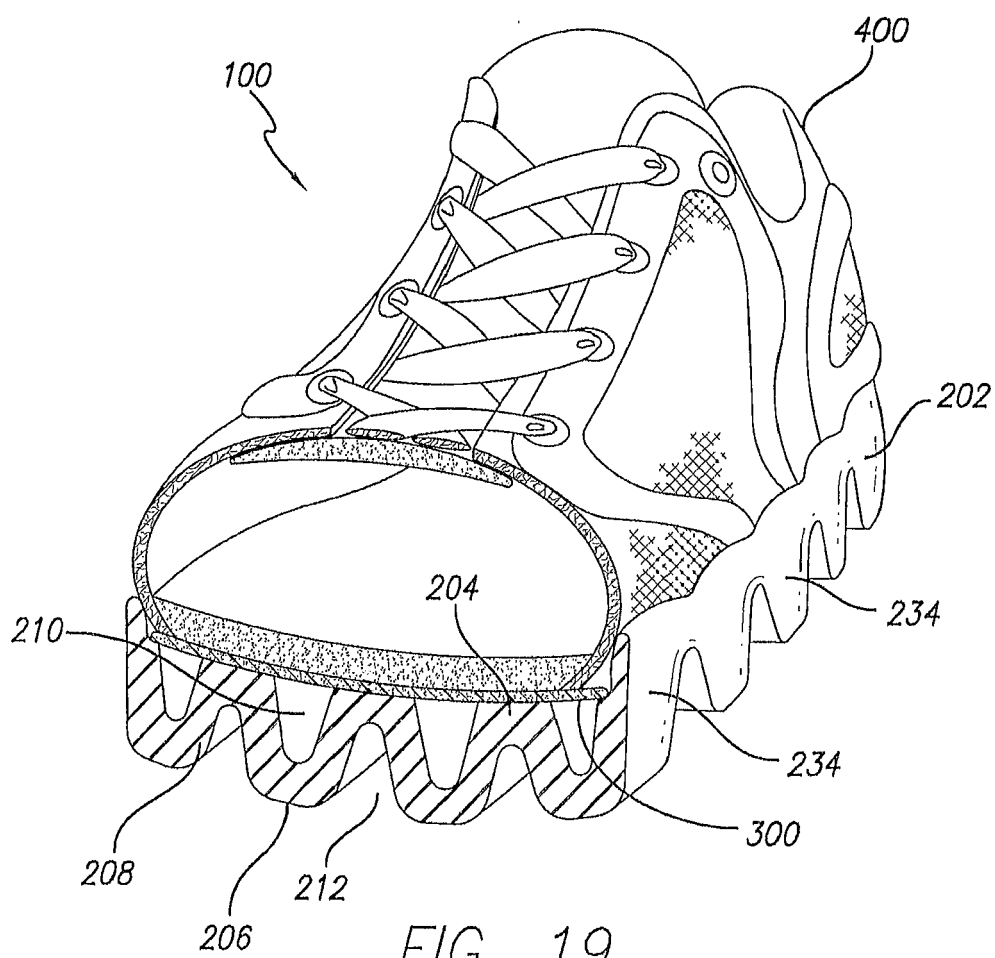


FIG. 18



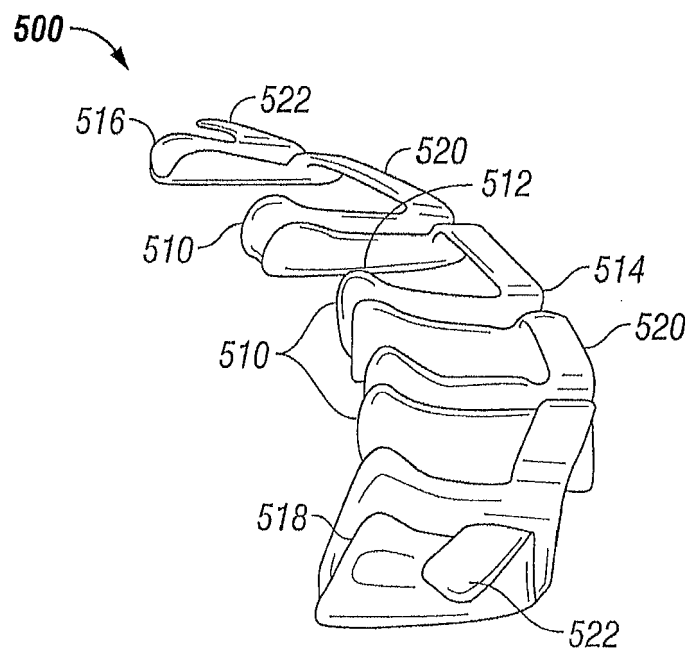


FIG. 20

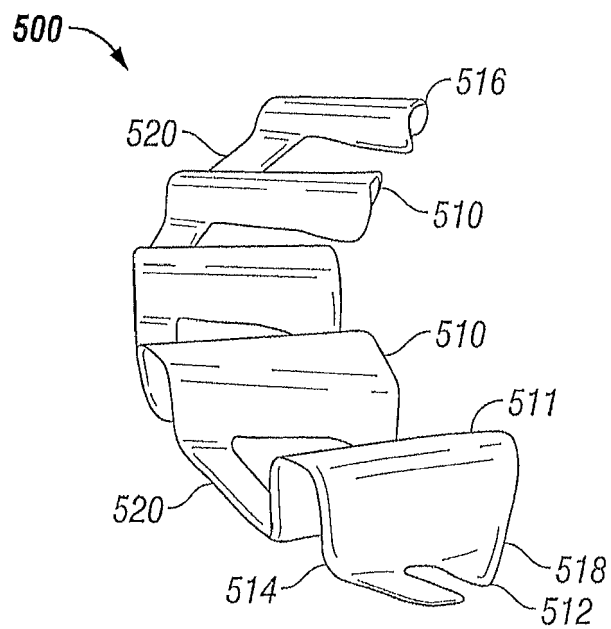


FIG. 21

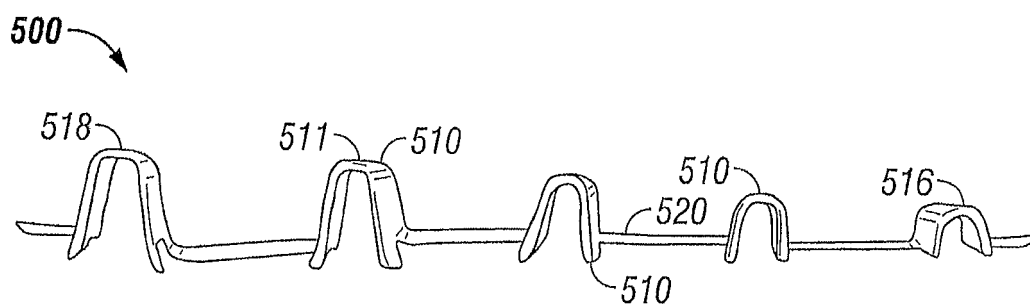


FIG. 22

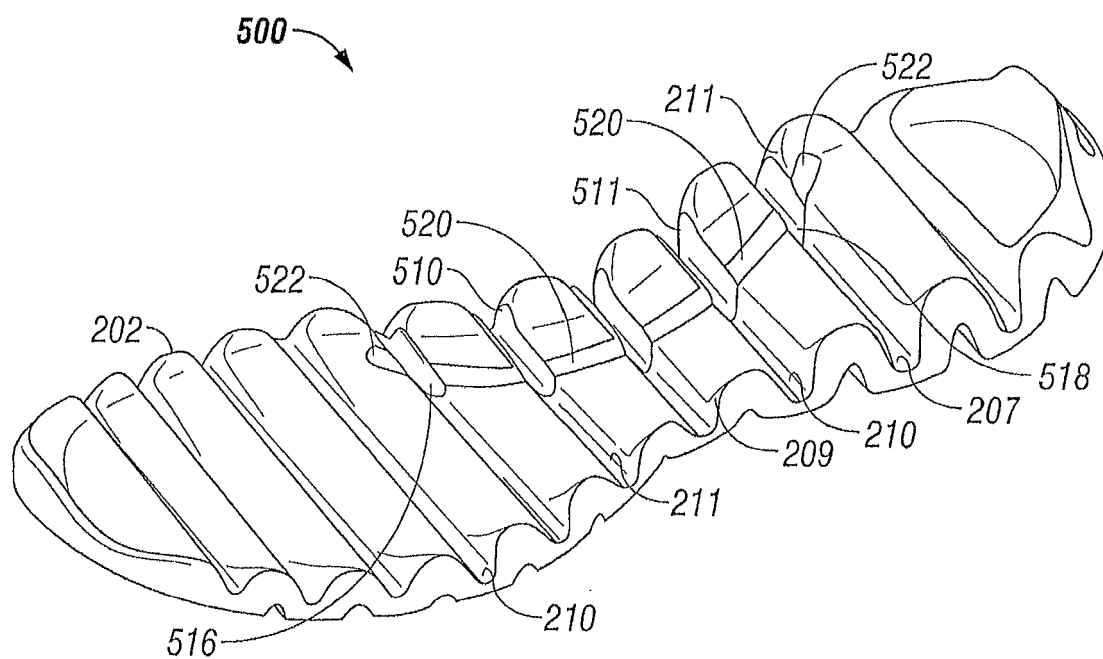


FIG. 23

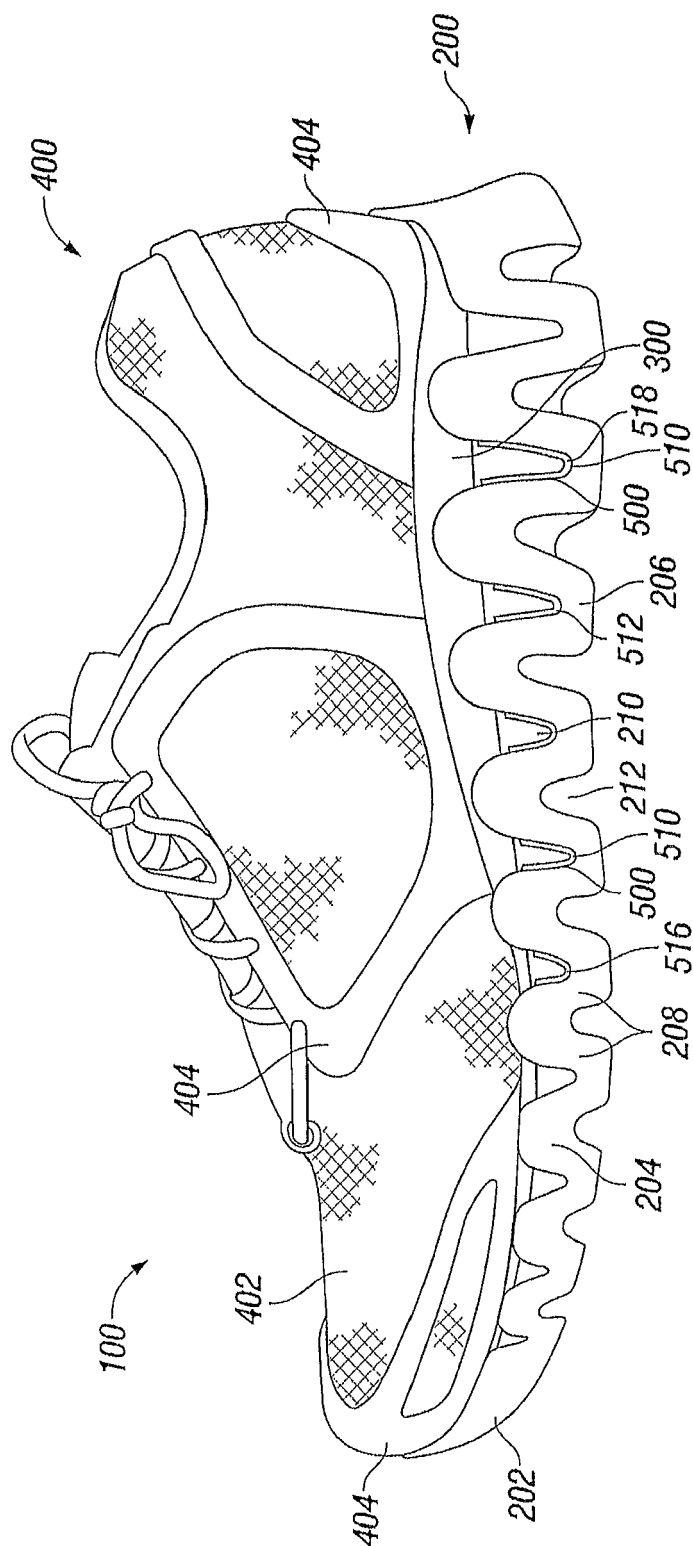


FIG. 24

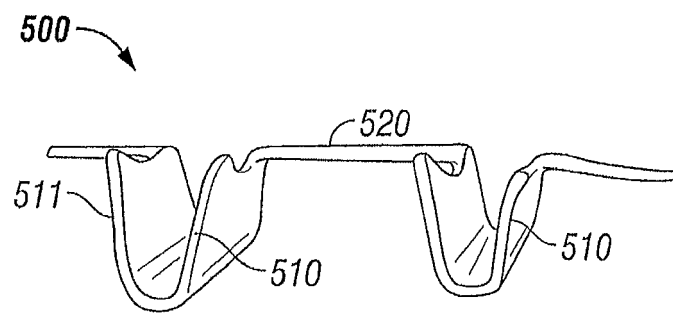


FIG. 25

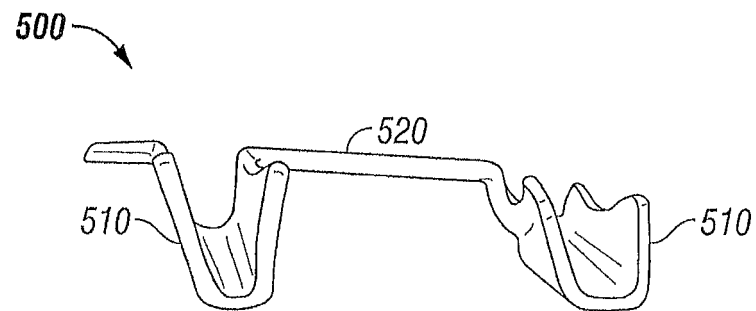


FIG. 26

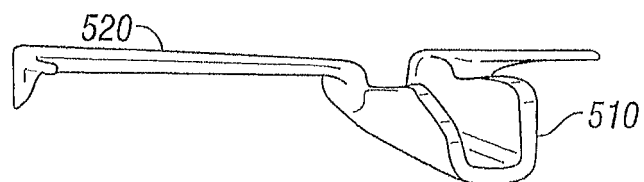


FIG. 27

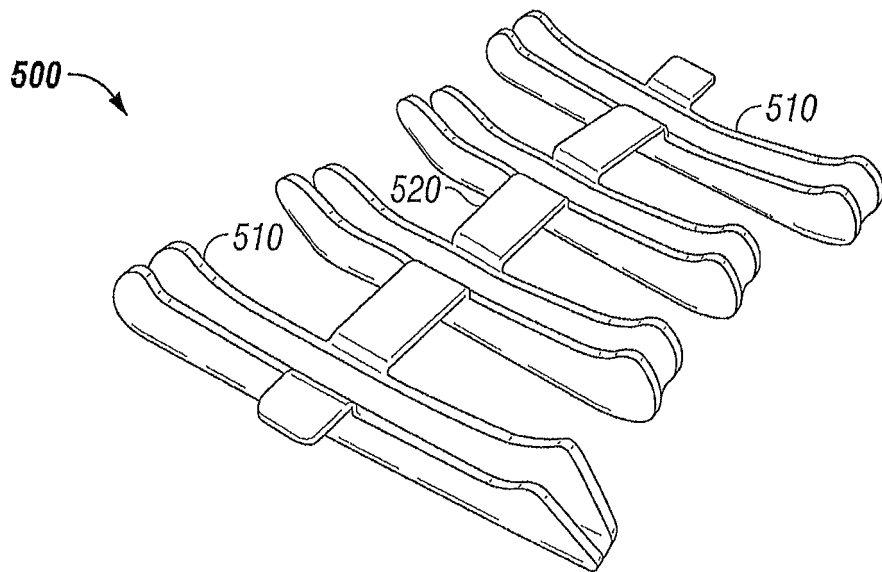


FIG. 28

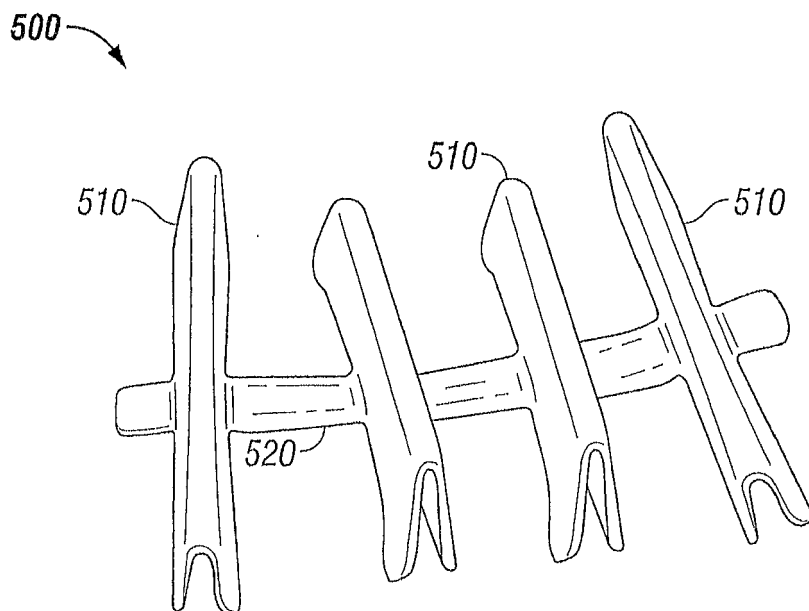


FIG. 29

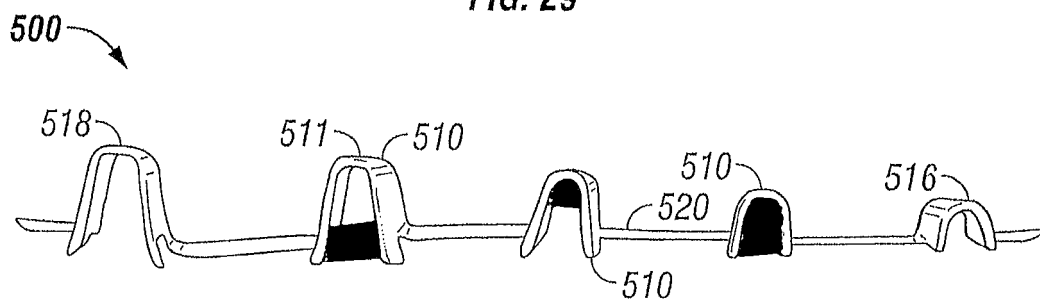


FIG. 30

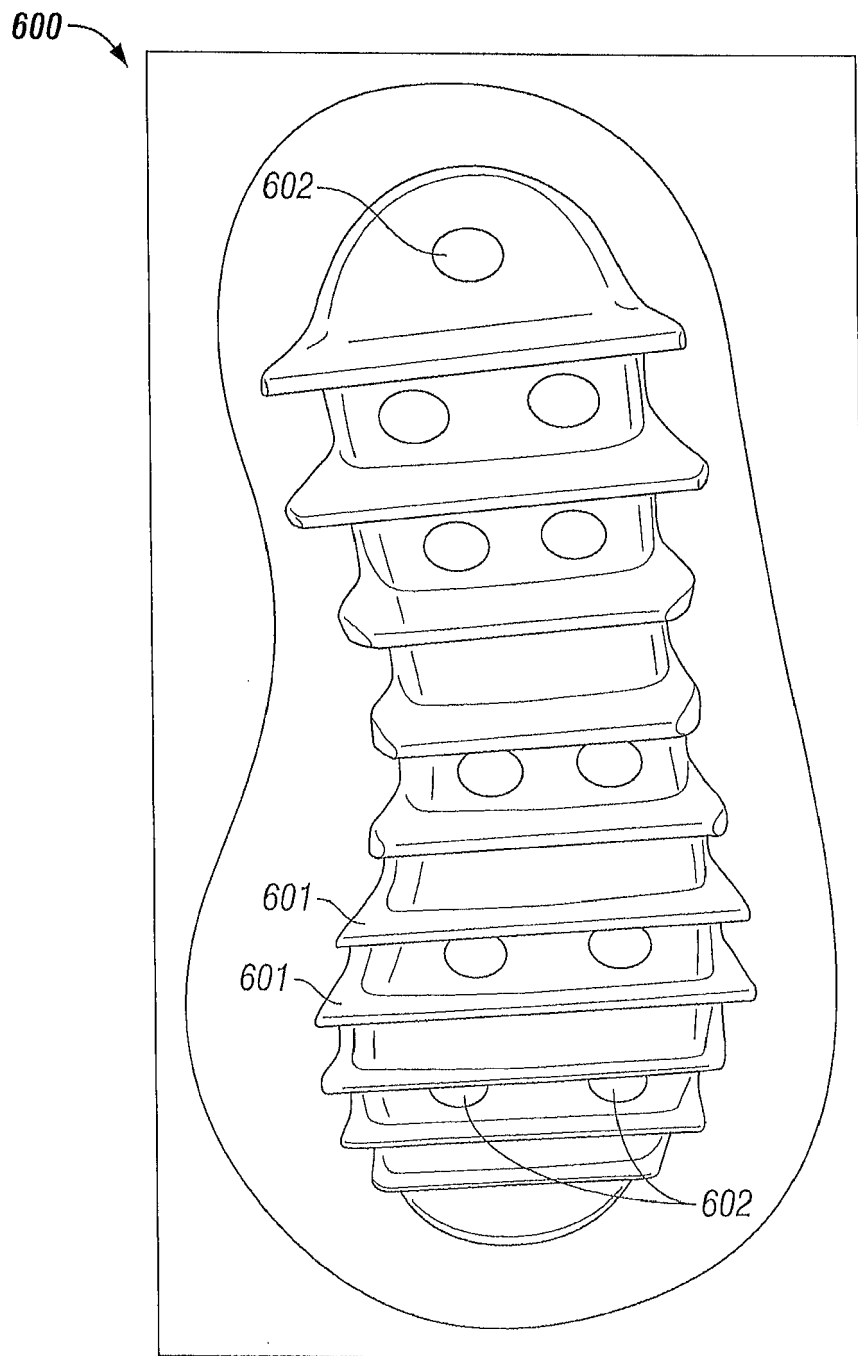


FIG. 31

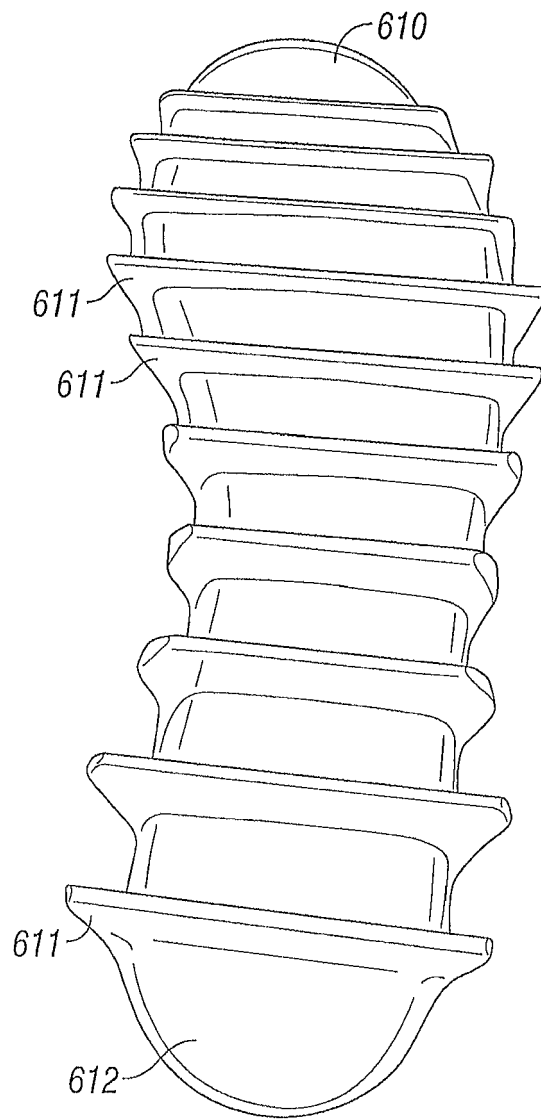


FIG. 32

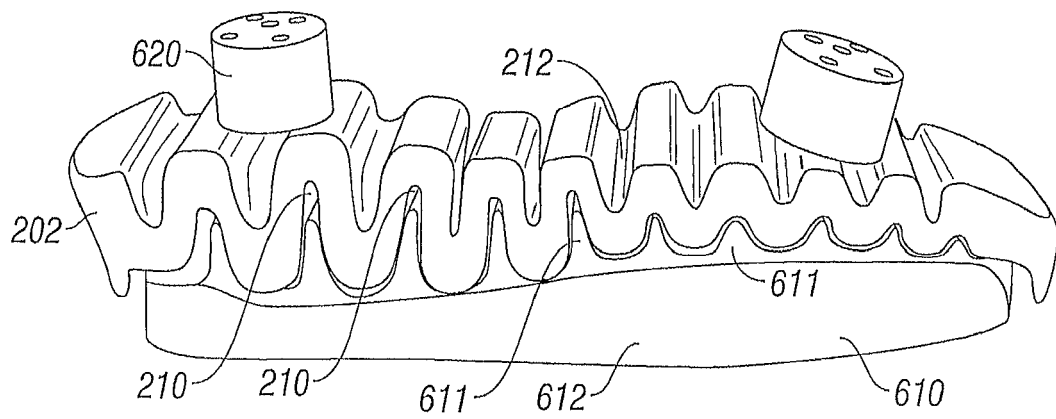


FIG. 33

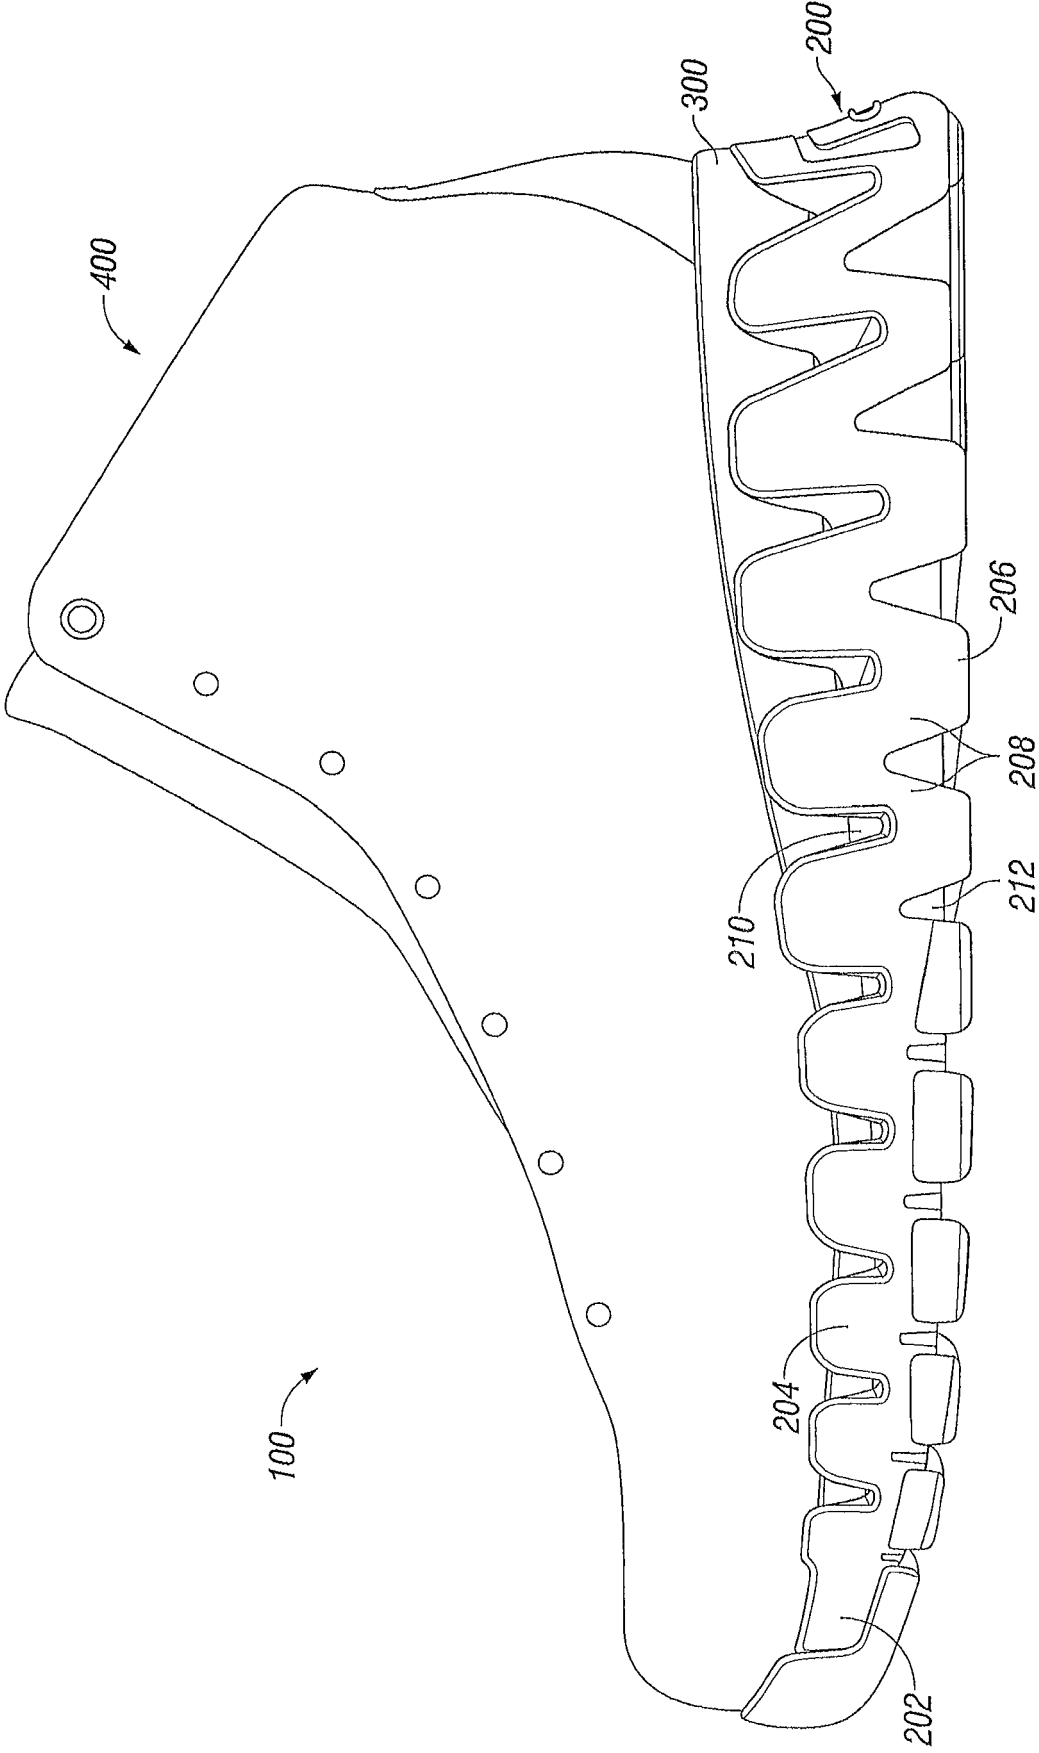


FIG. 34

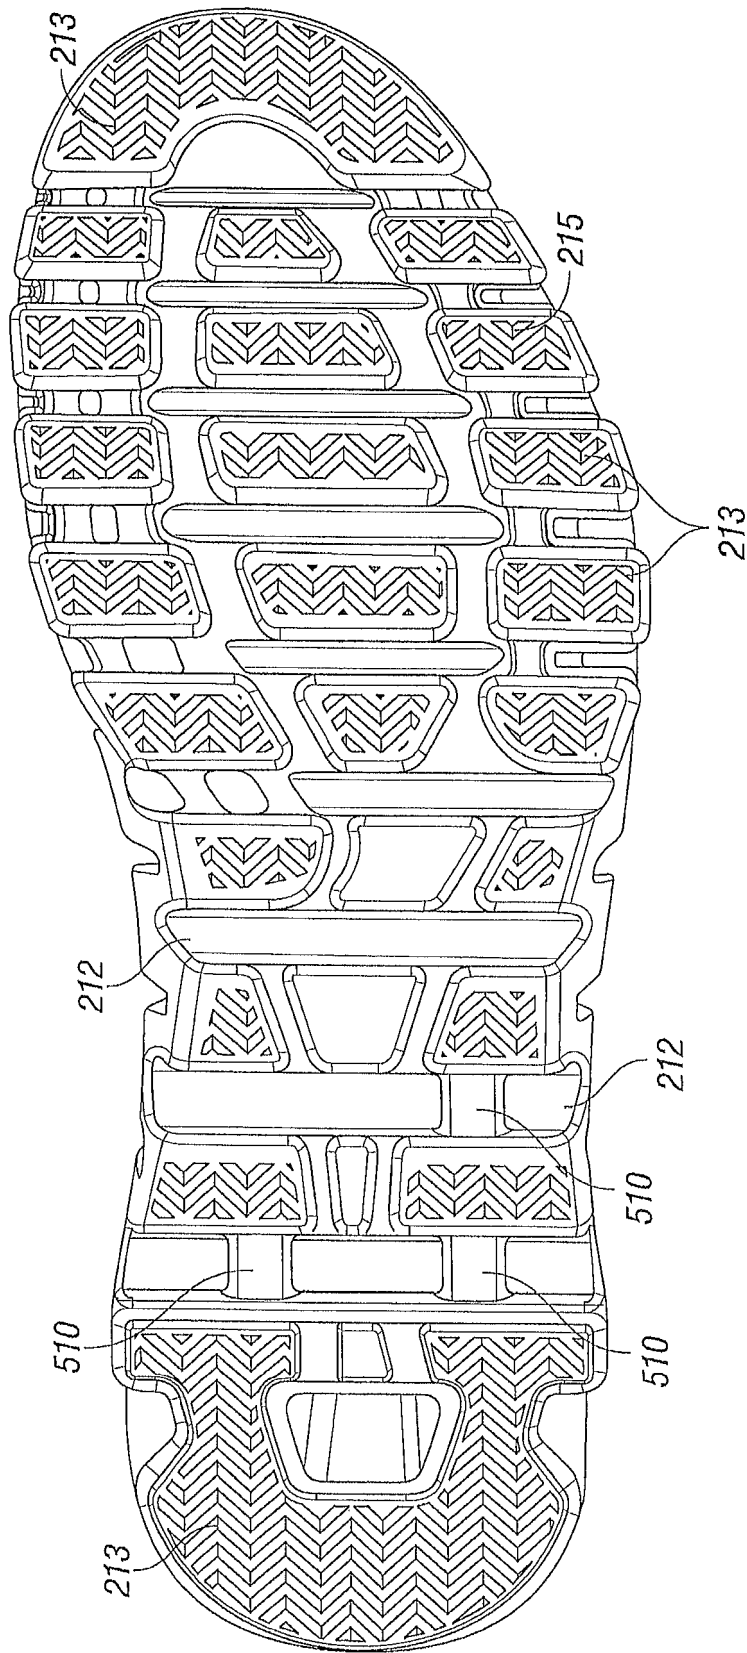


FIG. 35



EUROPEAN SEARCH REPORT

Application Number
EP 19 19 6198

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2008/052965 A1 (SATO NATSUKI [JP]) 6 March 2008 (2008-03-06) * paragraphs [0043] - [0049]; figures 3,5,7 *	1-15	INV. A43B13/12 A43B13/18 A43B13/14 A43B13/22
X	WO 2004/052136 A1 (NIKE INC [US]; NIKE INTERNATIONAL LTD [US]; FUSCO CIRO [US]) 24 June 2004 (2004-06-24) * paragraphs [0024] - [0029], [0038]; figure 1 *	1,2,9, 10,14	
X	DE 11 45 961 B (KLAUS MAERTENS DR MED; FUNCK HERBERT) 21 March 1963 (1963-03-21) * column 3, line 9 - column 5, line 16; figures 2,3,6,8 *	1-6,8-11	
X	US 2 553 616 A (WALLS GEORGE V) 22 May 1951 (1951-05-22) * column 1, line 32 - column 2, line 14; figures 1,3 *	1	
			TECHNICAL FIELDS SEARCHED (IPC)
			A43B
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 9 December 2019	Examiner Vesin, Stéphane
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 19 19 6198

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

09-12-2019

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2008052965 A1	06-03-2008	BR PI0716100 A2	26-02-2013
		CA 2661845 A1	06-03-2008
		CN 101505626 A	12-08-2009
		EP 2060197 A1	20-05-2009
		JP 4153002 B2	17-09-2008
		JP 2008054780 A	13-03-2008
		US 2008052965 A1	06-03-2008
		US 2011113656 A1	19-05-2011
		WO 2008026379 A1	06-03-2008

WO 2004052136 A1	24-06-2004	AU 2003294372 A1	30-06-2004
		US 2004111922 A1	17-06-2004
		WO 2004052136 A1	24-06-2004

DE 1145961 B	21-03-1963	NONE	

US 2553616 A	22-05-1951	NONE	
