



(11) **EP 3 607 839 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
12.02.2020 Bulletin 2020/07

(51) Int Cl.:
A24D 3/04 (2006.01)

(21) Application number: **18187733.3**

(22) Date of filing: **07.08.2018**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

- **Zhang, Ziheng**
Jiangxi Province, 332000 (CN)
- **Liu, Gang**
Jiangxi Province, 332000 (CN)
- **Li, Zhengyong**
Jiangxi Province, 332000 (CN)
- **Shi, Zhaozhen**
Jiangxi Province, 332000 (CN)

(71) Applicant: **Gongqingcheng Daole Investment Management Partnership (LLP)**
332000 Gongqingcheng, Jiangxi (CN)

(74) Representative: **Turner, Craig Robert**
A.A. Thornton & Co.
10 Old Bailey
London EC4M 7NG (GB)

(72) Inventors:
• **Fu, Yuanfeng**
Jiangxi Province, 332000 (CN)

(54) **SMOKE FILTERING DEVICE**

(57) The present disclosure relates to a smoke filtering device, comprising a body (1), flow channels (2) configured for allowing smoke to flow therethrough being present in the body, and the flow channels filtering the smoke by prolonging duration of the smoke staying in the flow channels. Through a particular flow channel design of the present disclosure, a flow speed of the smoke is increased, a flow state of the smoke is changed, further, a part of harmful substances such as tar are settled and adsorbed.

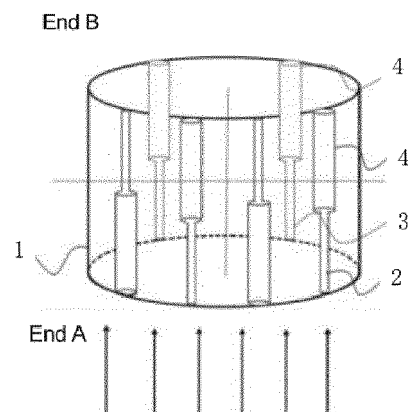


FIG.1

EP 3 607 839 A1

Description**Technical Field**

5 **[0001]** The present disclosure relates to the technical field of tobacco, particularly to a smoke filtering device.

Background Art

10 **[0002]** With the progress of society, the problem of "smoking and health" attracts extensive social concerns. As the living standard is improved continuously, people are becoming conscious of health more and more. "Smoking and health" has become one of the main challenges confronted with in the development of the tobacco industry.

15 **[0003]** Smoking can bring about spiritual enjoyment, but smoking is harmful to health because the tobaccos will form in a combustion process a series of substances harmful to human's body. Similarly, tobacco products such as cigars also have the same problem. Harmful compounds produced by the tobaccos in the combustion process include: nicotine, nitrosamine, carbonic oxide, polycyclic aromatic hydrocarbon (PAHs), tar, cyanide, formaldehyde, acrolein, heavy metals and so on.

Summary

20 **[0004]** An object of the present disclosure is to provide a smoke filtering device to overcome defects of the prior art.

[0005] Another object of the present disclosure is a use of a one-time injection-molded smoke filtering device in cigarettes.

[0006] In order to achieve the above objects, the present disclosure provides following technical solutions.

25 **[0007]** The present disclosure provides a smoke filtering device, including a body which is provided therein with flow channels configured for allowing smoke to flow therethrough, wherein the flow channels filter the smoke by prolonging duration of the smoke staying in the flow channels.

[0008] According to a preferred aspect of the smoke filtering device of the present disclosure, the body is a cylindrical body, with a diameter of 4-10mm, and a height of 3-25mm.

30 **[0009]** Preferably, the body is internally symmetrical in structure, and the symmetrical structure is axially symmetrical along a linear line perpendicular to an axis of the body.

[0010] Preferably, the flow channels have an inner diameter of 0.2-1.0mm.

[0011] Preferably, a sectional shape of each flow channel is a circular shape, an oval shape, a polygonal shape or an irregular shape. For the polygonal shape, a square shape is the most common shape.

35 **[0012]** A shape of a longitudinal profile of each flow channel can be a triangular shape, a shape formed by rectangles connected in a front-rear direction or a bent shape.

[0013] In the present disclosure, the flow channels are distributed in a discrete and uniform manner or regularly distributed in rows or columns inside the body.

[0014] According to a preferred aspect of the above smoke filtering device of the present disclosure, an upper end face and/or a lower end face of the body are/is a structure of a concave platform.

40 **[0015]** According to another preferred aspect of the above smoke filtering device, the flow channels each have a first inner diameter segment and a second inner diameter segment in communication with each other, wherein an inner diameter size of the first inner diameter segment is smaller than an inner diameter size of the second inner diameter segment. Therefore, the shape of the longitudinal profile of the flow channel is formed by two rectangles connected in a front-rear direction.

45 **[0016]** According to another preferred aspect of the above smoke filtering device, the flow channels each have a first inner diameter end and a second inner diameter end, wherein an inner diameter size of the first inner diameter end is smaller than an inner diameter size of the second inner diameter end. The shape of the longitudinal profile of the flow channels is a trapezoidal shape.

50 **[0017]** According to another preferred aspect of the above smoke filtering device, the flow channels are in a straight-through structure and/or a bent structure.

[0018] According to another preferred aspect of the above smoke filtering device, the shape of the longitudinal profile of the flow channel is formed by two rectangles connected in a front-rear direction and has a bent structure having a middle portion as the bent portion.

[0019] In the present disclosure, the smoke filtering device is made through a one-time injection-molding process.

55 **[0020]** In the present disclosure, the smoke filtering device can use injection-molding raw materials, such as PS (polystyrenes), PP (polypropylene), AS (styrene-acrylonitrile copolymers), ABS (acrylonitrile-butadiene-styrene), PLA (polylactic acid), PBS (polybutylene succinate), and PBAT (polybutylene adipate terephthalate). Any raw materials that can realize one-time injection molding can be used for implementing the solutions of the present disclosure.

[0021] According to another preferred aspect of the above smoke filtering device, the flow channels are each provided therein with at least one smoke filtering component.

[0022] According to another preferred aspect of the above smoke filtering device, the smoke filtering component includes a light-free catalyst filtering layer and a polypropylene electret filtering layer, wherein the light-free catalyst is a catalyst capable of achieving catalysis without light.

[0023] According to another preferred aspect of the above smoke filtering device, the smoke filtering component includes an inner barrel, an outer barrel and swirling blades provided between the inner barrel and the outer barrel, wherein the inner barrel and the outer barrel are coaxially provided; the inner barrel is detachably connected with a blocking mechanism configured for blocking an inner passage of the inner barrel.

[0024] Preferably, a torsion angle between a top edge and a bottom edge of each swirling blade is 30°-60°.

[0025] According to another preferred aspect of the above smoke filtering device, the flow channels are each provided therein with at least one baffle plate. The baffle plate and an inner wall of the flow channel define a flow guide passage.

[0026] Preferably, the flow channels are each provided therein with a plurality of baffle plates arranged in parallel at intervals, and two adjacent baffle plates and an inner wall of the flow channel define a flow guide passage.

[0027] Preferably, the baffle plate is provided with a plurality of curved portions.

[0028] Preferably, the curved portions each include a first bent sheet, a second bent sheet and a third bent sheet connected in sequence, and the first bent sheet and the second bent sheet are both provided to define an angle with the third bent sheet.

[0029] The present disclosure further relates to a use of the above smoke filtering device in a cavity-combined filter rod.

[0030] The smoke filtering device provided in the present disclosure has the following effects:

through a particular flow channel design of the present disclosure, the staying duration of the smoke is prolonged, a flow state of the smoke is changed, and further, a part of harmful substances such as tar are settled and adsorbed.

Brief Description of Drawings

[0031]

FIG. 1 is a schematic structural diagram of a smoke filtering device;

FIG. 2 is a schematic structural diagram of another smoke filtering device;

FIG. 3 is a schematic structural diagram of another smoke filtering device;

FIG. 4 is a longitudinal section schematic diagram of a flow channel;

FIG. 5 is a schematic structural diagram of a smoke filtering component;

FIG. 6 is a schematic structural diagram of another smoke filtering component; and

FIG. 7 is a schematic structural diagram of a curved portion of a baffle plate.

[0032] In the figures: 1. body; 2. flow channel; 3. first inner diameter segment; 4. second inner diameter segment; 5. first inner diameter end; 6. second inner diameter end; 7. bent portion; 8. concave platform; 9. smoke filtering component; 10. light-free catalyst filtering layer; 11. polypropylene electret filtering layer; 12. inner barrel; 13. outer barrel; 14. swirling blade; 15. blocking mechanism; 16. baffle plate; 17. flow guide passage; 18. curved portion; 19. first bent sheet; 20. second bent sheet; 21. third bent sheet.

[0033] Directions of arrows in FIG. 1 and FIG. 2 represent smoke flow directions.

Detailed Description

[0034] Non-limiting statements, including preferred features of the invention, are given below and are used to describe the present disclosure in more detail.

[0035] The present disclosure provides a smoke filtering device, including a body 1, wherein there are flow channels 2 configured for allowing smoke to flow therethrough in the body 1, and the flow channels 2 filter the smoke by prolonging duration of the smoke staying in the flow channels.

[0036] According to a preferred aspect of the smoke filtering device of the present disclosure, the body 1 is a cylindrical body, with a diameter of 4-10mm, and a height of 3-25mm.

[0037] Preferably, the body 1 is internally symmetrical in structure, and the symmetrical structure is axially symmetrical

along a linear line perpendicular to an axis of the body 1. In the present disclosure, the term "the body is internally symmetrical in structure" should be construed that a shape of a longitudinal profile of the body is symmetric in a front-rear direction. For a structure of the body having the flow channels 2, the smoke enters from a front end and is discharged from a rear end, or enters from the rear end and is discharged from the front end, wherein paths that the smoke flows through in both cases are same.

[0038] Preferably, the flow channels 2 have an inner diameter of 0.2-1.0mm.

[0039] Preferably, a sectional shape of the flow channel 2 is a circular shape, an oval shape, a polygonal shape or an irregular shape. For the polygonal shape, a square shape is the most common shape.

[0040] A shape of a longitudinal profile of the flow channels 2 can be a triangular shape, a shape formed by rectangles connected in a front-rear direction or a bent shape.

[0041] In the present disclosure, the flow channels 2 are distributed in a discrete and uniform manner or regularly distributed in rows or columns inside the body 1.

[0042] According to a preferred aspect of the above smoke filtering device, an upper end face and/or a lower end face of the body 1 are/is in a structure of a concave platform 8.

[0043] According to another preferred aspect of the above smoke filtering device, the flow channels 2 each have a first inner diameter segment 3 and a second inner diameter segment 4 in communication with each other, an inner diameter size of the first inner diameter segment 3 is smaller than an inner diameter size of the second inner diameter segment 4. Therefore, the shape of the longitudinal profile of the flow channel 2 is formed by two rectangles connected in a front-rear direction.

[0044] According to another preferred aspect of the above smoke filtering device, the flow channels 2 each have a first inner diameter end 5 and a second inner diameter end 6, an inner diameter size of the first inner diameter end 5 is smaller than an inner diameter size of the second inner diameter end 6. Therefore, the shape of the longitudinal profile of the flow channel 2 is a trapezoidal shape.

[0045] According to another preferred aspect of the above smoke filtering device, the flow channels 2 are in a straight-through structure and/or a bent structure.

[0046] According to another preferred aspect of the above smoke filtering device, the shape of the longitudinal profile of the flow channel 2 is formed by two rectangles connected in a front-rear direction and has a bent structure, having a middle portion as the bent portion 7.

[0047] In the present disclosure, the smoke filtering device is made through a one-time injection-molding process.

[0048] In the present disclosure, the smoke filtering device can use injection-molding raw materials, such as PS (polystyrenes), PP (polypropylene), AS (styrene-acrylonitrile copolymers), ABS (acrylonitrile-butadiene-styrene), PLA (polylactic acid), PBS (polybutylene succinate), and PBAT (polybutylene adipate terephthalate). Any raw materials that can realize one-time injection molding can be used for implementing the solutions of the present disclosure.

[0049] According to another preferred aspect of the above smoke filtering device, the flow channels 2 are each provided therein with at least one smoke filtering component 9.

[0050] According to another preferred aspect of the above smoke filtering device, the smoke filtering component 9 includes a light-free catalyst filtering layer 10 and a polypropylene electret filtering layer 11.

[0051] According to another preferred aspect of the above smoke filtering device, the smoke filtering component 9 includes an inner barrel 12, an outer barrel 13 and swirling blades 14 provided between the inner barrel 12 and the outer barrel 13, wherein the inner barrel 12 and the outer barrel 13 are coaxially provided; the inner barrel 12 is detachably connected with a blocking mechanism 15 for blocking an inner passage of the inner barrel 12. Preferably, the blocking mechanism 15 is in form of blind plates connected to two ends of the inner barrel 12. When the smoke passes through the above smoke filtering component 9, the smoke flows in a swirling manner along the swirling blades 14, which prolongs smoke passages to a certain extent, further prolongs duration of the smoke staying in the flow channels 2, and improves a filtering effect for the smoke in the flow channels 2.

[0052] Preferably, a torsion angle between a top edge and a bottom edge of the swirling blade 14 is 30°-60°. The swirling blades 14 are designed in a torsional manner, wherein the angle between the top edge and the bottom edge of one swirling blade 14 is the torsion angle, which torsion angle can be 30°, 45° or 60°. A torsional rotation direction of the swirling blades 14 can be of two types, i.e. the clockwise direction and the anticlockwise direction.

[0053] According to another preferred aspect of the above smoke filtering device, the flow channels 2 are each provided therein with at least one baffle plate 16. The baffle plate 16 and an inner wall of the flow channel 2 forms a flow guide passage 17.

[0054] Preferably, the flow channels 2 are each provided therein with a plurality of baffle plates 16 arranged in parallel at intervals, and two adjacent baffle plates 16 and an inner wall of the flow channel 2 form a flow guide passage 17.

[0055] Preferably, the baffle plate 16 is provided with a plurality of curved portions 18. The curved portions 18 on the baffle plate 16 can enhance a turbulent degree of gas in the flow guide passages 17, and can prolong the duration of the gas staying in the flow guide passages 17, improving the filtering efficiency. The curved portions 18 can be in an arc shape or also can be in an angular shape (formed by bent sheets with an angle therebetween), of which a section also

can be in an isosceles trapezoidal shape.

[0056] Preferably, the curved portions 18 each include a first bent sheet 19, a second bent sheet 20 and a third bent sheet 21 connected in sequence, and the first bent sheet 19 and the second bent sheet 20 are both provided to define an angle with the third bent sheet 21. Such arrangement manner increases the turbulent degree of the smoke inside the flow guide passages 17, and increases random motion of the gas, such that the probability of the smoke striking the baffle plates 16 is increased, meanwhile, the duration of the smoke staying in the flow guide passages 17 is also prolonged, thus greatly improving the filtering efficiency of the smoke filtering device.

[0057] According to certain embodiments, referring to FIG. 1, an appearance of the body 1 is in a cylindrical shape, the body has six flow channels 2 uniformly distributed therein, and the flow channels each have a cross section in a circular shape. Among the six flow channels 2, the first inner diameter segments 3 of two flow channels 2 face up, the second inner diameter segments 4 of the other four flow channels 2 face up. The six flow channels are distributed uniformly, ensuring that this smoke filtering device has a symmetrical structure which is symmetrical in a front-rear direction. Here, the smoke enters from an end A and is discharged from an end B.

[0058] Optionally, in specific implementation, also, in the six flow channels 2, the first inner diameter segments 3 of three flow channels 2 may face up, the second inner diameter segments 4 of the other three flow channels 2 may face up.

[0059] According to certain embodiments, referring to FIG. 2, the appearance of the body 1 is in a cylindrical shape, the body has seven flow channels 2 uniformly distributed therein, and the flow channels each have a cross section in a circular shape. There is a bent portion 7 in a middle portion of the flow channel 2. This smoke filtering device is in a symmetrical structure which is symmetrical in a front-rear direction. Here, the smoke enters from an end A and is discharged from an end B.

[0060] According to certain embodiments, referring to FIG. 3, the appearance of the body 1 is in a cylindrical shape, with a concave platform 8 at both upper and lower ends. The body has 16 flow channels 2 uniformly distributed therein, and the flow channels each have a cross section in a circular shape. The flow channels 2 are uniformly distributed, ensuring that this smoke filtering device has a symmetrical structure which is symmetrical in a front-rear direction.

[0061] According to certain embodiments, referring to the structure of the flow channel 2 shown in FIG. 4, a shape of a longitudinal profile of this flow channel 2 is a trapezoidal shape.

[0062] According to certain embodiments, referring to the structure of the smoke filtering component 9 shown in FIG. 5, a light-free catalyst filtering layer 10 and a polypropylene electret filtering layer 11 are provided in a stacking manner; in use, cigarette smoke enters the flow channel 2, passes through the polypropylene electret filtering layer 11, to filter out most of smoke particle pollutants. Then, the cigarette smoke passes through the light-free catalyst filtering layer 10 to filter out most of harmful substances such as nicotine, nitrosamine, and benzopyrene. Finally, the cigarette smoke enters a mouth of a smoker. Harm of the cigarette smoke to the body in the smoking process is significantly reduced. Increasing or decreasing the number of the polypropylene electret filtering layer can change the filtering efficiency, so as to satisfy requirements of different population to health.

[0063] According to certain embodiments, referring to the structure of the smoke filtering component 9 shown in FIG. 5, this smoke filtering component 9 includes an inner barrel 12, an outer barrel 13, swirling blades 14, a support ring, and a blocking mechanism 15 (for example, a blind plate). The support ring is connected to an upper edge of an outer wall of the outer barrel 13, and four holes are circumferentially provided uniformly on the support ring for connection and fixation. The inner barrel 12 and the outer barrel 13 are provided coaxially, the swirling blades 14 are between the inner barrel 12 and the outer barrel 13, and a torsional rotation direction of the swirling blades 14 is the clockwise direction. The blind plate blocks a top end of the inner barrel.

[0064] The present disclosure further relates to a use of the above smoke filtering device in a cavity-combined filter rod.

Embodiment 1

[0065] A polystyrene smoke filtering device with a diameter of 6mm and a length of 20mm is manufactured through a one-time injection molding process. An appearance of the polystyrene smoke filtering device is in a cylindrical shape. The polystyrene smoke filtering device has six flow channels 2 uniformly distributed therein. The flow channels each have a cross section in a circular shape. The flow channels 2 each have an inner diameter of 0.2mm for a front 10mm segment, and an inner diameter of 0.4mm for a rear 10mm segment. Among the six flow channels 2, first inner diameter segments 3 of three flow channels 2 face up, second inner diameter segments 4 of the other three flow channels 2 face up, the six flow channels are distributed uniformly, ensuring that this smoke filtering device has a symmetrical structure which is symmetrical in a front-rear direction.

Embodiment 2

[0066] A polybutylene succinate smoke filtering device with a diameter of 10mm and a length of 5mm is manufactured through a one-time injection molding process. An appearance of the polybutylene succinate smoke filtering device is in

a cylindrical shape. The polybutylene succinate smoke filtering device has eight flow channels 2 uniformly distributed therein. The flow channels each have a cross section in a circular shape with a diameter of 1mm. There is a bent portion 7 in a middle portion of the flow channel 2.

Embodiment 3

[0067] A styrene-acrylonitrile copolymer smoke filtering device with a diameter of 4mm and a length of 25mm is manufactured through a one-time injection molding process. An appearance of the styrene-acrylonitrile copolymer smoke filtering device is in a cylindrical shape, which has two ends (i.e. the upper and lower ends) each provided with a concave platform 8 with a height of 3mm. The styrene-acrylonitrile copolymer smoke filtering device has a plurality of flow channels 2 uniformly distributed therein. The flow channels each have a cross section in a circular shape. The flow channels are uniformly distributed, ensuring that this smoke filtering device has a symmetrical structure which is symmetrical in a front-rear direction.

[0068] As a variation, the structure of the flow channel 2 as shown in FIG. 4 also can be used. This flow channel 2 has a front end in a square shape with a side length of 0.2mm, and a tail end in a square shape with a side length of 0.3mm, and has a longitudinal profile in a trapezoidal shape. Among the eight flow channels 2, first inner diameter ends 5 of four flow channels 2 face up, second inner diameter ends 6 of the other four flow channels 2 face up, thus ensuring that the filtering device has a symmetrical structure which is symmetrical in a front-rear direction.

[0069] 60 commercially available common cigarettes were chosen as control sample.

[0070] The smoke filtering device of Embodiment 1 was processed to manufacture a filter rod by combining cavities, then another 60 commercially available common cigarettes were taken, and taws therein were drawn out and replaced by the combined filter rod.

[0071] Similarly, the smoke filtering devices of Embodiments 2 and 3 were processed respectively to manufacture a filter rod by combining cavities. Another 60 commercially available common cigarettes were taken for each case, and taws therein were drawn out and replaced by the compounded filter rods. Smoke test was carried out for the above 240 cigarettes in 4 groups, and results are as follows:

Item	TPM mg/per cigarette	H ₂ O mg/per cigarette	NIC mg/per cigarette	NFDPM mg/per cigarette	CO mg/per cigarette
Control Sample	13.5	1.5	0.76	11.24	10.6
Embodiment 1	11.6	1.6	0.75	9.25	9.8
Embodiment 2	11.3	1.55	0.71	9.04	9.7
Embodiment 3	11.5	1.48	0.73	9.29	10.1

[0072] In the above, TPM refers to a total particulate matter in the smoke, NIC refers to the content of nicotine in the smoke, and NFDPM (nicotine-free dry particulate matter) refers to a tar content. Detection methods thereof are conventional methods existing in the art, for example, detections are carried out according to the methods recorded in GB/T19069-2004.

Data analysis:

[0073] Through the conventional smoke detection of the cigarettes, compared with the control sample, Embodiments 1-3 according to the present disclosure have a significantly reduced tar content (NFDPM), about 17% in average.

[0074] Thus, the smoke filtering device of the present disclosure has the following effects.

[0075] Due to its particular external structure design, the smoke filtering device of the present disclosure can be directly used in the cavity-combined filter rod. The smoke filtering device of the present disclosure has good mechanical processability.

[0076] Due to its particular internal structure design, the smoke filtering device of the present disclosure increases the length of the flow channels for the smoke, increases the duration of the smoke staying in the flow channels, improves the collision efficiency of the smoke, and thus reduces the harmful substances such as tar in the smoke.

[0077] In the smoke filtering device of the present disclosure, all the materials used are food-grade raw materials, and the raw materials are odorless, tasteless, heat-proof and so on. Therefore, on the basis of reducing the harmful substances such as tar in the smoke, no unfavorable odor will be introduced or generated.

[0078] It is worth noting that the smoke filtering device of the present disclosure not only can be used in the conventional cigarettes, but also can be used in heat-not-burn cigarettes.

Industrial Applicability

[0079] The smoke filtering device of the present disclosure can settle and adsorb a part of harmful substances such as tar in the smoke, and has industrial applicability.

Claims

1. A smoke filtering device, **characterized by** comprising a body (1), in which flow channels (2) are provided for allowing smoke to flow therethrough, with the flow channels (2) filtering the smoke by prolonging duration of the smoke staying in the flow channels.
2. The smoke filtering device of claim 1, **characterized in that** the body (1) is a cylindrical body, with a diameter of 4-10mm, and a height of 3-25mm, preferably, the body (1) is internally symmetrical in structure, and the structure symmetrical is axially symmetrical along a linear line perpendicular to an axis of the body (1).
3. The smoke filtering device of any one of claims 1-2, **characterized in that** the flow channels (2) have an inner diameter of 0.2-1.0mm.
4. The smoke filtering device of any one of claims 1-3, **characterized in that** a sectional shape of each flow channel (2) is a circular shape, an oval shape, a polygonal shape or an irregular shape, preferably, the flow channels (2) are distributed in a discrete and uniform manner, or regularly distributed in rows or columns inside the body (1).
5. The smoke filtering device of any one of claims 1-4, **characterized in that** an upper end face and/or a lower end face of the body (1) has a structure of a concave platform (8).
6. The smoke filtering device of any one of claims 1-5, **characterized in that** the flow channels (2) each have a first inner diameter segment (3) and a second inner diameter segment (4) in communication with each other, wherein an inner diameter size of the first inner diameter segment (3) is smaller than an inner diameter size of the second inner diameter segment (4).
7. The smoke filtering device of any one of claims 1-5, **characterized in that** the flow channels (2) each have a first inner diameter end (5) and a second inner diameter end (6), wherein an inner diameter size of the first inner diameter end (5) is smaller than an inner diameter size of the second inner diameter end (6).
8. The smoke filtering device of any one of claims 1-7, **characterized in that** the flow channels (2) are in a straight-through structure and/or a bent structure.
9. The smoke filtering device of any one of claims 1-5, **characterized in that** a shape of a longitudinal profile of each flow channel (2) is formed by two rectangles connected in a front-rear direction and has a bent structure having a middle portion as a bent portion (7).
10. The smoke filtering device of any one of claims 1-5, **characterized in that** the flow channels (2) are each provided therein with at least one smoke filtering component (9).
11. The smoke filtering device of claim 10, **characterized in that** the smoke filtering component (9) comprises a light-free catalyst filtering layer (10) and a polypropylene electret filtering layer (11).
12. The smoke filtering device of claim 10, **characterized in that** the smoke filtering component (9) comprises an inner barrel (12), an outer barrel (13) and swirling blades (14) provided between the inner barrel (12) and the outer barrel (13), wherein the inner barrel (12) and the outer barrel (13) are coaxially provided; and the inner barrel (12) is detachably connected with a blocking mechanism (15) configured for blocking an inner passage of the inner barrel (12), preferably, a torsion angle between a top edge and a bottom edge of each swirling blade (14) is 30°-60°.
13. The smoke filtering device of any one of claims 1-5, **characterized in that** the flow channels (2) are each provided therein with at least one baffle plate (16), and the at least one baffle plate (16) and an inner wall of the flow channel (2) define a guide flow passage (17), preferably, the baffle plate (16) is provided with a plurality of curved portions (18), more preferably, the curved portions (18) each comprise a first bent sheet (19), a second bent sheet (20) and

a third bent sheet (21) connected in sequence, and the first bent sheet (19) and the second bent sheet (20) are both provided to define an angle with the third bent sheet (21).

5 14. The smoke filtering device of any one of claims 1-5, **characterized in that** the flow channels (2) are each provided therein with a plurality of baffle plates (16) arranged in parallel at intervals, and two adjacent baffle plates (16) and an inner wall of the flow channel (2) define a flow guide passage (17), preferably, the baffle plate (16) is provided with a plurality of curved portions (18), more preferably, the curved portions (18) each comprise a first bent sheet (19), a second bent sheet (20) and a third bent sheet (21) connected in sequence, and the first bent sheet (19) and the second bent sheet (20) are both provided to define an angle with the third bent sheet (21).

10 15. The smoke filtering device of any one of claims 1-14, **characterized in that** the smoke filtering device is used in a cavity-combined filter rod.

15

20

25

30

35

40

45

50

55

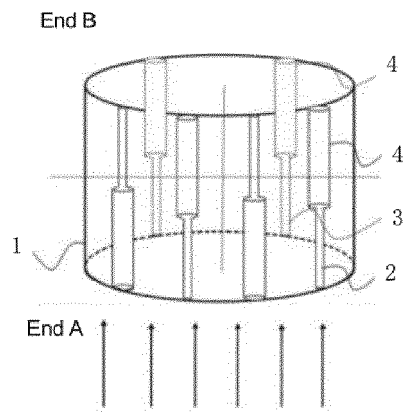


FIG.1

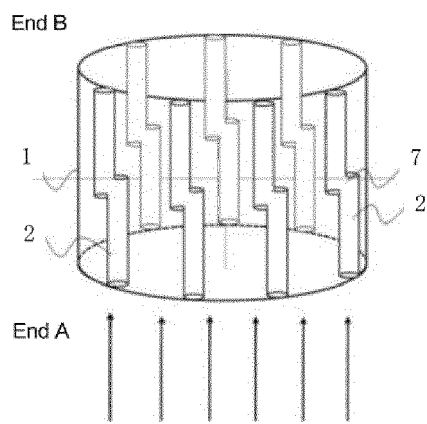


FIG.2

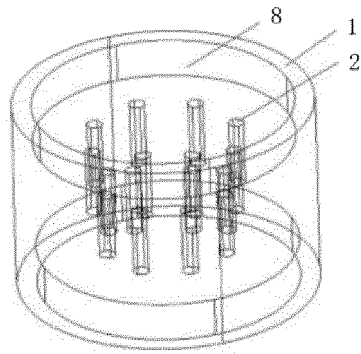


FIG.3

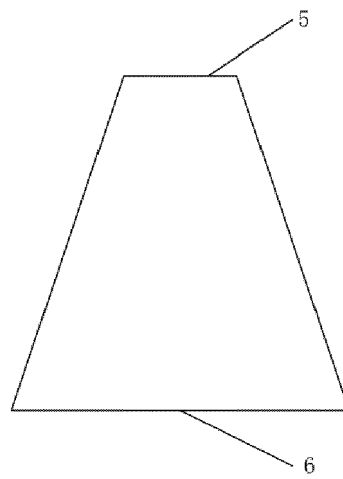


FIG.4

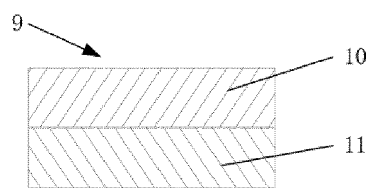


FIG.5

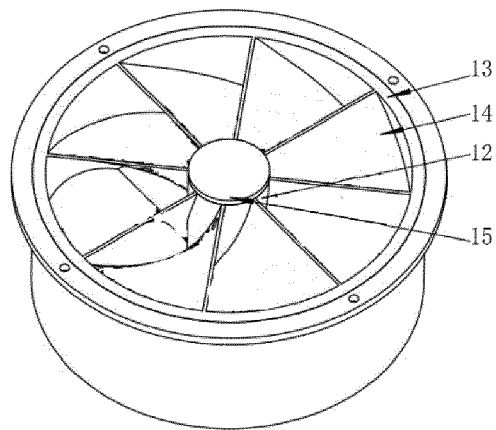


FIG. 6

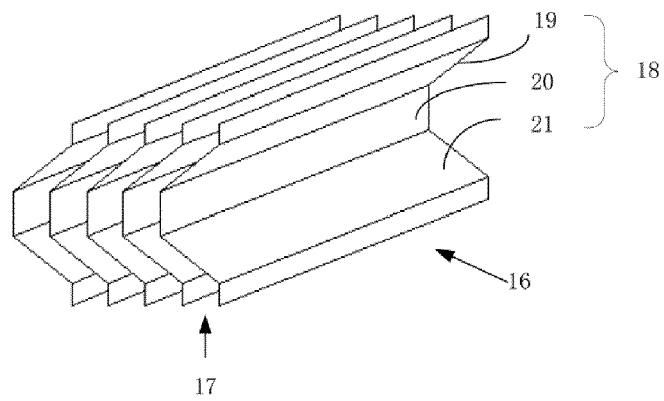


FIG. 7



EUROPEAN SEARCH REPORT

Application Number
EP 18 18 7733

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	CN 103 431 518 A (SHANGHAI HUABAO BIOLOG TECHNOLOGY CO LTD) 11 December 2013 (2013-12-11)	1-9,15	INV. A24D3/04
A	* figures * * the whole document *	10-14	
X	EP 3 305 102 A1 (REEMTSMA CIGARETTENFABRIKEN GMBH [DE]) 11 April 2018 (2018-04-11)	1-4,8,10	
Y	* claim 12; figures * * paragraphs [0026] - [0030], [0042] *	11	
X	US 2014/202479 A1 (NICHOLLS JANE [GB] ET AL) 24 July 2014 (2014-07-24)	1,2,4,8,13,15	TECHNICAL FIELDS SEARCHED (IPC) A24D
A	* figure 10 * * paragraphs [0045] - [0046], [0177] - [0178] *	14	
X	US 6 345 625 B1 (CHEW KAR ENG [MY]) 12 February 2002 (2002-02-12)	1	
Y	* figures 1, 1A * * column 16, line 38 - column 17, line 3 *	14	
Y	US 4 393 885 A (SILBERSTEIN DONALD A) 19 July 1983 (1983-07-19)	14	
	* figures 3-4 * * column 2, lines 28-68 * * column 3, lines 33-47 *		
Y	EP 3 332 868 A1 (JINAN SHENGQUAN GROUP SHARE HOLDING CO LTD [CN]) 13 June 2018 (2018-06-13)	11	
A	US 2017/127719 A1 (CLARKE SHANE [GB] ET AL) 11 May 2017 (2017-05-11)	12	
	* figures 1-3 * * paragraphs [0050] - [0052] *		
		-/--	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 8 February 2019	Examiner Kirchmayr, Katrin
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1503 03.82 (P04C01)



EUROPEAN SEARCH REPORT

Application Number
EP 18 18 7733

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	US 2015/122277 A1 (FROBISHER PAUL [GB] ET AL) 7 May 2015 (2015-05-07) * figures 1-5 * -----	12	
			TECHNICAL FIELDS SEARCHED (IPC)
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 8 February 2019	Examiner Kirchmayr, Katrin
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 18 18 7733

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-02-2019

10

15

20

25

30

35

40

45

50

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
CN 103431518 A	11-12-2013	CN 103431518 A	11-12-2013
		KR 20150028169 A	13-03-2015
EP 3305102 A1	11-04-2018	EP 3305102 A1	11-04-2018
		WO 2018065191 A1	12-04-2018
US 2014202479 A1	24-07-2014	AR 086375 A1	11-12-2013
		BR 112013029365 A2	31-01-2017
		EP 2706873 A1	19-03-2014
		JP 5901745 B2	13-04-2016
		JP 2014513538 A	05-06-2014
		MX 346812 B	31-03-2017
		RU 2013155217 A	20-06-2015
		TW 201306761 A	16-02-2013
		US 2014202479 A1	24-07-2014
		WO 2012156695 A1	22-11-2012
US 6345625 B1	12-02-2002	CN 1229616 A	29-09-1999
		EP 0920817 A2	09-06-1999
		US 6345625 B1	12-02-2002
US 4393885 A	19-07-1983	AR 229421 A1	15-08-1983
		AU 544936 B2	20-06-1985
		BE 893519 A	01-10-1982
		BG 36343 A3	15-10-1984
		BR 8204093 A	05-07-1983
		CA 1196833 A	19-11-1985
		CS 231195 B2	15-10-1984
		DE 3224313 A1	07-04-1983
		DK 417782 A	22-03-1983
		ES 266642 U	16-02-1983
		FI 70513 B	06-06-1986
		FR 2513094 A1	25-03-1983
		GB 2107167 A	27-04-1983
		GR 77640 B	25-09-1984
		GT 198276521 A	25-01-1984
		HU 188192 B	28-03-1986
		IL 66403 A	30-08-1985
		IN 154266 B	13-10-1984
		IT 1153735 B	14-01-1987
		JP 55863380 A	15-04-1983
		KR 840001262 A	30-04-1984
		LU 84220 A1	20-01-1983
		NL 8203589 A	18-04-1983
		NO 823179 A	22-03-1983
		NZ 201079 A	28-09-1984

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

55

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 18 18 7733

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-02-2019

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		PH 18516 A	02-08-1985
		PL 238300 A1	23-05-1983
		RO 88238 B	01-01-1986
		SU 1170955 A3	30-07-1985
		TR 21386 A	01-05-1984
		US 4393885 A	19-07-1983
		YU 191082 A	30-04-1985
		ZA 8204620 B	27-04-1983
		ZW 15282 A1	13-10-1982

EP 3332868	A1 13-06-2018	EP 3332868 A1	13-06-2018
		JP 2018534140 A	22-11-2018
		KR 20180044311 A	02-05-2018
		US 2018228209 A1	16-08-2018
		WO 2017024933 A1	16-02-2017

US 2017127719	A1 11-05-2017	AR 101823 A1	18-01-2017
		AU 2015282467 A1	05-01-2017
		CL 2016003377 A1	21-07-2017
		EP 3160269 A1	03-05-2017
		JP 2017524354 A	31-08-2017
		KR 20170024082 A	06-03-2017
		RU 2644106 C1	07-02-2018
		UA 117874 C2	10-10-2018
		US 2017127719 A1	11-05-2017
		WO 2016001648 A1	07-01-2016

US 2015122277	A1 07-05-2015	AR 089338 A1	13-08-2014
		AR 089339 A1	13-08-2014
		AU 2012356454 A1	24-07-2014
		AU 2012356455 A1	24-07-2014
		AU 2015243060 A1	05-11-2015
		AU 2015243064 A1	05-11-2015
		BR 112014015195 A2	13-06-2017
		BR 112014015198 A2	13-06-2017
		CA 2859083 A1	27-06-2013
		CA 2859086 A1	27-06-2013
		CL 2014001608 A1	14-11-2014
		CL 2014001609 A1	14-11-2014
		CN 104114046 A	22-10-2014
		CN 104144619 A	12-11-2014
		EP 2793625 A2	29-10-2014
		EP 2793626 A2	29-10-2014
		EP 3272234 A1	24-01-2018
		EP 3295812 A1	21-03-2018
		EP 3400813 A1	14-11-2018

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 18 18 7733

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-02-2019

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		JP 5855763 B2	09-02-2016
		JP 6116724 B2	19-04-2017
		JP 6199888 B2	20-09-2017
		JP 6212584 B2	11-10-2017
		JP 6218796 B2	25-10-2017
		JP 2015502172 A	22-01-2015
		JP 2015502173 A	22-01-2015
		JP 2016063825 A	28-04-2016
		JP 2016144460 A	12-08-2016
		JP 2016152808 A	25-08-2016
		KR 20140107553 A	04-09-2014
		KR 20140107558 A	04-09-2014
		PH 12014501419 A1	22-09-2014
		PH 12014501421 A1	22-09-2014
		RU 2643426 C1	01-02-2018
		RU 2645647 C1	26-02-2018
		RU 2014129606 A	10-02-2016
		RU 2014129607 A	10-02-2016
		TW 201340893 A	16-10-2013
		TW 201340894 A	16-10-2013
		US 2015122276 A1	07-05-2015
		US 2015122277 A1	07-05-2015
		WO 2013093469 A2	27-06-2013
		WO 2013093470 A2	27-06-2013
		ZA 201405105 B	27-09-2017

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- GB T190692004 A [0072]