



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
12.02.2020 Bulletin 2020/07

(51) Int Cl.:
A61J 3/00 (2006.01)

(21) Application number: **19197867.5**

(22) Date of filing: **02.06.2016**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

- **MUMPOWER, Mariano**
Bethlehem, PA Pennsylvania 18018-3524 (US)
- **LANE, Benjamin, R.**
Bethlehem, PA Pennsylvania 18018-3524 (US)

(30) Priority: **04.06.2015 US 201514731042**

(74) Representative: **Winter, Brandl, Fürniss, Hübner, Röss, Kaiser, Polte - Partnerschaft mbB**
Patent- und Rechtsanwaltskanzlei
Alois-Steinecker-Strasse 22
85354 Freising (DE)

(71) Applicant: **B. BRAUN MEDICAL INC.**
Bethlehem
Pennsylvania 18018-3524 (US)

Remarks:

This application was filed on 17.09.2019 as a divisional application to the application mentioned under INID code 62.


(72) Inventors:
• **JANDERS, Mike**
Bethlehem, PA Pennsylvania 18018-3524 (US)

(54) **COMPOUNDING DEVICE, SYSTEM, KIT, SOFTWARE AND METHOD**

(57) An exemplary pharmaceutical compounding system and device for mixing materials from at least two distinct material sources can include a transfer set and junction structure that has a junction body, a first inlet port located at a first portion of the junction body, a second inlet port located at a second portion of the junction body, and an outlet port located at a third portion of the junction

body. The junction structure can be configured to mix fluid received from both the first inlet port and second inlet port and to deliver the fluid to the outlet port. The junction structure can also include attachment structure located on the junction body and configured to attach the junction structure to the housing of the compounding device at a location downstream of a pump system.

FIG. 10

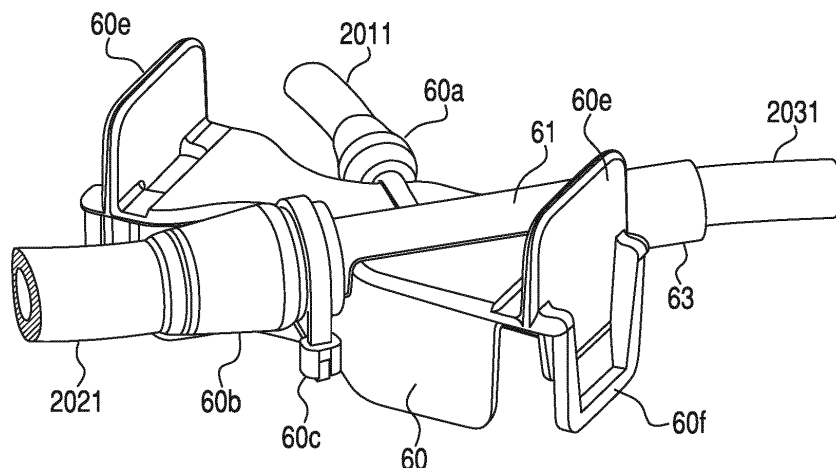

Description

[0001] This application is a Continuation of and claims the priority benefit under Article 76 EPC of European Patent Application 3 302 398 filed on June 2, 2016, which is hereby incorporated in its entirety by reference.

BACKGROUND

1. Field

[0002] The presently disclosed subject matter relates generally to devices, systems, software, kits, and methods for preparing admixtures of various fluids, such as pharmaceuticals, assays, nutritional fluids, chemicals, and other fluids, for administration to human, animal, plant, mechanical/electrical/chemical/nuclear systems, or other users. In one exemplary embodiment, the disclosed subject matter can relate to devices, systems, software, kits and methods in which a plurality of parenteral ingredients are mixed or compounded together for delivery to a patient or user via an infusion or intravenous bag (e.g., for intravenous, intra-arterial, subcutaneous, epidural, or other transmission).

2. Description of the Related Art

[0003] Compounding involves the preparation of customized fluid ingredients including medications, nutritional liquids, and/or pharmaceuticals, on a patient-by-patient basis. Compounded medications and solutions can be made on an as needed basis whereby individual components are mixed together to form a unique solution having the strength and dosage needed by the patient. This method allows the compounding pharmacist to work with the patient and/or the prescriber to customize a medication to meet the patient's specific needs. Alternatively, compounding can involve the use of a compounding device to produce compounds in an anticipatory fashion, such as when a future or imminent demand for a particular combination of medicaments or pharmaceuticals or other compound components is known. Further, compounding devices can be used to produce pooled bags, for example, that include certain fluids that are needed for either a number of patients or for the same patient for a number of days or a number of administrations. Thus, the pooled bag(s) can be used by including further specific compounding components, if any, either for a specific patient or for a specific timing for the same patient.

[0004] Compounding devices typically use three types of measuring methods: gravimetric (e.g., additive gravimetric (weight final container) or subtractive gravimetric (weight the source containers as the pump delivers)), volumetric, or a combination of gravimetric and volumetric where each type can be used to check the other type. Compounders can be further broken down into three categories based on the minimum volumes they can deliver and the number of components they can accommodate:

macro, micro, or macro/micro. Compounders typically have a stated minimum measurable volume and accuracy range. When compounding, higher volumes usually have larger absolute deviations, but lower percentage deviations. Operating software has been used to maximize the effectiveness and efficiency of compounding devices.

[0005] Gravimetric devices generally use a peristaltic pump mechanism combined with a weight scale or load cell to measure volume delivered. The volume delivered is calculated by dividing the weight delivered by the specific gravity of the ingredient. Gravimetric devices are not typically affected by running the source containers empty and delivering air into the final bag. These devices can be calibrated by using a reference weight for each ingredient. For example, the device's load cell can be calibrated using a reference mass on the load cell, and individual amounts of fluid dispensed measured by the load cell can be corrected based on the specific gravity of the fluid being dispensed.

[0006] Volumetric devices generally use both a peristaltic pump mechanism and a "stepper" motor to turn the pump mechanism in precisely measurable increments. The device calculates the volume delivered by the precision of the delivery mechanism, internal diameter of the pump tubing, viscosity of the solution, and the diameter and length of the distal and proximal tubing. Delivery from these devices can be affected by many factors including: variances in the pump tubing's material, length, elasticity, and diameter; temperature, which affects solution viscosity and tubing size; total volume pumped; ingredient head height; final bag height; position (e.g., initial and final positions) of the pump rollers relative to the pump platens; and empty source components. Thickness of the pump tubing can significantly affect delivery accuracy, and wear on the pumps over time can also cause diminishing accuracy.

[0007] Monitoring and replacing source containers before they are empty can prevent the volumetric devices from delivering air in lieu of the ingredient to the final container.

[0008] In some cases, due to injury, disease, or trauma, a patient may need to receive all or some of his or her nutritional requirements intravenously. In this situation, the patient will typically receive a basic solution containing a mixture of amino acids, dextrose, and fat emulsions, which can provide a major portion of the patient's nutritional needs. These mixtures are commonly referred to as parenteral mixtures ("PN"). Parenteral mixtures that do not include lipids are commonly referred to as total parenteral nutritional mixtures ("TPN"), while parenteral mixtures containing lipids are referred to as total nutritional admixtures ("TNA"). Often, to maintain a patient for an extended period of time on a PN, smaller volumes of additional additives, such as vitamins, minerals, electrolytes, etc., are also prescribed for inclusion in the mix.

[0009] Compounding devices facilitate the preparation of PN mixtures in accordance with the instructions pro-

vided by a medical professional, such as a doctor, nurse, pharmacist, veterinarian, nutritionist, engineer, or other. Compounding devices typically provide an interface that allows the medical professional to input, view, and verify the dosage and composition of the PN to be prepared and afterward confirm what had been compounded. The compounding device also typically includes source containers (*i.e.*, bottles, bags, syringes, vials, etc.) that contain various solutions that can be part of the prescribed PN. The source containers can be hung from a framework that is part of the compounding device or can be mounted to a hood bar that is either part of or separate from the compounding device. A single pump or a plurality of pumps may be provided which, under the control of a controller, pump the selected solutions into a final container, for example, a receiving bag. The receiving bag is typically set on a load cell while being filled so that it can be weighed to ensure that the correct amount of solution is prepared. Once the bag has been filled, it can be released from the compounding device and, in this exemplary embodiment, can be used as a reservoir for intravenous infusion to a patient. Compounding devices are typically designed for operation in aseptic conditions when compounding pharmaceutical or nutraceutical ingredients.

[0010] When pharmaceuticals are used, a pharmacist can review instructions that are sent to the compounding device to ensure an improper mixture does not occur. The pharmacist can also ensure the specific sequencing of fluids/liquids is appropriate.

[0011] In the medical field, compounding devices can be used to compound fluids and/or drugs in support of chemotherapy, cardioplegia, therapies involving the administration of antibiotics and/or blood products therapies, and in biotechnology processing, including diagnostic solution preparation and solution preparation for cellular and molecular process development. Furthermore, compounding devices can be used to compound fluids outside the medical field.

[0012] Recently, there have been efforts to provide a compounding device that can operate more efficiently, with less downtime during source container replacement, and with increased usability features promoting more intuitive use of the system, as well as bubble and/or occlusion sensor mechanisms that cause fewer nuisance alarms.

SUMMARY

[0013] Accordingly, it may be beneficial to provide a compounding device, system, method, kit or software that operates more efficiently, improves set up time, and reduces downtime when an ingredient runs out and needs replacement, and which provides an aesthetically pleasing and intuitively operational structure, method of set up and use, and an associated usable, efficient and aesthetically pleasing computer interface. Certain embodiments of the disclosed subject matter also increase

accuracy at small dispensed volumes, provide a form factor that promotes easier cleaning/disinfecting to maintain aseptic conditions, and also prevent errors, especially in transfer set/fluid path connections.

[0014] According to one aspect of the disclosure, a transfer set kit for use with a pharmaceutical compounding device, comprises a first fluid source connected to a first valve; a second fluid source connected to a second valve; a third fluid source connected to a third valve; a first output line in fluid communication with an output of the first valve and extending to a micro pump mechanism; a second output line in fluid communication with an output of the second valve and an output of the third valve and extending to a macro pump mechanism; a junction structure located downstream of both the micro pump mechanism and the macro pump mechanism and configured to join the first output line with the second output line such that fluid from the first fluid source is combined with fluid from the second fluid source and fluid from the third fluid source after passing by the micro pump mechanism and the macro pump mechanism; and a manifold including, a micro channel configured to be connected to the first output line, and a macro channel configured to be connected to the second output line, wherein a cross-sectional area taken normal to a longitudinal axis of the micro channel is smaller than a cross-sectional area taken normal to a longitudinal axis of the macro channel, and the manifold is located upstream of the micro pump mechanism and macro pump mechanism such that fluid passes through the manifold and then passes by the micro pump mechanism and macro pump mechanism. Thereby, the first valve is located adjacent and in fluid communication with the micro channel of the manifold, and the second valve and third valve are located adjacent and in fluid communication with the macro channel of the manifold. Further, an inner diameter of the micro channel is equal to an inner diameter of the macro channel.

[0015] According to another aspect of the disclosure, a transfer set kit for use with a pharmaceutical compounding device, comprises a plurality of micro input lines each having a cross sectional area taken normal to a longitudinal axis of each respective one of the plurality of micro input lines; a plurality of macro input lines each having a cross sectional area taken normal to a longitudinal axis of each respective one of the plurality of macro input lines, each of the macro input lines separate and distinct from each of the micro input lines such that fluid within each of the micro input lines is isolated from fluid within each of the macro input lines; a manifold including a micro channel and a macro channel separate from and in fluid isolation from the micro channel, the manifold including a plurality of micro ports each configured to be connected to a respective one of the plurality of micro input lines, and a plurality of macro ports each configured to be connected to a respective one of the plurality of macro input lines, wherein the cross sectional area of each of the micro input lines is less than the cross sectional area of each of the macro input lines; an output micro line con-

figured to be connected to a micro output port of the micro channel; an output macro line configured to be connected to a macro output port of the macro channel; and a junction structure configured to join the output micro line with the output macro line, the junction structure including a mixing chamber wherein the output micro line and the output macro line are in fluid communication with the mixing chamber such that any fluid located within the output micro line and output macro line mix in the mixing chamber of the junction structure.

[0016] The present invention relates to any one of the following aspects:

1. A junction structure for use in a pharmaceutical compounding device, the compounding device having a housing that supports a pump system and a valving mechanism, the junction structure comprising: a junction body; a first inlet port located at a first portion of the junction body; a second inlet port located at a second portion of the junction body; an outlet port located at a third portion of the junction body; a mixing chamber located between the outlet port and both the first inlet port and second inlet port, the mixing chamber configured to mix fluid received from both the first inlet port and second inlet port and to deliver the fluid to the outlet port; and an attachment structure located on the junction body and configured to attach the junction structure to the housing of the compounding device.

2. The junction structure of aspect 1, wherein the first inlet port defines a first flowpath for fluid and the second inlet port defines a second flowpath for fluid, the first flowpath defined by the first inlet port has a micro cross-sectional area taken normal to the first flowpath, the second flowpath defined by the second inlet port has a macro cross-sectional area taken normal to the second flowpath, and the micro cross-sectional area is less than the macro cross-sectional area.

3. The junction structure of aspect 2, wherein an outlet flowpath defined by the outlet port has an outlet cross-sectional area taken normal to the outlet flowpath that is equal to or greater than the macro cross-sectional area.

4. The junction structure of aspect 1, wherein the attachment structure includes at least one clip extending from a lower surface of the junction body and configured to mate with a corresponding locking structure on the housing of the compounding device.

5. The junction structure of aspect 4, wherein the at least one clip includes a first clip and a second clip, and the attachment structure includes a first handle extending away from a top surface of the junction body and away from the first clip, and a second handle extending away from the top surface of the junction body and away from the second clip.

6. The junction structure of aspect 5, wherein the first handle is configured to cause the first clip to

move relative to the lower surface of the junction body when an amount of force is applied to the first handle by a user, and the second handle is configured to cause the second clip to move relative to the lower surface of the junction body when an amount of force is applied to the second handle by the user.

6. The junction structure of aspect 1, wherein the junction body is configured as a junction plate, and the first inlet port, the second inlet port, the outlet port, and the mixing chamber are configured as a junction line, and the junction plate includes a recess configured to receive the junction line.

7. The junction structure of aspect 6, wherein the junction plate is a single piece integral structure, and the junction line is a single piece integral structure configured for attachment to the junction plate.

8. The junction structure of aspect 6, wherein the junction plate includes a locking structure configured to secure the junction line in the recess of the junction plate.

9. The junction structure of aspect 1, further comprising a standoff structure extending from a lower surface of the junction body and configured to space the junction body from a surface of the compounding device to which the junction body is to be attached.

10. The junction structure of aspect 1, further comprising a manifold configured for attachment to the valving mechanism of the compounding device, a macro line extending from the manifold to the pump system and to the junction body, a micro line extending from the manifold to the pump system and to the junction body, wherein the junction body, first inlet port, second inlet port and mixing chamber are located downstream of the pump system and configured such that fluid from the micro line and macro line are caused to mix at the mixing chamber after passing the pump system.

11. The junction structure of aspect 10, wherein the macro line and micro line are in fluid isolation from each other upstream of the junction body.

12. The junction structure of aspect 11, wherein the manifold includes a micro channel and a macro channel, and a cross-sectional area taken normal to a longitudinal axis of the micro channel is less than a cross-sectional area taken normal to a longitudinal axis of the macro channel.

13. A pharmaceutical compounding device, comprising: a first fluid source connected to a first valve; a second fluid source connected to a second valve; a third fluid source connected to a third valve; a first line in fluid communication with an output of the first valve and extending to a micro pump mechanism; a second line in fluid communication with an output of the second valve and an output of the third valve and extending to a macro pump mechanism; a junction structure located downstream of both the micro pump mechanism and the macro pump mechanism and configured to join the first line with the second

line such that fluid from the first fluid source is combined with fluid from the second fluid source and fluid from the third fluid source after passing by the micro pump mechanism and the macro pump mechanism.

14. The pharmaceutical compounding device of aspect 13, wherein the first line has a cross sectional area taken normal to a longitudinal axis of the first line that is less than a cross sectional area of the second line taken normal to a longitudinal axis of the second line.

15. The pharmaceutical compounding device of aspect 13, wherein the first line and second line are isolated from each other such that they are completely fluidly separated from each other until the junction structure.

16. The pharmaceutical compounding device of aspect 13, further comprising: a manifold including, a micro channel configured to be connected to the first line, and a macro channel configured to be connected to the second line, wherein a cross-sectional area taken normal to a longitudinal axis of the micro channel is smaller than a cross-sectional area taken normal to a longitudinal axis of the macro channel, and the manifold is located upstream of the micro pump mechanism and macro pump mechanism such that fluid passes through the manifold and then passes by the micro pump mechanism and macro pump mechanism.

17. The pharmaceutical compounding device of aspect 16, wherein the first valve is located adjacent and in fluid communication with the micro channel of the manifold, and the second valve and third valve are located adjacent and in fluid communication with the macro channel of the manifold.

18. The pharmaceutical compounding device of aspect 17, wherein an inner diameter of the micro channel is equal to an inner diameter of the macro channel.

19. The pharmaceutical compounding device of aspect 13, further comprising: a housing that supports the macro pump mechanism and the micro pump mechanism, wherein the junction structure includes two inlet ports each configured for attachment to a respective one of the first line and second line, and an attachment structure configured to attach the junction structure to the housing.

20. The pharmaceutical compounding device of aspect 13, wherein the junction structure includes a mixing chamber and an outlet port.

21. The pharmaceutical compounding device of aspect 13, further comprising: a housing that supports the macro pump mechanism and the micro pump mechanism, wherein the junction structure includes a standoff structure extending from a lower surface of the junction structure and configured to space the junction structure from a surface of the housing to which the junction structure is to be attached.

22. A transfer set kit for use with a pharmaceutical

compounding device, comprising: a plurality of micro input lines each having a cross sectional area taken normal to a longitudinal axis of each respective one of the plurality of micro input lines; a plurality of macro input lines each having a cross sectional area taken normal to a longitudinal axis of each respective one of the plurality of macro input lines, each of the macro input lines separate and distinct from each of the micro input lines such that fluid within each of the macro input lines is isolated from fluid within each of the micro input lines; a manifold including a micro channel and a macro channel separate from and in fluid isolation from the micro channel, the manifold including a plurality of micro ports each configured to be connected to a respective one of the plurality of micro input lines, and a plurality of macro ports each configured to be connected to a respective one of the plurality of macro input lines, wherein the cross sectional area of each of the micro input lines is less than the cross sectional area of each of the macro input lines; an output micro input line configured to be connected to a micro output port of the micro channel; an output macro input line configured to be connected to a macro output port of the macro channel; and a junction structure configured to join the output micro input line with the output macro input line.

23. The transfer set kit of aspect 22, further comprising: at least one junction structure clip configured to connect the junction structure to a housing of the compounding device.

24. The transfer set kit of aspect 22, wherein the junction structure includes an attachment structure for fluid connection to a final container.

25. The transfer set kit of aspect 22, wherein the junction structure includes a mixing chamber and an outlet port.

26. The transfer set kit of aspect 22, wherein the junction structure includes a standoff structure extending from a lower surface of the junction structure and configured to space the junction structure from a surface of the compounding device to which the junction structure is to be attached.

27. The transfer set kit of aspect 26, further comprising a junction output line extending from an output port of the junction structure, wherein the standoff structure is configured such that each of the output micro input line, the output macro input line are substantially contained in a common plane, and the junction output line extends away from the junction structure in the common plane.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] The disclosed subject matter of the present application will now be described in more detail with reference to exemplary embodiments of the apparatus and method, given by way of example, and with reference to

the accompanying drawings, in which:

Fig. 1 is a perspective view of an exemplary embodiment of a compounding system made in accordance with principles of the disclosed subject matter.

Fig. 2A is a perspective view of the exemplary transfer set of Fig. 1.

Fig. 2B is a partial perspective view of the exemplary embodiment of Fig. 1.

Figs. 3A-G are partial perspective views of the exemplary embodiment of Fig. 1 in sequential positions in which an exemplary transfer set including manifold and output lines are aligned and connected to exemplary valve actuators, sensor block and pumps.

Fig. 3H is a side view of the platen lock shown in Figs 3A-3F.

Fig. 4A is a top view of an exemplary manifold, strain relief, union junction, and output line made in accordance with principles of the disclosed subject matter. Fig. 4B is a perspective exploded view of the structures shown in Fig. 4A.

Fig. 5 is a partial perspective view of the strain relief shown in Fig. 4A.

Figs. 6A-C are cross section views taken along lines 6A, 6B, and 6C of Fig. 4A, respectively.

Figs. 7A-C are a bottom, perspective exploded, and perspective assembled view, respectively, of the manifold of Fig. 1.

Fig. 8A is a cross-section taken along line 8A-8A of Fig. 8B.

Fig. 8B is a side view of the valve shown in Fig. 7B.

Fig. 9 is a cross-sectional view of two exemplary micro valves and two macro valves in open and closed positions and located in a valve housing in the manifold of Fig. 1.

Fig. 10 is a top perspective view of an exemplary union junction.

Fig. 11 is a bottom perspective view of the exemplary union junction of Fig. 10.

Fig. 12 is a top view of the exemplary union junction of Fig. 10.

Fig. 13 is a partial perspective view of a compounding system made in accordance with principles of the presently disclosed subject matter.

Fig. 14A and 14B are partial perspective views of the bag tray and receiving bag.

Fig. 15 is a right rear corner perspective view of a front/top panel and sensor array for the compounding system of Fig. 1.

Figs. 16-34 are screen shots of an exemplary controller interface for use with a compounding device or system made in accordance with principles of the disclosed subject matter.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

[0018] Figs. 1 and 2B are two different perspective

views of an exemplary embodiment of a compounding system 1 made in accordance with principles of the disclosed subject matter, with safety lids which are also hereinafter referred to as a sensor bridge cover 10f and a pump cover 10g in a closed position and opened position, respectively. The system 1 can be used to compound or combine various fluids from small or large containers 4a, 4b and consolidate the fluids into a single/final container, such as an intravenous fluid bag 80, for delivery to a human or animal patient, or to a lab for diagnostics, or to a storage facility for later sales or use. In one example, the system 1 can include a plurality of small supply containers 4a and large supply containers 4b each attached to an ingredient frame 3, a housing 10 having at least one pump (41, 42) (See Fig. 3A), a transfer set 2 (See Fig. 2A) that is selectively connectable to the housing 10 and that includes a manifold 20 attached to a plurality of micro input lines 2011, macro lines 2021, a controller connection 90, a controller 2900, and a discharge tray 70 in which a final container, such as IV fluid bag 80, can rest while connected to an output line(s) of the transfer set 2. The transfer set 2 is intended to be a sterile, disposable item. In particular, the transfer set 2 can be configured to create or compound many different mixtures or prescriptions into appropriate receiving bags 80 for a predetermined time or predetermined volume limit. Once the transfer set 2 reaches its predetermined time and/or volume limit, the set 2 can be disposed of and replaced by a new transfer set 2. In other words, the transfer set 2 is a pharmacy tool that is to be used for a full compounding campaign, for example, for a 24hour compounding run in which prescriptions for multiple patients are filled during that time period. Before beginning a given compounding procedure, the operator loads the various components of the transfer set 2 to the housing 10 of the compounding device 1.

[0019] As shown in Fig. 1, the transfer set 2 (See Fig. 2A) can be connected (or connectable) between the at least one input container (such as micro container(s) 4a and/or macro container(s) 4b) and the output container (such as an IV fluid bag 80) via a plurality of lines (for example, micro input line(s) 2011 and/or macro line(s) 2021). The transfer set 2 can include a plurality of micro and macro lines 2011, 2021 extending therethrough, a manifold 20, a strain relief clip 33, a union junction 60 and an output line 2031. The micro and macro lines 2011, 2021 run through at least one manifold 20 such that fluids from each of the separate supply containers 4a, 4b can be at least partially mixed in the manifold 20 prior to further mixing at junction 60 located downstream of pump 40. The transfer set 2 is connectable to the main housing 10 of the system 1 and provides the connection between the input supply container(s) 4a, 4b and the output container. The housing 10 provides (among other features) pumping and control functionality to safely and efficiently select and deliver exact quantities of various fluids from containers 4a, 4b through the transfer set 2 to the output container. The manifold 20 can include two separate flow

paths such that compounding can continue along a first flow path while the second flow path is interrupted.

[0020] The transfer set 2 macro lines 2021 and micro lines 2011 are all attached to specific inlet tubing ports (*i.e.*, 20a and 20b) of the manifold 20. The free or upstream ends of these lines are each uniquely marked with a permanent identification tag 802. In this exemplary embodiment, the identification tag 802 is a bar coded flag or sticker. The identification tag 802 provides one-to-one traceability and corresponds to a specific instance of the inlet tubing port (20a or 20b) to which it is attached. The source containers 4a and 4b possess unique data identifying the type and kind of fluids contained therein. This data can also be formatted in bar code format and placed onto tag 801. During use, the attached source containers (*i.e.*, 4a and 4b) can be linked in the controlling software to the specific lines 2011 or 2021 by linking the source container data on the bar code format located on tag 801 to the bar code (or other identification information) located on the attached line identification tag 802. Once connected, correlated and linked in this way, when the compounding device requires the specific ingredient, the software links established above determines which valve actuator 102a' or 102b' must be turned in order to introduce the required or intended source fluid into the compounded receiving bag 80.

[0021] Connection of the transfer set 2 to the main housing 10 can be initiated by connecting the manifold 20 to the housing 10. The manifold 20 can include a plurality of ports, such as micro input line port(s) 20a and/or macro input line port(s) 20b. The lines of the transfer set 2 can include a plurality of lines, such as micro lines 2011 and/or macro lines 2021 and/or combination micro/macro line(s) referred to as flex line(s). The plurality of lines can correspondingly connect to the above-referenced micro container(s) 4a and/or macro container(s) 4b at an input end of respective micro and macro line(s) 2011, 2021. An output end of each of the micro and macro line(s) 2011, 2021 can be connected to the manifold 20. The manifold 20 can be selectively connected to the housing 10 such that at least one valve 21a, 21b located in the manifold 20 can be aligned with a valve actuator 102a' and 102b' that can be incorporated in a stepper motor 102a, 102b located in the housing 10 (which will be described in more detail below).

[0022] In this exemplary embodiment, as shown in Figs. 3A and 3B, when installing the transfer set 2 onto housing 10, the manifold 20 is connected to a top left side of housing 10 within a shallow tray indent 10c in the upper surface of the housing 10. The shallow tray 10c allows spilled fluids or leaks to run off the pump housing 10 in order to prevent ingress of the fluids to the internal electronics and mechanisms of the compounding system 1. In Figure 3A, transfer set 2 and manifold 20 are not yet in position and are located above the housing 10 as if a user is starting the process of placing the transfer set 2 onto the housing 10 and preparing for use of the compounding system 1. The transfer set 2 includes a manifold

20 that has two distinct channels: a first channel 24a that connects to a plurality of micro lines 2011 and/or macro lines 2021, and a second channel 24b that connects to a plurality of macro lines 2021. Of course, in other embodiments the first and second channels could each be connected solely to micro, macro, flex, or other types of lines, respectively, or could be connected to combinations of micro, macro, or other types of lines. The first channel 24a and the second channel 24b are located in the manifold 20 and can be completely separate from each other (*i.e.*, in fluid isolation from each other), such that no fluid from the first channel 24a mixes with fluid from the second channel 24b. The channel is considered that portion or area in the manifold through which fluid can flow. In this embodiment, a micro outlet 25a and a macro outlet 25b can be located on a downstream side of manifold 20 and connected to micro line 2011 and macro line 2021, respectively. It should be noted that the lines downstream of the manifold (*e.g.*, outlet lines, or micro line 2011 and macro line 2021) can incorporate different tubing as compared to the inlet lines 2011, 2021 that supply fluid to the manifold 20. For example, the inlet lines can include tubing made of more or less rigid material as compared to the outlet lines, and can also include tubing made with larger or smaller diameter openings, or made of larger or smaller side wall thicknesses. In addition, the color of the inlet lines can be different from the color of the outlet lines, and the lines can also have different surface textures either inside or outside of the tubing. For example, the texture on the inside could be configured to promote or prevent turbulence, depending on the application and location of the line.

[0023] A sensor structure 29 can be located in the manifold (See Figs. 7A and 7B) and is configured to trip a sensor 2901 (See Fig. 15) located in the housing 10 that tells the system that the manifold 20 is in a correct/operational position. Alternatively, the sensor 2901 can be configured to confirm the presence and gross positional information for the manifold 20, but not necessarily configured to confirm that the position is fully operational. The sensor structure 29 can include a magnet 29m that goes into a housing 29h and provides a signal to (or actuates) the sensor 2901 in the housing 10 which indicates that manifold 20 and transfer set 2 are properly (*i.e.*, securely) in place (See Fig. 7A). Software used with the system can be configured such that the compounder 1 will not operate/function when sensor 2901 does not sense or is not actuated by the magnet 29m (*i.e.*, when the manifold 20 is not in proper position with respect to the housing 10). After the manifold 20 is secured to the housing by clips 27a, 27b located on opposing ends of the manifold 20 (See Fig. 2B), a strain relief clip 33 can be seated onto the housing. The strain relief clip can be pre-assembled and attached to both the micro line 2011 and macro line 2021. When installed, the strain relief can be placed to the right and immediately adjacent a sensor bridge 10e that forms a right wall of the shallow manifold tray indent 10c in which the manifold 20 is seated. The

strain relief clip 33 can be pre-assembled to the transfer set 2 to ensure ease of use by the end user.

[0024] As shown in Fig. 3C, once the manifold 20 is attached to the housing 10 and the strain relief clip 33 is in place, the sensor bridge cover 10f can be closed over the sensor bridge 10e in order to protect the sensors and strain relief clip 33 from inadvertent contact and/or contamination from dust, liquids or other contaminants. The sensor bridge 10e can include a sensor or sensors (for example, an ultrasonic sensor, photo sensor, or other sensor) acting as a bubble detector and/or occlusion detector.

[0025] Fig. 3D shows an exemplary next step of installing the transfer set 2, which includes connecting the union junction 60 to the housing by snapping clip locks 60f (see Figs. 10 and 11) located on the junction 60 to mating locks formed on an upper surface of the housing 10 and to the right of the pump 40. The output line 2031 can be set within an output guide 18 (See Fig. 3A) formed in an outer wall that defines a second shallow pump tray indent 10d in the upper surface of the housing in which the pump 40 is located.

[0026] As shown in Fig. 3E, once the junction 60 and output line 2031 are in place, the micro line 2011 and macro line 2021 can be seated within the peristaltic pump 40. Alternatively, the union junction 60 can also be snapped into place after installing the pump tubing around each rotor 41, 42. In particular, micro line 2011 can be placed about the outer periphery of first rotor 41 and macro line 2021 can be placed about the outer periphery of second rotor 42. In this position, the micro line 2011 will be located between the first/micro rotor 41 and the first/micro platen 43a, and the macro line 2021 will be located between the second/macro rotor 42 and the second/macro platen 43b.

[0027] Fig. 3F shows an exemplary next step for connecting the transfer set 2 to the housing 10, which includes rotating the first/micro platen lock 44a clockwise to lock the platen 43a at its closed position relative to the first rotor 41, and rotating the second/macro platen lock 44b counter-clockwise to lock the second platen 43b at its closed position relative to the second rotor 42. In this position, when the rotors 41 and 42 are actuated and when any one of the valves 21a, 21b are rotated to the open position, each of the rotors will draw fluid(s) through respective lines 2011, 2021 through peristaltic forces/actions. If one of the valves 21a or 21b is not opened and the pump rotor operates, the peristaltic forces will create a vacuum between the manifold channels 24a, 24b inside the micro lines 2011 or macro lines 2021 between the manifold 20 and the pump rotors 41, 42 possibly resulting in an occlusion of the affected line. The occlusion will be detected as the wall of the micro lines 2011 and macro lines 2021 will partially collapse and this will be measured by the occlusion sensor within the sensor bridge 10e. The occlusion sensor 33o can be an optical sensor, a force based sensor, pressure sensor, an ultrasonic sensor or other known sensor for determining whether an

occlusion has occurred in the line. In another embodiment, an occlusion sensor 33o and a bubble sensor 33b can be incorporated into the sensor bridge 10e. Alternatively, a combined sensor 33o/b or sensors 33o, 33b can be incorporated into the strain relief 33, or at other locations along the system 1, and can be integrated into the strain relief 33 or bridge 10e or can be separate and independent structures that are attached to the system 1.

[0028] Fig. 3G shows an exemplary final step in the setup of the system 1, in which the pump cover 10g is closed over the pump 40 to protect the pump 40 from contact with other devices/structures/persons and to protect the pump 40 and associated lines 2011, 2021 from contamination from dust, liquids, or other contaminants. Each of the sensor cover 10f and pump cover 10g can include a magnet or other type of sensor or locking mechanism to ensure the covers are in place during operation of the system 1.

[0029] Once the transfer set 2 is correctly connected to the housing 10, input/storage containers 4a, 4b, and receiving bag 80, and the covers 10f and 10g are closed, calibration of the system 1 and then processing and compounding of various fluids can take place.

[0030] Fig. 3H depicts an exemplary embodiment of a platen lock 44a. The platen lock 44a can be configured to rotate about a rotational axis and cause a cam 444 to come into resilient contact with the platen 43a. The cam 444 can include a biasing member, such as, for example, a spring 443, including, but not limited to, a plate spring, coil spring, or other type of spring to cause the cam 444 to keep in constant contact with and apply a preset and constant force to the platen 43a, which in turn keeps a constant or preset force on the micro line 2011 located between the platen and the rotor 41 to ensure accurate and predictable volumetric output by the pump 40 over the life of the transfer set. The spring 443 can be an important factor in the wear of the tubing lines during compounding, which can also impact the output of the pump 40.

[0031] Accuracy can also be a function of pump tubing inner diameter, tubing wall thickness, and the spacing between rollers and platen. Accuracy is also affected by the speed of rotation, but both motors can have the same accuracy.

[0032] The platen lock 44a can have a streamlined appearance, being configured substantially as a simple, L-shaped structure with an overhang upper extension 441 and a rotational lower extension 442. The lower extension having a longitudinal axis about which the platen lock 44a rotates. The platen lock 44a can be made from aluminum or other rigid material such as plastics, ceramics and/or other metals or alloys. The simple structure provides a user a sense of efficiency in the nature of operation of the platen lock structure 44a. The lower extension 442 can be configured with an opening to slide onto and attach to rotational post 449 extending from/within the housing 10. The platen lock 44a can lock onto the post 449 via a simple friction fit, a spline type

relationship between the post 449 and the opening in the lower extension 442, or other structural configuration. In an alternate embodiment, a set screw structure 445 can be provided in the lower extension 442 for quick connection to the rotational post 449 that extends from the housing 10 of the compounding system 1. In the embodiment depicted in Fig. 3H, a set screw 445s can be used to set the preload on the spring 443 that is contained inside the platen lock 44a, 44b. This spring 443 applies force on the platen 43a, 43b and ultimately squeezes the platen 43a, 43b against the respective rotor 41, 42. A magnetic lock structure 449m and 442m can also (or alternative to the screw structure 445) be provided and can have multiple functions, including: locking the platen lock 44a to the housing 10 to prevent removal of the platen lock 44a from the housing 10 until the magnetic locks 449m and 442m are released. The location of platen lock 44a with respect to platen 43a can be achieved by a detent position on the backside of the platen 43a. As the platen lock 44a is rotated against the platen 43a towards the lock position, the cam 444 follows a profile on the back of the platen which includes a raised feature to compress the cam 444, which the user has to rotate past to reach the final lock position. The action of the cam over this feature provides feedback to the user that the lock point has been reached, and mechanically maintains this lock position due to the cam sitting in a cavity feature. Continued rotation past the desired lock point can be prevented by providing hard stop geometry in the platen profile such that the cam cannot get past the hard stop geometry. The location of the cam 444 when the platen lock 44a is in this lock position, is where sensor 2904a is tripped via a magnet 446 embedded in the bottom of cam 444. The coupling of lock arm 44a to the post 449 is achieved via a pair of magnets, the first 449m embedded in the top of post 449, the second 442m at the end of the receiving bore in the lower extension 442 of the lock arm 44a.

[0033] Another benefit of this exemplary embodiment of the system 1 is that the configuration allows the operator to easily remove the platens 43a, 43b and platen lock components 44a, 44b from the pump housing for cleaning without the use of tools. Both platens 43a, 43b can be removed by simply pulling them upward and away from the pump housing surface 10d.

[0034] In addition, both rotors 41, 42 can be removed without tools by simply unscrewing thumb screws that can be provided at a center / rotational axis of the rotors 41, 42. Because the rotors 41, 42 can be interchangeable, their life can be extended by swapping their positions after cleaning, e.g., macro to micro and micro to macro.

[0035] The pump 40 can include rotors 41, 42 that are each mounted upon and separately rotated by a respective stepper motor 41s, 42s (See Fig. 3F). Each of the stepper motors 41s, 42s can have a preset microsteps per revolution value that is relatively high (for example, on the order of 10^3 greater than the microsteps per revolution value for the stepper motors 102a, 102b used to rotate valves 21a, 21b located in manifold 20, as de-

scribed in more detail below). The high value of microsteps per revolution for the stepper motors 41s, 42s allows for greater accuracy or precision in fluid delivery for the system 1. Each of the stepper motors 41s, 42s can be connected to controller 2900 and can be separately, sequentially, serially, concurrently or otherwise controlled to cause each of the rotors 41, 42 to rotate a known and predetermined amount and possibly at a predetermined speed such that a highly accurate amount and timing of material flow through the compounding device can be achieved. In addition, steppers 41s, 42s can be provided with absolute encoders that are in communication with controller 2900 to provide explicit positioning control of the steppers 41s, 42s.

[0036] The rotors 41, 42 can be substantially identical to each other such that they can be interchanged. For example, in one embodiment, the macro rotor 42 can be configured to rotate more than the micro rotor 41 and will thus be subject to higher wear. Thus, at some point during a break in operation of the compounding system 1, the macro rotor 42 can be interchanged with the micro rotor 41 such that the rotor 41 will act as the macro rotor and be subject to the heightened wear for a time period. In this manner, the life of both rotors 41, 42 can be extended.

[0037] The cam 444 and the spring 443 can also be configured to provide a known force to the platen 43a when the platen lock 44a is in a certain rotational position such that the platen lock 44a is effectively locked in place due to both resilient forces and frictional forces that occur when at the certain position relative to the platen 43a. In other words, once the platen lock 44a passes a predetermined rotational position, resilient force acting on the platen lock 44a by the platen 43a tends to cause the platen lock to continue its clockwise rotation. A sensor, such as a magnet 446, can be provided in the platen lock 44a and configured to trip a corresponding sensor 2904a in the housing 10 that tells the system the platen lock 44a is in the correct position. However, if there is a rotational stop located in either the post in the housing or the lower extension 442, the platen lock 44a will be unable to rotate further in the clockwise rotational direction and will simply maintain the above-referenced known resilient force (due to cam 444 and cam spring 443) with the resilient force also acting to prevent release of (counterclockwise rotation of) the platen lock 44a. Unlocking the platen lock 44a from the platen 43a in this case would simply require the operator to overcome the resilient and frictional forces of the cam in the detent position tending to hold the structures in place. It should also be noted that the platen lock 44b and platen 43b can be configured in a similar manner as described above with respect to the platen lock 44a and platen 43a, except that locking would occur in a counterclockwise rotational motion.

[0038] Figs. 4A and 4B show a portion of an exemplary transfer set 2 that includes a manifold 20 connected via micro line 2011 and macro line 2021 to a strain relief clip 33. Micro line 2011 and macro line 2021 extend past the strain relief clip 33 and eventually combine or merge at

the union junction 60, resulting in a single outlet line 2031 for the transfer set 2. The macro lines 2021 can be portions of the same continuous tubing structure. By contrast, in this example, micro lines 2011 are separate structures joined together by shunt 33g. The shunt 33g can be made from a material that is harder than the micro lines 2011. For example, the micro lines 2011 can be made from silicone tubing while the shunt 33g can be made from a relatively more rigid PVC material. The shunt 33g provides extra rigidity such that the strain relief clip 33 can connect securely thereto without causing the inner diameter of the shunt 33g to be squeezed or otherwise reduced. One or more collars 33d can be provided on the shunt 33g to lock to the clip 33 and prevent the shunt 33g from moving along a longitudinal axis of the micro lines 2011. Additional collars are contemplated so that manufacturing can be easier with respect to consistently locating/ assembling of the manifold set structures. By contrast, the macro line 2021 can be sufficiently large enough in diameter and thickness such that its inner diameter is not squeezed or reduced when the clip 33 is attached thereto. Thus, when the strain relief clip 33 is attached to the micro lines 2011 and macro line 2021, the clip 33 does not significantly change the inner diameter characteristics for the lines while preventing forces acting along the longitudinal axes of the lines from being transmitted past the clip 33. Thus, when the micro line 2011 and macro line 2021 are connected about a respective rotor 41, 42 of the peristaltic pump 40, the rotary forces acting on the lines do not translate along the micro and macro input lines back towards the manifold 20 and the bubble and occlusion sensors. The strain relief clip 33 acts as a damper to minimize transmission of linear forces and vibrations from the pump 40 to the manifold 20. Minimizing these forces and vibrations optimizes the functionality of the bubble and occlusion sensors, which would otherwise be impacted by changes in tubing tension as the tubing is pulled by the peristaltic action of the pump. Similarly, the strain relief provides a fixed position on the set 2 relative to the manifold 20 to facilitate installation of the tubing or line segments through the occlusion and bubble sensors 33o, 33b, 33o/b and maintains a repeatable tension on these line segments.

[0039] The strain relief clip 33 can be of various shapes, and in the embodiment shown in Fig. 5 the clip 33 is configured as a two piece clam shell type design in which an upper portion 33a can be attached to a lower portion 33b by clips 33i that are integrally formed at locations about a perimeter of each portion 33a and 33b, and mate with snap latch receptacles 33j in an opposing portion 33a, 33b. Throughways 33c can be formed as half cylindrical cutouts in the upper portion 33a and lower portion 33b. A guide sleeve 33h can be provided at a corner of one of the clam shell portions 33a, 33b to guide the opposing clam shell portion 33a, 33b into engagement when coupling the clam shell portions 33a, 33b. The micro line 2011 and macro line 2021 can pass through these throughways 33c and be locked to the

strain relief clip 33 by a series of ridges 33r that connect to mating ridge 33s in the shunt 33g and/or to the macro line 2021 itself. It is possible that the strain relief parts 33a and 33b are in fact identical so that the above described process and configuration is possible with the use of two instances of the same component.

[0040] Figs. 6A-6C show various cross-sections of the exemplary manifold 20 of Fig. 4A without valve structures located therein for clarity. The cross section shown in Fig. 6A depicts two sets of ports: two macro ports 20b and two flex ports 20bf that are each cylindrical in shape and are in fluid communication with a valve housing 20bh and 20bfh, respectively, located immediately underneath the ports 20b and 20bf. The ports 20b and 20bf are configured such that a macro line 2021 can be slid into the inner periphery of the upward and outward facing cylindrical opening in the ports 20b and 20bf for attachment thereto. Thus, the ports 20b and 20bf can be connected to various macro source containers 4b via the lines 2021 attached to the ports 20b and 20bf. A valve 21b, 21a (to be described in more detail below) can be located within the valve housing 20bh, 20bfh, respectively, located beneath the ports 20b, 20bf. When the valve 21b, 21a is located in the housing 20bh, 20bfh, the valve 21b, 21a selectively connects the fluid located in line 2021 with the fluid located in channel 24b, 24a of the manifold depending on the valve's rotational position within the housing 20bh, 20bfh.

[0041] The manifold described above can, in the exemplary embodiment, be formed (e.g., molded) as one unitary structure 20 including all of the features 20a, 20b, 20bf, 20ah, 20bh, 20bfh, 24a, 24b, 25b, 26, 27a, 27b, and 29. Also, it is possible to join any or all separate structures (components) 20a, 20b, 20bf, 20ah, 20bh, 20bfh, 24a, 24b, 25b, 26, 27a, 27b, and 29 in any combination into a manifold assembly 20 to achieve the same purpose.

[0042] Figs. 7A-C show a bottom view of the manifold 20, an exploded view, and an assembled view, respectively. The manifold 20 includes an array of macro ports 20b located in a linear fashion along either side of second channel 24b. The first channel 24a includes both flex ports 20bf and micro ports 20a located along the length thereof and provides fluid communication therebetween. Thus, the first channel 24a can be connected to both a macro flex line 2021 and a micro line 2011. In this embodiment, the flex line is configured as shown in Fig. 1 as a first macro line 2021 that is joined at a junction 2071 to two outgoing macro lines 2021 to allow fluid from macro container 4b to be supplied to both the first channel 24a and second channel 24b. In other words, a jumper branch connection in a macro line 2021 can be provided such that the macro line 2021 branches in two directions after leaving the macro storage container 4b, and can be connected to both the second channel 24b and the first channel 24a. The flex line conducts the same fluid/solution (e.g., nutritional ingredient) from container 4b to both channels 24a and 24b of the manifold 20 after passing

through the valves 21bf and 21b, respectively. This facilitates the option of a singular or larger source container 4b being used for purposes of flushing/clearing the channels 24a and 24b as opposed to two separate containers 4b, wherein one container is connected to channel 24a and a separate other container is connected to channel 24b. A plurality of flex lines can be used since multiple types of flushing ingredients may be required during a compounding campaign depending on the varying clinical needs of the intended final contents of sequentially filled receiving containers (e.g. final bags 80). It should be noted that in this embodiment flex lines are terminated at flex ports 20bf (See Fig. 6B) farthest along the channels 24a and 24b from the outlets 25a and 25b, thereby allowing the entire channels 24a and 24b to be flushed with the flushing ingredient. In this embodiment, the micro line 2011 is not branched after leaving the micro storage container 4a, and therefore, there are no micro ports 20a that communicate with the second channel 24b. It is contemplated that an embodiment of the disclosed subject matter could include a manifold configured with valves adapted to allow micro lines to be attached to both the first and second channels 24a and 24b. Flex lines are designed to be used for any ingredient, which may be requested across a wide range of volumes among different patient prescriptions. Hence, for some prescriptions where they are requested in small volumes, they can be delivered by the micro pump. Similarly, for prescriptions where they are requested in large volumes, they can be delivered by the macro pump. The y-connection fluid path of the flex line gives the ingredient access to both fluid paths (micro and macro) therefore the system can decide which pump to use to deliver that ingredient appropriately based on the requested volume.

[0043] In Fig. 7B, the valves 21a, 21b and filler 200 are disassembled to better show their relationship with the macro valve housing 20bh, micro valve housing 20ah, and first channel 24a in which each of these structures resides when assembled and ready for use. As can be seen, each of the valves 21a and 21b include a keyway 21a4 and 21b4, respectively, that allows for positive attachment to an actuator member 102a' and 102b' that extends from a manifold indent/surface 10c in the housing 10 of the compounding device.

[0044] The operational valve structures are in fact combinations of the rotating members (valves 21a and 21b) and the inner diameter (ID) of the socket in the manifold (20ah and 20bh) in which the valves 21a, 21b are located. The configuration of the operational valve structures was intended to create a more moldable elastomeric valve in which, under static fluid conditions, gravity based movement of fluids (like the motion caused by fluids of differing densities or different specific gravities settling or rising when the valve is left open) can be prevented or limited.

[0045] The actuator member is controlled by at least one stepper motor 102a, 102b such that rotation of the valves 21a and 21b can be precise. In one embodiment, the stepper motor 102a for the micro valves 21a can be

of higher precision than the stepper motor 102b for the macro valves 21b (See Fig. 9). Higher precision stepper motors can be used to provide the positional accuracy of the micro valves 24a due to the inherent flexibility of the micro valves 24a. For example, a stepper that has a preset value of about 48 microsteps per revolution can be used (which preset value can be on the order of 10^3 less than the microsteps per revolution value for the pump). Accuracy of the valves 21a, 21b (*i.e.*, precise movement of the valves 21a, 21b) can be further controlled through the use of a tall gear box, which would result in large input rotations for the stepper motors 102a, 102b providing for small movement of each of the valves 21a, 21b, respectively. The flexibility of material that makes up each of the valves 21a, 21b can be configured or selected to enhance or provide improved sealing surfaces which withstand pressure differentials without leaking. Given this torsional flexibility and considering the friction opposing rotation of the micro valve 24a, it follows that during rotation, the upper features of the valve, *i.e.*, those opposite the drive slots 24a4, angularly lag behind the lower features of the valve. Thus, in order to properly place the fluid opening between the valve 24a and the channel 21a, the higher precision stepper motors first rotate the valve 24a so that the top of the valve is properly positioned, and then reverse direction to bring the lower features also into proper position and therefore straightening the valve. The same action returns the valve to the closed position. The rotation of the steppers 102a and therefore the actuators 102a' and the valve 24a, can be clockwise, counter-clockwise, or any combination of these directions. Because, the micro valves 21a typically control the smaller volume ingredients, the volume should be measured and distributed with relatively higher accuracy as compared to that of the macro valves 21b which typically distribute large volume ingredients in which high accuracy is easier to achieve. However, it should be understood that accuracy of delivery is not necessarily a direct function of valve operation. As long as the valves are properly opened and closed, the pumps 41, 42 can be used to provide accuracy of amount and control of fluid delivery.

[0046] In operation, the micro valves 21a and macro valves 21b can be described as being overdriven by the stepper motors past the 'open' position since the valves are flexible and the top of the valve lags behind the bottom of the valve when rotated. Thus, to properly open the valve, the bottom of the valve is overdriven from the target angular position. Once the top has achieved a proper location, the stepper reverses and brings the bottom of the valve into proper position. This operation effectively twists and then straightens the valve, and occurs in both the opening and closing process for the valves 21a, 21b.

[0047] Fig. 7C and 9 show the valves 21a, 21b and filler 200 in place in the manifold 20. The filler 200 takes up volume within the first channel 24a such that the cross sectional area of the first channel 24a taken normal to a longitudinal axis of the channel 24a is smaller than the

cross sectional area of the second channel 24b taken normal to a longitudinal axis of the channel 24b. Thus, the inner periphery of the first channel 24a and second channel 24b can be similarly shaped, allowing for certain architectural benefits in placement of the valves 21a, 21b and in fluid flow geometry of the channels 24a, 24b. The filler 200 can include a filler rod 201 that includes a plurality of spacers 202 located along the rod 201 so as to keep the rod 201 centered within the channel 24a. A clip lock 203 can be provided at a proximal location of the rod 201 and configured to lock with a mating clip lock indent in the manifold 20. In particular, a flexible tab 203a can be located on the lock 203 and configured to mate and lock with opening 203b in manifold 20 (See Fig. 7C). A sealing member 204, such as an O-ring 204, as shown in Fig. 7B, can seal the filler 200 in the socket 26 to prevent fluid such as air or liquids from leaking into or out of the channel 24a via the socket 26 when the filler 200 is located therein. The sealing member 204 can be located in an indent or receiving groove 204a on the rod 201 to lock the sealing member 204 in place with respect to the filler 200. One function of the filler 200 is to reduce common volume in channel 24a, which reduces priming volume and flushing volume. Because the micro pump only achieves limited flowrates, the large cross section of channel 24a without the filler would be difficult to be flushed of residuals.

[0048] Placement of the filler 200 in the channel 24a has the added benefit of increasing (or otherwise controlling and directing) turbulence within the channel 24a, and thus increases maximum fluid velocity within the channel 24a, permitting faster and more thorough flushing of residual fluids in the channel 24a to output 25a. The filler 200 can be conveniently loaded into the manifold via socket 26 during the time the manifold assembly 20 is being manufactured. The filler 200 geometry, particularly at the downstream end, is designed to promote flushing and to avoid areas where residual fluid can hide out and not flush properly.

[0049] Each of the micro and macro valves 21a and 21b can be configured as a rotational type valve that, when rotated a set amount, permits a corresponding or known amount of fluid to bypass the valve. In one embodiment, the valves 21a, 21b can be configured such that rotation of each of the valves does not move fluid, and only opens/closes a fluid path. The amount of fluid that bypasses the valve can, however, be ultimately determined by the pump speed, size and in conjunction with the tubing size when using a peristaltic pump. The valves can be configured to simply open or close the fluid lines. Fig. 8A shows a macro valve 21b that includes an inlet 21b1 at a top of the structure and an outlet 21b3 at a side wall of the structure. Thus, fluid enters the top of the valve 21b along a rotational axis of the valve 21b, and exits a side of the valve 21b in a direction substantially normal to the rotational axis of the valve 21b. Rotation of the valve 21b is accomplished by connection to a stepper motor 102b via actuator connection slot 21b4 located in

a bottom surface of the valve 21b. The slot 21b4 acts as a keyway for a corresponding projection 102b' extending from the top of the stepper motor 102b. When the stepper motor 102b turns the projection 102b' a preset amount, the valve 21b is also caused to turn the same amount due to the connection between the projection 102b' and the keyway or slot 21b4. When the valve 21b is located in an open position or a semi open position, fluid can travel from the inlet 21b1 down through a center of the valve 21b until it passes wall 21b2, which can be configured as a gravity wall, or P-Trap, or similar structure. After passing the wall 21b2, the fluid then changes directions by approximately 180 degrees and moves up and over the outlet wall in the manifold 20 to be distributed into the second channel 24b. The wall 21b2 and geometry and configuration of surrounding manifold walls prevents fluid from inadvertent and uncontrolled mixing between lines 2011/2021 and the common volume of channel 24a on the micro side and between lines 2011 and the common volume of channel 24b on the macro side when 1) the valve is open, 2) the fluid is static (*i.e.*, pump rotors 41 and 42 are not moving), and 3) there exists a differential in specific gravity between the respective fluids in the input lines and in the channels. The motivator for this backflow is specific gravity differences between the ingredient fluid and the fluid in the channel. This wall 21b2 is a technical feature of the valve that mechanically prevents this backflow from occurring without additional control mitigations, and requires no additional software/valve controls to limit the effect of this backflow tendency because the wall structure physically stops or prevents backflow from happening. Thus, the walls 21b2 and surrounding geometry of the valve housing 21bh prevents contamination of the ingredients in the supply lines and storage containers 4b and prevents uncontrollable flow/mixing into the channels 24a and 24b of the manifold 20 due to, for example, differences in specific gravity of the solutions or fluids running through the valves. The output of the micro and macro valves 21a, 21b (with respect to each respective opening into the common channels 24a, 24b located in manifold 20, shown in Fig. 9) is above the above-described "P-trap" thus not allowing flow that might otherwise enter into the manifold 20 due to specific gravity differences. Thus, the valves 21a, 21b work with the structure of the manifold 20 in this embodiment to form the specific gravity "P-trap" structures.

[0050] Although Fig. 8A and B show a macro valve 21b, the micro valve 21a can be configured and will operate in the same manner, albeit using smaller dimensions.

[0051] The two motors that drive each of the rotors 41, 42 can be the same, and similarly the rotors 41, 42 can be identical. The tubing in each channel can be different, and the platen positions can be different because of the difference in the diameter and wall thickness of the tube sections.

[0052] Fig. 10 shows a perspective view of the union junction 60. The union junction 60 is configured to retain

and/or receive a tubing structure that includes a micro input line inlet port 60a, a macro input line inlet port 60b, a union junction line 61 and an outlet port 63. The micro input line inlet port 60a is configured to receive the micro line 2011 which carries fluid from the micro channel, which can include fluid from one or both the micro fluid containers and macro fluid containers that were described earlier. The macro input line inlet port 60b is configured to receive the macro line 2021 which carries fluid from the macro fluid containers that were described earlier. The micro input line inlet port 60a and the macro input line inlet port 60b are both coupled to a junction line 61. Thus, fluid flowing from the micro line 2011 enters the micro input line inlet port 60a and flows through the junction line 61 and is combined with fluid received by the junction line 61 from the macro line 2021 via the macro line inlet port 60b. In this manner, fluid from micro line 2011 is combined with fluid from the macro line 2021 for delivery to the receiving/final container (e.g., IV bag 80). Fig. 10 also shows macro input line tie down 60c that maintains the macro input line inlet port 60b in place. A similar tie down 60c can be used to secure or maintain the micro input line inlet port 60a in place. The junction line 61 includes an outlet port 63 coupled to a combined fluid line 2031. As fluids from the micro line 2011 and the macro line 2021 combine in the junction line 61, they flow through the outlet port 63 to the combined fluid line 2031. The fluid flows from the combined fluid line 2031 to the final container or receiving bag filling station which is described in greater detail below. Fig. 10 also shows that the union junction 60 includes handles 60e which can be used for the placement and removal of the union junction 60 onto mating receptacles on the housing 10. Locks, such as flexible spring locks 60f, can mate with receptacles on the housing 10 to further secure the junction 60 thereto.

[0053] Fig. 11 shows a bottom side perspective view of the union junction 60. Fig. 11 shows that the union junction 60 includes a plurality of standoff ribs 62 and pin bosses 65 which are spaced apart from each other along an interior surface of the union junction 60. The standoff ribs 62 and pin bosses 65 are configured to provide an insertion spacing stop to retain the junction 60 at a predetermined distance/height relative to the housing surface. The standoff ribs 62 and pin bosses 65 can also provide structural integrity for the tubing structures described above, including the micro input line inlet port 60a, the macro input line inlet port 60b, the junction line 61 and the outlet port 63 so that those structures are maintained in place even as fluids are passed there-through.

[0054] Fig. 12 shows a top view of the union junction 60 with the tubing structures described above in place. As can be seen in Fig. 12, the union junction line 61 receives fluid via the micro input line inlet port 60a and the macro input line inlet port 60b. The fluids mix in the union junction line 61 and are carried to the outlet port 63 for eventual delivery to the receiving bag 80. As shown in

the Fig. 12 and in this exemplary embodiment, the micro input line inlet port 60a joins the union junction line 61 in a direction perpendicular to a longitudinal direction of the union junction line 61, while the macro input line inlet port 60b causes fluid to flow into the union junction line 61 in the same direction as the longitudinal axis of the union junction line 61. In alternative embodiments, the micro input line inlet port 60a can join the union junction line 61 at any angle relative to the longitudinal direction of the union junction line 61 so as to optimize usability of loading onto the platform 10d and notch 18 and simultaneously ensure proper contact with pump rotors 41, 42 and optimize flushability of the union junction 61.

[0055] The tubing structure described above, including the micro line inlet port 60a, the macro line inlet port 60b, the union junction line 61 and the outlet port 63 can be formed, e.g., molded, into the union junction 60 so as to form a unitary structure. Alternately, the tubing structure can be formed as a separate unit that can be placed or snapped into the union junction 60 and retained in place using a mechanism such as the standoff ribs 62 and pin bosses 65 described above. In addition, it should be understood that the compounding device 1 can be configured without the presence of a union junction 60 as shown. Instead, the union structure can be the final container, such as the receiving bag 80 itself. For example, lines 2011 and 2021 can extend about rotors 41, 42 and continue all the way to two separate ports in the receiving bag 80 such that mixing of materials from lines 2011 and 2021 occurs only at the receiving bag 80. In this case, it may be beneficial, depending on the particular operating parameters, to secure lines 2011 and 2021 at locations downstream of the rotors 41, 42 to ensure proper and efficient operation of the pump 40.

[0056] Fig. 13 shows perspective view of the compounding system 1 in accordance with an exemplary embodiment. Fig. 13 shows housing 10 located adjacent a bag tray 70 for holding a receiving bag 80 during the filling process. A load cell 71 or other device, such as an analytical balance, can be integrated into the bag tray 70 to provide information relative to the weight and contents and to facilitate calibration as well as confirmation of operational functions for the compounding device 1. Protective devices and/or software can be incorporated into the device to protect the load cell 71 or other measuring device from damage due to accidental overload or other mishaps. As shown in Fig. 13, the bag tray 70 includes a bag tray receiving section 1350 that accommodates the shape of the receiving bag 80. The bag receiving section 1350 can be formed as a generally indented surface within the surface of the bag tray 70. The bag tray 70 also includes bag tray pins 1330 which are formed on an upper section of the bag tray 70. As shown in Fig. 13, the bag tray pins 1330 are formed perpendicular to the surface of the bag tray 70 so as to project in a direction away from the top surface of the bag tray 70. The bag tray pins 1330 are positioned to receive and hold a receiving bag 80 for filling. Fig. 13 also shows a bag tray

clip 1340 which is formed along an upper section of the bag tray 70. The bag tray clip 1340 can be configured to keep a known tubing artifact constant with respect to the fluid line(s) 2031 connected to the receiving bag 80 (i.e., can be configured to dampen vibration or other force transmission to the bag 80 and/or load cell 71). Depending on how the bag 80 is connected to the outlet of the transfer set, and how the tube is positioned, variances can occur. The clip 1340 prevents these variances.

[0057] Fig. 14a shows a close up view the upper section of the bag tray 70 illustrating the placement of the bag tray pins 1330 that are positioned to receive and retain a receiving bag 80 for filling. Fig. 14a also shows the bag tray clip 1340 which is provided to secure the container input tubing, which includes the combined fluid line 2031. Fig. 14b shows a close up view of the upper section of the bag tray 70 including a receiving bag 80 placed in the bag tray 70. The exemplary receiving bag 80 includes two openings 1380 for receiving the bag tray pins 1330. Thus, when the bag tray pins 1330 are placed through respective openings 1380 of the receiving bag 80, the receiving bag 80 is maintained in place for filling. Fig. 14b also shows a twist lock 1350 formed on the end of the combined fluid line 2031. The twist lock 1350 is configured to connect to and lock with a port 1360 formed on a top surface of the receiving bag 80. The twist lock 1350 allows the combined fluid line 2031 to be securely coupled to the receiving bag 80 so that the receiving bag 80 can be filled. The bag tray clip 1340 can be configured to securely retain the port 1360 and twist lock 1350 that allows for quick placement, filling and removal of the receiving bag 80. The clip 1340 also secures the tubing to the bag tray to prevent unwanted artifacts in the load cell 71 measurement that could occur from excessive motion of the tubing segment that spans the gap between the bag tray and the pump module. This tubing motion could be caused by user interaction or pump vibration during compounding. Manual port 1390 can be provided at the top of the receiving bag 80 such that a user can inject an ingredient that is either not included in the compounding system 1 or has run out and is required to complete the receiving bag 80.

[0058] In similar fashion to the description above, a dual chamber bag may be filled using a slightly modified workflow, wherein the dual chamber bag keeps incompatible ingredients separate by two physical separated chambers that are kept separate from each other during compounding, but are combined just before infusion of the patient is started. All of the steps described above are followed for the 'primary' side of the receiving bag. Once complete on the primary side, the primary side port 1360a is disconnected from the twist lock 1350. The secondary bag port 1360b can then be connected to the twist lock 1350 and the secondary chamber thus filled.

[0059] Fig. 15 is a rear partial perspective view of the compounding system 1 that shows an exemplary sensor array used in conjunction with the system. Sensors 2910 can be configured to sense when the covers 10f and/or

10g are in place (See Fig. 3A). Alternatively, a reed switch sensor can be built into the combination sensor assembly to provide confirmation that 10f is closed. Sensors 2910 can be magnetic, such that they serve two purposes: 1) communication to a controller 2900 information indicating that the covers 10f and/or 10g are in a closed/operational position; and 2) securing, via magnetic force, the covers 10f and/or 10g in place in the closed/operational position. It should be understood that the sensors themselves may not provide enough force to provide a hold down function. Instead, a ferrous catch plate and lid magnet can be used in conjunction with the magnetic sensor. Sensors 2904a and 2904b can be configured to communicate to the controller 2900 that the platen locks 44a and 44b, respectively, are in a closed/operational position. Sensor 2901 can be provided in housing 10 and configured to communicate with the controller 2900 information that indicates that the manifold 20 has been properly affixed to the housing 10 and is ready for operation.

[0060] Sensor 2902 can be located adjacent a rear surface of the housing 10 and configured to communicate with the controller 2900 information that places the compounding system 1 in a service or firmware/programming mode when a maintenance operator or technician activates this sensor (for example, by placing a magnet adjacent the sensor 2902). The location of the sensor 2902 may be known only to service and technical maintenance personnel.

[0061] The exemplary compounding system 1 can also include a compounding control manager which resides in a central processing unit (e.g., controller 2900). The compounding control manager allows a clinician or other healthcare or compounding professional to enter, view, adjust and offload information pertaining to a given compounding protocol. In general, the compounding control manager is the program language that provides the operator with real time feedback and interaction with the compounding device through graphical user interface (GUI) elements. The GUI elements, created in a graphical format, display the various inputs and outputs generated by the compounding control manager and allow the user to input and adjust the information used by the compounding control manager to operate the compounding device. To develop the GUI elements, the compounding control manager can utilize certain third party, off-the-shelf components and tools. Once developed, the compounding control manager can reside as a standard software program on a memory device.

[0062] The controller 2900 can include firmware that provides several adjustment algorithms or hardware solutions to control the accuracy of the pump 40. For example, the pump output can be corrected for wear of the pump tubing lines 2011, 2021 over the life of the transfer set or manifold 20. This adjustment is applied as a function of the number of pump rotations experienced by each tubing line. The controller 2900 can also include software or hardware such that pump output or "flow factor" can also be adjusted for the specific fluid being pumped. This

"flow factor" can account for fluid viscosity, pump speed, line type, and source container/spike type. The controller 2900 can also be configured to correct pump output for the rotational location of the pump rotor 41, 42 rollers relative to the platens 43a, 43b. This adjustment can be significant for small volumes that are dispensed and which represent only a few rotations of the pump head or less. Note that absolute encoders can be included on both pump motors 41s, 42s (and valve steppers) to provide the firmware (e.g., controller 2900) with the information necessary to make the above-noted adjustment(s). The controller 2900 can include a bubble detection algorithm that attempts to minimize nuisance alarms.

[0063] Figs. 16-34 are a walk-through of display screens generated by a representative embodiment of the compounding control manager, which demonstrate various features of the compounding control manager. After an initial start-up mode of software initialization, a main work area is created on a display device, which initially opens a log-in screen. The operator first identifies him or herself, either by using the bar code scanner to scan an operator badge number, or by entry of a badge number or other selected form of identification on the graphical touch screen entry pad. This identification procedure is required for logging-in and/or assessing the operator's level of security clearance. Desirably, a system administrator would have previously established a list of authorized users, against which the sign-in data is compared.

[0064] Fig. 16 depicts an interface that may be presented to a user after the user has logged in and been authenticated as an authorized user. Fig. 16 is a control panel that allows the user to indicate the type of transfer set to be used, select the number of stations to be used and select the source solution configuration template. The user may then be presented with the interface shown in Fig. 17. The interface of Fig. 17 allows the user to scan a bar code located on a lid of a tray in which the transfer set 2 is provided. In this manner, the system knows the transfer set 2 that the user has chosen. The user can then remove the transfer set 2 from the packaging and install it. The process of installing the transfer set 2 includes opening the device doors and platens, placing and snapping the transfer set manifold 20 to the top of valve actuators 102a', 102b' and platform 10c and draping the leads of the transfer set over a rack that is disposed in the laminar flow hood.

[0065] After the user snaps down the manifold 20 onto the device, the user may then route the tubing through a bubble and occlusion sensor followed by closing the sensor lid. Next, the user can route the tubing around the pump rotors and secure union junction to the pump module. Each of the rotors can include a bottom flange or guide member, 410, 420 that is configured to prevent the tubing from being installed too low or slipping or being pinched between the pump surface and the rotor. Finally, the user can close the platen locks and then close the pump door or cover. The user is also presented with the

interface of Fig. 18 which includes a checklist of each of the tasks described above. Once each of the tasks is completed, the user can select "OK" to verify completion of the tasks. In this manner, the system ensures that the user has completed the transfer set installation before proceeding to the next step.

[0066] The user can then initiate calibration of the load cell 71 by selecting the "scale calibration button" shown in Fig. 19. Fig. 20 shows a further interface that is presented to the user to ensure that the load cell 71 is properly calibrated. When the calibration is completed, the user can then select the "close" button.

[0067] The user then confirms the source solutions. Fig. 21 shows an interface that is presented to the user for confirming the source solutions. The user can select the button that reads "confirm solution." At this point, the user can select the tubing lead (i.e., micro line 2011 or macro line 2021) to be confirmed and can remove a protective cap that covers the lead. The user can then attach the appropriate lead. The user can then attach the source container to the tubing lead and hang the container on the rack or rail. The user is then presented with the interface of Fig. 22 whereby the user can scan the bar code flag 802 of the tubing lead for the solution to be confirmed. The user can then scan the source container bar code 801 for the solution attached to the tubing lead that is scanned. The lot number and expiration date bar can also be scanned (Figs. 23).

[0068] After completing confirmation of the first container, the user can select the "next ingredient" button shown on the interface of Fig. 24. This allows the user to repeat the steps of Figs. 21-23 above which allows confirmation of all of the source solutions.

[0069] Once the source solutions have been confirmed, the user can initiate the priming of the solutions. The user first attaches a receiving bag 80, i.e., calibration container, to the load cell 71. Then, after all of the solutions have been confirmed, the user taps the "setup and prime" tab shown in Fig. 25. After priming is completed, the user can select the "next" button and repeat this process for all stations. The user can also initiate the manifold flush at this point. Next, the user can initiate a pump calibration sequence via the interface of Fig. 26. The user can then follow steps 1-5 of Fig. 26 to calibrate the pump. These steps include confirming that that calibration final container is attached and marked "Not for Patient Use"; calibrate the macro pump; confirm that the macro pump is calibrated; calibrate the micro pump; and then confirm the micro pump calibration. The user can then remove and discard the calibration bag.

[0070] Next, the user can install the final container (e.g., receiving bag 80). The user may be presented with the interface of Fig. 27 which allows the user to select the option of installing the final container. The user may then be presented with the interface of Fig. 28 which allows the user to select a single chamber or a dual chamber receiving bag. The user can then scan or enter the lot number and expiration date. The user can then attach

the final container by removing the protective caps and attach the receiving bag 80 to the transfer set connector. The user can then install or otherwise attach the receiving bag 80 by using the hanging holes formed in the container to connect to the load cell pins and then attach the tubing inlet to the tubing clip.

[0071] At this stage, the system has been calibrated, the solutions to be dispensed have been verified and the receiving bag 80 has been installed and is ready to be filled. The user can manually program an order for the solutions to be dispensed using the interface shown in Fig. 29. Alternatively, the user can scan in an order or select an order from a transaction pending buffer (TPB) manager or a .PAT file. Utilizing the interface of Fig. 29, the user can enter all of the solution volumes to be dispensed. Once the solution volumes have all been programmed, the user can select the "start" tab shown in Fig. 30. As shown in Fig. 30, if a solution requires a source container 4a or 4b change while compounding the next formulation, the station will display the solution requiring a change in yellow.

[0072] The controller 2900 can be configured to review the prescription and to require the user to either change the sequence of the script or to add a buffer to avoid incompatibility issues in either of the common channels 24a, b (micro/macro). The pump 40 will control deliveries from each of the common channels by stopping one or more of the pumps 40 if the incompatible fluids would meet in the union connector 60 after the pumps 40.

[0073] Fig. 31 shows a warning interface that is presented to the user when the software determines that the source solution container 4a or 4b has insufficient volume. The user can then replace the container or, if there is some solution remaining, a manual dispense can be performed. If the user chooses to perform a manual dispense, the user enters the estimated volume remaining using the interface of Fig. 32.

[0074] In order to replace the solution, the user can remove the empty container 4a or 4b and place a new container on the tubing lead and hang. The user can then access the interface of Fig. 33 to scan the bar code flag of the tubing lead for the new solution to be confirmed. The user can then scan the source container bar code for the solution attached to the tubing lead that is scanned. The lot number and expiration date bar codes can also be scanned. The user can then select the "confirm" button to complete this step.

[0075] The user can then resume compounding via the interface of Fig. 34. Once the order is complete, the user can select the appropriate disposition for the receiving bag 80 (*i.e.*, complete filling; scrap bag, etc.). Finally, the user can select the "apply disposition button." This completes the compounding process and the receiving bag 80 is ready for removal and can be used with a patient or other end user.

[0076] After all the required ingredients have been processed, the controller 2900 will direct the compounder to use a universal ingredient (UI) to flush all of the ingre-

dients out of the manifold 20 and output tubing and into final container (*e.g.*, fluid bag 80).

[0077] The fluid bag 80 resides on a gravimetric scale 71 that provides a final weight check back to the controller 2900 to verify that all compounded solutions were added. However, if a manual add of a particular component is necessary or desired during operation, the final check by the controller 2900 can be overridden. The load cell 71 can also be used to accomplish pump calibrations as well as in process calibrations, if desired.

[0078] The controller 2900 can include hardware or software that performs calibration of the load cell 71 and pump 40. For example, the system can be configured to allow up to 6 verification weights to ensure the load cell is within required accuracy. Pump calibration and in process calibrations ensure accuracy over the life of the disposable manifold 20.

[0079] The controller 2900 can also include a tube wear algorithm such that tubing wear is accounted for during the life of the manifold 20. In other words, the timing and speed of both the valves and the pump motors can be changed over time to account for tubing wear such that a substantially equal volume and flow rate can be achieved by the device.

[0080] The controller 2900 can also include software and/or hardware to track and possibly mark bags such that manual adds can be added to a particular bag after automatic compounding. Use of a separate (possibly networked) control panel at a manual add station will open the compounding event and allow the user to manually add ingredients while tracking the fact that such ingredients were added before approving the bag for distribution to a patient or other user.

[0081] An algorithm can be incorporated into the software and/or hardware of the controller 2900 to determine if any bubble event requires the pump 40 to stop and for the user to verify if they accept the bubble that was sensed. A flow algorithm can also be incorporated in coordination with the use of pressure sensors to detect occlusions and/or flow pressures. Furthermore, it is conceivable that intelligent bubble handling technology can be incorporated into either the controller 2900 or the occlusion or bubble sensor(s) 33o, 33s, 33o/b that monitors what has been delivered into the common volume (and attempts to determine a worse case bubble event). The technology can include hardware and/or software that causes the system to stop and require a user to accept or reject the operation depending on the presence (or lack thereof) of bubbles or an occlusion, etc. Software and/or hardware can also be provided that determines whether any occlusion or bubble event, when weighed against the size/volume of delivery, was large enough to effect accuracy, and provide a user with an automated or user defined option to accept or reject delivery of the end product.

[0082] The interface for the controller 2900 can include dual display of stations that uses colors and/or numbers to identify each station. The screen for the controller 2900

can include a first column that represents flex lines, a second and third column that represent micro lines, and a fourth or last column that represents macro lines. The screen can group the different (in this case, three) types of stations in order to present a clear picture of what fluids are at what station and what type of station it is. Of course, the number and arrangement of micro, macro and flex lines can change depending on a particular application for a different embodiment of the compounding system 1.

[0083] The controller 2900 can also be configured to require a username/password or bar coded badges to sign in/out. In addition, access can be further controlled to require username/password or bar coded badges for confirmation of required steps (e.g., addition of an ingredient that requires a prescription or that is in another way regulated).

[0084] The controller 2900 can also be configured to display a real time status of the compounding event. For example, the controller 2900 can display which solution(s) are currently being pumped from which station as well as how much solution is left in each source container 4a, b.

[0085] Templates can also be stored in the controller 2900 to quickly and efficiently determine the set-up and sequence of ingredients for a particular application or a particular patient or user. A database located in or accessible by the controller 2900 can include data related to storage, additions, removals of all drugs allowed for compounding and their associated data. The controller 2900 can be configured to include multiple interfaces for the user and can be networked such that a plurality of compounding devices can be controlled and/or monitored by a separate entity or controller. In addition, a print wizard can be incorporated into the controller 2900 software and/or hardware that automatically prints certain items when certain actions take place using the compounding device.

[0086] While certain embodiments of the invention are described above, it should be understood that the invention can be embodied and configured in many different ways without departing from the spirit and scope of the invention.

[0087] In another alternate exemplary embodiment, the occlusion sensor and bubble sensor can be positioned under the manifold common volume instead of being located in the manifold outlet tubing. Although locating the sensor area in the common volume in the manifold may make the flushing act slightly more difficult, the location of the bubble sensor in the common volume can allow a user to better discriminate which source line generated the bubble. For example, an array of bubble sensors could be located along the length of a common volume in the manifold to accomplish this feature.

[0088] In yet another exemplary embodiment, the filler 200 could be removed from the micro common volume (e.g., first channel 24a) and the inner diameter of the common volume could be reduced as compared to the volume depicted in, for example, Fig. 6B. This modifica-

tion comes with certain complications in that manufacturing and design of the valves would be more complicated to affect the volumetric flow rates desired in the modified first channel 24a of the compounding device.

[0089] In another embodiment, the filler 200 could be configured with vanes on its outer diameter (OD) surface that induce turbulence and/or swirl to promote better flushing. Additionally, the filler 200 could be removable from the channel in order to provide an alternate flushing port. Likewise, the filler 200 could be removable such that different style fillers (e.g., fillers having different cross-sectional shapes, sizes, number and shape of vanes, etc.) could be used in the manifold 20.

[0090] In yet another embodiment, a cross connect channel can be located between the downstream end of the micro and macro common volumes (e.g., the first channel 24a and second channel 24b). A valve could be provided to close this channel, allowing dispensing to occur as usual, and then the valve could be opened to allow the micro common volume to be flushed by the macro pump, which operates at higher flowrates and provide more efficient flushing.

[0091] As described above, the platen/lock arm design has springs in the lock arms that press the platens against the rotors 41, 42 when the lock arms 44a, b are closed. An alternate approach would locate torsional springs at the platen hinge points (potentially inside the instrument) such that the platens are always spring loaded against the rotors. The platen lock arms 44a, b could be replaced by "platen disengagement arms" configured to pull the platens 43a, b away from the rotors 41, 42 during transfer set installation and removal.

[0092] The pump output is a function of upstream suction pressure. To provide better volumetric accuracy, the occlusion sensor could be used to compensate for variations in upstream suction pressure and prevent alarms due to partial occlusions. In this approach, the number of commanded pump rotations and rotor speed could be adjusted based on the measured suction pressure during pumping.

[0093] In yet another embodiment, LEDs or other types of lights or light sources can be located in the top surface of the pump under each ingredient source line. The molded manifold would guide light into the source tubing line, possibly all the way up to the spike where a visual indication could be provided if a source container or line needs attention. The light or light source would be connected to the electronic control unit for the compounding device, which would dictate when and how to provide light to a particular location, depending on error codes, programming desires, reminder notices, etc.

[0094] While it has been disclosed that a plurality of different sizes and shapes of tubings/lines and containers can be connected to the compounding device, in yet another alternative configuration of the disclosed subject matter, the compounding device can be configured for use with only a single type of container and tubing, such as only macro lines and macro containers, or only micro

lines and micro containers. In this manner, the compounding device can be an effective replacement for current compounding systems and applications that include only single types of containers and lines.

[0095] The number of channels can also vary and remain within the scope of the presently disclosed subject matter. For example, three, four or more different sized channels could be incorporated into the manifold. Similarly, more than one same shaped and sized channel could be included in the manifold 20.

[0096] The strain relief clip 33 is disclosed as being pre-assembled to the lines 2011 and 2021. However, it should be understood that the strain relief clip 33 or similar structure could be attached during use or installation of the manifold. Moreover, the strain relief clip 33 could be attached only when its function is needed for a particular application. Similarly, the strain relief clip 33 can be configured in various different shapes and sizes and attached at different locations on the line or tubing. The strain relief clip 33 could also be configured as a two piece structure that can be attached at different locations on a respective one of the lines. It is also contemplated that the strain relief clip 33 can be integrated into the bubble occlusion sensor or vice versa. In addition, the strain relief clip 33 can be configured as a dampening material, adhesive or putty that can be located at a portion of the line(s) and attached to the housing to dampen movement of the lines where strain would otherwise be present.

[0097] The pump cover door could be mechanically interlocked with a specific position of platen locks (for example, a user can be prevented from closing the door if both platens are not locked into place). A lip can be provided on a lower portion of the platen to ensure that the user does not mislead a pumping segment of the tubing line to a position that is too low and that would possibly be captured between the platen and the base of the rotor (instead of being correctly placed on the roller).

[0098] The many variations and alternate structures described herein are contemplated for use in all various combinations and permutations with each other, and without certain features or components (for example, the filler can be provided without vanes 202, and the micro channel can be provided without flex ports 20bf, etc.)

[0099] While the subject matter has been described in detail with reference to exemplary embodiments thereof, it will be apparent to one skilled in the art that various changes can be made, and equivalents employed, without departing from the scope of the invention. All related art references discussed in the above Description of the Related Art section are hereby incorporated by reference in their entirety.

[0100] Summing up, the invention relates to any one of the following aspects:

1. A junction structure for use in a pharmaceutical compounding device, the compounding device hav-

ing a housing that supports a pump system and a valving mechanism, the junction structure comprising: a junction body; a first inlet port located at a first portion of the junction body; a second inlet port located at a second portion of the junction body; an outlet port located at a third portion of the junction body; a mixing chamber located between the outlet port and both the first inlet port and second inlet port, the mixing chamber configured to mix fluid received from both the first inlet port and second inlet port and to deliver the fluid to the outlet port; and an attachment structure located on the junction body and configured to attach the junction structure to the housing of the compounding device.

2. The junction structure of aspect 1, wherein the first inlet port defines a first flowpath for fluid and the second inlet port defines a second flowpath for fluid, the first flowpath defined by the first inlet port has a micro cross-sectional area taken normal to the first flowpath, the second flowpath defined by the second inlet port has a macro cross-sectional area taken normal to the second flowpath, and the micro cross-sectional area is less than the macro cross-sectional area.

3. The junction structure of aspect 2, wherein an outlet flowpath defined by the outlet port has an outlet cross-sectional area taken normal to the outlet flowpath that is equal to or greater than the macro cross-sectional area.

4. The junction structure of aspect 1, wherein the attachment structure includes at least one clip extending from a lower surface of the junction body and configured to mate with a corresponding locking structure on the housing of the compounding device.

5. The junction structure of aspect 4, wherein the at least one clip includes a first clip and a second clip, and the attachment structure includes a first handle extending away from a top surface of the junction body and away from the first clip, and a second handle extending away from the top surface of the junction body and away from the second clip.

6. The junction structure of aspect 5, wherein the first handle is configured to cause the first clip to move relative to the lower surface of the junction body when an amount of force is applied to the first handle by a user, and the second handle is configured to cause the second clip to move relative to the lower surface of the junction body when an amount of force is applied to the second handle by the user.

6. The junction structure of aspect 1, wherein the junction body is configured as a junction plate, and the first inlet port, the second inlet port, the outlet port, and the mixing chamber are configured as a junction line, and the junction plate includes a recess configured to receive the junction line.

7. The junction structure of aspect 6, wherein the junction plate is a single piece integral structure, and the junction line is a single piece integral structure

configured for attachment to the junction plate.

8. The junction structure of aspect 6, wherein the junction plate includes a locking structure configured to secure the junction line in the recess of the junction plate.

9. The junction structure of aspect 1, further comprising a standoff structure extending from a lower surface of the junction body and configured to space the junction body from a surface of the compounding device to which the junction body is to be attached.

10. The junction structure of aspect 1, further comprising a manifold configured for attachment to the valving mechanism of the compounding device, a macro line extending from the manifold to the pump system and to the junction body, a micro line extending from the manifold to the pump system and to the junction body, wherein the junction body, first inlet port, second inlet port and mixing chamber are located downstream of the pump system and configured such that fluid from the micro line and macro line are caused to mix at the mixing chamber after passing the pump system.

11. The junction structure of aspect 10, wherein the macro line and micro line are in fluid isolation from each other upstream of the junction body.

12. The junction structure of aspect 11, wherein the manifold includes a micro channel and a macro channel, and a cross-sectional area taken normal to a longitudinal axis of the micro channel is less than a cross-sectional area taken normal to a longitudinal axis of the macro channel.

13. A pharmaceutical compounding device, comprising: a first fluid source connected to a first valve; a second fluid source connected to a second valve; a third fluid source connected to a third valve; a first line in fluid communication with an output of the first valve and extending to a micro pump mechanism; a second line in fluid communication with an output of the second valve and an output of the third valve and extending to a macro pump mechanism; a junction structure located downstream of both the micro pump mechanism and the macro pump mechanism and configured to join the first line with the second line such that fluid from the first fluid source is combined with fluid from the second fluid source and fluid from the third fluid source after passing by the micro pump mechanism and the macro pump mechanism.

14. The pharmaceutical compounding device of aspect 13, wherein the first line has a cross sectional area taken normal to a longitudinal axis of the first line that is less than a cross sectional area of the second line taken normal to a longitudinal axis of the second line.

15. The pharmaceutical compounding device of aspect 13, wherein the first line and second line are isolated from each other such that they are completely fluidly separated from each other until the junction structure.

16. The pharmaceutical compounding device of aspect 13, further comprising: a manifold including, a micro channel configured to be connected to the first line, and a macro channel configured to be connected to the second line, wherein a cross-sectional area taken normal to a longitudinal axis of the micro channel is smaller than a cross-sectional area taken normal to a longitudinal axis of the macro channel, and the manifold is located upstream of the micro pump mechanism and macro pump mechanism such that fluid passes through the manifold and then passes by the micro pump mechanism and macro pump mechanism.

17. The pharmaceutical compounding device of aspect 16, wherein the first valve is located adjacent and in fluid communication with the micro channel of the manifold, and the second valve and third valve are located adjacent and in fluid communication with the macro channel of the manifold.

18. The pharmaceutical compounding device of aspect 17, wherein an inner diameter of the micro channel is equal to an inner diameter of the macro channel.

19. The pharmaceutical compounding device of aspect 13, further comprising: a housing that supports the macro pump mechanism and the micro pump mechanism, wherein the junction structure includes two inlet ports each configured for attachment to a respective one of the first line and second line, and an attachment structure configured to attach the junction structure to the housing.

20. The pharmaceutical compounding device of aspect 13, wherein the junction structure includes a mixing chamber and an outlet port.

21. The pharmaceutical compounding device of aspect 13, further comprising: a housing that supports the macro pump mechanism and the micro pump mechanism, wherein the junction structure includes a standoff structure extending from a lower surface of the junction structure and configured to space the junction structure from a surface of the housing to which the junction structure is to be attached.

22. A transfer set kit for use with a pharmaceutical compounding device, comprising: a plurality of micro input lines each having a cross sectional area taken normal to a longitudinal axis of each respective one of the plurality of micro input lines; a plurality of macro input lines each having a cross sectional area taken normal to a longitudinal axis of each respective one of the plurality of macro input lines, each of the macro input lines separate and distinct from each of the micro input lines such that fluid within each of the micro input lines is isolated from fluid within each of the macro input lines; a manifold including a micro channel and a macro channel separate from and in fluid isolation from the micro channel, the manifold including a plurality of micro ports each configured to be connected to a respective one of the plurality

of micro input lines, and a plurality of macro ports each configured to be connected to a respective one of the plurality of macro input lines, wherein the cross sectional area of each of the micro input lines is less than the cross sectional area of each of the macro input lines; an output micro input line configured to be connected to a micro output port of the micro channel; an output macro input line configured to be connected to a macro output port of the macro channel; and a junction structure configured to join the output micro input line with the output macro input line.

23. The transfer set kit of aspect 22, further comprising: at least one junction structure clip configured to connect the junction structure to a housing of the compounding device.

24. The transfer set kit of aspect 22, wherein the junction structure includes an attachment structure for fluid connection to a final container.

25. The transfer set kit of aspect 22, wherein the junction structure includes a mixing chamber and an outlet port.

26. The transfer set kit of aspect 22, wherein the junction structure includes a standoff structure extending from a lower surface of the junction structure and configured to space the junction structure from a surface of the compounding device to which the junction structure is to be attached.

27. The transfer set kit of aspect 26, further comprising a junction output line extending from an output port of the junction structure, wherein the standoff structure is configured such that each of the output micro input line, the output macro input line are substantially contained in a common plane, and the junction output line extends away from the junction structure in the common plane.

Claims

1. A transfer set kit for use with a pharmaceutical compounding device, comprising:

a first fluid source connected to a first valve;
 a second fluid source connected to a second valve;
 a third fluid source connected to a third valve;
 a first output line in fluid communication with an output of the first valve and extending to a micro pump mechanism;
 a second output line in fluid communication with an output of the second valve and an output of the third valve and extending to a macro pump mechanism;
 a junction structure located downstream of both the micro pump mechanism and the macro pump mechanism and configured to join the first output line with the second output line such that

fluid from the first fluid source is combined with fluid from the second fluid source and fluid from the third fluid source after passing by the micro pump mechanism and the macro pump mechanism; and
 a manifold including,

a micro channel configured to be connected to the first output line, and
 a macro channel configured to be connected to the second output line, wherein a cross-sectional area taken normal to a longitudinal axis of the micro channel is smaller than a cross-sectional area taken normal to a longitudinal axis of the macro channel, and the manifold is located upstream of the micro pump mechanism and macro pump mechanism such that fluid passes through the manifold and then passes by the micro pump mechanism and macro pump mechanism,

wherein the first valve is located adjacent and in fluid communication with the micro channel of the manifold, and the second valve and third valve are located adjacent and in fluid communication with the macro channel of the manifold, wherein an inner diameter of the micro channel is equal to an inner diameter of the macro channel.

2. The transfer set kit for use with a pharmaceutical compounding device of claim 1, wherein the first output line has a cross sectional area taken normal to a longitudinal axis of the first output line that is less than a cross sectional area of the second output line taken normal to a longitudinal axis of the second output line.
3. The transfer set kit for use with a pharmaceutical compounding device of claim 1, wherein the first output line and second output line are isolated from each other such that they are completely fluidly separated from each other until the junction structure.
4. The transfer set kit for use with a pharmaceutical compounding device of claim 1, wherein the manifold includes an attachment structure configured to attach the manifold to a housing of the pharmaceutical compounding device.
5. The transfer set kit for use with a pharmaceutical compounding device of claim 1, wherein the first valve, second valve and third valve are each rotary type valves.
6. The transfer set kit for use with a pharmaceutical compounding device of claim 1, further comprising:

- a housing that supports the macro pump mechanism and the micro pump mechanism, wherein the junction structure includes two inlet ports each configured for attachment to a respective one of the first output line and second output line, and an attachment structure configured to attach the junction structure to the housing. 5
7. The transfer set kit for use with a pharmaceutical compounding device of claim 1, wherein the junction structure includes a mixing chamber and an outlet port. 10
8. The transfer set kit for use with a pharmaceutical compounding device of claim 1, further comprising: 15
- a housing that supports the macro pump mechanism and the micro pump mechanism, wherein the junction structure includes a standoff structure extending from a lower surface of the junction structure and configured to space the junction structure from a surface of the housing to which the junction structure is to be attached. 20
9. The transfer set kit for use with a pharmaceutical compounding device of claim 1, further comprising: another valve, in fluid communication with the micro channel. 25
10. The transfer set kit for use with a pharmaceutical compounding device of claim 1, wherein the micro channel and macro channel are substantially parallel with respect to each other. 30
11. A transfer set kit for use with a pharmaceutical compounding device, comprising: 35
- a plurality of micro input lines each having a cross sectional area taken normal to a longitudinal axis of each respective one of the plurality of micro input lines; 40
- a plurality of macro input lines each having a cross sectional area taken normal to a longitudinal axis of each respective one of the plurality of macro input lines, each of the macro input lines separate and distinct from each of the micro input lines such that fluid within each of the micro input lines is isolated from fluid within each of the macro input lines; 45
- a manifold including a micro channel and a macro channel separate from and in fluid isolation from the micro channel, the manifold including a plurality of micro ports each configured to be connected to a respective one of the plurality of micro input lines, and a plurality of macro ports each configured to be connected to a respective one of the plurality of macro input lines, wherein the cross sectional area of each of the micro input lines is less than the cross sectional area of each of the macro input lines; 50
- an output micro line configured to be connected to a micro output port of the micro channel; and
- an output macro line configured to be connected to a macro output port of the macro channel; and
- a junction structure configured to join the output micro line with the output macro line, the junction structure including a mixing chamber wherein the output micro line and the output macro line are in fluid communication with the mixing chamber such that any fluid located within the output micro line and output macro line mix in the mixing chamber of the junction structure. 55
12. The transfer set kit of claim 11, further comprising: at least one junction structure clip configured to connect the junction structure to a housing of the compounding device.
13. The transfer set kit of claim 11, wherein the junction structure includes an attachment structure for fluid connection to a final container.
14. The transfer set kit of claim 11, wherein the mixing chamber of the junction structure is a final flexible container.
15. The transfer set kit of claim 11, wherein the plurality of micro input lines, the plurality of macro input lines, the output micro line, and the output macro line are configured from tubing.

ர
க
ட

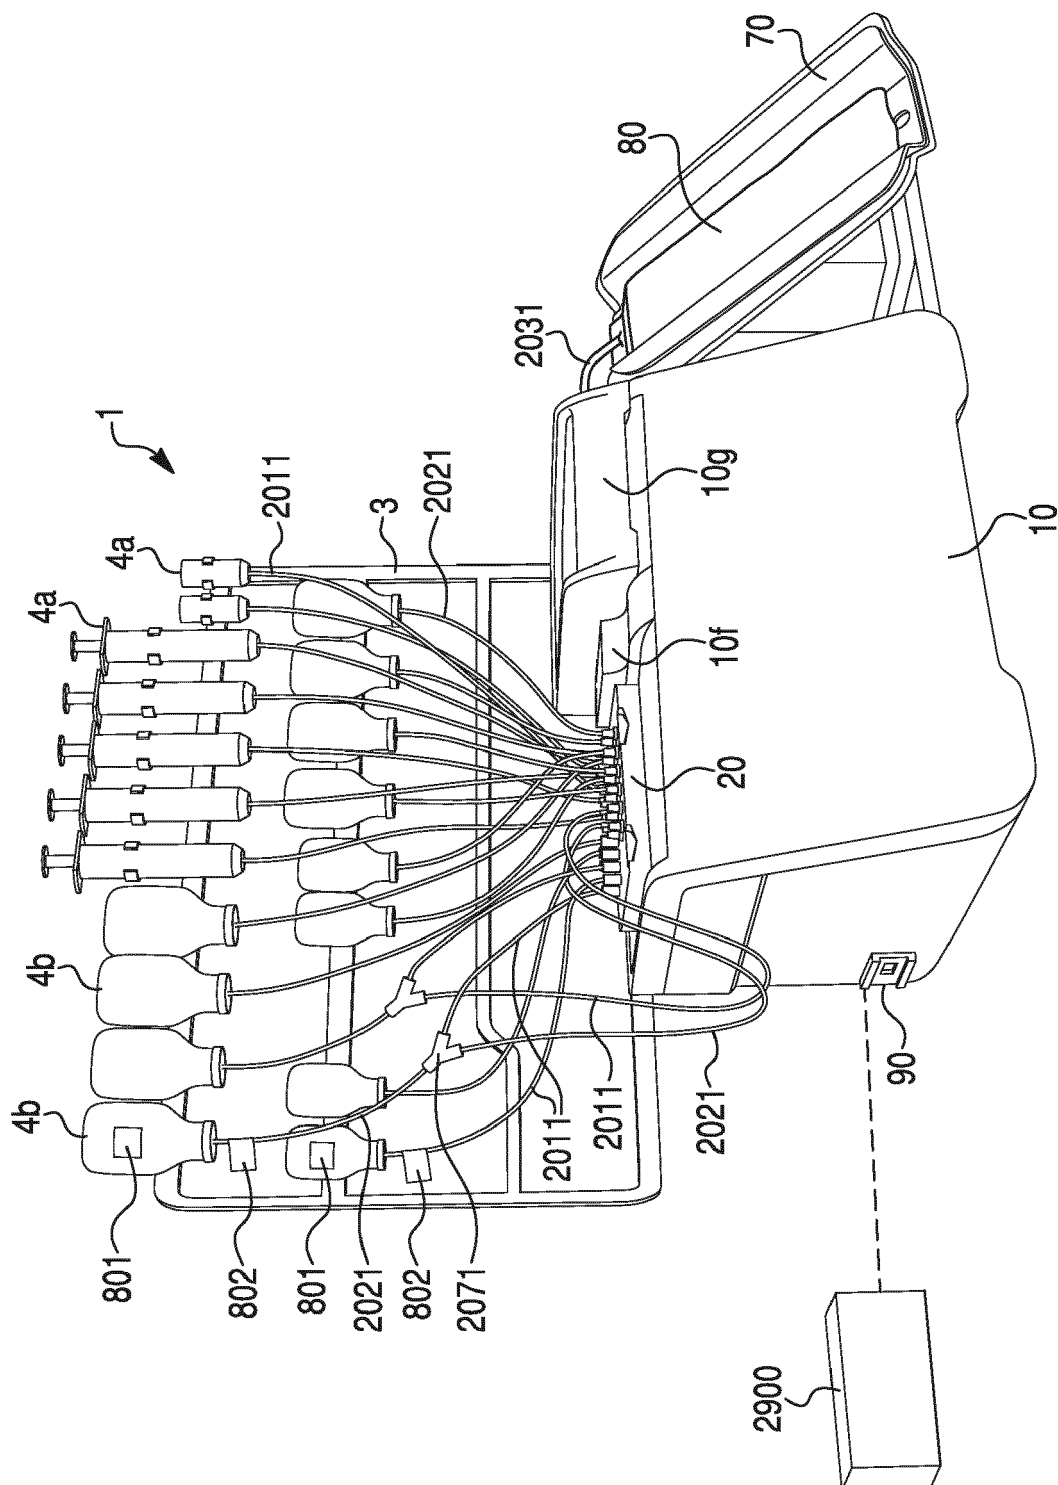


FIG. 2A

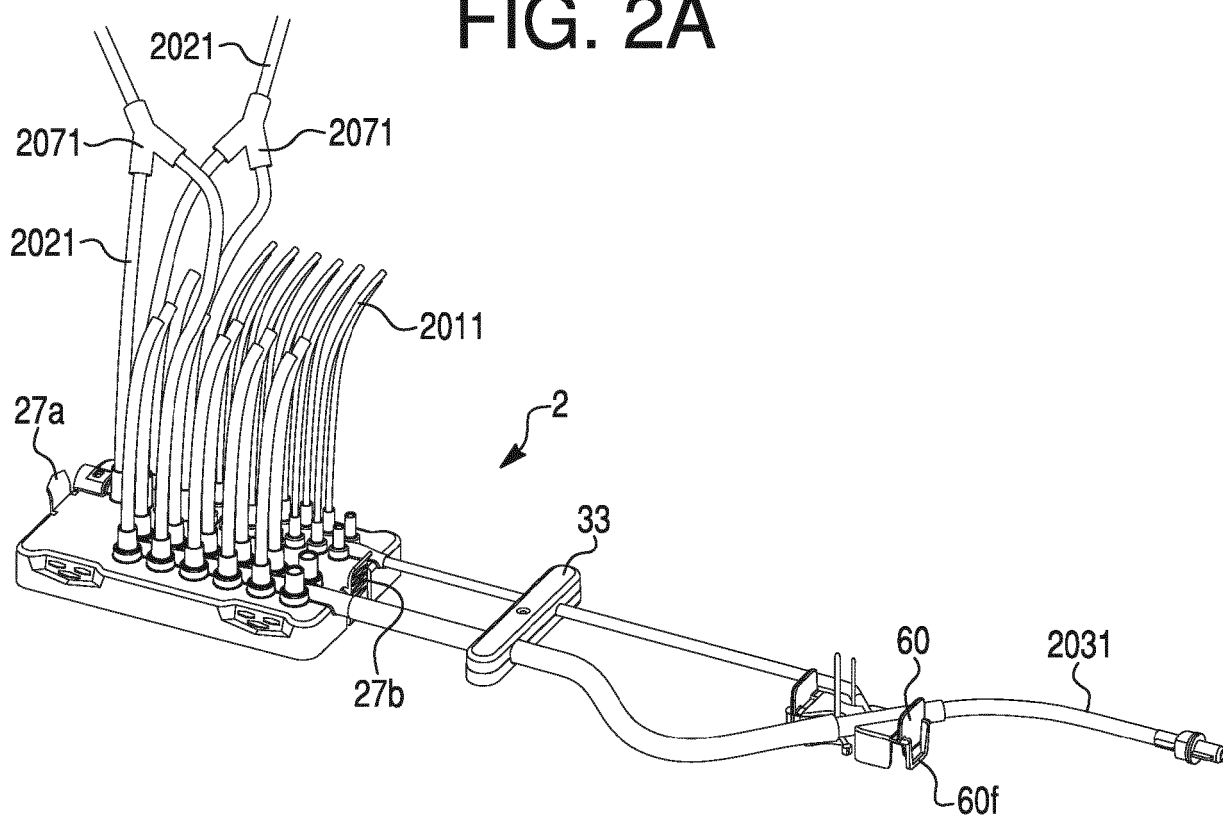


FIG. 2B

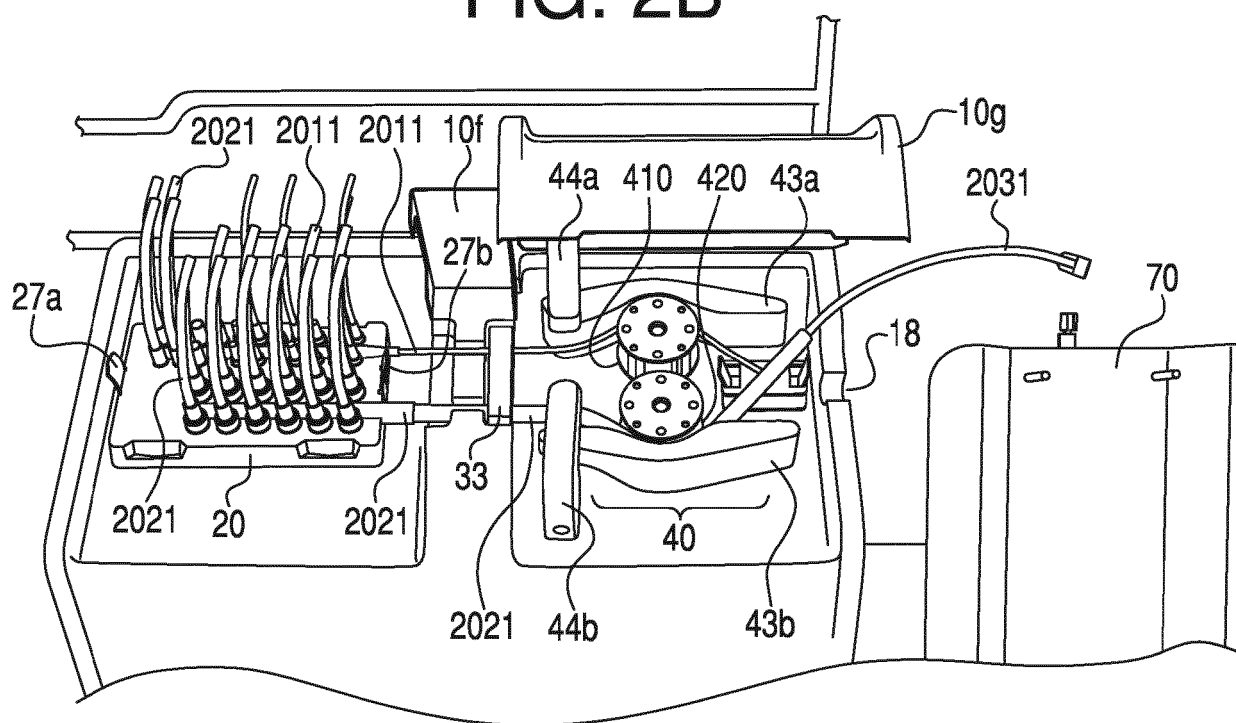


FIG. 3A

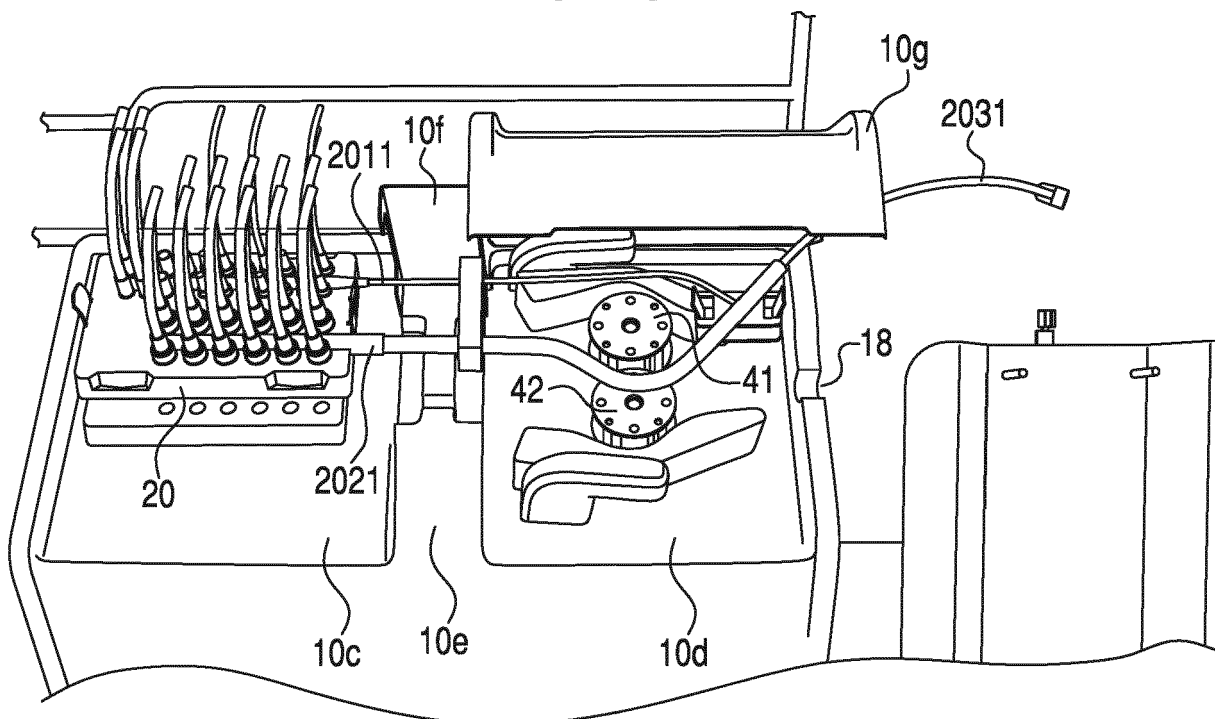


FIG. 3B

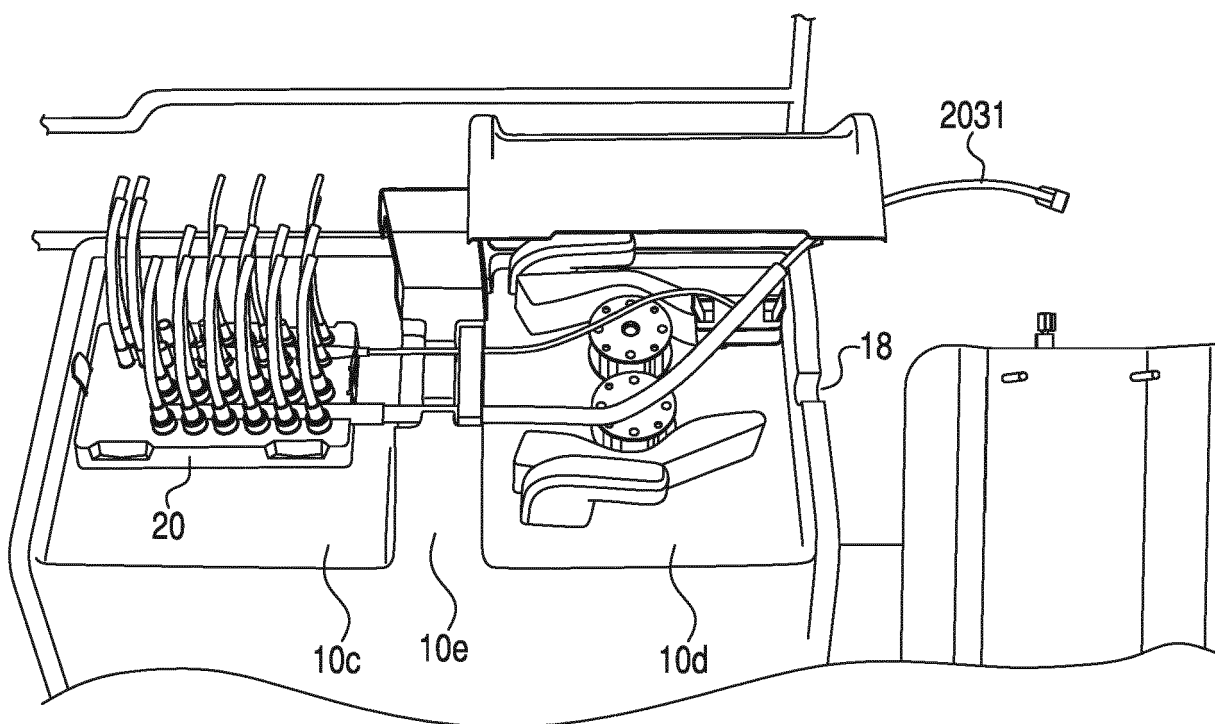


FIG. 3C

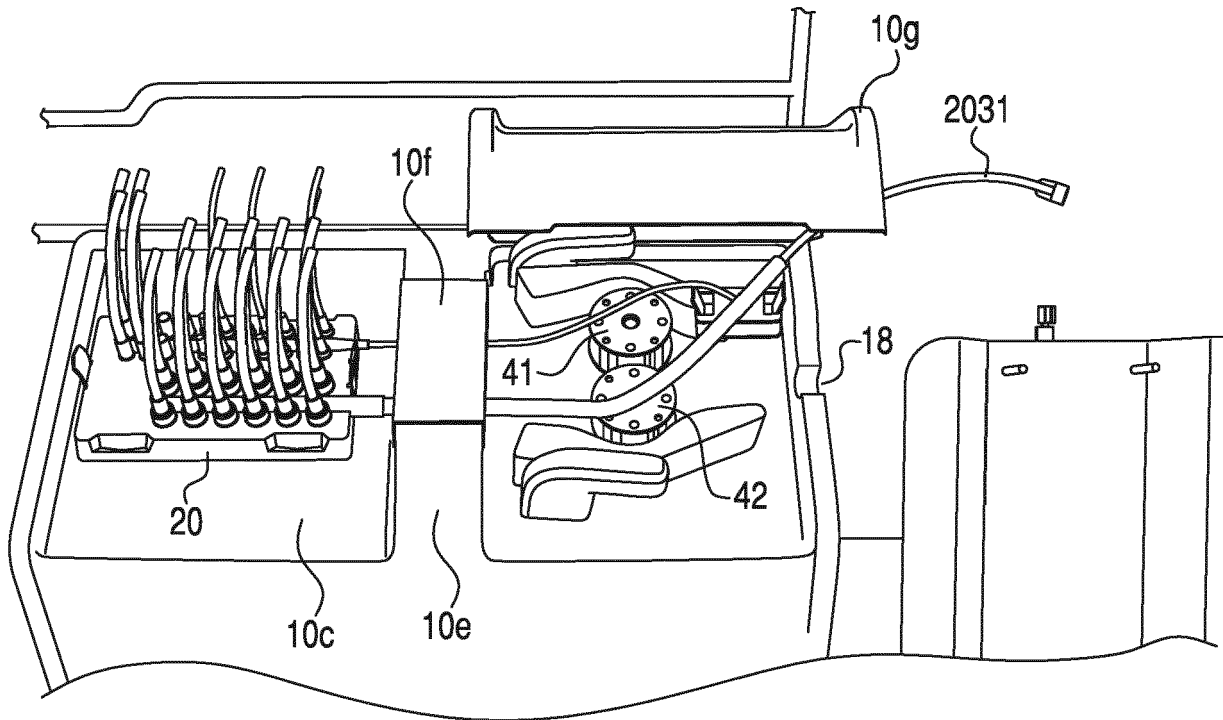


FIG. 3D

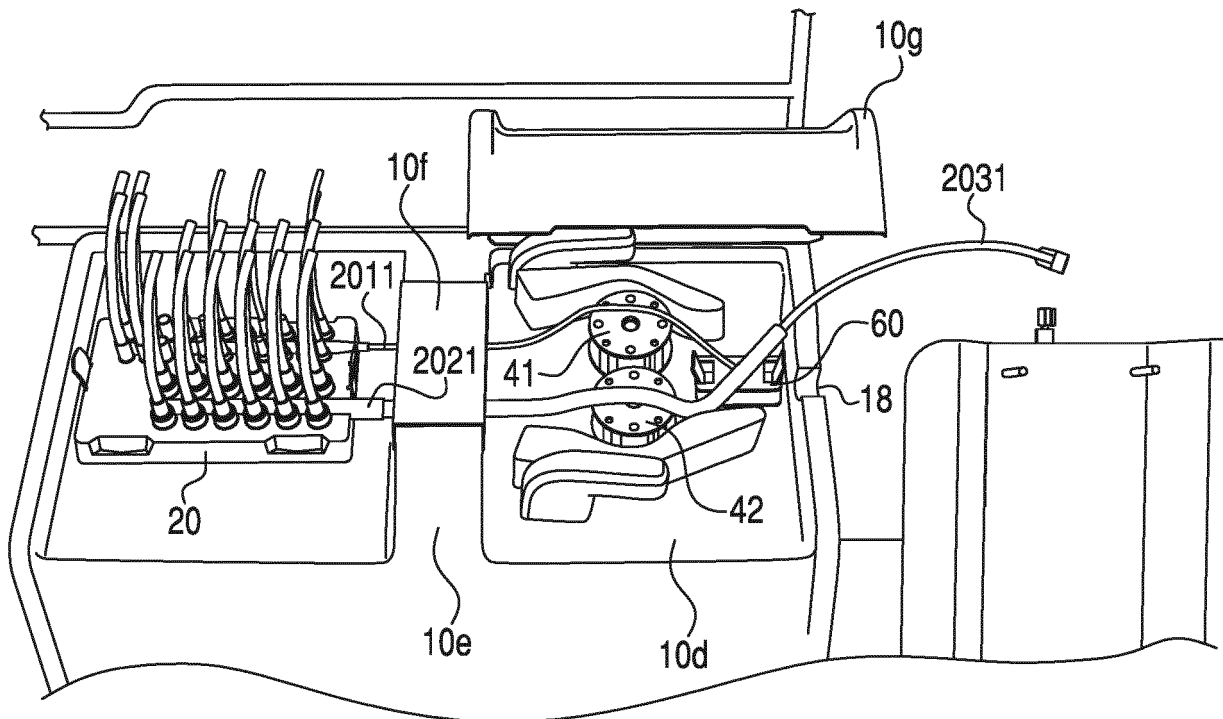


FIG. 3E

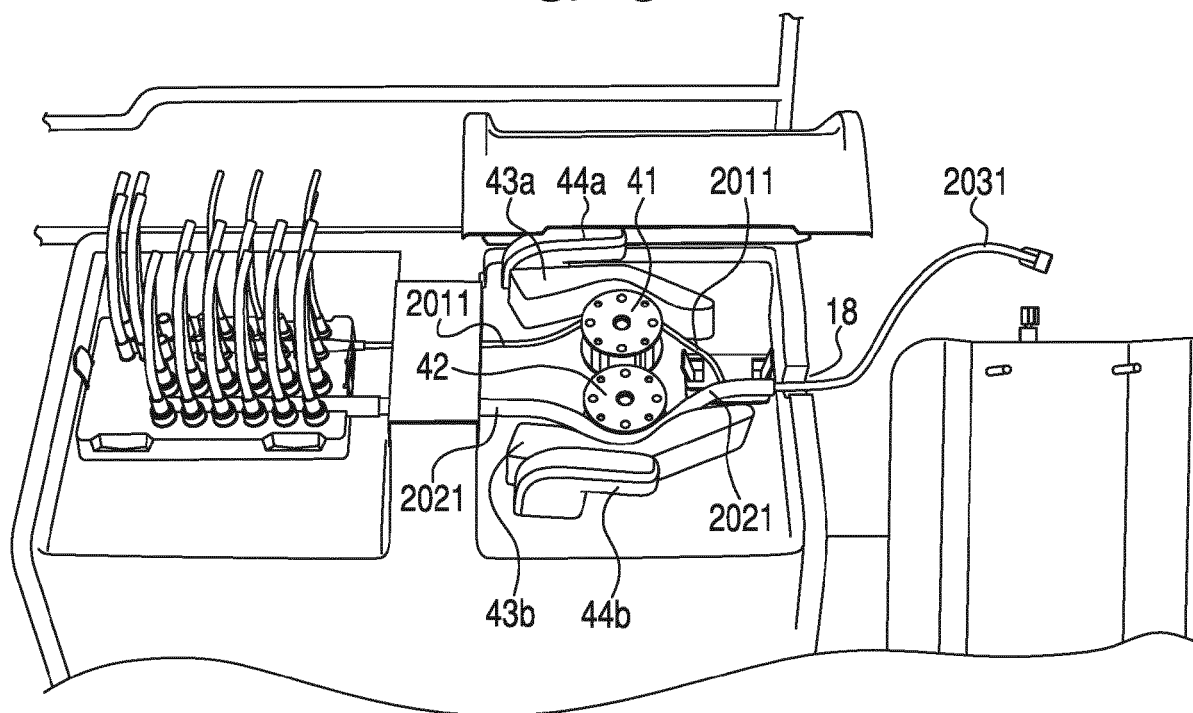


FIG. 3F

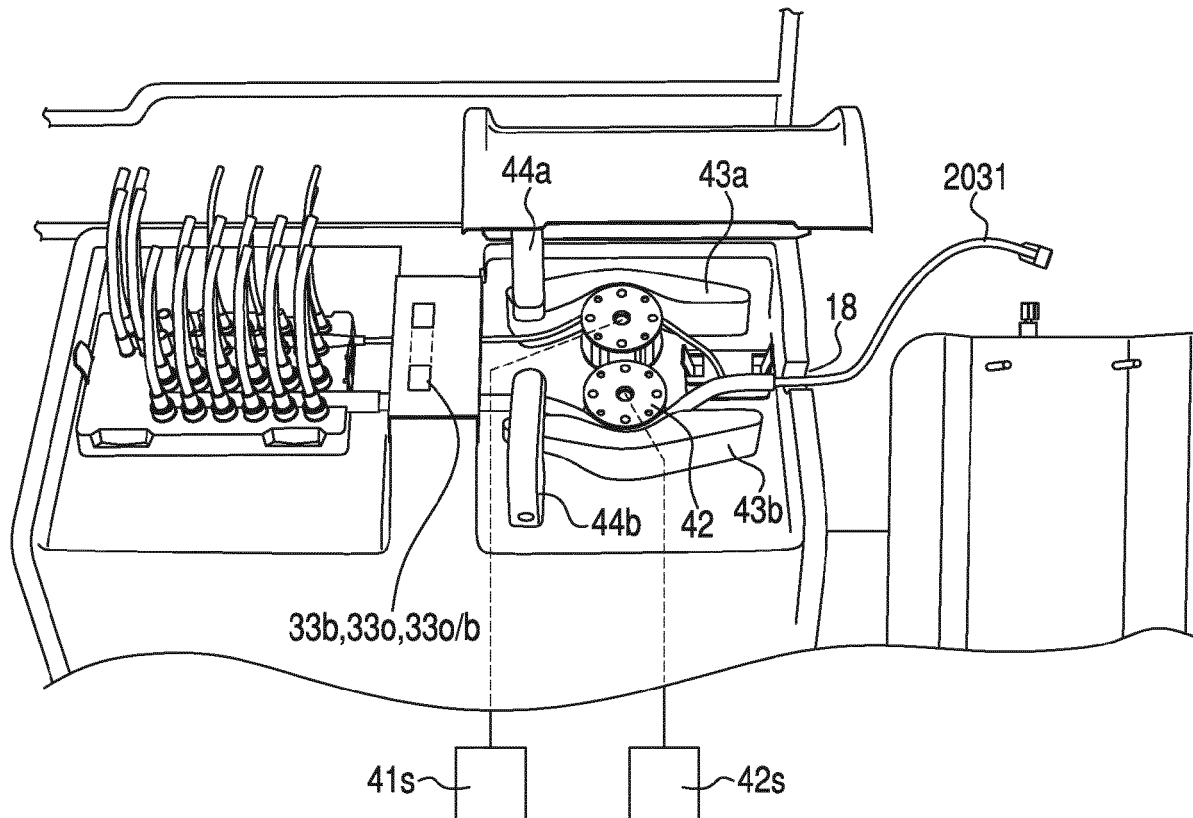


FIG. 3G

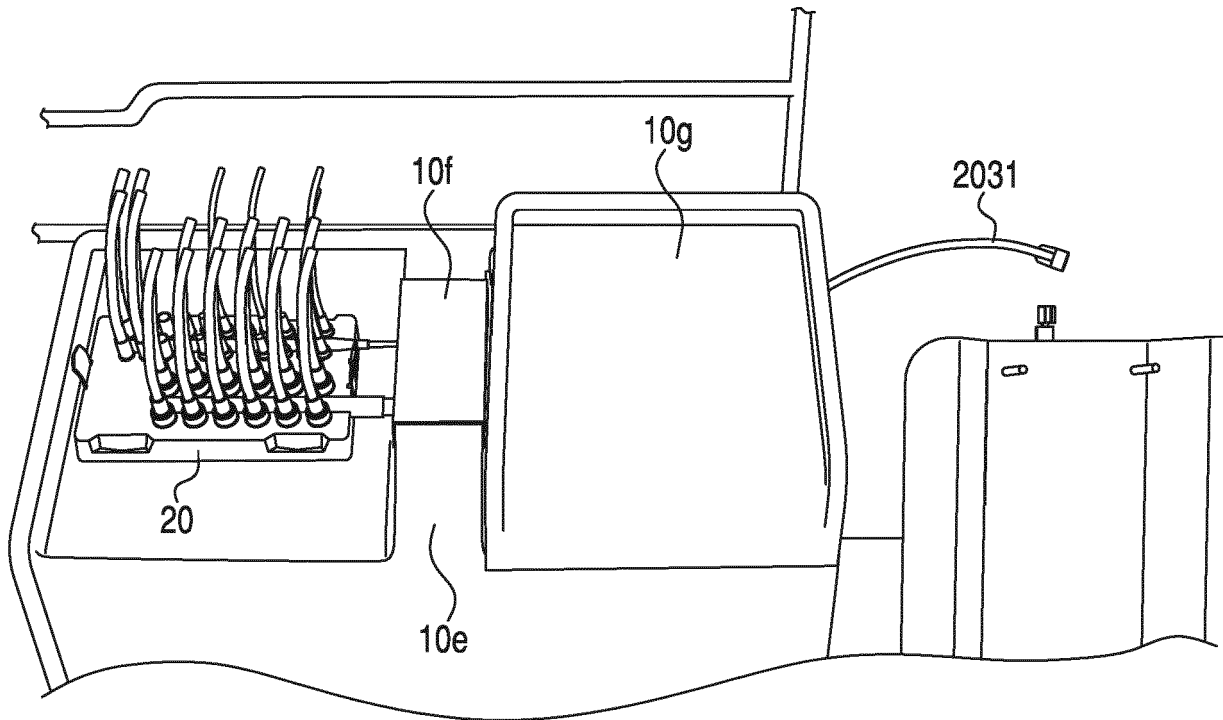


FIG. 3H

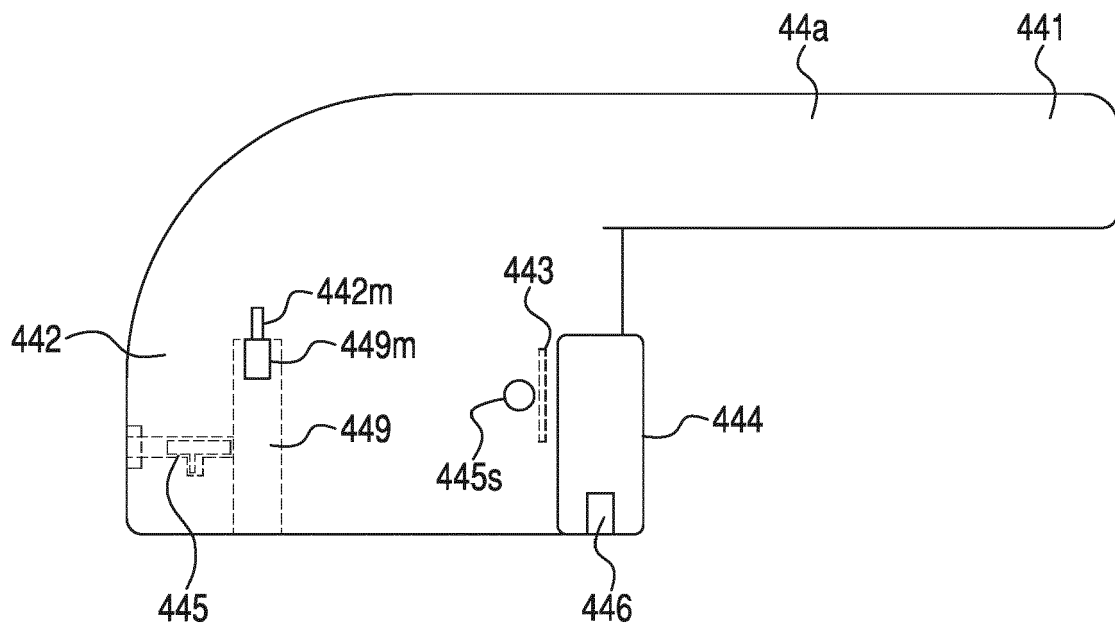


FIG. 4A

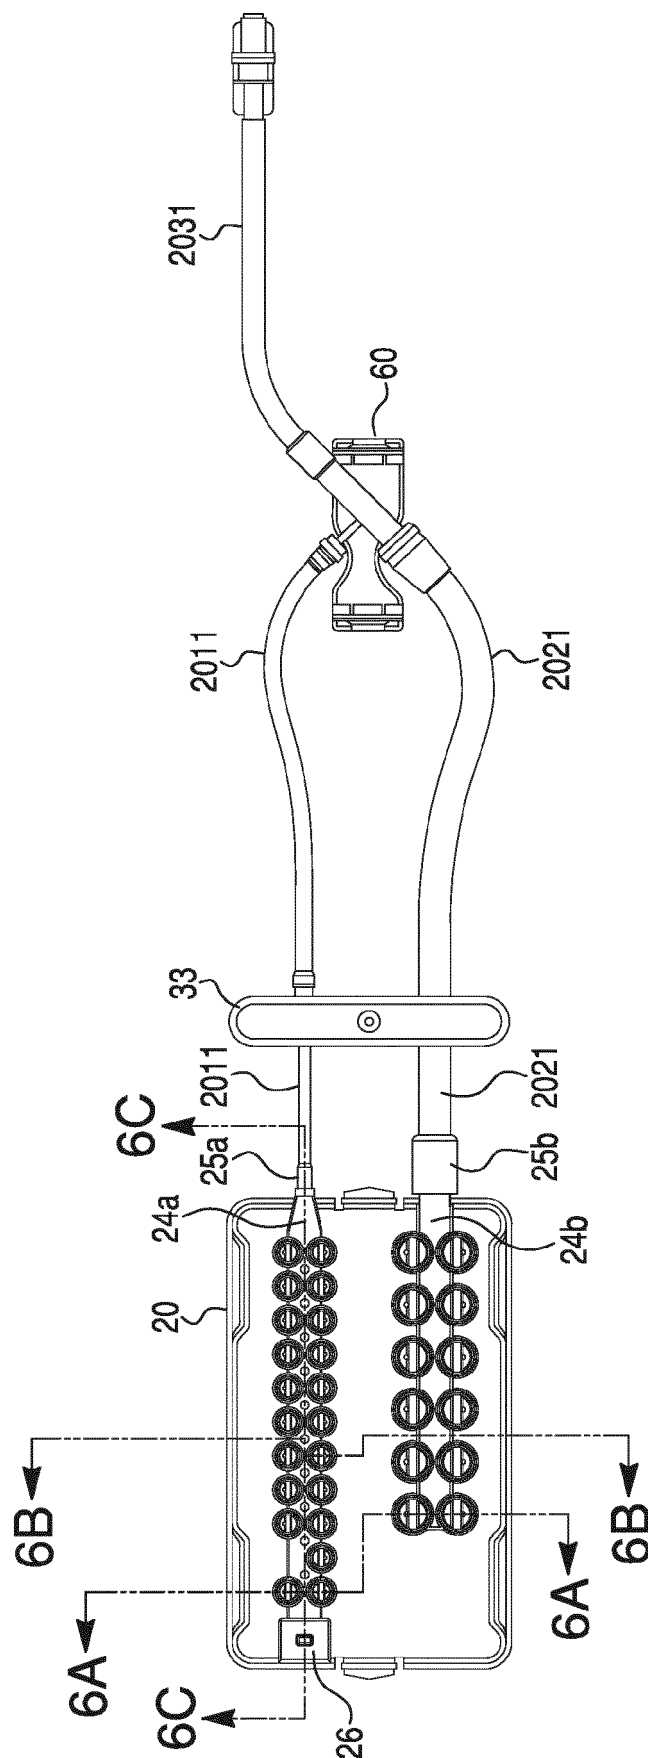


FIG. 4B

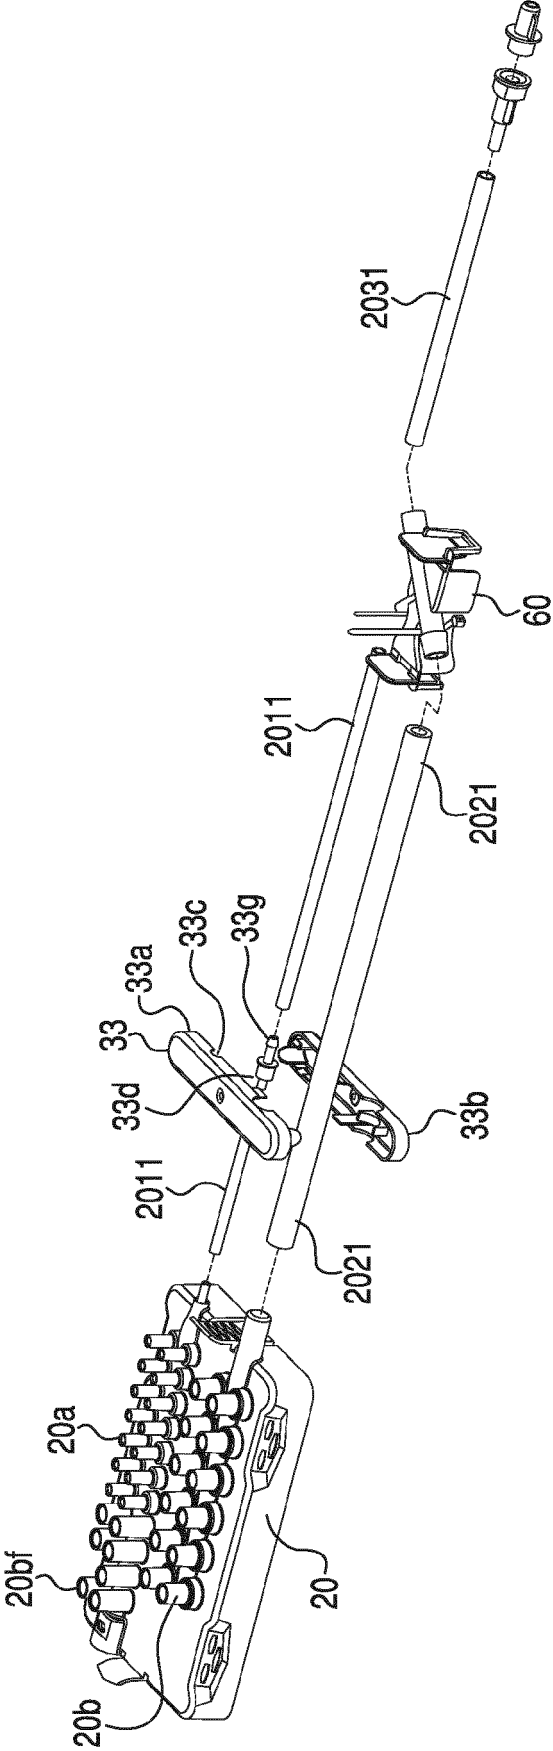


FIG. 5

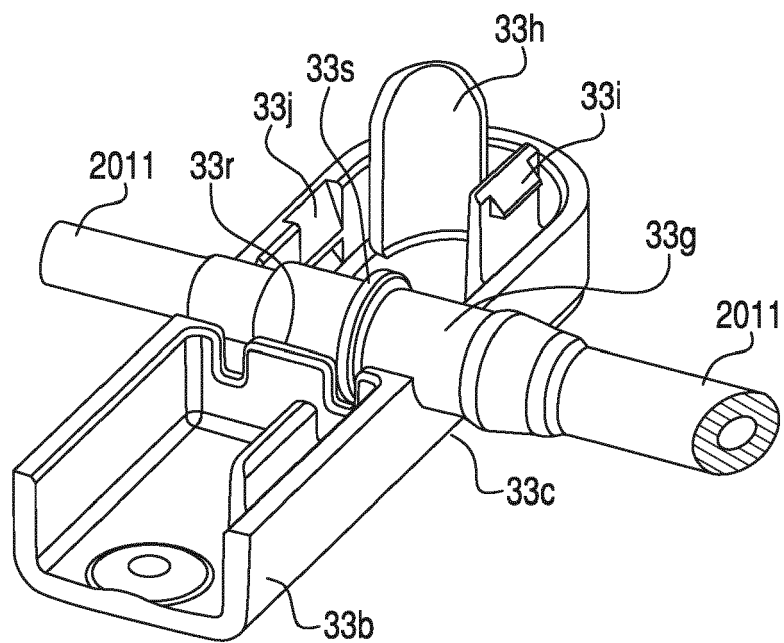


FIG. 6A

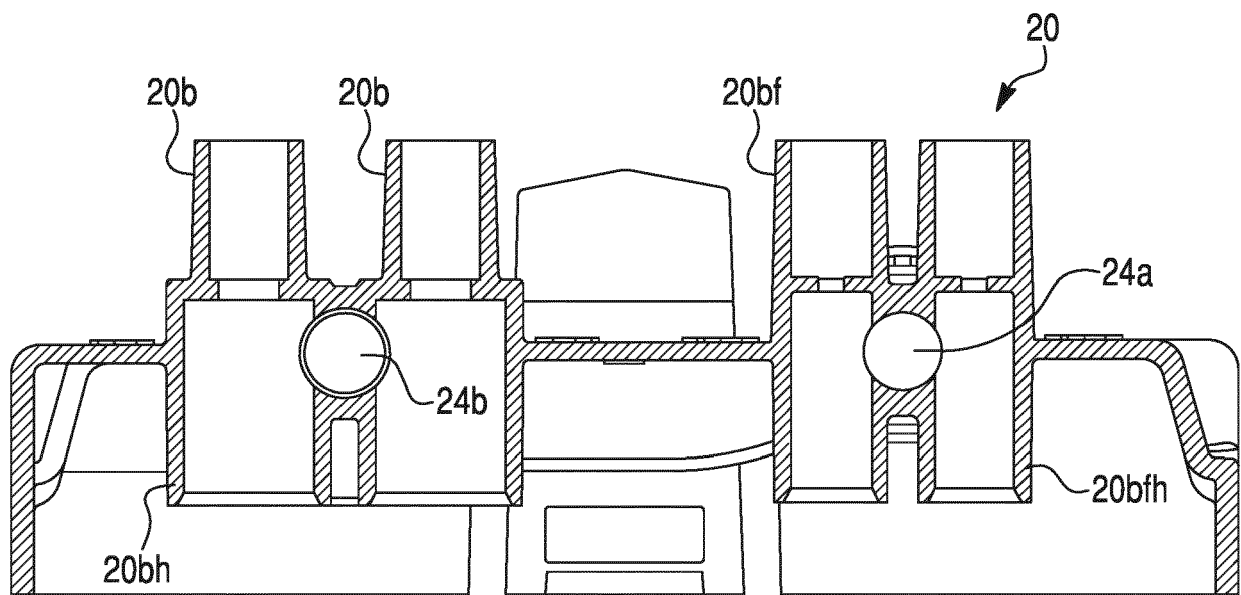


FIG. 6B

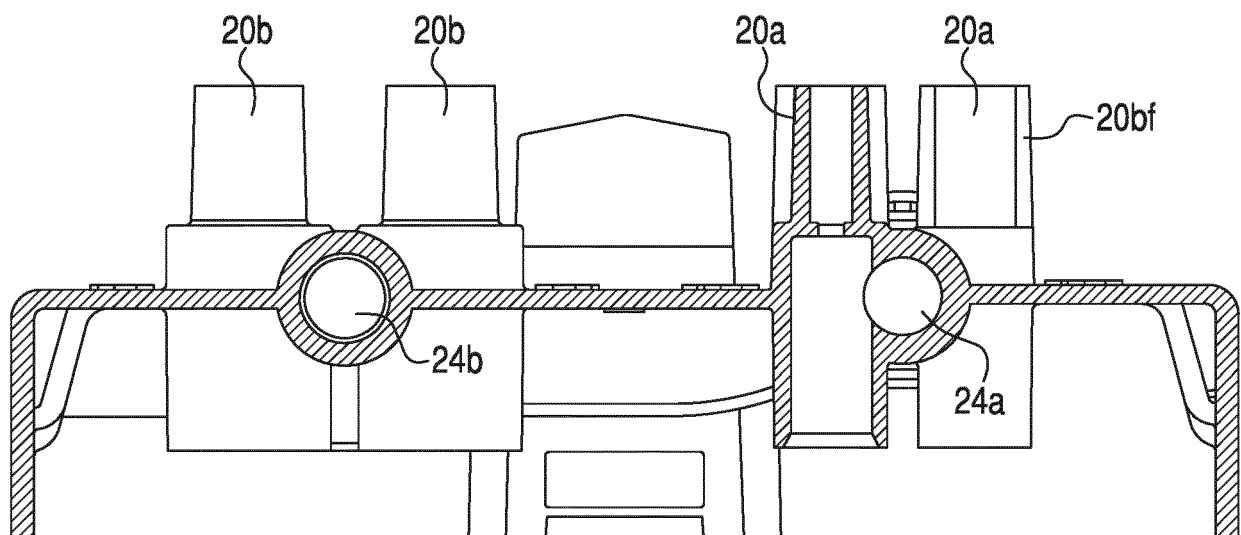


Fig. 6

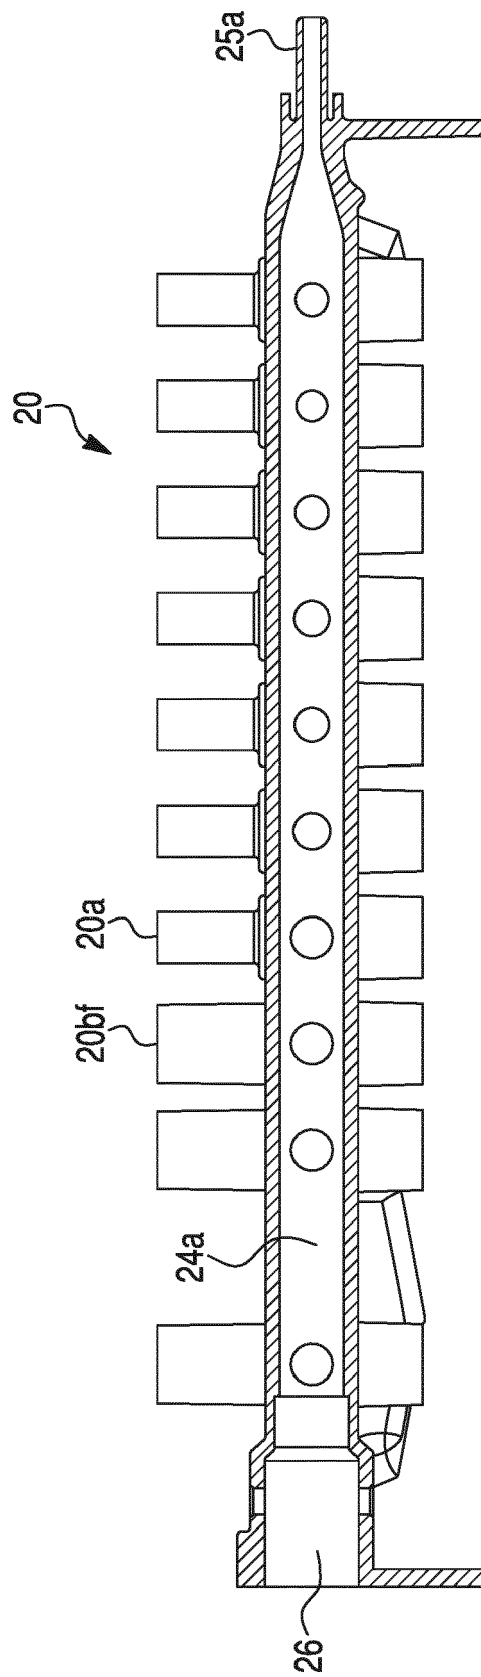


FIG. 7A

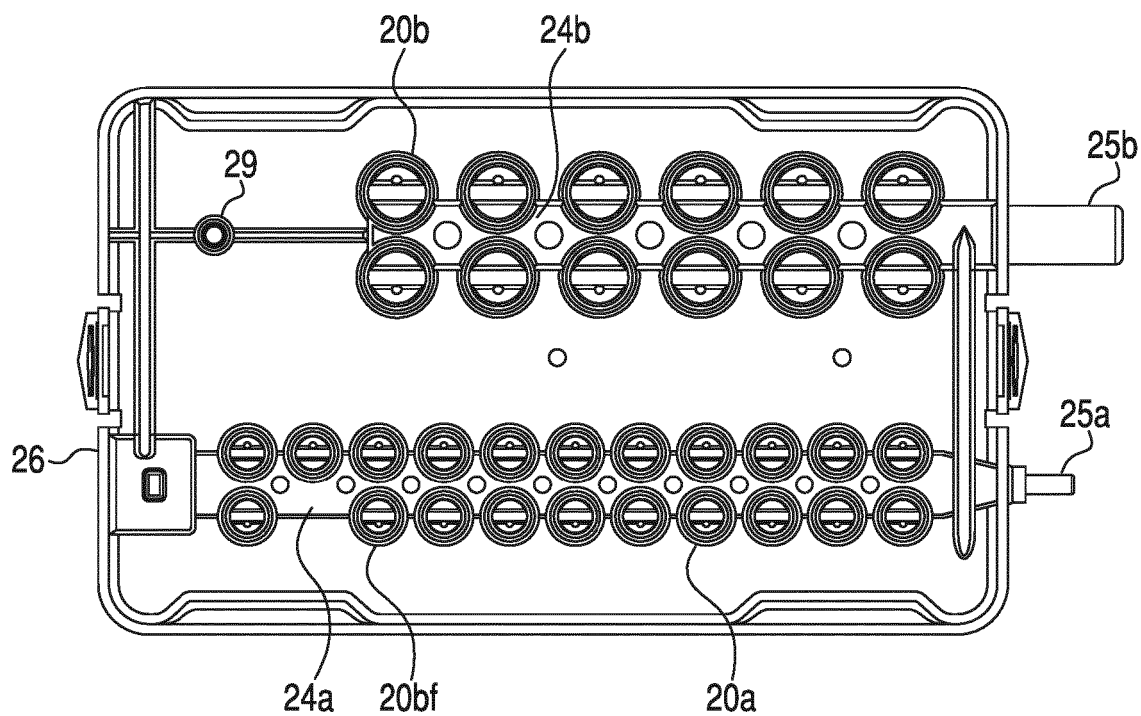


FIG. 7B

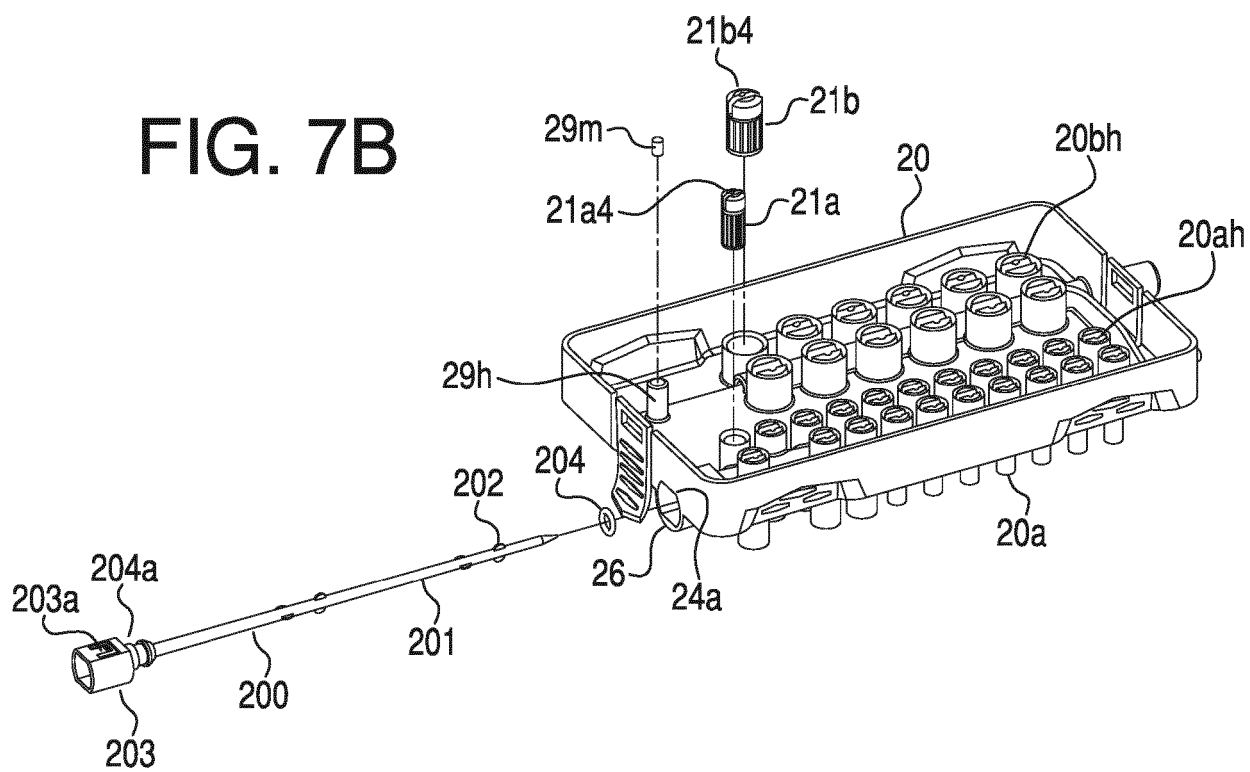


FIG. 7C

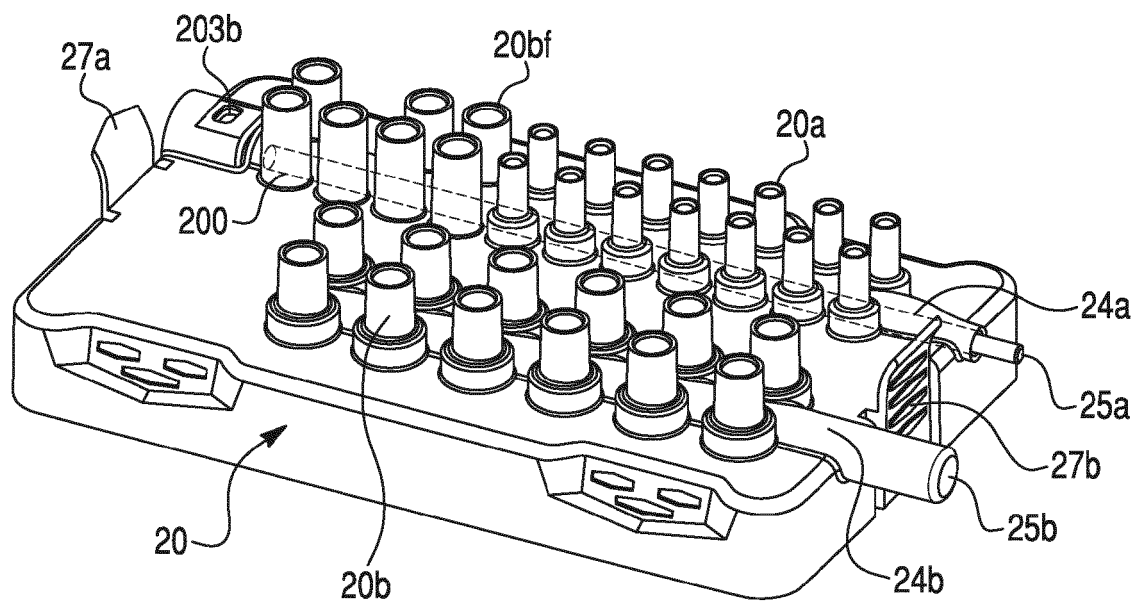


FIG. 8A

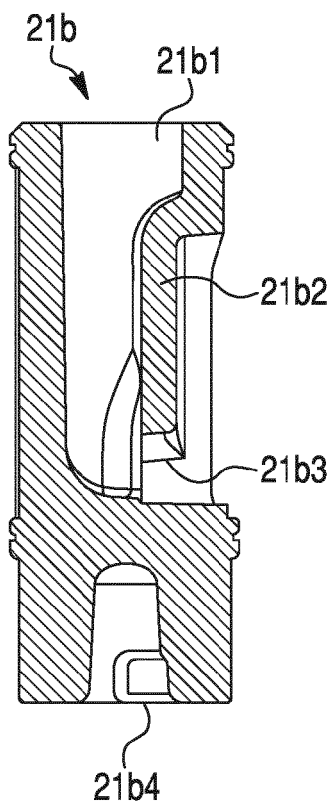


FIG. 8B

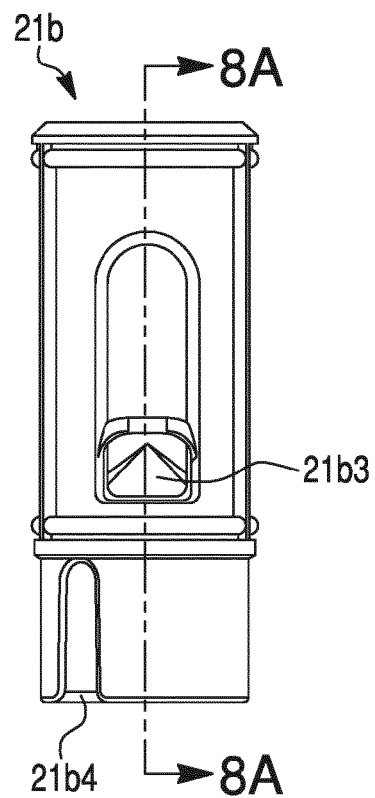


FIG. 9

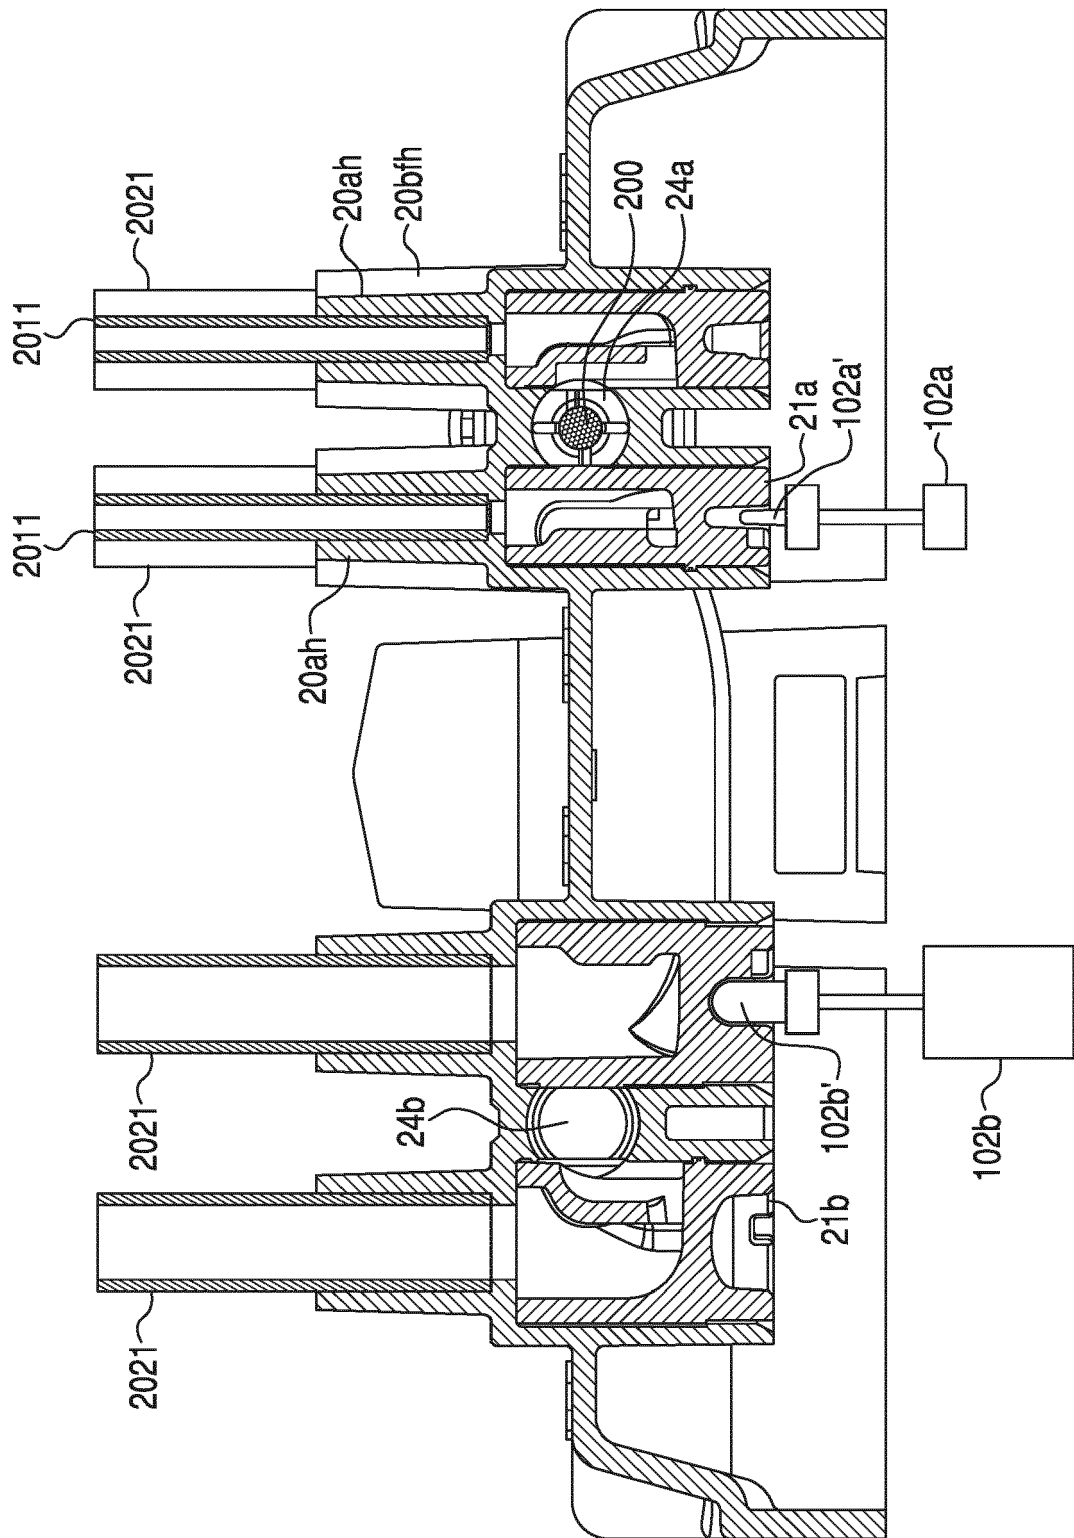


FIG. 10

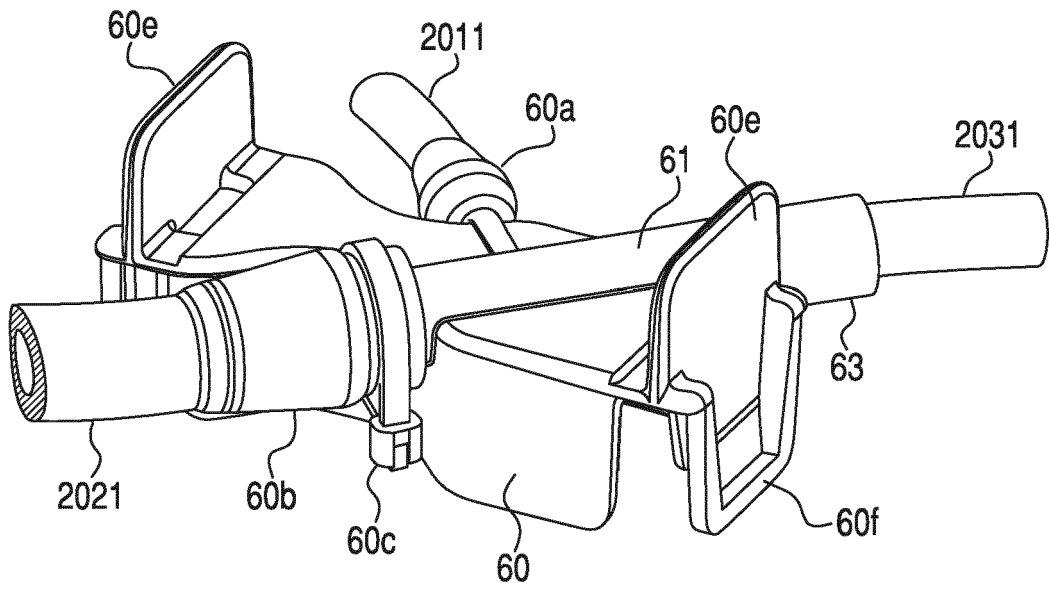


FIG. 11

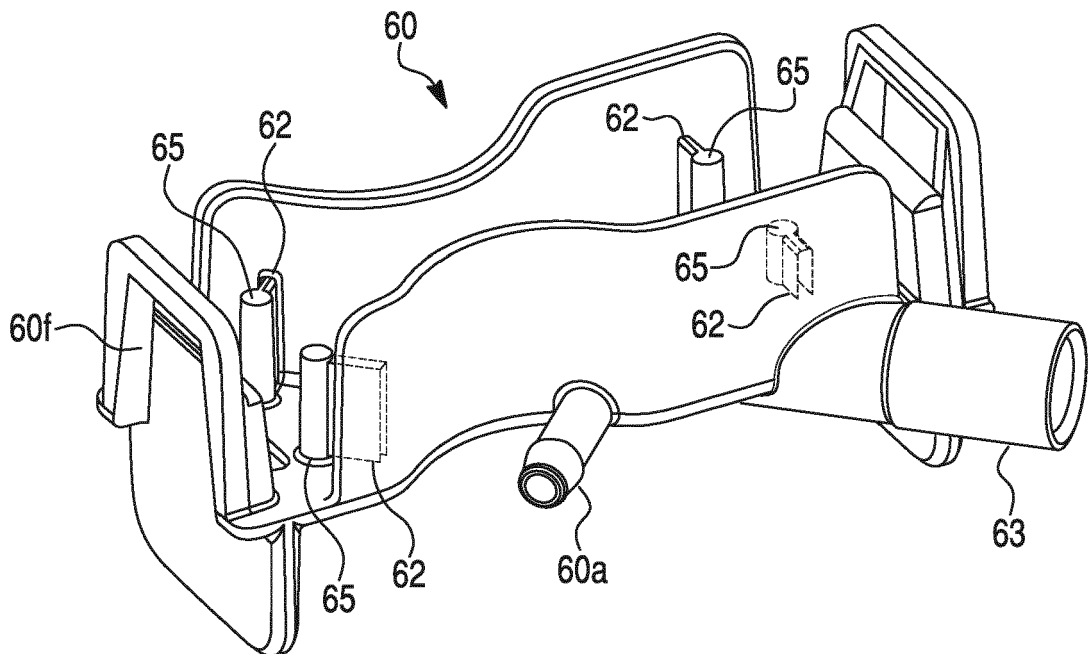


FIG. 12

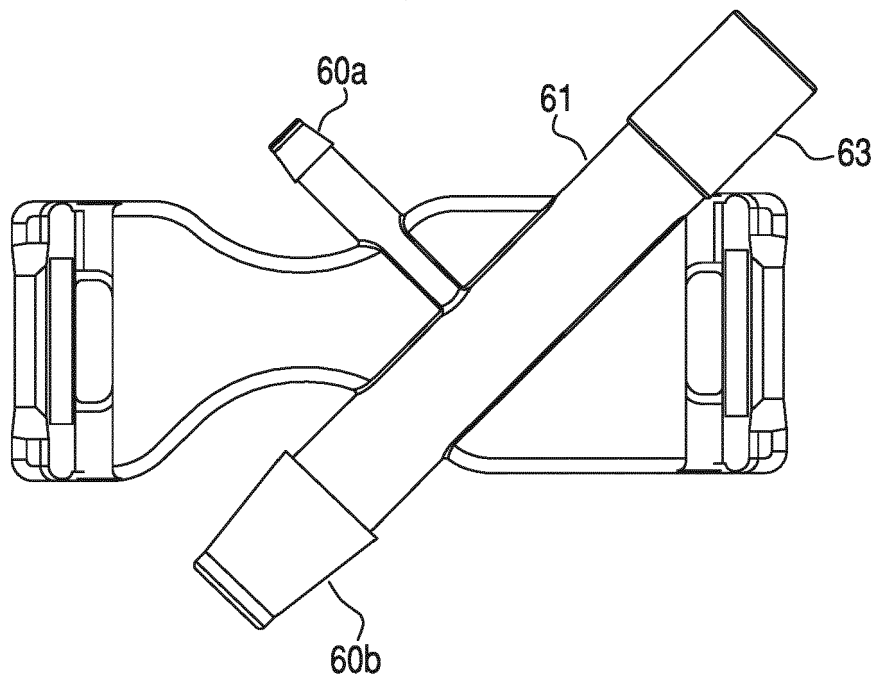


FIG. 13

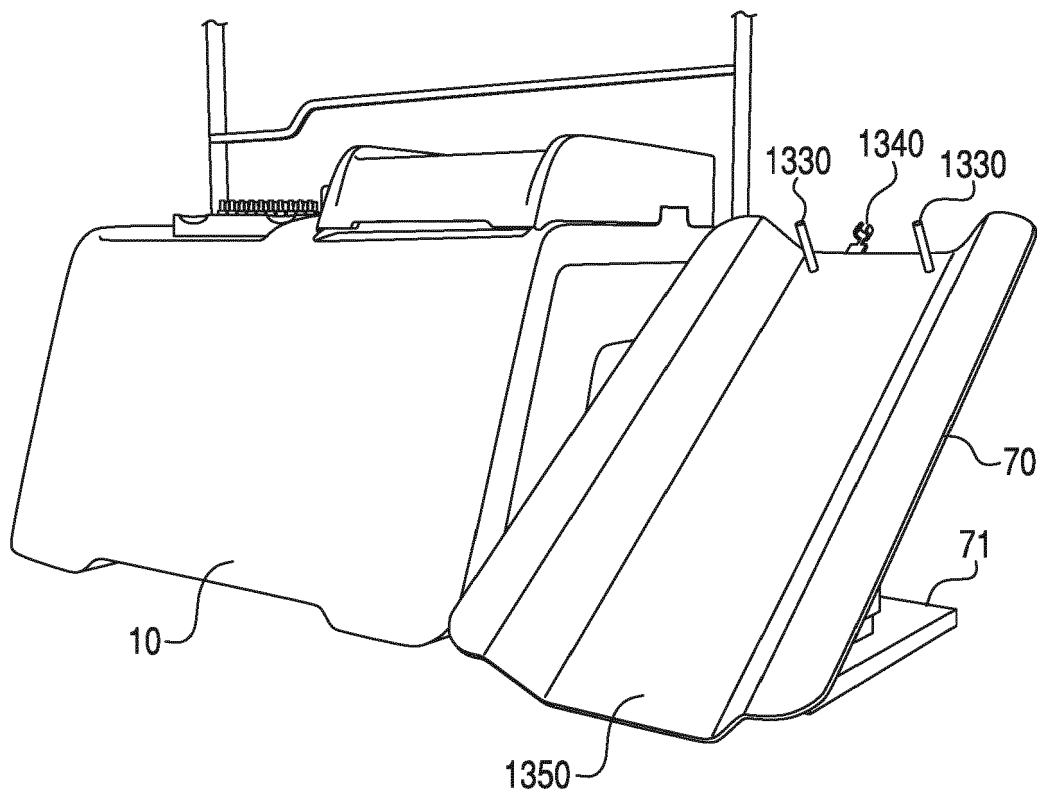


FIG. 14A

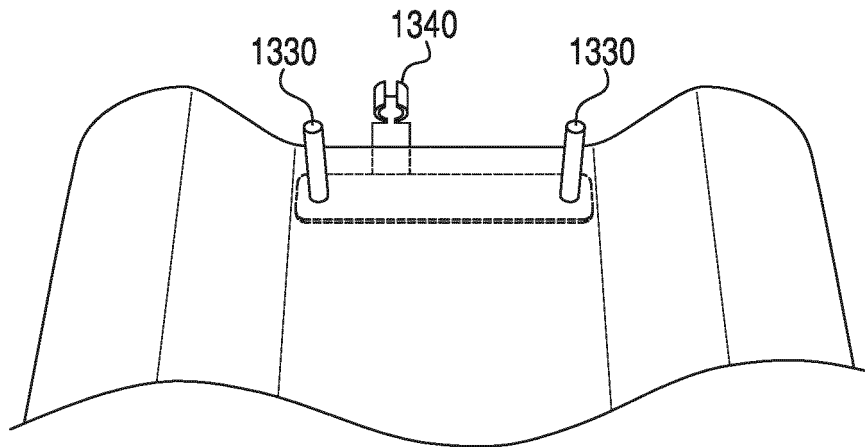


FIG. 14B

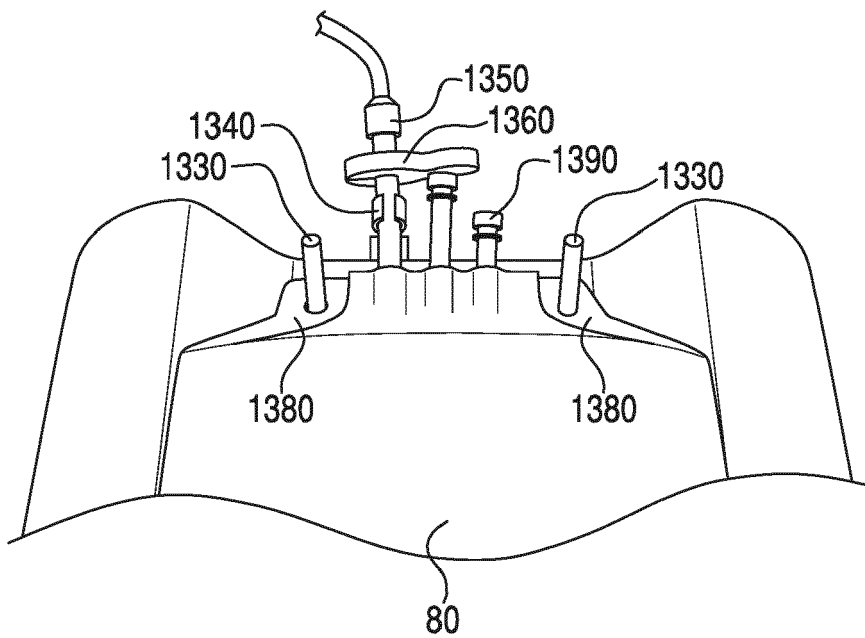


FIG. 15

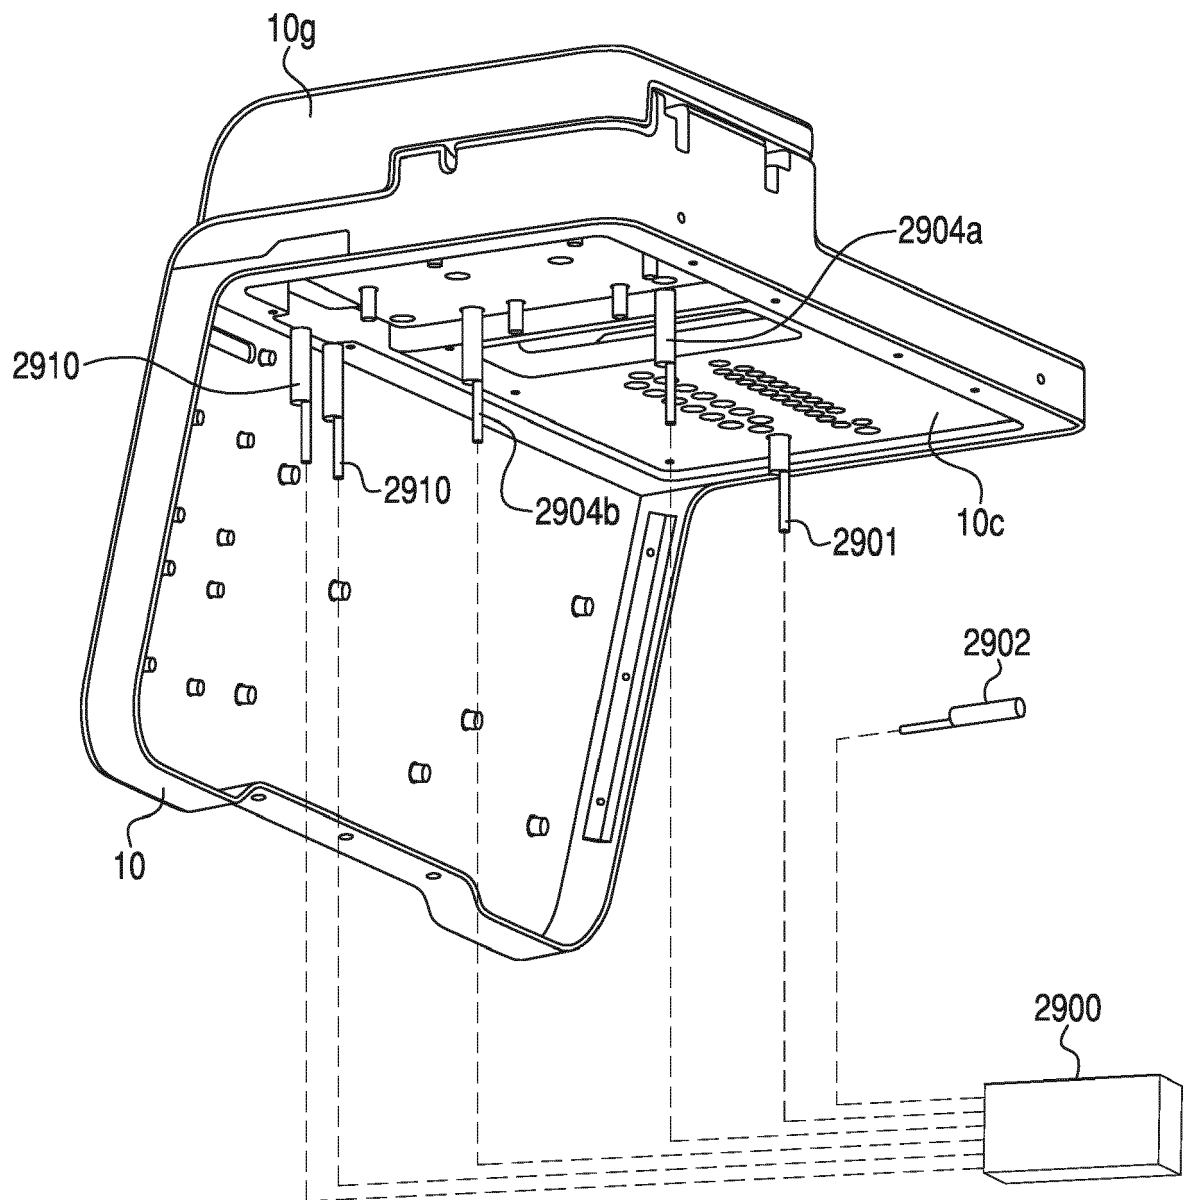


FIG. 16

Source Solution Set Up

Indicate the Transfer Set Type

1. Select transfer set type:

☐ Previous

☒ New

2. Select the number of stations:

☒ 13

☐ 26

3. Select a source solution configuration to use:

Sample Template ▼

OK

Cancel

?

FIG. 17

Transfer Set Installation

Skip Transfer Set Installation

Skip

1. Scan transfer set barcode.

T,13,MM/YYY,LOT#

FIG. 18

2. Confirm that transfer set manifold is not installed.	Confirm	
3. Secure manifold and confirm manifold is attached to device.	Confirm	
4. Secure strain relief in sensor block.	Confirm	
5. Confirm sensor block door is closed.	Confirm	
6. Route tubing around pump rotors and secure union junction to device.	Confirm	
7. Confirm that platens are closed and locked.	Confirm	
8. Close pump door.	Confirm	
OK	Cancel	?

FIG. 19

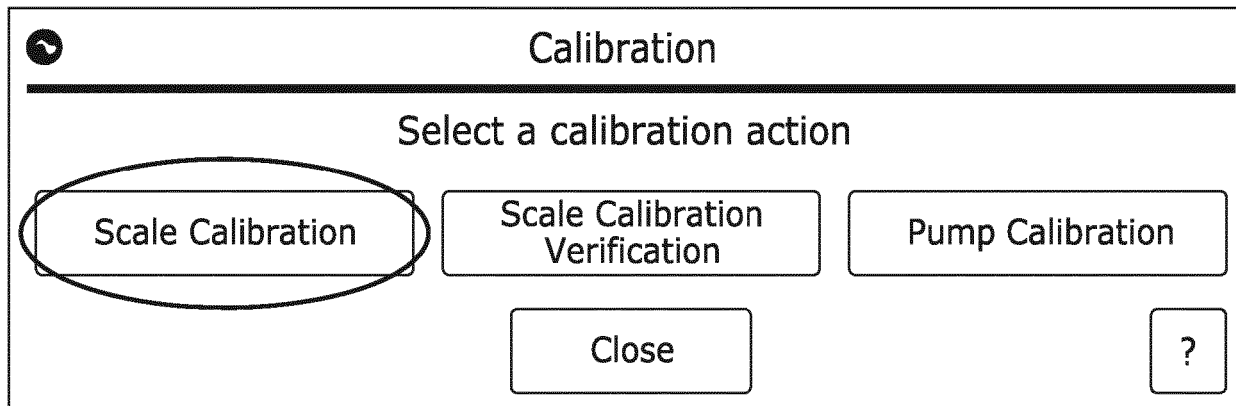


FIG. 19 is a screenshot of a "Calibration" screen. At the top, there is a header bar with a circular icon on the left and the title "Calibration" in the center. Below the header, the text "Select a calibration action" is displayed. There are three buttons arranged horizontally: "Scale Calibration", "Scale Calibration Verification", and "Pump Calibration". The "Scale Calibration" button is highlighted with a red oval. Below these buttons, there is a "Close" button and a button with a question mark "?" in the bottom right corner.

FIG. 20

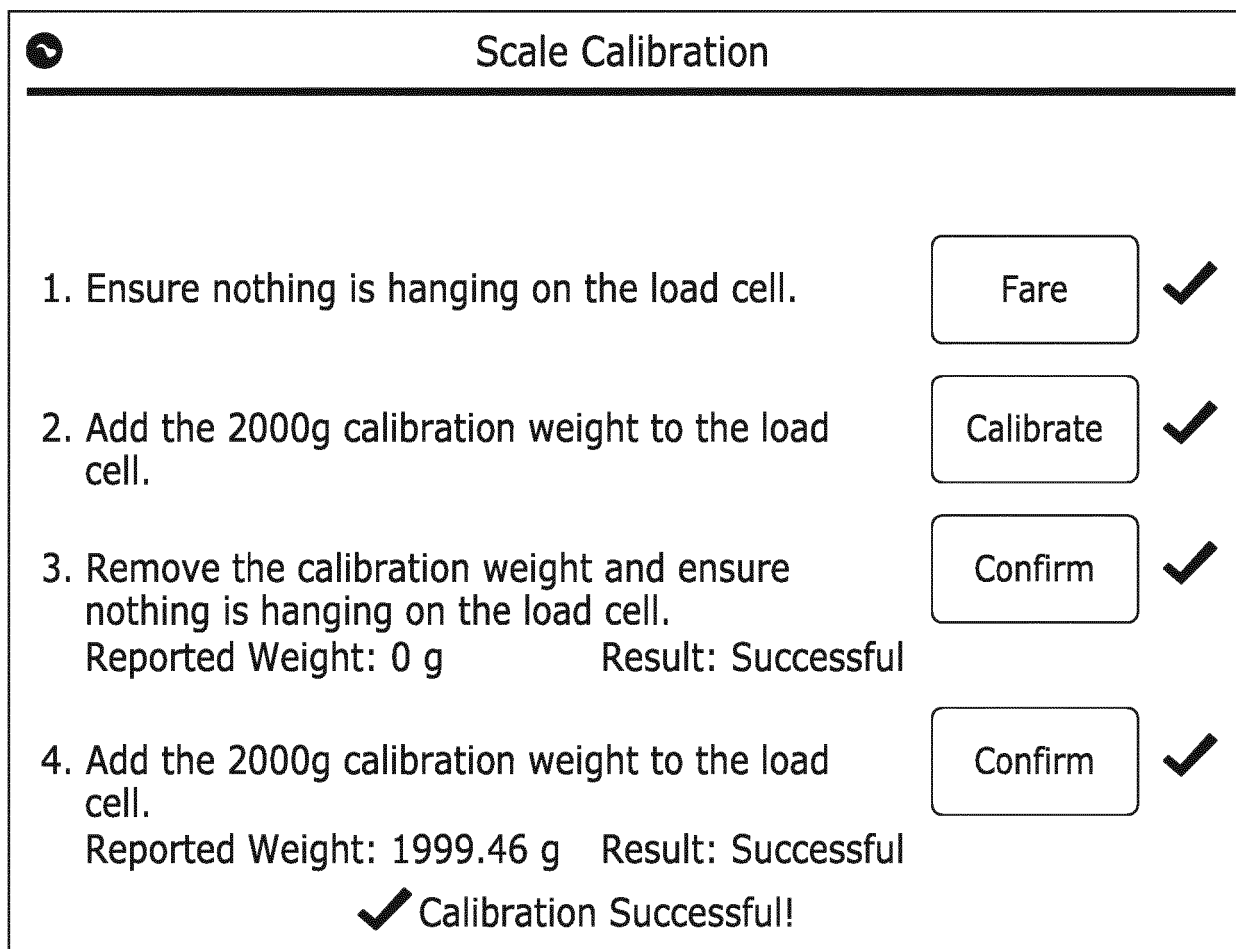


FIG. 20 is a screenshot of a "Scale Calibration" screen. At the top, there is a header bar with a circular icon on the left and the title "Scale Calibration" in the center. Below the header, there are four numbered steps for calibration, each with a corresponding button and a checkmark icon:

- 1. Ensure nothing is hanging on the load cell. Fare ✓
- 2. Add the 2000g calibration weight to the load cell. Calibrate ✓
- 3. Remove the calibration weight and ensure nothing is hanging on the load cell. Confirm ✓
Reported Weight: 0 g Result: Successful
- 4. Add the 2000g calibration weight to the load cell. Confirm ✓
Reported Weight: 1999.46 g Result: Successful

At the bottom of the screen, there is a large checkmark icon followed by the text "Calibration Successful!".

FIG. 21



Station 1 Source Solution

1

STERILE W Inj (BBM)

Change Solution

Confirm Solution

Prime

Replace Solution

Close

Next Ingredient

Manifold Flush

?

FIG. 22

 Station 1 Programmed Solution

1

STERILE W Inj (BBM)

To Confirm Station Source Solution

1. Scan Source Solution Container Barcode.
Scanned Container NDC:

Adjust Source Container Volume: mL

2. Scan Source Line 1 Barcode.
Scanned Source Barcode: ✓

3. Select Spike. ▼ ✓

4. Confirm selected spike.

FIG. 23

Station 1 Programmed Solution

1

STERILE W Inj (BBM)

To Confirm Station Source Solution

1. Scan Source Solution Container Barcode.

Scanned Container NDC: 0264-7850-00 ✓

Adjust Source Container Volume: 2000 mL

2. Scan Source Line 1 Barcode.

Scanned Source Barcode: 1 ✓

3. Select Spike.

Macro, non-vented ✓

4. Confirm selected spike.

Confirm

OK Cancel ?

Source Solution Information

Enter Solution Information

Confirmation Identification: 0264-7850-00

Solution Name: STERILE W Inj (BBM)

Lot Number:

Expiration Date:

2014 April

Su Mo Tu We Th Fr Sa

25 26

27 28 Tu 30 1 2 3

4 5 6 7 8 9 10

OK Cancel ?

FIG. 24



Station 1 Source Solution

1

STERILE W Inj (BBM)

Change Solution

Confirm Solution

Prime

Replace Solution

Close

Next Ingredient

Manifold Flush

?

FIG. 25

Setup and Prime

 **Station 1 Prime - STERILE W Inj (BBM)**

1. Confirm Final Container is clearly marked as not intended for Patient use.

Confirm

2. Prime Container.

Prime

Next

Stop

?

FIG. 26

 Pump Calibration

1. Confirm the calibration final container is attached and marked Not For Patient Use

Confirm

2. Calibrate macro pump

Confirm

3. Confirm macro pump calibration

Confirm

4. Calibrate micro pump

Confirm

5. Confirm micro pump calibration

Confirm

Close

?

FIG. 27

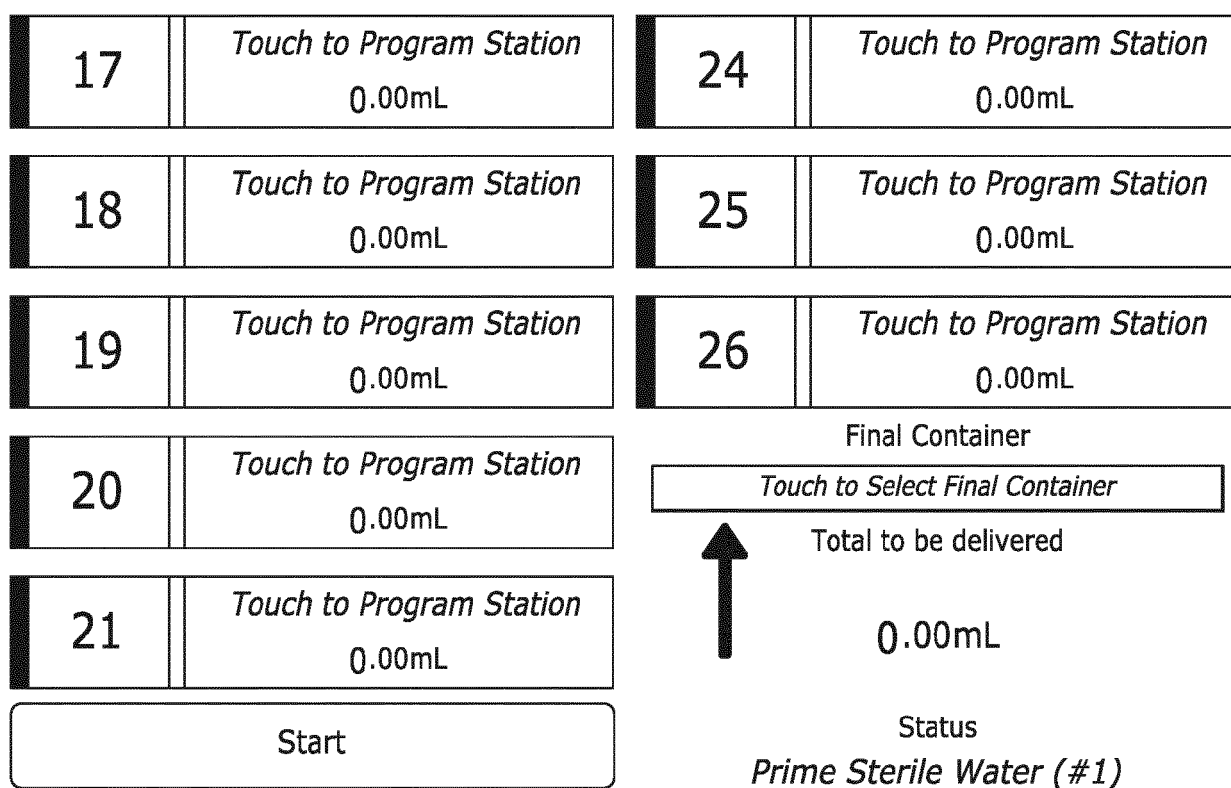


FIG. 28

Select Final Container

◀

Empty 1000 ml.

▶

Single Chamber

Dual Chamber

List

Lot Number:

655234

(max 16)

Expiration Date:

12/2014

(mm/yyyy)

OK

Cancel

?

FIG. 29



Enter Station 1 Volume

1

2000mL

1

2

3

4

5

CLR

6

7

8

9

0

.

OK

Cancel

?

FIG. 30

APEX **B BRAUN**

User: System Administrator Order #: MAN1000 Patient Name/ID: Manual Additions

1	STERILE W Inj (BBM) 5000.00mL ✓	8	Touch to Program Station 0.00mL	15	Touch to Program Station 0.00mL	22	Touch to Program Station 0.00mL
2	FreAmine III 10% 500.00mL ✓	9	Touch to Program Station 0.00mL	16	Touch to Program Station 0.00mL	23	Touch to Program Station 0.00mL
3	AmineSVN II 15% 0.00mL ✓	10	Touch to Program Station 0.00mL	17	Touch to Program Station 0.00mL	24	DEXTrose 70% (BBM) 500.00mL ✓
4	Touch to Program Station 0.00mL	11	Touch to Program Station 0.00mL	18	Touch to Program Station 0.00mL	25	TrophAmine 6% 0.00mL ✓
5	Touch to Program Station 0.00mL	12	Touch to Program Station 0.00mL	19	Touch to Program Station 0.00mL	26	LipoSVN II 10% 200.00mL ✓
6	Touch to Program Station 0.00mL	13	Touch to Program Station 0.00mL	20	Touch to Program Station 0.00mL	Final Container Empty 1000mL Total to be delivered	
7	Touch to Program Station 0.00mL	14	Touch to Program Station 0.00mL	21	Touch to Program Station 0.00mL	1700.00mL Status Ready	

Options Recall Cancel Order Help Start

FIG. 31



Low Volume Warning

2

FreAmine III 10% : 56.00mL Required

Insufficient volume remaining for automated dispense.
Manually dispense remaining volume or replace source.

Manual
Dispense

Replace Source
Container

Resume
Compounding

?

FIG. 32

 Manual Dispense

2

FreAmine III 10% : 46.00mL Required

System tracked container volume is lower then minimum deliverable on this channel (5mL).
Manually dispense per visual inspection if desired.

Dispense Volume:

1	2	3	4	5	CLR
6	7	8	9	0	.

Dispense

Exit

?

FIG. 33

 Station 1 Programmed Solution

1

STERILE W Inj (BBM)

To Confirm Station Source Solution

1. Scan Source Solution Container Barcode.

Scanned Container NDC: 0264-7850-00 ✓

Adjust Source Container Volume: 2000 mL

2. Scan Source Line 1 Barcode.

Scanned Source Barcode: 1 ✓

3. Select Spike. Macro, non-vented ▼ ✓

4. Confirm selected spike. Confirm

OK

Cancel

?

FIG. 34



Compounding Completed

v(1.0.2.3)

Patient Name/ID:

MAN1000

Order ID

MAN1000

Filled 102% (02 %)

View Less

Remove Final Container

Ordered

1831.50 g

Delivered

1999.46 g

Order ID: MAN1000

Bag ID:

Operator: System Administrator

Job Time: 4/28/2014 12:25 PM

Job Status: Unsuccessful

←

→

STERILE W/Inj (BBM)

500

1

0264-7850-00

654654

6/30/2014 12:00 AM

FreAmine III 10%

500

2

0264-9010-55

654654

6/30/2014 12:00 AM

DEXTrose 70% (BBM)

500

24

0264-1129-50

654654

6/30/2014 12:00 AM

LipoSYN III 10%

500

26

0409-9790-03

654654

6/30/2014 12:00 AM

Container Disposition

Final Bag Completed Successfully

Scrap Bag & Cancel Order

Scrap Bag & Keep for Compounding Again

Print

Bubble Events

Manual Additions

Apply Disposition

Close

?

56

EP 3 607 929 A1



EUROPEAN SEARCH REPORT

 Application Number
 EP 19 19 7867

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	WO 98/25570 A1 (BAXTER INT [US]) 18 June 1998 (1998-06-18) * page 10, line 22 - page 11, line 5 *	1-15	INV. A61J3/00
A	US 2005/121103 A1 (STEIGERWALT JEFFREY [US] ET AL) 9 June 2005 (2005-06-09) * paragraphs [0037] - [0038]; figure 2 *	1-15	
A	US 5 701 937 A (BOURBOULOU YVES [FR] ET AL) 30 December 1997 (1997-12-30) * the whole document *	1	
A	US 5 431 202 A (DIKEMAN W CARY [US] ET AL) 11 July 1995 (1995-07-11) * figure 1 *	1-15	
			TECHNICAL FIELDS SEARCHED (IPC)
			A61J
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 15 November 2019	Examiner Birlanga Pérez, J
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 19 19 7867

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-11-2019

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9825570 A1	18-06-1998	AT 237297 T	15-05-2003
		AU 718362 B2	13-04-2000
		BR 9707626 A	27-07-1999
		CA 2243960 A1	18-06-1998
		CN 1210458 A	10-03-1999
		CO 4750848 A1	31-03-1999
		DE 69720981 D1	22-05-2003
		DE 69720981 T2	19-08-2004
		DK 0886513 T3	04-08-2003
		EP 0886513 A1	30-12-1998
		ES 2197374 T3	01-01-2004
		ID 20422 A	10-12-1998
		JP 4560572 B2	13-10-2010
		JP 2000506425 A	30-05-2000
		JP 2009039536 A	26-02-2009
		KR 19990082388 A	25-11-1999
		MY 118402 A	30-10-2004
		PT 886513 E	30-09-2003
		US 5927349 A	27-07-1999
		US 6079462 A	27-06-2000
		US 6202711 B1	20-03-2001
		WO 9825570 A1	18-06-1998
US 2005121103 A1	09-06-2005	AU 2004305480 A1	07-07-2005
		BR PI0416543 A	09-01-2007
		CA 2547786 A1	07-07-2005
		CN 1997553 A	11-07-2007
		EP 1689641 A1	16-08-2006
		ES 2539797 T3	06-07-2015
		HK 1090009 A1	11-09-2015
		JP 4538004 B2	08-09-2010
		JP 5188531 B2	24-04-2013
		JP 2007515207 A	14-06-2007
		JP 2010148963 A	08-07-2010
		US 2005121103 A1	09-06-2005
		US 2005126652 A1	16-06-2005
		US 2006070684 A1	06-04-2006
		WO 2005061328 A1	07-07-2005
US 5701937 A	30-12-1997	AU 670474 B2	18-07-1996
		CA 2148831 A1	26-05-1994
		EP 0667762 A1	23-08-1995
		FI 952195 A	08-05-1995
		NZ 257681 A	22-09-1997
		US 5701937 A	30-12-1997
		WO 9410965 A1	26-05-1994

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 19 19 7867

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-11-2019

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5431202	A	11-07-1995	NONE

15

20

25

30

35

40

45

50

EPO FORM P0459

55

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 3302398 A [0001]