

(19)



(11)

EP 3 608 253 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
12.02.2020 Bulletin 2020/07

(51) Int Cl.:
B65D 43/02 (2006.01) B65D 45/30 (2006.01)
B65D 41/04 (2006.01) B65D 51/16 (2006.01)

(21) Application number: **19382700.3**

(22) Date of filing: **08.08.2019**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(71) Applicant: **Böttger, Bettina**
2765-227 Estoril (PT)

(72) Inventor: **Böttger, Bettina**
2765-227 Estoril (PT)

(74) Representative: **Juncosa Miró, Jaime et al**
Torner, Juncosa i Associats, S.L.
Gran Via de les Corts
Catalanes, 669 bis, 1^o, 2^a
08013 Barcelona (ES)

(30) Priority: **09.08.2018 ES 201831261 U**

(54) **CONTAINER WITH A LID ATTACHED TO A THREADED CLOSURE MECHANISM**

(57) The container with a lid attached to a threaded closure mechanism includes a receptacle (10) having a mouth (11) surrounded by a thread (12), a lid (20), a sealing ring (30) and a closure mechanism (40) formed by a disc (41) with a hollow interior and a perimetral tubular skirt (42) provided with an engagement configuration complementary to the thread of the receptacle. The closure mechanism surrounds the lid and holds it against the mouth of the receptacle by means of a threaded attachment between the engagement configuration of the closure mechanism and the thread of the receptacle, assuring proper hermetic closure of the lid with the receptacle in cooperation with the sealing ring and a retainer element (50) connected to the closure mechanism to constrict an insertion passage thereof thereby retaining the lid into the closure mechanism.

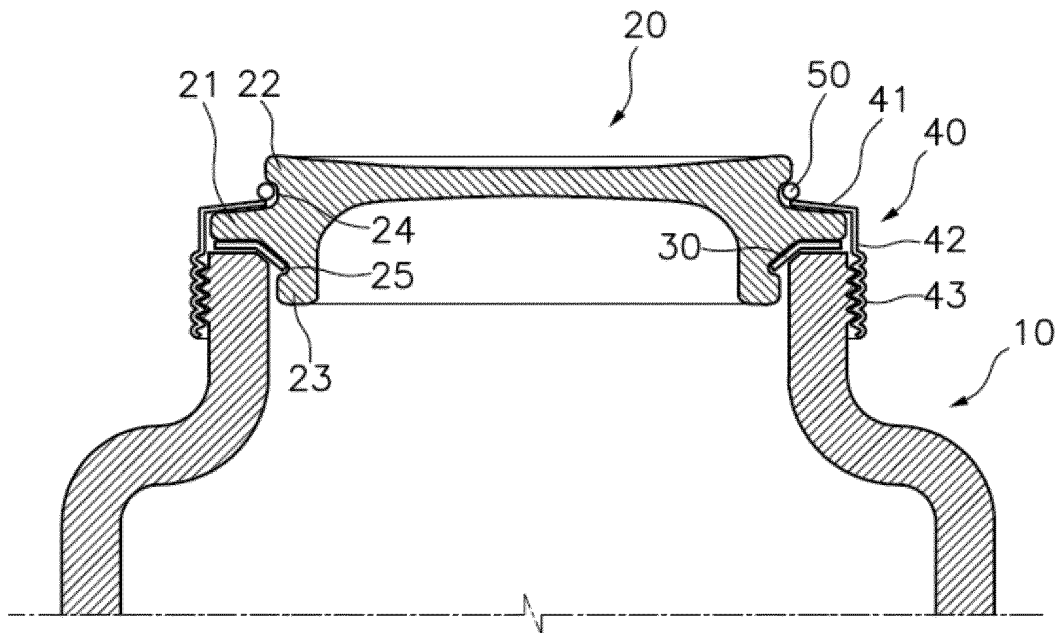


Fig.2

EP 3 608 253 A1

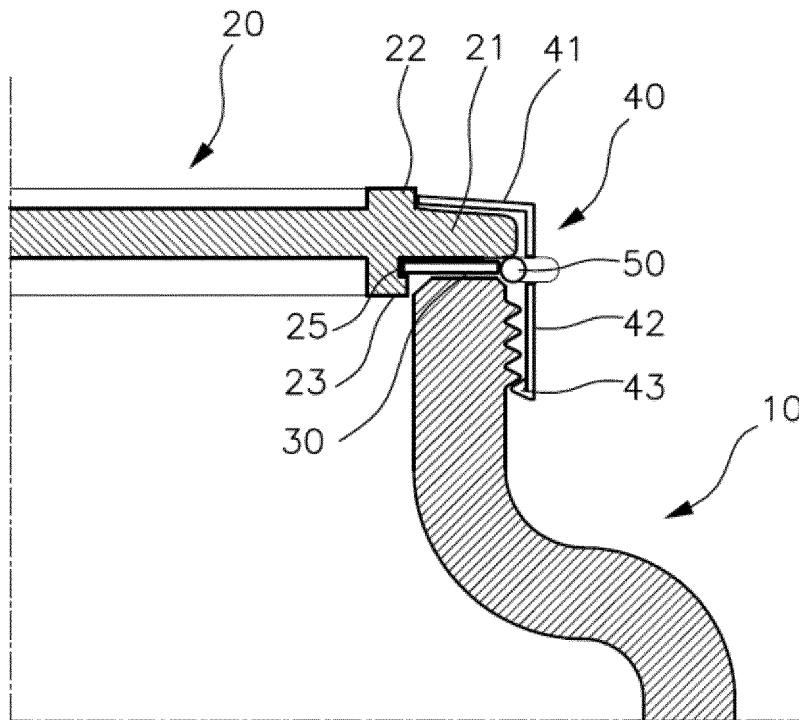


Fig.4

Description

Technical field

[0001] The present invention relates to the field of containers with a lid attached to a threaded closure mechanism, the containers being of the type including a receptacle having a mouth surrounded by a thread, a lid, and a closure mechanism formed by a disc with a hollow interior and a perimetral tubular skirt provided with an engagement configuration complementary to the thread of the receptacle.

[0002] The closure mechanism surrounds the lid and holds it against the mouth by means of the threaded attachment between the engagement configuration of the closure mechanism and the thread of the receptacle, assuring proper hermetic closure of the lid with the receptacle.

State of the Art

[0003] Containers provided with a receptacle and a lid held against the mouth of the receptacle by means of a closure mechanism formed by a disc with a hollow interior and a perimetral skirt provided with an engagement configuration complementary to a thread of the receptacle have been known for over a hundred years.

[0004] The oldest and most well-known containers of this type are those known as Mason jars which have been marketed by Mason since the end of the 19th century in the form of glass receptacles and lids.

[0005] Since then, there have been registrations for containers of this type, incorporating minor system variations or improvements. For example, document US1602346A or document US8550268B1 describes containers of this type.

[0006] However, in known containers of this type the closure mechanism is not attached to the lid, so the lid is separated from the closure mechanism after opening the receptacle.

Disclosure of the Invention

[0007] The present invention relates to a container with a lid attached to a threaded closure mechanism including:

- a receptacle provided with a mouth including a receptacle opening, an annular mouth surface surrounding said receptacle opening, and a thread externally surrounding said mouth;
- a lid with a front side and a back side, said lid including an annular perimetral flange which, in a closed position, is superimposed on the annular mouth surface of the receptacle, and at least one central rib protruding from the front side of the lid;
- a sealing ring arranged and held between the annular mouth surface of the receptacle and the annular flange of the lid;

- a closure mechanism movable between a closed position and an open position, the closure mechanism being formed by a tubular skirt with a first open end and a second end closed by means of an annular disc attached along its outer perimeter to the tubular skirt, said tubular skirt being provided with an engagement configuration complementary to the thread of the receptacle; wherein

- the tubular skirt surrounds and defines a first insertion passage the size of which is equal to or greater than the external size of the annular flange of the lid and the depth of which is greater than the thickness of the annular flange; and
- the annular disc surrounds and defines a second insertion passage in the center thereof, the size of which is smaller than the size of the first insertion passage and the external size of the annular flange and greater than or equal to the size of the at least one central rib of the lid;

wherein in the closed position the annular flange is inserted into the first insertion passage and in contact with the annular disc of the closure mechanism, the at least one central rib is inserted into the second insertion passage, the tubular skirt is arranged around the mouth, and the engagement configuration of the closure mechanism is coupled to the thread.

[0008] The threaded hermetic closure determines that the thread is circular, and therefore the mouth will also preferably be tubular. This preferably determines that the general configuration of the annular flange of the lid and the closure mechanism also have a general circular geometry to be adapted to said tubular mouth.

[0009] The back side of the lid is envisaged for being oriented, in a closed position, towards the receptacle opening, the front side being the opposite face of the lid in which the at least one central rib is located.

[0010] The closure mechanism is provided for screwing the engagement configuration on the thread of the receptacle, holding the lid against the receptacle achieving hermetic closure thereof. More specifically, the annular disc of the closure mechanism will be superimposed on the annular flange of the lid in the closed position, pressing it against the annular mouth surface of the receptacle.

[0011] It is furthermore understood that when it is specified that two linked or fitted elements are of the same size, the possibility of there being small differences in size making it necessary to apply a certain force and there being small elastic deformation of one of the elements so that they can be fitted and inserted with respect to one another is also contemplated.

[0012] The sealing ring will preferably be made of a flexible or elastomeric material that is, however, air-tight, such as plastics, soft plastics, gums, latex, or rubber, for example.

[0013] The invention furthermore proposes, in a man-

ner not known in the state of the art, the inclusion of:

a retainer element connected to the closure mechanism constricting the first insertion passage thereby retaining the annular flange attached to the closure mechanism preventing the removal of the lid; or
 5 a retainer element connected to the closure mechanism constricting the second insertion passage, with portions of the retainer element being inserted into portions of side grooves located in areas of the
 10 at least one central rib of the lid located at two different halves of the lid, thereby retaining the at least one central rib attached to the closure mechanism preventing the removal of the lid.

[0014] In other words, it is proposed to include a retainer element which, in collaboration with the closure mechanism, reduces the free section of the first or second insertion passage of the closure mechanism thus preventing the removal of the lid from inside the closure mechanism.

[0015] This allows the closure mechanism to remain attached to the lid even in the open position, preventing the loss of one of these elements, and preventing the lid from accidentally falling out from inside the closure mechanism, which may cause said lid to break if it is made of a fragile material such as glass or ceramic.

[0016] When opening the receptacle, the rotation of the closure mechanism in collaboration with the thread causes the distancing of the closure mechanism with respect to the annular mouth surface of the receptacle. The proposed retainer element will cause said distancing to pull the lid along as well, moving it away from the annular mouth surface, which will help to break the vacuum that may exist inside the container while it is being unscrewed at the same time, facilitating the entry of air therein.

[0017] In the closed position, the lid is inserted into the closure mechanism through the first insertion passage, with the annular flange being in contact with the annular disc closing the bottom of the first insertion passage and the at least one annular rib being inserted into the second insertion passage.

[0018] Since the depth of the tubular skirt is greater than the thickness of the annular flange, in the closed position only a part of the tubular skirt will be arranged around the annular flange, the retainer element being positioned in the rest of the tubular skirt that will be arranged below the mentioned annular flange, the receptacle being in a vertical position with its mouth at the upper end.

[0019] The receptacle and/or the lid can be made of glass or ceramic, although alternatively the use of plastic is also contemplated.

[0020] According to a first alternative of the invention, the retainer element will cause the first insertion passage to narrow to a size smaller than the size of the annular flange, thereby preventing said annular flange from being able to be removed from the first insertion passage, the

closure mechanism being attached to the annular lid.

[0021] Alternatively, the retainer element will cause the second insertion passage to narrow. However in this case, for the retention of the lid to occur, said at least one central rib must include portions of side grooves located in at least two different halves of the lid, and the retainer element must be at least partially inserted in said portions of side grooves.

[0022] For manufacturing said lid with the groove portions, the use of glass pressed in a mold provided with more than two parts is preferably proposed.

[0023] In any case, the retainer element reduces the size of the insertion passage through which the lid has been inserted into the closure mechanism, preventing it from being able to be removed again.

[0024] According to an embodiment of the proposed invention, the retainer element will be an elastically deformable element.

[0025] In one embodiment, said elastically deformable retainer element will be attached under elastic strain around the central rib of the lid, the retainer element being partially inserted into said side grooves, being connected to the annular disc of the closure mechanism by contact.

[0026] According to another embodiment, the elastically deformable retainer element will be attached under elastic strain to the tubular skirt externally surrounding it. In such case, the tubular skirt will include openings through which portions of said retainer element are introduced into the first insertion passage constricting it and reducing the free section of passage.

[0027] Alternatively, the elastically deformable retainer element may be inserted by pressure into the first insertion passage, the tubular skirt including openings or seats in which portions of said retainer element are fitted fixing the position of the retainer element inside the first insertion passage. In other words, the retainer element will be introduced into the compressed first insertion passage and its expansion will keep it pressed against openings or maintain it on seats made in the wall of the tubular skirt where it will be partially inserted, preventing accidental removal thereof.

[0028] The proposed elastically deformable retainer element can be, for example, an annular spring or an elastic ring or an open ring, made of, for example, a metallic or plastic material.

[0029] According to another embodiment of the invention, the retainer element can be a plastically deformed portion of the closure device producing a bulging which constricts the first or second insertion passage.

[0030] The closure mechanism may be, for example, metallic or plastic, which allows creating said plastic deformation by applying pressure or pressure and heat, after the insertion of the lid into the first insertion housing.

[0031] It is proposed that the engagement configuration of the closure mechanism mentioned above will be a thread formed in the tubular skirt, said thread being complementary to the thread of the receptacle to allow their attachment.

[0032] Alternatively, said engagement configuration can consist of a plurality of thickenings arranged around the first open end of the tubular skirt, said thickenings projecting from the tubular skirt towards the inside of the first insertion passage, said plurality of thickenings being complementary to the thread of the receptacle. If the closure mechanism is metallic, said plurality of thickenings may be formed by a fold of the edge of the tubular skirt.

[0033] To contribute to the breaking of the vacuum inside the container through the movement of opening the closure mechanism by means of unscrewing it from the mouth, other features causing the joint rotation of the closure mechanism with the lid are also proposed. The combination of pulling on the lid, moving it away from the receptacle, and rotating same will assure the breaking of hermetic sealing and the entry of air into the container.

[0034] For the joint rotation of the closure mechanism and the lid, it is proposed for at least:

- the first insertion passage and a perimetral area of the annular flange; or
- the second insertion passage and a perimetral area of the central rib

to have a complementary non-circular geometry and size, both elements being fitted together preventing relative rotation of the closure mechanism with respect to the lid.

[0035] A complementary size is understood to be that which allows the insertion of an element into the corresponding passage, even if certain force and elastic deformation is required to cause said insertion.

[0036] Likewise, a complementary size which prevents relative rotation is understood to be that size which will cause an interference of the insertion passage with the element inserted therein along its rotating path. For example, in most geometries, it is considered that a size difference equal to or less than 3 mm should provide said effect, unless these geometries are very close to the circular geometry.

[0037] It is considered that a circular geometry concentric with the thread will not allow obtaining the desired effect of causing the joint rotation of the closure mechanism with the lid. However, it is considered that other geometries will indeed cause said effect.

[0038] Therefore, two solutions are proposed to achieve the joint rotation of the closure mechanism with the lid.

[0039] On one hand, it is proposed that neither the central rib of the lid nor the second insertion passage will be circular, with both elements having complementary geometries and sizes and therefore producing a coupling which prevents their relative rotation.

[0040] On the other hand, it is proposed that neither the annular flange nor the first insertion passage will be circular, with both elements having complementary geometries and sizes and therefore producing a coupling which prevents their relative rotation.

[0041] By way of non-limiting example, it is proposed that the central rib will be in the shape of a polygon, ellipse, sinuous contour, star, cross, symbol, letter, word, number, or a truncated circular shape or circular shape with notches on the perimeter thereof.

[0042] Also by way of non-limiting example, it is proposed that the perimetral area of the annular flange will be in the shape of a polygon, flute, sinuous contour, or a truncated circular shape or circular shape with notches on the perimeter thereof.

[0043] According to another embodiment of the invention, the at least one central rib includes at least two diametrically opposing portions defining between them a central passage diametrically crossing the lid and going through the center thereof, said two diametrically opposing portions having supporting planes perpendicular to the front side of the lid.

[0044] This allows a user to introduce a lever element, such as a knife, a handle of a piece of cutlery, or a toothpick in said central passage, the lever element being supported on the lid. A rotation applied on that lever element will cause it to come into contact with the supporting planes of the two diametrically opposing portions of the central rib, allowing the application of torque on the lid, causing the rotation thereof with respect to the rest of the receptacle.

[0045] In addition or as an alternative to the preceding features, it is also proposed to include discrete protuberances of a thickness smaller than the thickness of the sealing ring on:

- the face of the annular flange facing the sealing ring; or
- the annular mouth surface facing the sealing ring, or
- the face of the sealing ring facing the annular flange; or
- the face of the sealing ring facing the annular mouth surface.

[0046] Said protuberances will not prevent the hermetic sealing of the container, given that by having a thickness smaller than the thickness of the sealing ring, the flattening of said sealing ring under the force exerted by the closure mechanism can bear said irregularity the protuberance entails, keeping the sealing leak-tight, particularly with the protuberance being rounded edges and slightly inclined. Preferably, the thickness of said protuberance will be less than half the thickness of the sealing ring.

[0047] However, once the lid is released from the closure mechanism, the same elastic force of the sealing ring will push the protuberance and facilitate the spontaneous breaking of the hermetic sealing, allowing the entry of outside air through spaces adjacent to the discrete protuberances.

[0048] It is furthermore preferably contemplated for each of said discrete protuberances to consist of an elongated bulge which traverses the face on which they are

formed from the outer perimeter to the inner perimeter of the element in which they are formed, thereby facilitating the entry of air from the outside to the inside of the container when the closure mechanism is released.

[0049] Each of said protuberances preferably comprises a bulge which traverses the face on which they are formed from the outer perimeter to the inner perimeter of the element in which they are formed.

[0050] The lid may furthermore include at the back side thereof a rear centering rib of a smaller diameter than the receptacle opening, provided for being inserted into said mouth when the lid is in the closed position, and wherein the rear centering rib will consist of an annular perimetral groove in which the sealing ring will be partially fitted.

[0051] This feature assures that the sealing ring remains attached to the lid also in the open position, preventing it from going missing.

[0052] According to a proposed additional embodiment, said annular flange of the lid has a thickness equal to or less than 5 mm, this being a reduced thickness which allows obtaining a lid and closure mechanism assembly with a small height.

[0053] The sealing ring will preferably have a thickness equal to or less than 2.1 mm, which will also help in reducing the visible part of the lid and closure mechanism assembly, as this thickness is smaller than usual.

[0054] Furthermore, this reduced thickness will require lower pressure of the closure mechanism to obtain hermetic closure.

[0055] Other features of the invention will become apparent in the following detailed description of an embodiment.

Brief Description of the Drawings

[0056] The foregoing and other advantages and features will be better understood based on the following detailed description of an embodiment in with reference to the attached drawings which must be interpreted in an illustrative and non-limiting manner, in which:

Fig. 1 is an exploded vertical cross-section of the different components of a container with a hermetic closure according to a first embodiment of the present invention in which the retainer element is an open metallic ring provided for surrounding the central rib of the lid, being partially inserted into portions of side grooves of the central rib;

Fig. 2 is a vertical cross-section of the same embodiment as Fig. 1 but in an assembled, not exploded view, in a closed position;

Fig. 3 is a vertical cross-section of the enlarged view of Fig. 2 but according to an alternative embodiment in which the retainer element is a plastic deformation of a part of the annular disc of the closure mechanism, said retainer element being partially inserted into the portions of annular groove of the central rib;

Fig. 4 is a vertical cross-section of an alternative embodiment according to which the tubular skirt is surrounded by a ring-shaped retainer element under elastic pressure which has portions inserted into the first insertion passage through openings provided on said tubular skirt;

Fig. 5 is a horizontal cross-section of the embodiment shown in Fig. 4, showing the tubular skirt surrounded by the retainer element in the form of a metallic ring, and the openings of the tubular skirt with the portions of the retainer element inserted there-through;

Fig. 6 is an embodiment similar to that shown in Fig. 4 but according to which the retainer element is inserted by pressure into the first insertion passage, being surrounded by the tubular skirt and fitted in a seat provided on the inner face of said tubular skirt;

Fig. 7 is a vertical cross-section according to an alternative embodiment in which the retainer element is a plastic deformation made in the wall of the tubular skirt towards the inside of the first insertion passage;

Fig. 8 is a plan view of the lid attached to a closure mechanism according to an embodiment in which the second passage defined in the annular disc of the closure mechanism is polygonal, in this case in the shape of a hexagon, and in which the central rib of the lid is an also hexagonal base wall the outer perimeter of which is slightly smaller than the inner perimeter of the second insertion passage, said hexagonal base wall being interrupted by three central passages diagonally crossing the lid, forming three pairs of diametrically opposing portions;

Fig. 9 is an alternative embodiment with respect to that shown in Fig. 8 but in which the second insertion passage and the central rib have a circular shape with one side clipped, having only one central passage in this example;

Fig. 10 is an alternative embodiment with respect to that shown in Figs. 8 and 9 in which the tubular skirt has notches oriented towards the inside of the first insertion passage and coupled to complementary notches provided on the perimeter of the annular flange of the lid;

Fig. 11 is a plan view of the rear face of the lid, according to the same embodiment shown in Fig. 10 in which the annular flange includes notches on the perimeter thereof provided for being fitted in the notches provided in the tubular skirt, this embodiment furthermore including discrete protuberances on the rear face of the annular flange facing the sealing ring.

Detailed Description of an Embodiment

[0057] The attached drawings show illustrative non-limiting embodiments of the container of the present invention.

[0058] Figs. 1, 2, 3, 4, 6, and 7 show an embodiment

of the container comprising a receptacle 10 which, in this example, is proposed to be a glass receptacle 10. Said receptacle 10 defines a cylindrical mouth 11 around which there is a thread 12 made of the same glass forming the receptacle 10. The mouth 11 contains an annular mouth surface 14 surrounding a receptacle opening 13 which provides access to the inside of the receptacle.

[0059] The opening 13 is closed by means of the lid 20 which, in this example, is proposed to also be made of glass, in the shape of a circular disc, plate, or dish. There is on the periphery of said lid 20 an annular perimetral flange 21 which, in a closed position, is superimposed on the annular mouth surface 14 of the receptacle 10, the rest of the lid 20 being of a smaller diameter than the diameter of the mentioned opening 13.

[0060] It will be understood that although the preferred embodiment is made of glass, both the receptacle 10 and the lid 20 can be made of other materials, such as ceramic, for example, or the use of plastic is even optionally contemplated.

[0061] There is located between the annular flange 21 and the mouth 11 a sealing ring 30 which is held between the annular flange 21 and the mouth 11 when the lid 20 is in the closed position, providing hermetic closure. This sealing ring 30 will preferably be made of a flexible elastomeric material which, when pressed between the lid 20 and the receptacle 10, will be pressed causing hermetic sealing.

[0062] The lid 20 includes at its front side not facing the mouth 11 a central rib 22 projecting from the plane defined by the annular flange 21.

[0063] The lid 20 may optionally furthermore include a rear centering rib 23 at its back side oriented towards the receptacle 10, said rear centering rib 23 being of a smaller diameter than the opening 13 of the receptacle 10.

[0064] In these examples, the central rib 22 and the rear centering rib 23 are both in the form of a cylindrical wall with approximately one and the same diameter, so they are arranged one on top of another.

[0065] The annular flange 21 is located between said central rib 22 and rear centering rib 23, such that said ribs form a step at both the front side and the back side with respect to the annular flange 21.

[0066] To hold the glass lid 20 against the mouth 11 of the glass receptacle 10, causing hermetic sealing, a closure mechanism 40 consisting of a planar circular disc 41 with a hollow center with a cylindrical-shaped tubular skirt 42 extending along the periphery thereof is used.

[0067] Said tubular skirt 42 includes an engagement configuration 43 which will be complementary to the thread 12 of the receptacle 10, such that it allows screwing the closure mechanism 40 on the receptacle 10, thereby holding the annular flange 21 against the mouth 11 of the receptacle 10, assuring hermetic closure.

[0068] The engagement configuration 43 can be, for example, a thread formed by the inner face of the tubular skirt 42, complementary with the thread 12 of the receptacle 10, as shown in Figs. 1, 2, and 3.

[0069] Alternatively, it is contemplated for the edge of the mentioned tubular skirt 42 to have, at its end farthest from the disc 41, a discontinuous thickening configured for engaging with the thread 12 of the receptacle by way of an engagement configuration 43, thereby providing the hermetic closure of the lid 20 with the receptacle 10.

[0070] Figs. 4, 6, and 7 show an engagement configuration 43 formed by a fold of the edge of the tubular skirt 42, which will preferably be metallic in this embodiment, for example stainless steel.

[0071] In any case, the closure mechanism 40 defines a first insertion passage 44 which corresponds to the space surrounded by the tubular skirt 42 and is partially closed at one end by the annular disc 41, provided for insertion of the lid 20, and it also defines a second insertion passage 45 corresponding to the central hollow of the annular disc 41 provided for the insertion of the central rib 22 of the lid 20 therethrough.

[0072] Therefore, the first insertion passage 44 will have a size equal to or greater than the maximum size of the lid 20, corresponding to the perimeter of the annular flange 21, said size being sufficient to allow the insertion of the lid 20 into the closure mechanism 40.

[0073] The second insertion passage 45 will have a size equal to or greater than the size of the central rib 22 of the glass lid 20, such that said central rib 22 can be inserted into the second insertion passage, allowing the rest of the annular disc 41 to be supported on the front side of the annular flange 21.

[0074] It will be understood that the expression "size equal to" also covers those cases in which there is a small difference in size which requires the application of certain force or even a small deformation to achieve insertion.

[0075] According to the embodiments shown in Figs. 1, 2, and 3, the central rib 22 has a height greater than that of the annular disc 41, so it protrudes above same when it is supported on the annular flange 21.

[0076] There are included around the central rib 22 at least portions of side grooves 24 accessible from the side of said central ribs 22, above the position of the annular disc 41, when it is in the closed position.

[0077] Said portions of side grooves 24 can completely surround the central rib 22 or can consist of a plurality separated partial grooves all arranged on one and the same plane around the central rib 22, with at least two of said partial grooves being located in different halves of the lid 20. This arrangement assures a secure coupling of the lid 20 to the closure mechanism 40 along the entire perimeter.

[0078] According to the present embodiment shown in Figs. 1, 2, and 3, the invention proposes including a retainer element 50 at least partially surrounding the portion protruding from the cylindrical wall of the central rib 22, with the portions of the retainer element 50 being at least partially inserted into said portions of side groove 24, while at the same time other portions of the retainer element 50 will be attached to the annular disc 41 of the

closure mechanism 40, anchoring the lid 20 to the closure mechanism 40.

[0079] According to the embodiment shown in Figs. 1 and 2, the retainer element 50 will consist of an elastic ring, such as an open metallic ring or a ring made of gum or another elastic material, for example, inserted under elastic strain into the portions of side groove 24 of the central rib 22 of the lid 20. Said retainer element 50 will be partially supported on portions of the annular disc 41, with the annular disc 41 and retainer element 50 assembly determining a narrowing of the second insertion passage 45, the lid 20 therefore being retained in the closure mechanism 40.

[0080] In the present example, said retainer element 50 comprises an open metal washer with certain elastic capacity. To arrange the mentioned metallic washer around the central rib 22, it must be elastically opened, being partially retained inside the groove 24 under elastic strain.

[0081] The groove 24 will preferably be continuous around the central rib 22, but it is alternatively contemplated for it to be able to consist of different separated groove segments arranged around the central rib 22.

[0082] In any case, by coupling the retainer element 50 to the groove 24, part of said retainer element 50 will project radially from the periphery of the central rib 22, such that the central hollow of the disc 41 of the closure mechanism 40 is of a size smaller than that of said retainer element 50, therefore preventing the separation of the closure mechanism 40 from the rest of the glass lid 20.

[0083] This prevents parts of the assembly from going missing, while at the same time allows pulling on the closure mechanism 40, pulling along with it the glass lid 20 to overcome the vacuum that may exist inside the receptacle 10, therefore allowing the glass lid 20 to be unscrewed and removed in a single operation.

[0084] The embodiment shown in Figs. 4 and 5 is similar to the preceding embodiment, but the retainer element 50 in the form of an elastic washer surrounds the tubular skirt 42 in this case. At certain points, the tubular skirt 42 has openings through which an appendage of the retainer element 50 will be introduced into the first insertion passage 44, reducing its size to a size smaller than that of the annular flange 21, and therefore preventing the removal of the lid 20 from inside the closure mechanism 40.

[0085] Fig. 5 shows another view of this same embodiment in which it can be seen that the mentioned appendages are folds of the elastic washer, which is proposed to be metallic in this case.

[0086] Alternatively, the washer may be made of plastic or an elastic material such as gum, rubber, or latex, said appendages therefore being included as extensions of the same washer.

[0087] Another proposed embodiment shown in Fig. 6 comprises the insertion of the retainer element 50 in the form of an elastic washer into the first insertion passage 44, said retainer element 50 being subjected to elastic

strain therein, pressing against the lower surface of the tubular skirt 42.

[0088] There will be provided on said lower surface a seat, for example in the form of an annular groove, or isolated openings, located below the annular flange 21, with the receptacle being in the vertical position. The retainer element 50 or parts thereof will be partially inserted into said seat or into said openings fixing the position of the retainer element 50 inside the closure mechanism 40.

[0089] Another alternative embodiment is the one shown in Fig. 3 in which the retainer element 50 is not a ring, but rather a portion of the closure mechanism 40 which extends from the annular disc 41 and has been plastically deformed after the insertion of the lid 20 into the closure mechanism 40 to be arranged partially inserted into the portions of side groove 24 of the central rib 22 of the lid. In this case, the retainer elements 50 can be, for example, tabs extending from the edge of the annular disc 41 demarcating the second insertion passage 45.

[0090] Fig. 7 shows an embodiment similar to the one described above, but in which the retainer element 50 is a plastic deformation of a part of the tubular skirt 42 located below the annular flange 21 of the lid 20, with the receptacle 10 being in the vertical position.

[0091] This plastic deformation forming the retainer element 50 determines a protuberance of the tubular skirt 42 towards the inside of the first insertion passage 44, reducing the free passage to a size smaller than the size of the annular flange 21 and therefore preventing the removal of the lid 20 from inside the closure mechanism 40.

[0092] Other features provided for assuring the joint rotation of the closure mechanism 40 with the lid 20 during screwing and unscrewing are also proposed.

[0093] The rotation of the glass lid 20 facilitates the breaking of the hermetic closure, facilitating the entry of air into the receptacle 10 in the event that there is a certain degree of vacuum inside the container.

[0094] To achieve this joint rotation of the closure mechanism 40 with the lid 20, it is proposed for the second insertion passage 45 to have a non-circular shape, and for the central rib 22 of the front side of the lid 20 to have a shape and size complementary with the shape and size of the second insertion passage 45, allowing them to be coupled to one another and preventing their relative rotation.

[0095] In the example shown in Fig. 8, the second insertion passage 45 is hexagonal and the central rib 22 is in the form of a wall with a hexagonal base. Other polygonal shapes would also be acceptable, achieving the same effect.

[0096] It is also considered that the mentioned effect can be achieved without the central rib 22 reproducing the geometry of the second insertion passage 45, i.e., in the example of the hexagonal second insertion passage 45, the central rib can be, for example, in the shape of a six-pointed star, or consist of six protuberances coincid-

ing with the corners of the hexagon, i.e., any shape contained within the shape of the second insertion passage 45 but occupying the areas farthest from the center of the lid will obtain said desired effect.

[0097] Another embodiment is the one shown in Fig. 9 which shows a second insertion passage 45 and a central rib 22 in the shape of a circle with one side clipped.

[0098] According to another embodiment of the invention, it is proposed for the sought effect to be achieved by means of engagement between the tubular skirt 42 and the annular flange 21, said engagement being achieved by means of a non-circular geometry.

[0099] In the embodiment shown in Figs. 10 and 11, it is proposed for the annular flange 21 to have on the perimeter thereof a plurality of notches, and for the tubular skirt 42 to also include notches complementary with those of the annular flange 21, causing their engagement, preventing relative rotation between both elements.

[0100] Another feature proposed by the invention is the incorporation of at least one central passage 26 in the lid 20, formed by interruptions of the central rib 22 which will split it into diametrically opposing portions located in different halves of the lid 20.

[0101] Each portion of the central rib 22 will have supporting planes 27 perpendicular to the front side of the lid 20 facing the central passage 26, allowing the insertion of a lever arm, such as a knife, a handle of a piece of cutlery, or a toothpick, for example, through the central passage 26, said lever arm being supported on two supporting planes 27 of two diametrically opposing portions of central rib 22, allowing the transfer of torque to the lid 20 through said lever arm.

[0102] This feature can help to overcome the vacuum existing inside the receptacle 10, facilitating the opening of the lid 20.

[0103] Said feature can be combined with the proposed coupling between the lid 20 and the closure mechanism 40 in the direction of rotation, as shown in Figs. 8, 9, and 10, such that the lever arm allows rotating the lid 20 together with the closure mechanism 40, to initiate the opening of the container, for example, or it can be independent of same, which allows overcoming the vacuum inside the container by means of rotating the lid 20 using the lever arm without this causing the rotation of the closure mechanism 40, which must be unscrewed manually.

[0104] Fig. 11 shows another embodiment in which the face of the front side of the annular flange 21 comprises four radial protuberances 60 uniformly spaced apart from one another.

[0105] Each protuberance 60 is in the form an elongated bulge traversing the width of the face of the annular flange 21 on which they are arranged, from the outer periphery to the inner periphery. Each protuberance 60 has a thickness equal to half the thickness of the sealing ring 30.

[0106] This protuberance 60 will be integrated in the

sealing ring 30 when pressure is exerted on the lid 20 with the closure mechanism 40, achieving hermetic closure.

[0107] However, when pressure is released each protuberance 60 will facilitate a point of entry of air towards the inside of the container during the opening process thereof, facilitating the breaking of the vacuum which may exist therein.

[0108] Though not depicted in the drawings, it is contemplated that said protuberances 60 are located in the mouth 11 or on one of the two annular faces of the sealing ring 30.

It will be understood that the different parts forming the invention described in one embodiment can be freely combined with the parts described in other different embodiments even though said combination has not been explicitly described, provided that the combination does not entail any drawback side.

Claims

1. A container with a lid attached to a threaded closure mechanism, the container including:

- a receptacle (10) provided with a mouth (11) including a receptacle opening (13), an annular mouth surface (14) surrounding said receptacle opening (13), and a thread (12) externally surrounding said mouth (11);
- a lid (20) with a front side and a back side, said lid (20) including an annular perimetral flange (21) which, in a closed position, is superimposed on the annular mouth surface (14) of the receptacle (10), and at least one central rib (22) protruding from the front side of the lid (20);
- a sealing ring (30) arranged and held between the annular mouth surface (14) of the receptacle (10) and the annular flange (21) of the lid (20);
- a closure mechanism (40) movable between a closed position and an open position, the closure mechanism (40) being formed by a tubular skirt (42) with a first open end and a second end closed by means of an annular disc (41) attached along its outer perimeter to the tubular skirt (42), said tubular skirt (42) being provided with an engagement configuration (43) complementary to the thread (12) of the receptacle (10); wherein

- the tubular skirt (42) surrounds and defines a first insertion passage (44) the size of which is equal to or greater than the external size of the annular flange (21) of the lid (20) and the depth of which is greater than the thickness of the annular flange (21); and
- the annular disc (41) surrounds and defines a second insertion passage (45) in the

center thereof, the size of which is smaller than the size of the first insertion passage (44) and the external size of the annular flange (21) and greater than or equal to the size of the at least one central rib (22) of the lid (20);

wherein in the closed position the annular flange (21) is inserted into the first insertion passage (44) and in contact with the annular disc (41) of the closure mechanism (40), the at least one central rib (22) is inserted into the second insertion passage (45), the tubular skirt (42) is arranged around the mouth (11), and the engagement configuration (43) of the closure mechanism (40) is coupled to the thread (12);

characterized in that:

a retainer element (50) is connected to the closure mechanism (40) constricting the first insertion passage (44) thereby retaining the annular flange (21) attached to the closure mechanism (40) preventing the removal of the lid (20); or a retainer element (50) is connected to the closure mechanism (40) constricting the second insertion passage (45), portions of the retainer element (50) being inserted into portions of side grooves (24) located in areas of the at least one central rib (22) of the lid (20) located at two different halves of the lid (20), thereby retaining the at least one central rib (22) attached to the closure mechanism (40) preventing the removal of the lid (20).

2. The container according to claim 1, wherein the retainer element (50) is an elastically deformable element attached under elastic strain around the central rib (22) of the lid (20), the retainer element (50) being partially inserted into said side grooves (24) and connected to the annular disc (41) of the closure mechanism (40) by contact.
3. The container according to claim 1, wherein the retainer element (50) is an elastically deformable element attached under elastic strain to the tubular skirt (42) externally surrounding the tubular skirt (42), the tubular skirt (42) including openings through which portions of said retainer element (50) are introduced into the first insertion passage (44) constricting the first insertion passage (44).
4. The container according to claim 1, wherein the retainer element (50) is an elastically deformable element attached under elastic strain to the tubular skirt (42) and inserted by pressure into the first insertion passage (44), the tubular skirt (42) including openings or seats in which portions of said retainer element (50) are fitted thereby fixing the position of the retainer element (50) inside the first insertion pas-

sage (44).

5. The container according to claim 2, 3, or 4, wherein the retainer element (50) is an annular spring or an elastic ring or an open ring and/or the retainer element (50) is an element made of metallic or plastic material.
6. The container according to claim 1, wherein the retainer element (50) is a plastically deformed portion of the closure device (40) producing a bulging which constricts the first or second insertion passage (44, 45).
7. The container according to any one of the preceding claims, wherein the closure mechanism (40) is metallic or plastic.
8. The container according to any one of the preceding claims, wherein the engagement configuration (43) of the closure mechanism (40) is a thread formed in the tubular skirt (42) complementary to the thread of the receptacle (10).
9. The container according to any one of preceding claims 1 to 7, wherein the engagement configuration (43) comprises a plurality of thickenings which are provided around the first open end of the tubular skirt (42) and project from the tubular skirt (42) into the first insertion passage (44), said plurality of thickenings being complementary to the thread of the receptacle (10).
10. The container according to claim 9, wherein the closure mechanism (40) is metallic and wherein said plurality of thickenings is formed by a fold of the edge of the tubular skirt (42).
11. The container according to any one of the preceding claims, wherein at least:
 - the first insertion passage (44) and a perimetral area of the annular flange (21); or
 - the second insertion passage (45) and a perimetral area of the central rib (22),
 have a complementary non-circular geometry and size, both elements being fitted together preventing relative rotation of the closure mechanism (40) with respect to the lid (20).
12. The container according to claim 11, wherein the perimetral area of the central rib (22) has the same shape as the second insertion passage (45) and the same size or a size that is at most 3 mm smaller.
13. The container according to claim 11 or 12, wherein the central rib (22) is in the shape of a polygon, el-

lipse, sinuous contour, star, cross, symbol, letter, word, number, or a truncated circular shape or circular shape with notches on the perimeter thereof.

14. The container according to claim 11, wherein the perimetral area of the annular flange (21) is in the shape of a polygon, flute, sinuous contour, or a truncated circular shape or circular shape with notches on the perimeter thereof. 5

10

15. The container according to any one of the preceding claims, wherein the at least one central rib (22) includes at least two diametrically opposing portions defining between them a central passage (26) diametrically crossing the lid (20), said two diametrically opposing portions having supporting planes (27) perpendicular to the front side of the lid (20). 15

20

25

30

35

40

45

50

55

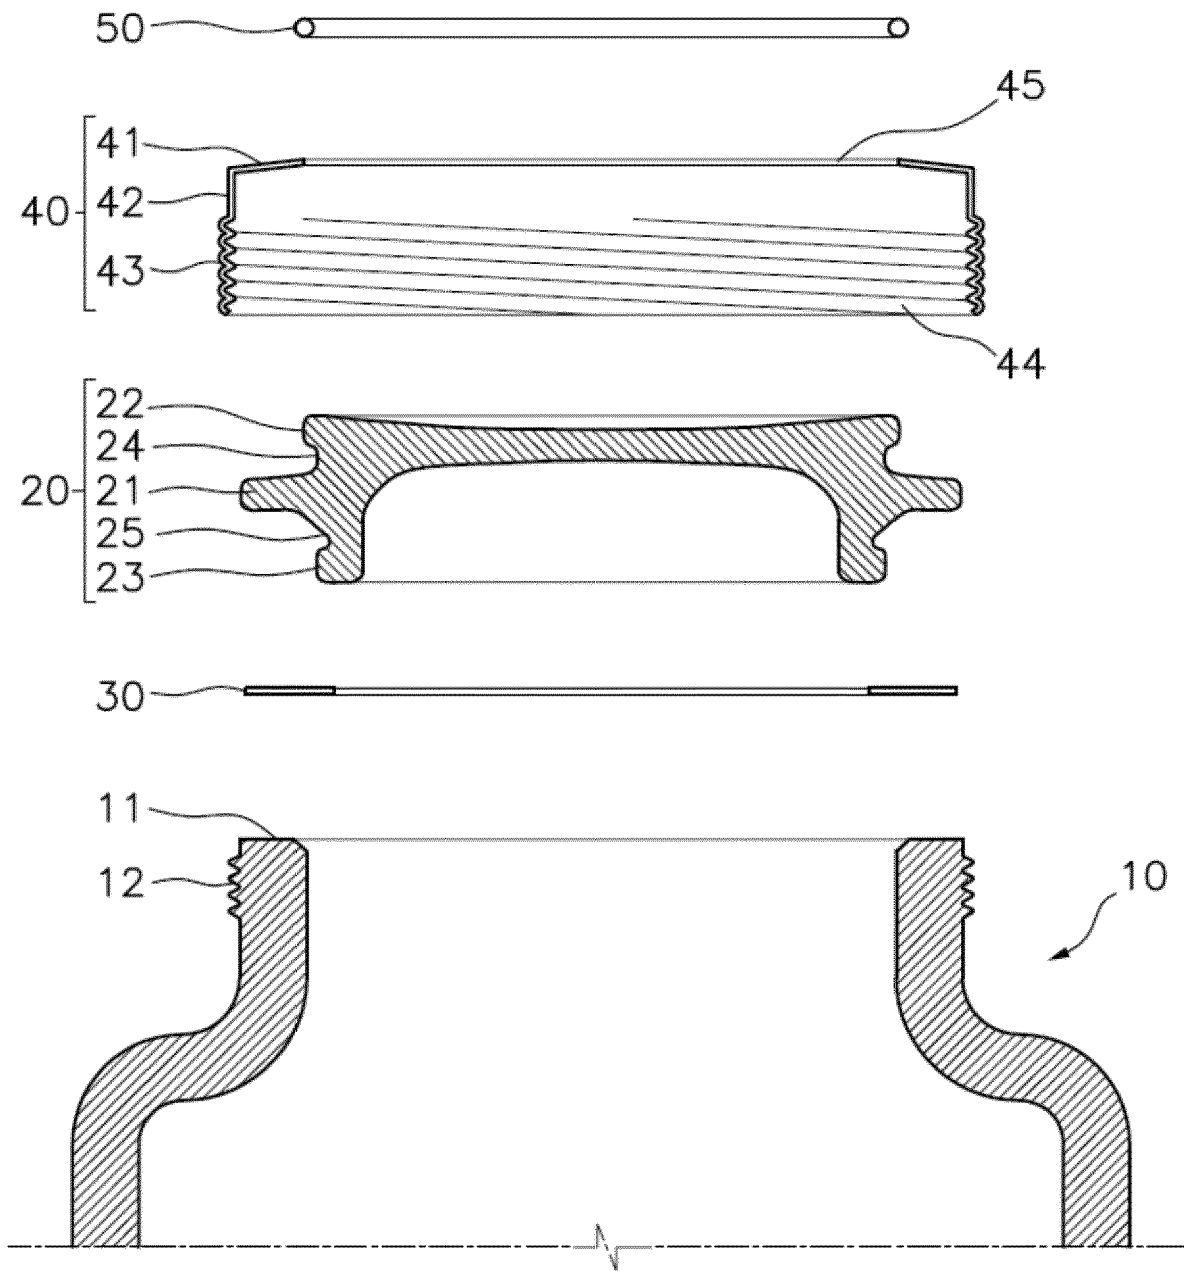


Fig. 1

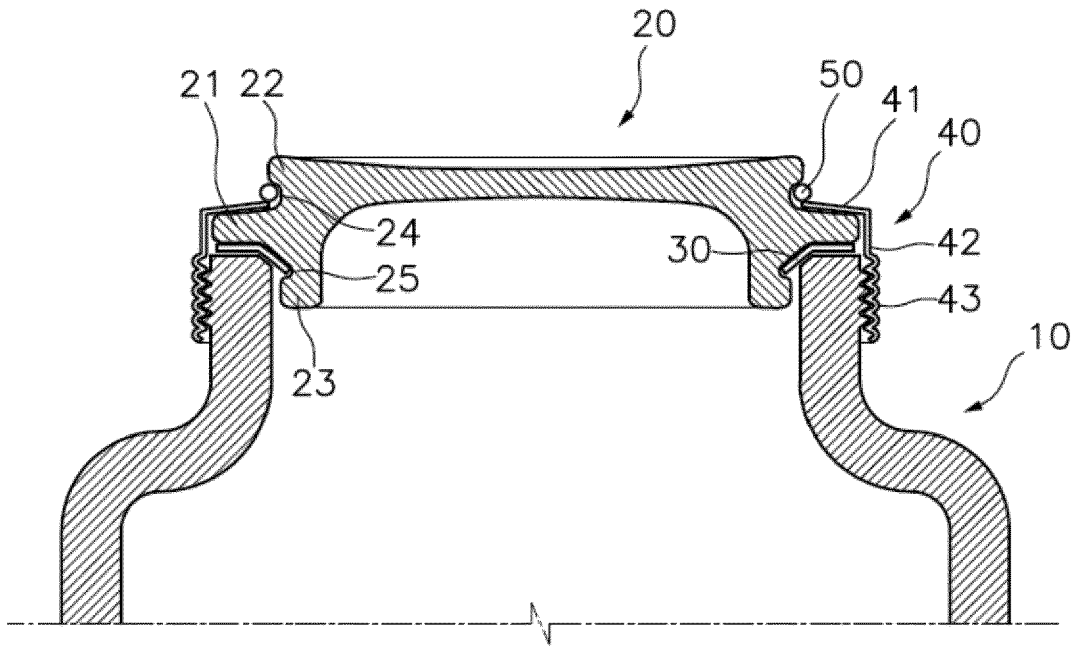


Fig.2

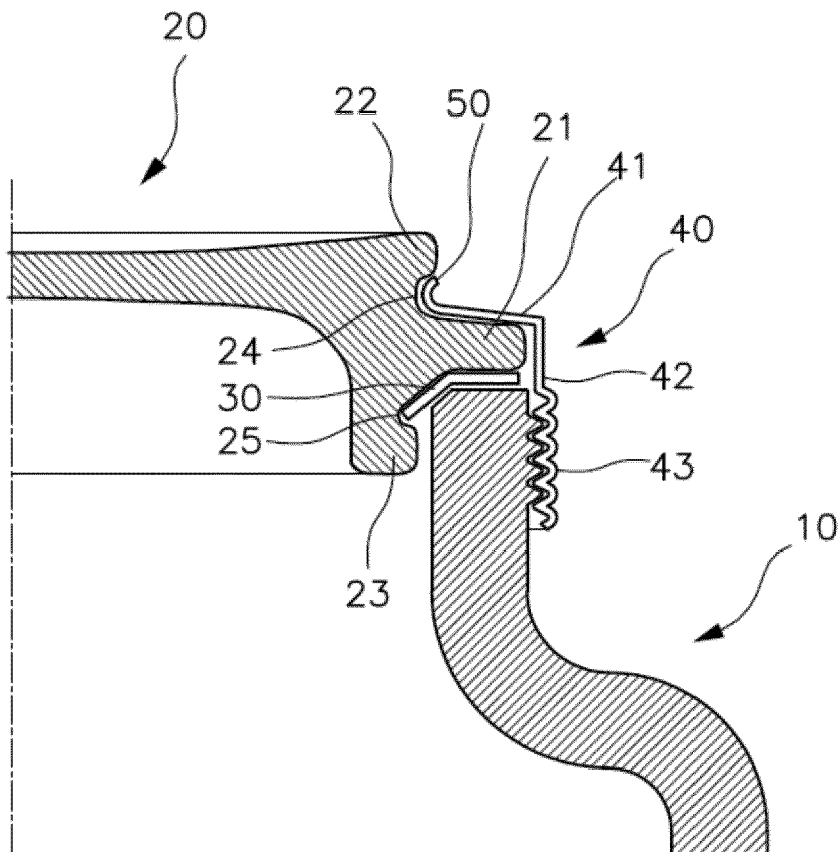


Fig.3

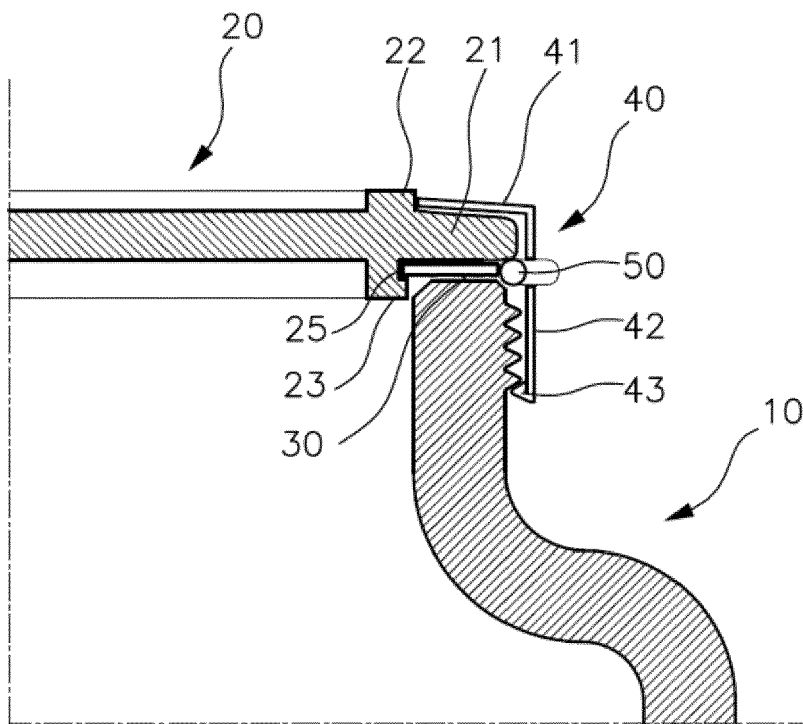


Fig.4

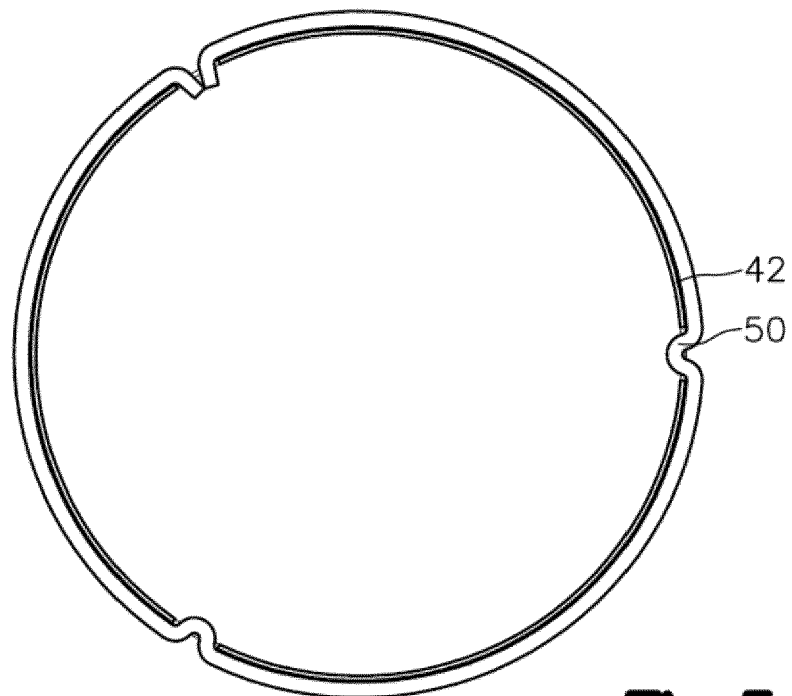


Fig.5

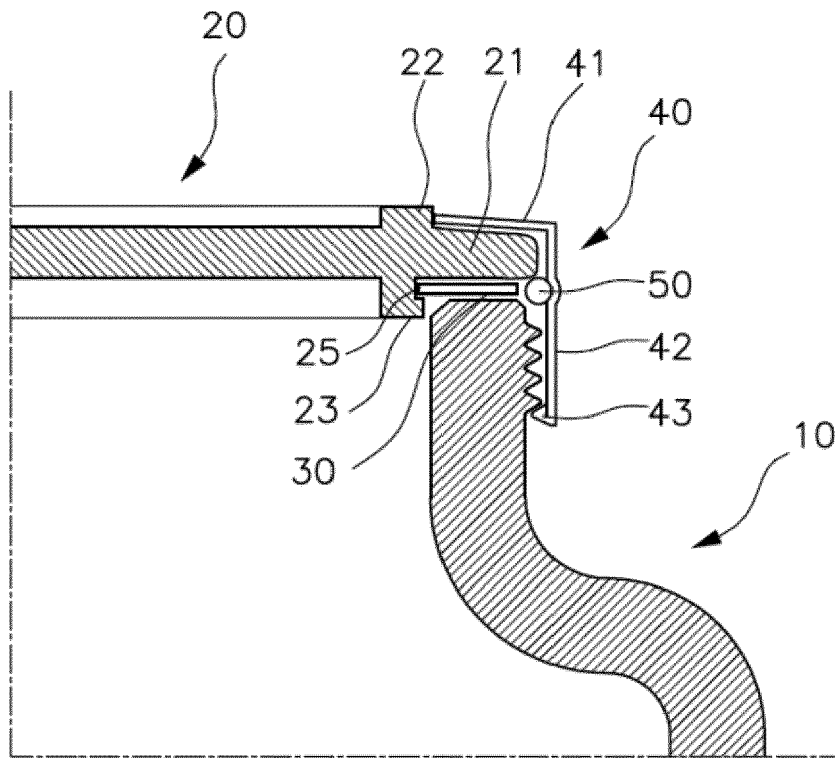


Fig. 6

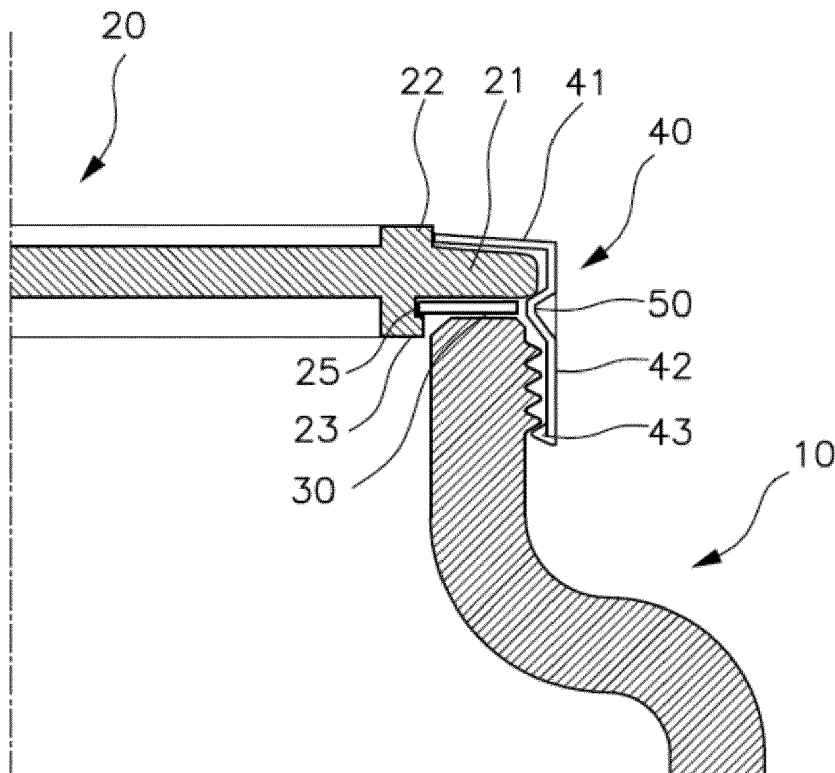


Fig. 7

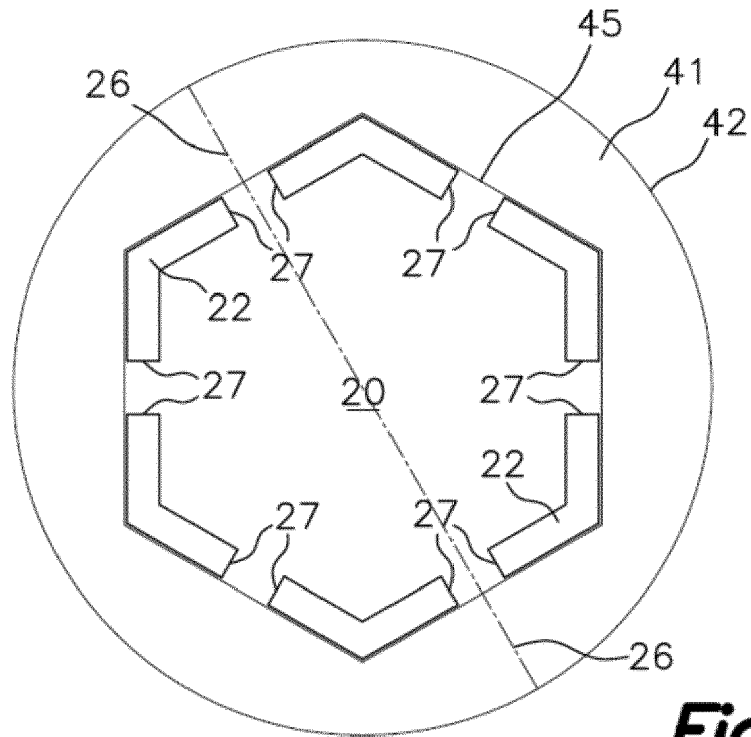


Fig. 8

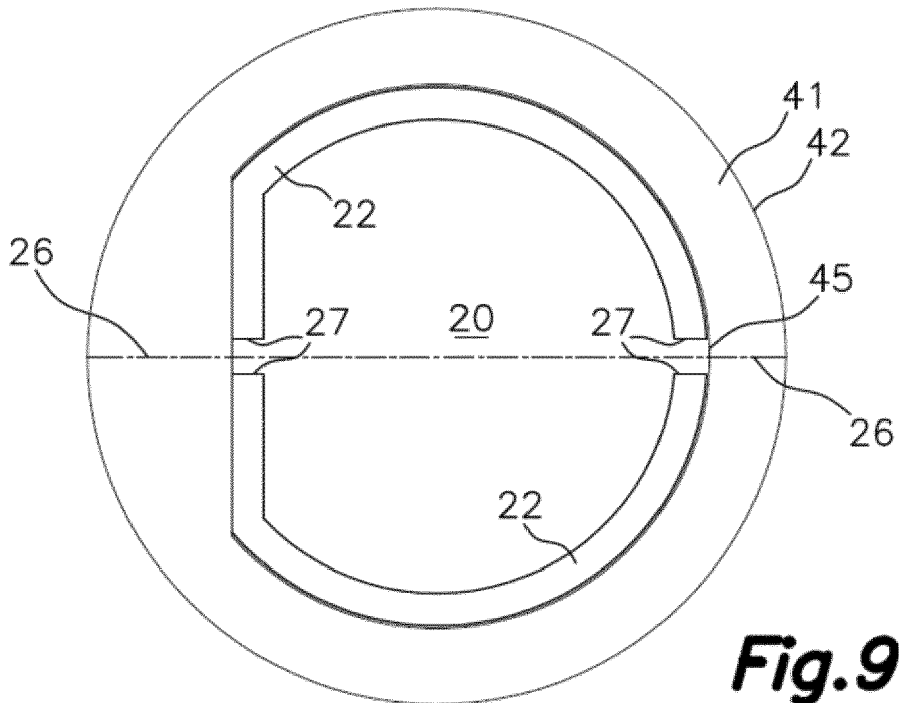


Fig. 9

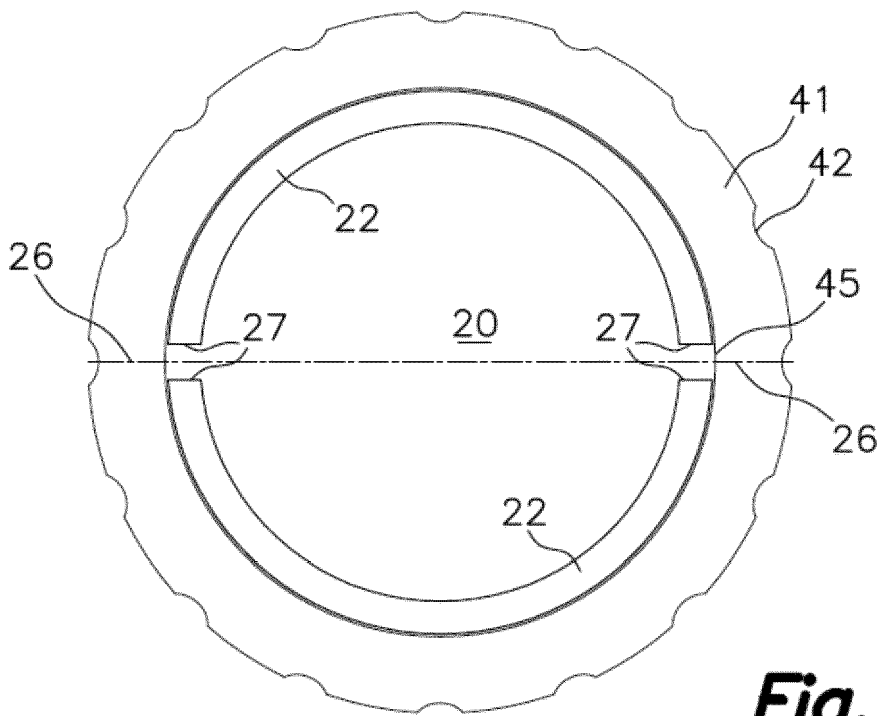


Fig. 10

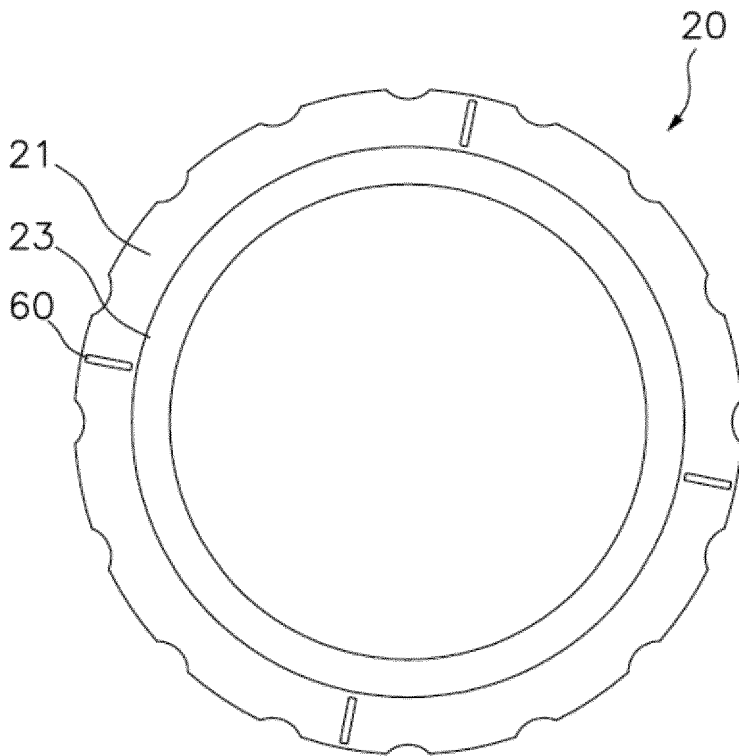


Fig. 11



EUROPEAN SEARCH REPORT

Application Number
EP 19 38 2700

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X,D	US 8 550 268 B1 (CHISHOLM BRIAN J [US]) 8 October 2013 (2013-10-08) * figure 3 *	1,6-10	INV. B65D43/02 B65D45/30 B65D41/04 B65D51/16
Y		2,4,5,15	
A		3,11-14	
X	US 2009/057259 A1 (JOHNSON SCOTT R [US] ET AL) 5 March 2009 (2009-03-05) * figures 1,5 *	1,6-10	
Y		2,4,5,15	
A		3,11-14	
Y	US 2009/217493 A1 (GREENHILL MICHAEL [US]) 3 September 2009 (2009-09-03) * paragraph [0003] *	2,4,5	TECHNICAL FIELDS SEARCHED (IPC) B65D
Y	US 4 156 491 A (LYON NEWTON E [US]) 29 May 1979 (1979-05-29) * column 2, line 59 - line 62; figure 1 *	15	
X	US 1 425 594 A (KEERAN CHARLES R) 15 August 1922 (1922-08-15)	1,6-10	
Y	* page 1, line 40 - line 42; figure 5 *	15	
A	* page 2, line 19 - line 20 * * page 2, line 32 - line 50 * * page 3, line 10 - line 25 *	2-5, 11-14	
A	US 1 407 008 A (TAYLOR BURT E) 21 February 1922 (1922-02-21) * page 1, line 63 - line 64 *	1-15	
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 13 December 2019	Examiner Sundell, 011i
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/02 (P04/C01)

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 19 38 2700

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-12-2019

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 8550268	B1	08-10-2013	AR 091698 A1 25-02-2015
			AU 2013289137 A1 04-12-2014
			BR 112015000199 A2 27-06-2017
			CA 2874634 A1 16-01-2014
			CL 2015000043 A1 07-08-2015
			CN 104661925 A 27-05-2015
			CO 7240415 A2 17-04-2015
			EP 2872410 A1 20-05-2015
			ES 2573518 T3 08-06-2016
			MX 348549 B 19-06-2017
			MY 167937 A 04-10-2018
			NZ 701997 A 29-04-2016
			PE 20150151 A1 07-02-2015
			PH 12014502709 A1 02-02-2015
			PL 2872410 T3 30-09-2016
			RU 2015104163 A 27-08-2016
			SG 11201408264T A 29-01-2015
			TW 201412607 A 01-04-2014
			US 8550268 B1 08-10-2013
WO 2014011325 A1 16-01-2014			
ZA 201408576 B 28-09-2016			
US 2009057259	A1	05-03-2009	AT 550097 T 15-04-2012
			AU 2008295532 A1 12-03-2009
			BR PI0816470 A2 24-03-2015
			CN 101790420 A 28-07-2010
			DK 2188055 T3 09-07-2012
			EP 2188055 A1 26-05-2010
			IL 204176 A 31-07-2014
			JP 5575289 B2 20-08-2014
			JP 2010536528 A 02-12-2010
			JP 2013138875 A 18-07-2013
			US 2009057259 A1 05-03-2009
			US 2014291276 A1 02-10-2014
			US 2017190484 A1 06-07-2017
WO 2009032078 A1 12-03-2009			
US 2009217493	A1	03-09-2009	CA 2716934 A1 03-09-2009
			CN 102014687 A 13-04-2011
			GB 2470512 A 24-11-2010
			IL 207834 A 30-09-2014
			JP 5805392 B2 04-11-2015
			JP 2011528090 A 10-11-2011
			US 2009217493 A1 03-09-2009
			WO 2009108692 A2 03-09-2009

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

55

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 19 38 2700

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-12-2019

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4156491	A 29-05-1979	NONE	
US 1425594	A 15-08-1922	NONE	
US 1407008	A 21-02-1922	NONE	

15

20

25

30

35

40

45

50

EPO FORM P0459

55

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 1602346 A [0005]
- US 8550268 B1 [0005]