



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
11.03.2020 Bulletin 2020/11

(51) Int Cl.:
E04C 1/00 (2006.01)

(21) Application number: **18794808.8**

(86) International application number:
PCT/CN2018/085116

(22) Date of filing: **28.04.2018**

(87) International publication number:
WO 2018/202011 (08.11.2018 Gazette 2018/45)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(71) Applicant: **Shenzhen MYX PC Blocks Co Ltd.**
Shenzhen, Guangdong 518000 (CN)

(72) Inventor: **HON, Man Ching**
Shenzhen
Guangdong 518000 (CN)

(74) Representative: **de Arpe Fernandez, Manuel**
Arpe Patentes y Marcas, S.L.P.
C/Proción, 7 Edif. América II
Portal 2, 1° C
28023 Madrid-Aravaca (ES)

(30) Priority: **02.05.2017 CN 201720471364 U**
27.07.2017 CN 201720967874 U

(54) **CORNER BLOCK AND BLOCK KIT COMPRISING SAME**

(57) A corner block and a block kit including the corner block are disclosed. The corner block includes an upper convex structure formed on a top face of the corner block, extending along a length direction of the top face and having the same length as that of the top face; and a lower concave structure formed on a bottom face of

the corner block and configured for accommodating the upper convex structure. The upper convex structure includes a pair of guiding faces formed by extending inclined from the top face, as well as a connecting face connecting the guiding faces.

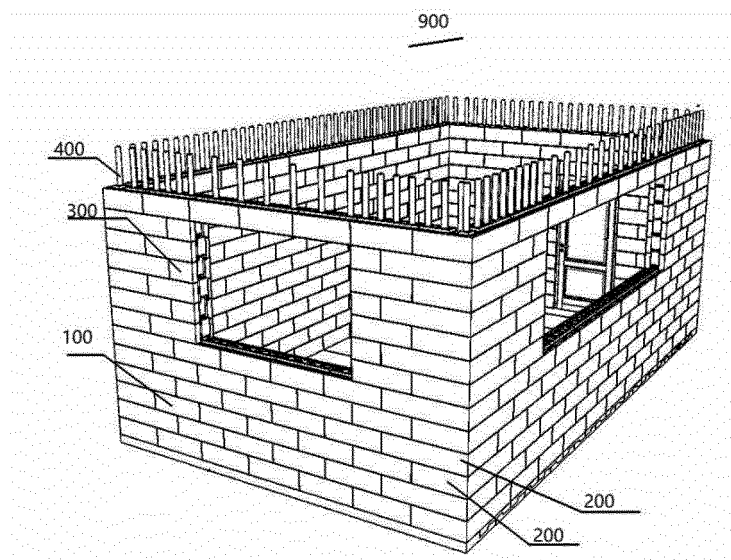


Fig. 1

Description

Technical Field

[0001] The present disclosure relates to building material, and more particularly to a corner block and a block kit comprising the same.

BACKGROUND

[0002] Generally, a solid waste involved in the present world includes: industrial solid wastes, domestic wastes, construction wastes, urban sludge, and crop straw wastes. The industrial wastes include, but not limited to, a waste slag, a slag and corner wastes of industrial products. The domestic wastes include, but not limited to, waste papers, waste furniture, used plastic, packaging materials and surplus deteriorating foods, which are produced in daily life. The construction wastes include, but not limited to, cement blocks, bricks and decoration materials produced while old buildings are demolished. The urban sludge includes, but not limited to, sludge produced by sewage treatment, sludge excavated in urban underground projects, and sludge deposited in urban sewage all year round. The crop straw wastes include, but not limited to, rice straw, wheat straw, corn stalk, sorghum stalk, cotton straw, peanut straw, sesame straw, and rape straw. At present, there are many methods to deal with these various types of wastes. However, with the continuous development of the society, the various types of wastes have not been handled well and become increasingly serious social problems and continue to cause harm to the human living environment. At the same time, various methods for constructing walls are using cement mortar to block bricks into walls, or after the frame structure is built, the wall plates are fixed to the frame structure. Only professional staff can implement these methods by using professional tools and equipment. The built walls are all base blank walls without any decoration. After the wall is built, if it needs to be renovated and decorated, the building material used for building the wall cannot be used repeatedly for construction and demolition. As a result, a large amount of building materials is wasted, and the disassembled construction waste cannot be decomposed and become new solid wastes, causing environmental pollution. In addition, a large number of skilled building workers are needed in a traditional wall building process, therefore causing a serious shortage of skilled building workers.

[0003] An existing recyclable block is provided with a concave-convex matching structure, all of the protruding structures of the blocks are discontinuous protruding portions configured on a top face of the block, and the protruding portions are all perpendicular to the top face. Thus, water may easily enter the block when the block is used in the environment with rainfall, therefore reducing the service life of the block, and further reducing the quality of the building.

[0004] Therefore, a block structure, which can prevent water from flowing into the block, needs to be provided.

Summary

[0005] One of the objectives of the present disclosure is to provide a corner block capable of preventing water from flowing into the block and a block kit using the corner block.

10 [0006] On one aspect, the technical solution is as follows.

[0007] In an embodiment, the corner block includes an upper convex structure arranged on a top face of the corner block and a lower concave structure arranged on a bottom face of the corner block, the upper convex structure extends along a length direction of the top face, and a length of the upper convex structure is the same as a length of the top face; and the lower concave structure is configured for receiving the upper convex structure; wherein the upper convex structure includes a pair of guiding faces extending inclined from the top face and a connecting face connecting with the guiding faces.

[0008] In the embodiment, the corner block includes a first straight edge portion, a second straight edge portion and a corner portion connecting the first straight edge portion with the second straight edge portion, and the upper convex structure extends from a top face of the first straight edge portion to a top face of the second straight edge portion through a top face of the corner portion, the lower concave structure extends from a bottom face of the first straight edge portion to a bottom face of the second straight edge portion through a bottom face of the corner portion.

[0009] In the embodiment, both an end of the first straight edge portion away from the corner portion, and an end of the second straight edge portion away from the corner portion, are recessed to form a concave structure.

[0010] In the embodiment, the corner block further includes a positioning groove formed by removing the upper convex structure at the corner portion, and the positioning groove is configured for receiving a bottom face of another corner block stacked on the corner block.

[0011] In the embodiment, the positioning groove includes a first positioning groove adjacent to the first straight edge portion and a second positioning groove adjacent to the second straight edge portion.

[0012] In the embodiment, the upper convex structure further includes a pair of arc-shaped faces, and each arc-shaped face is connected between the connecting face and the guiding face.

[0013] In the embodiment, the corner block includes a plurality of positioning holes extending from the connecting face of the upper convex structure to the bottom face of the corner block, and a plurality of power cable holes which are formed in two opposite sides of the upper convex structure, each line pipe hole extending from the top face of the corner block to the bottom face of the corner block.

[0014] In the embodiment, an internal sleeve is embedded in the positioning holes and/or the power cable holes.

[0015] In the embodiment, the corner block includes a block body, a core embedded in the block body and a waterproof layer wrapping the core, with the waterproof layer located between the block body and the core.

[0016] In the embodiment, the corner block further includes a supporting member fixedly connected with the waterproof layer, and a thermal insulating layer located between the waterproof layer and the core, with the supporting member embedded in the block body.

[0017] In another aspect, the present disclosure further provides a block kit for constructing a building, the block kit includes a first block, a corner block and an adjusting block, which are stacked and interlocked to construct the building, each of the first block, the corner block and the adjusting block includes:

an upper convex structure arranged on a top face, wherein the upper convex structure extends along a length direction of the top face, and a length of the upper convex structure is the same as a length of the top face; and

a lower concave structure arranged on a bottom face, wherein the lower concave structure is configured for receiving the upper convex structure.

the upper convex structure including a pair of guiding faces extending inclined from the top face and a connecting face connecting with the guiding faces;

when the plurality of first blocks, the adjusting blocks and the corner blocks are matched to construct the building, the plurality of blocks are stacked with each other, wherein the upper convex structure of one block is mutually interlocked with the lower concave structure of an adjacent other block.

[0018] In the embodiment, the corner block includes a first straight edge portion, a second straight edge portion and a corner portion connecting the first straight edge portion with the second straight edge portion, and the upper convex structure extends from a top face of the first straight edge portion to a top face of the second straight edge portion through a top face of the corner portion, the lower concave structure extends from a bottom face of the first straight edge portion to a bottom face of the second straight edge portion through a bottom face of the corner portion.

[0019] In the embodiment, both an end of the first straight edge portion away from the corner portion, and an end of the second straight edge portion, away from the corner portion, are recessed to form a concave structure.

[0020] In the embodiment, the corner block further includes a positioning groove formed by removing the upper convex structure at the corner portion, and the posi-

tioning groove is configured for receiving the bottom face of another corner block stacked on the corner block.

[0021] In the embodiment, the positioning groove includes a first positioning groove adjacent to the first straight edge portion and a second positioning groove adjacent to the second straight edge portion.

[0022] In the embodiment, each of the first block, the corner block and the adjusting block includes a plurality of positioning holes extending from the connecting face of the upper convex structure to the bottom face, and a plurality of power cable holes which are formed in two opposite sides of the upper convex structure, each line pipe hole extending from the top face to the bottom face.

[0023] In the embodiment, each of the first block, the corner block and the adjusting block includes an internal sleeve embedded in the power cable holes and/or the positioning holes.

[0024] In the embodiment, each of the first block, the corner block and the adjusting block includes a block body, a core embedded in the block body and a waterproof layer wrapping the core, with the waterproof layer located between the block body and the core.

[0025] In the embodiment, each of the first block, the corner block and the adjusting block includes a supporting member fixedly connected with the waterproof layer, and a thermal insulating layer located between the waterproof layer and the core, with the supporting member embedded in the block body.

[0026] In the embodiment, each of the first block, the corner block and the adjusting block includes a decorative layer connected to at least one side of the blocks.

[0027] Compared with the related art, the corner block and the block kit including the corner block in the present disclosure have the beneficial effects that, in the corner block, the first block, and the adjusting block of the block kit, the upper convex structures extend along the whole top face of the block to form an integrally non-interrupted structure, and the guiding face of the upper convex structure extends inclined from the top face, thus preventing the water from flowing into the block through the top face, and further realizing the waterproof effect of the block.

Brief Description of the Drawings

[0028]

FIG. 1 illustrates a building constructed by using the block kit provided by the present disclosure.

FIG. 2 illustrates a perspective view of a corner block included in the block kit in FIG. 1 according to one embodiment of the present disclosure.

FIG. 3 illustrates a perspective view of the corner block according to another embodiment of the present disclosure.

FIG. 4 illustrates a perspective view of a first block

included in the block kit in FIG. 1 according to one embodiment of the present disclosure.

FIG. 5 illustrates a perspective view of a first block according to another embodiment of the present disclosure.

FIG. 6 illustrates a perspective view of an adjusting block included in the block kit in FIG. 1 according to one embodiment of the present disclosure.

FIG. 7 illustrates a schematical diagram of an internal structure of any one of the adjusting block, the corner block and the first block.

FIG. 8 illustrates a structural diagram of two corner blocks when stacked.

FIG. 9 illustrates a dimensional relations between each block in the block kit.

Description of Embodiments

[0029] Technical solutions in embodiments of the present invention will be further clearly and completely illustrated below with reference to the attached drawings of the embodiments. Obviously, the described embodiments are merely a part of embodiments of the present invention, rather than all embodiments. Based on the embodiments of the present disclosure, all other embodiments obtained by one with ordinary skills in the art without any creative efforts, shall fall into the protection scope of the present invention.

[0030] Referring to FIG. 1, a building 900 constructed by a block kit provided by the present disclosure is illustrated in FIG. 1. The block kit includes a first block 100 for building a wall body of the building 900, a corner block 200 for being used at a corner position of the building 900, an adjusting block 300 for constructing a wall body at a position of doors, windows or the like, or for filling uneven gaps created at positions of one or more points of termination, and a reinforcement positioning rod 400 detachably inserted in the blocks when they are stacked upon each other. A plurality of corner blocks, first blocks and the adjusting blocks are stacked and interlocked so as to construct a stable building. The reinforcement positioning rod 400 is made of hollow metal, plastic or composite material, and may be used as a water supply pipe, a gas supply pipe, a power cable pipe, a communication cable pipe, and so on. The reinforcement positioning rod 400 may be a rod-like object in shape of circular, rectangular or other geometrical shape. When constructing the building, waterproof glue, fastening glue, structural glue, cement or other adhesive may be applied between each of the blocks to enhance the interlocking strength between the blocks. The block kit further includes a sealing gasket 500 sandwiched between two stacked blocks, and the stacked blocks can be any one of first block, corner

block and adjusting block.

[0031] Referring to FIGS. 2-3, the corner block 200 is generally L-shaped and includes a first straight edge portion 201, a second straight edge portion 202 and a corner portion 203 connected between the first straight edge portion 201 and the second straight edge portion 202. The corner portion 203 is formed by connecting two edges with an angle of approximately 90° therebetween. Therefore, the first straight edge portion 201 extends in a direction perpendicular to an extension direction of the second straight edge portion 202. A concave structure 10 is concaved from one end of the first straight edge portion 201 away from the corner portion 203. The concave structure 10 is also formed at an end of the second straight edge portion 202 away from the corner portion 203 and recessed inwards, and the concave structure 10 is configured for forming an interlocking structure when being latched with other blocks.

[0032] The corner block 200 includes an upper convex structure 11 arranged on a top face of the corner block 200 and a lower concave structure 12 arranged on a bottom face of the corner block 200. The upper convex structure 11 extends along a length direction of the top face, with a length of the upper convex structure equal to a length of the top face. Specifically, the upper convex structure 11 extends from the top face of the first straight edge portion 201 to the top face of the second straight edge portion 202 through the top face of the corner portion 203, namely, the upper convex structure 11 extends along the length direction of the top face of the whole corner block 200 to form an integrally non-interrupted structure. Accordingly, the lower concave structure 12 is a groove extending along the length direction of the bottom face of the whole corner block 200, by recessing from the bottom face to the top face, and specifically, the lower concave structure 12 extends from the bottom face of the first straight edge portion 201 to the bottom face of the second straight edge portion 202 through the bottom face of the corner portion 203. When the two blocks are stacked, the upper convex structure 11 is received in the lower concave structure 12 of the adjacent block, so as to realize the interlocking of the two blocks. It can be understood that, referring to FIG. 8, in other embodiments, a height H of the upper convex structure 11 is smaller than a depth D of the lower concave structure 12, so that when the upper convex structure 11 is received in the lower concave structure 12, so as to form a gap between the upper convex structure 11 and the lower convex structure 12, and the gap forms a horizontal line pipe slot 8 for receiving water supply pipes, electric wires, communication cables and the like, in the horizontal direction.

[0033] The upper convex structure 11 includes a pair of guiding faces 111 extending and inclined from the top face of the corner block 200, and a connecting face 112 connected between the pair of guiding faces. The pair of guiding faces 111 extend towards each other, each guiding face 111 connected with the top face at an inclined

angle, wherein the inclined angle is greater than 90 degrees and smaller than 180 degrees. In the present disclosure, as the integrally non-interrupted upper convex structure is adopted, and the guiding face of the upper convex structure is inclined to the top face, it can be effectively achieved to prevent water from entering the block from the top face. In addition, since the guiding face is an inclined face, a better cooperation with the lower concave structure can be realized, so as to obtain effects of guiding and positioning.

[0034] In another embodiment, the corner block 200 further includes a positioning groove formed by removing the upper convex structure 11 on the top face of the corner portion 203. The positioning groove is configured for accommodating the bottom face of another corner block stacked on the corner block, in particular the bottom face of the corner portion, so as to facilitate mutual cooperation and avoid a mutual interference when the two corner blocks are stacked. The positioning groove includes a first positioning groove 161 adjacent to the first straight edge portion 201 and a second positioning groove 162 adjacent to the second straight edge portion 202, and the first positioning groove 161 and the second positioning groove 162 are configured at intervals.

[0035] In another embodiment, the upper convex structure 11 further includes a pair of arc-shaped faces 113 connected between the connecting face 112 and the guiding face 111, so that the connecting face 112 is smoothly transitioned to the connecting face 111 to reduce stress concentration, further to prevent the upper convex structure from being damaged in the transportation process. Typically, the connecting face 113 has a cross section in shape of 1/4 arc. Accordingly, the shape of the lower concave structure 12 is matched with the shape of the upper convex structure 11 so as to better receive the upper convex structure.

[0036] The corner block 200 further includes a plurality of positioning holes 7 and power cable holes 6 formed in the upper convex structure 11. The plurality of positioning holes 7 and the power cable holes 6 extend from the connecting face 112 of the upper convex structure 11 to the bottom face of the corner block. The plurality of positioning holes 7 and the power cable holes 6 are configured at intervals, and each line pipe hole 6 is located between two adjacent positioning holes 7. The power cable holes 6 are generally circular, rectangular and the like. The positioning holes 7 are generally circular, rectangular and the like, with an inner diameter of the positioning hole 7 larger than an inner diameter of the line pipe hole 6. The positioning hole 7 is configured for receiving the reinforcing positioning rod 400, and the reinforcing positioning rod 400 is movable and can be pulled out from the positioning hole 7 when needed. The power cable holes 6 are configured for receiving electric wires, water supply pipes, communication cables and the like.

[0037] The corner block 200 further includes thermal insulating holes 17 formed in the top face and located on two opposite sides of the upper convex structure 11. The

thermal insulating holes 17 are configured to be filled with thermal insulation and sound insulation materials. The thermal insulating holes 17 extend from the top face of the corner block 200 to the bottom face of the corner block 200.

[0038] In another embodiment, the corner block 200 is not provided with the thermal insulating hole, while the line pipe hole 6 is configured on the top face of the corner block 200, and extends from the top face to the bottom face. The plurality of power cable holes 6 are configured on the two sides of the upper convex structure 11.

[0039] Referring to FIG. 7, the corner block 200 includes a block body 2001, a core 2002 embedded into the block body 2001, and a waterproof layer 2003 between the block body 2001 and the core 2002, a thermal insulating layer 2004 between the waterproof layer 2003 and the core 2002, and a supporting member 2005 fixedly connected with the waterproof layer 2003, wherein the supporting member 2005 is embedded in the block body 2001. The waterproof layer 2003 can be a waterproof film and is configured to warp the core 2002; and the supporting member 2005 is configured for supporting the waterproof layer 2003. The supporting member 2005 can be a claw-shaped element made of metal, so as to support the waterproof layer 2003 in a large area, and a stretching rib is provided inside the supporting member 2005, so that the waterproof layer 2003 may flatly warp the outer peripheral surfaces of the core 2002 and the thermal insulating layer 2004 under the support of the supporting member 2005. In addition, the supporting member can be formed in mixing with the block body, so as to enhance the strength of the block. The thermal insulating layer 2004 is configured inside the waterproof layer 2003, to achieve a better thermal insulating effect. An internal sleeve penetrates through the block body 2001 and the core 2002 of the corner block 200, and a through hole is accordingly formed in the waterproof layer 2003, the waterproof layer 2003 extends inclined in a direction towards the block body 2001 from the through hole, so as to further enhance the waterproof effect. The thermal insulating layer 2004 is made of a thermal insulation material such as sponge. The core 2002 can be made of a thermal insulation material, or can also be made of a bulletproof material with relatively high strength, such as high-strength ceramic and the like. In addition, the core 2002 can be made of the same material as the block body 2001.

[0040] The corner block 200 further includes an internal sleeve 207 embedded in the line pipe hole 6 and/or the positioning hole 7. The internal sleeve 207 may keep the inner face of the line pipe hole or the positioning hole smooth, to facilitate the insertion or disassembly of the line pipe or the reinforcement positioning rod.

[0041] A decorative layer 13 can be connected to one side or two sides of the corner block 200, wherein colors, and patterns of the decorative layer 13 may be integrally formed with the blocks, or being jointed together with the blocks into a whole after being manufactured separately,

and may be only single-side decoration.

[0042] Referring to FIGS. 4-5, the structure of the first block 100 is similar to that of the corner block 200. The difference is that the structure of the first block 100 is substantially in straight line, and one end of the first block 100 is a convex structure 9, and the other end of the front convex structure is a concave structure. The convex structure is configured for matching with the concave structure of the adjacent block to form an interlocking structure during stacking. Similar to the corner block 200, the first block 100 also has an integrally non-interrupted upper convex structure 11 and a lower concave structure 12, the upper convex structure 11 also has a pair of guiding faces 111 which extend inclined to the top face of the first block, a connecting face 112 and an arc-shaped face 113. The first block 100 also includes a plurality of positioning holes 7 and power cable holes 6, and the power cable holes 6 can also be configured on the two sides of the upper convex structure 11. An internal sleeve 207 is provided in the line pipe hole 6 and/or the positioning hole 7, and the first block 100 also includes a block body 2001, a core 2002, a waterproof layer 2003 located between the core 2002 and the block body 2001, a thermal insulating layer 2004 located between the waterproof layer 2003 and the core 2002, and a supporting member 2005 fixedly connected with the waterproof layer 2003. A decorative layer 13 can be connected to one side or two sides of the first block 100, wherein colors and patterns of the decorative layer 13 may be integrally formed with the blocks, or being jointed together with the blocks into a whole after being manufactured separately, and may be only single-side decoration.

[0043] Referring to FIG. 6, the structure of the adjusting block 300 is similar to that of the corner block 200. The difference is that the structure of the adjusting block 300 is substantially in straight line, and one end of the adjusting block 300 is a planar face 301, while the other end is a concave structure 10. The concave structure 10 is configured for matching with the convex structure 9 of an adjacent block to form an interlocking structure during stacking. Similar to the corner block 200, the adjusting block 300 also has an integrally non-interrupted upper convex structure 11 and a lower concave structure 12, the upper convex structure 11 is also provided with a pair of guiding faces 111 which extend inclined to the top face of the adjusting block, a connecting face 112 and an arc-shaped face 113. The adjusting block 300 also includes a plurality of positioning holes 7 and power cable holes 6, and the power cable holes 6 are also configured on the two sides of the upper convex structure 11. An internal sleeve 207 is provided in the line pipe hole 6 and/or the positioning hole 7, and the block 300 also includes a block body 2001, a core 2002, a waterproof layer 2003 located between the core 2002 and the block body 2001, a thermal insulating layer 2004 located between the waterproof layer and the core, and a supporting member 2005 fixedly connected with the waterproof layer 2003. A decorative layer can be connected to one side or two sides of the

adjusting block 300, wherein colors and patterns of the decorative layer 13 may be integrally formed with the blocks, or being jointed together with the blocks into a whole after being manufactured separately, and may be only single-side decoration.

[0044] Referring to FIG. 9, the dimensional relation between each block in the block kit is as follows. A length of the first block 100 is denoted by L, a width of the first block 100 is denoted by W, and the length L is the integral multiple N of the width W, namely $L = W \times N$. An outer length of the corner block 200 is $L + W$, an inner length of the corner block 200 is L, an outer width is $1/2L + W$, an inner width is $1/2L$, and the adjusting block 4300 has a length of $1/2L$, and a width of W. The main dimensions of other blocks corresponding to the first blocks with different widths and different lengths can be obtained based on the above calculation formulas, and the related dimensions allow a tolerance of ± 50 mm when the blocks are actually manufactured, so as to realize a complete matching of the blocks.

[0045] The above descriptions are merely the embodiments of the present invention, and it should be noted that, for those skilled in the art, various modifications can be made without departing from the concept of the present invention, and all such modifications are intended to be included within the protection scope of the invention.

Claims

1. A corner block, comprising: an upper convex structure arranged on a top face of the corner block, the upper convex structure extending along a length direction of the top face, with a length of the upper convex structure the same as a length of the top face; and a lower concave structure arranged on a bottom face of the corner block, the lower concave structure configured for receiving the upper convex structure; wherein the upper convex structure includes a pair of guiding faces extending inclined from the top face, and a connecting face connecting with the guiding faces.
2. The corner block according to claim 1, wherein, the corner block comprises a first straight edge portion, a second straight edge portion and a corner portion connecting the first straight edge portion with the second straight edge portion, the upper convex structure extending from a top face of the first straight edge portion to a top face of the second straight edge portion through a top face of the corner portion, the lower concave structure extending from a bottom face of the first straight edge portion to a bottom face of the second straight edge portion through a bottom face of the corner portion.

3. The corner block according to claim 2, wherein, both an end of the first straight edge portion away from the corner portion, and an end of the first straight edge portion away from the corner portion, are recessed to form a concave structure. 5
4. The corner block according to claim 3, wherein, the corner block further comprises a positioning groove formed by removing the upper convex structure at the corner portion, and the positioning groove is configured for receiving a bottom face of another corner block when stacked on the corner block. 10
5. The corner block according to claim 4, wherein, the positioning groove comprises a first positioning groove adjacent to the first straight edge portion and a second positioning groove adjacent to the second straight edge portion. 15
6. The corner block according to any one of claims 1-5, wherein, the upper convex structure further comprises a pair of arc-shaped faces, and each arc-shaped face is connected between the connecting face and the guiding face. 20
7. The corner block according to any one of claims 1-5, wherein, the corner block comprises a plurality of positioning holes extending from the connecting face of the upper convex structure to the bottom face of the corner block, and a plurality of power cable holes which are formed in two opposite sides of the upper convex structure, each line pipe hole extending from the top face of the corner block to the bottom face of the corner block. 25 30
8. The corner block according to claim 7, comprising an internal sleeve embedded in the positioning holes and/or the power cable holes. 35
9. The corner block according to any one of claims 1-5, wherein, the corner block comprises a block body, a core embedded in the block body and a waterproof layer wrapping the core, with the waterproof layer located between the block body and the core. 40 45
10. The corner block according to claim 9, wherein, the corner block further comprises a supporting member fixedly connected with the waterproof layer, and a thermal insulating layer located between the waterproof layer and the core, with the supporting member embedded in the block body. 50
11. A block kit, for constructing a building, the block kit comprising a first block, a corner block and an adjusting block, which are stacked and interlocked to construct the building, wherein, each of the first block, the corner block and the adjusting block comprises: 55
 - an upper convex structure configured on a top face, the upper convex structure extending along a length direction of the top face, with a length of the upper convex structure the same as a length of the top face; and
 - a lower concave structure configured on a bottom face, the lower concave structure configured for receiving the upper convex structure; the upper convex structure comprising a pair of guiding faces extending and inclined from the top face and a connecting face connecting with the guiding faces; wherein
 - when a plurality of the first blocks, the adjusting blocks and the corner blocks are interlocked to construct the building, the plurality of blocks are stacked with each other, and the upper convex structure of one of the blocks is mutually interlocked with the lower concave structure of an adjacent other block.
12. The block kit according to claim 11, wherein, the corner block includes a first straight edge portion, a second straight edge portion and a corner portion connecting the first straight edge portion with the second straight edge portion, the upper convex structure extends from a top face of the first straight edge portion to a top face of the second straight edge portion through a top face of the corner portion, and the lower concave structure extends from a bottom face of the first straight edge portion to a bottom face of the second straight edge portion through a bottom face of the corner portion.
13. The block kit according to claim 12, wherein, both an end of the first straight edge portion away from the corner portion, and an end of the first straight edge portion, away from the corner portion, are recessed to form a concave structure.
14. The block kit according to claim 13, wherein, the corner block further comprises a positioning groove formed by removing the upper convex structure at the corner portion, and the positioning groove is configured for receiving the bottom face of another corner block stacked on the corner block.
15. The block kit according to claim 14, wherein, the positioning groove comprises a first positioning groove adjacent to the first straight edge portion and a second positioning groove adjacent to the second straight edge portion.
16. The block kit according to any one of claims 11-15, wherein, each of the first block, the corner block and the adjusting block comprises a plurality of positioning holes extending from the connecting face of the upper convex structure to the bottom face, and a plurality of power cable holes which are formed in

two opposite sides of the upper convex structure, each line pipe hole extending from the top face to the bottom face.

17. The block kit according to claim 16, wherein, each of the first block, the corner block and the adjusting block comprises an internal sleeve embedded in the power cable holes and/or the positioning holes. 5
18. The block kit according to any one of claims 11-15, wherein, each of the first block, the corner block and the adjusting block comprises a block body, a core embedded in the block body and a waterproof layer wrapping the core, with the waterproof layer located between the block body and the core. 10 15
19. The block kit according to claim 11, wherein, each of the first block, the corner block and the adjusting block comprises a supporting member fixedly connected with the waterproof layer, and a thermal insulating layer located between the waterproof layer and the core, with the supporting member embedded in the block body. 20
20. The block kit according to claim 11, wherein, each of the first block, the corner block and the adjusting block comprises a decorative layer connected to at least one side of the block. 25

30

35

40

45

50

55

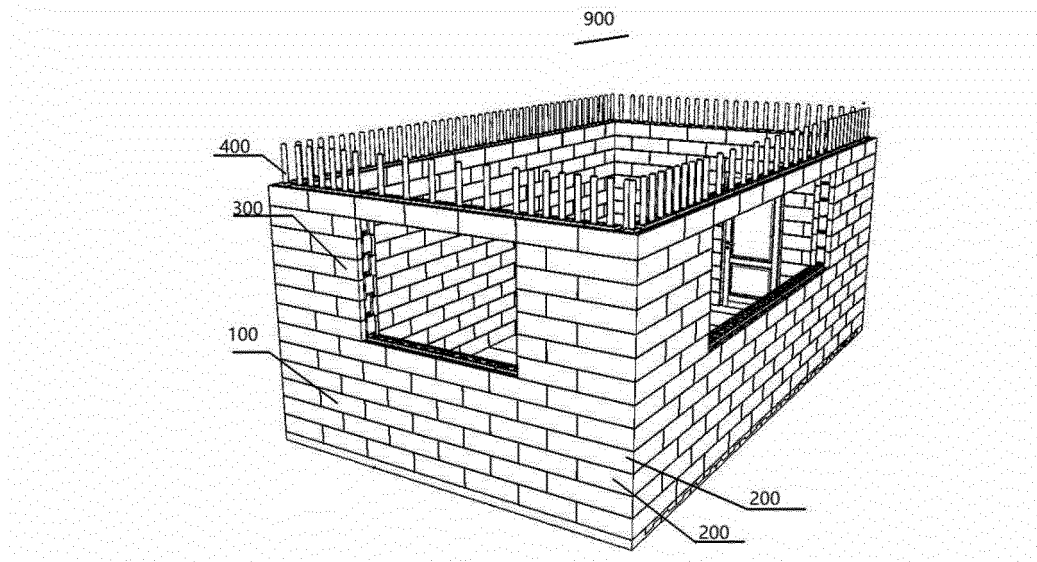


Fig. 1

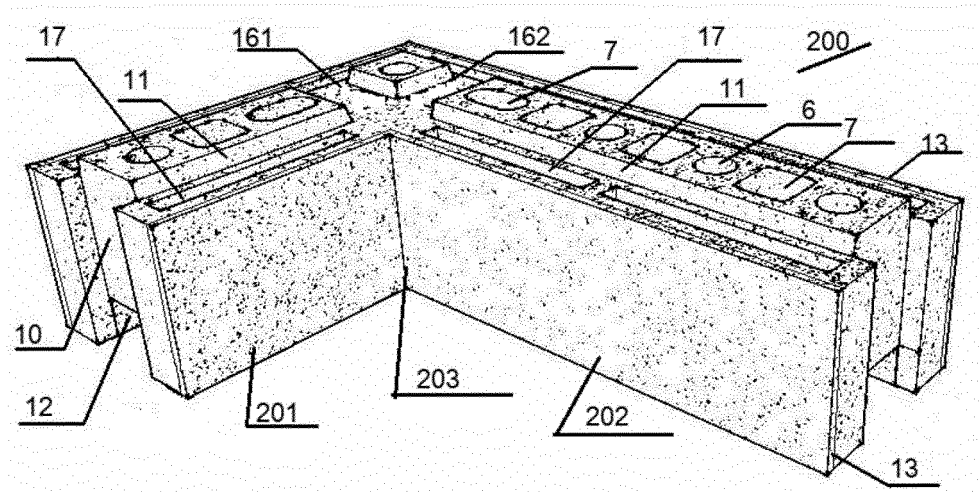


Fig. 2

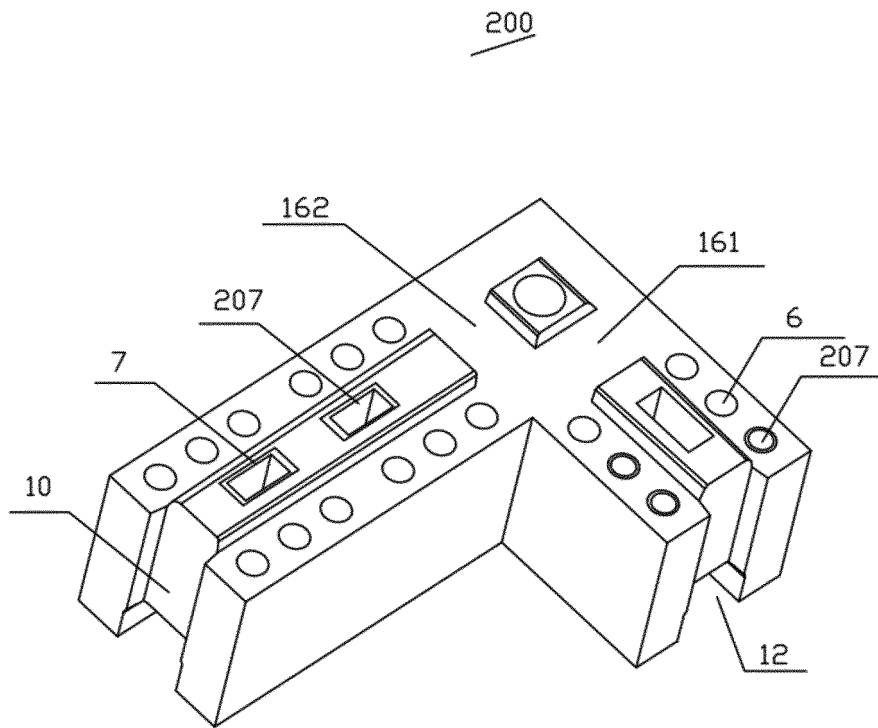


Fig. 3

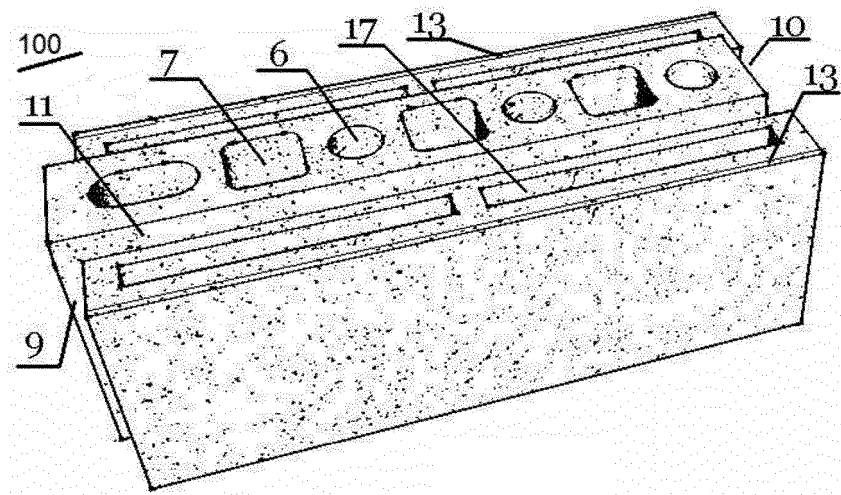


Fig. 4

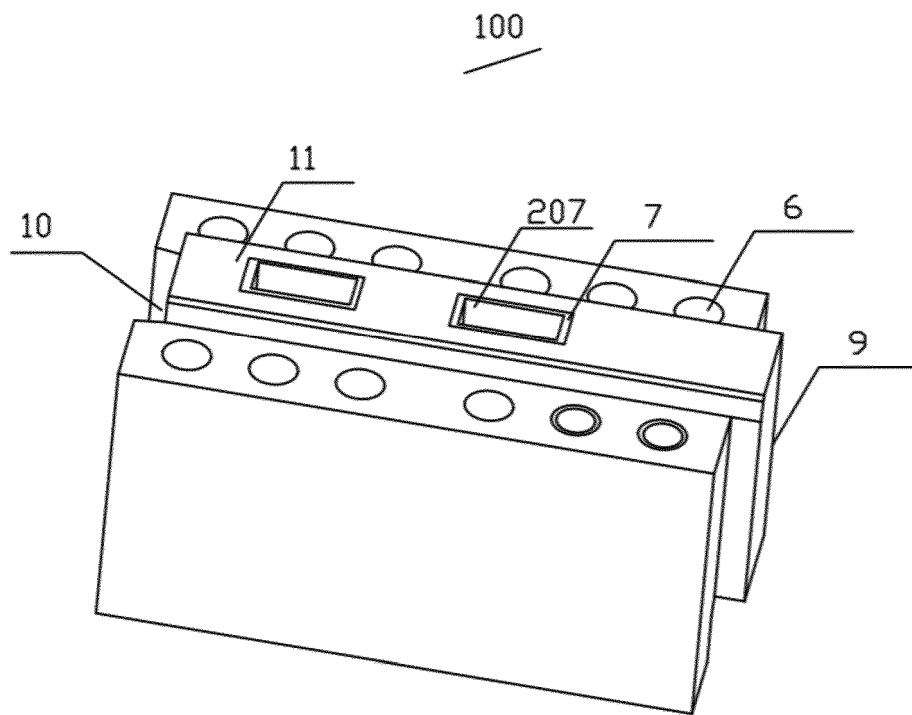


Fig. 5

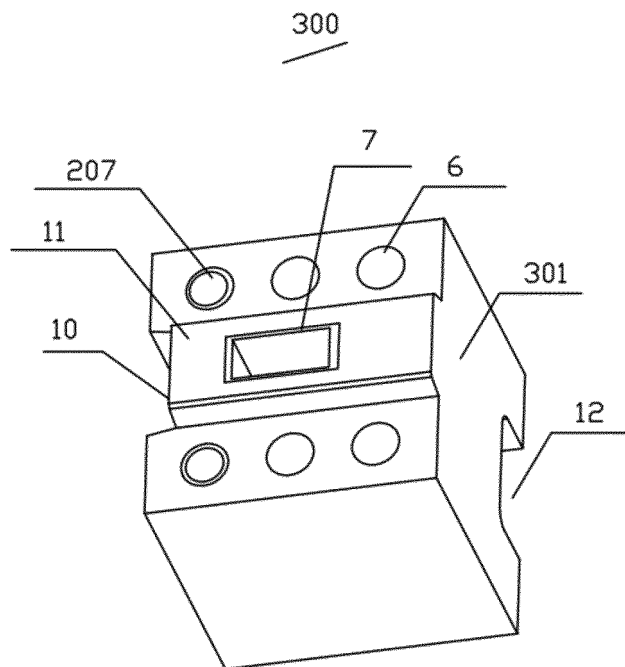


Fig. 6

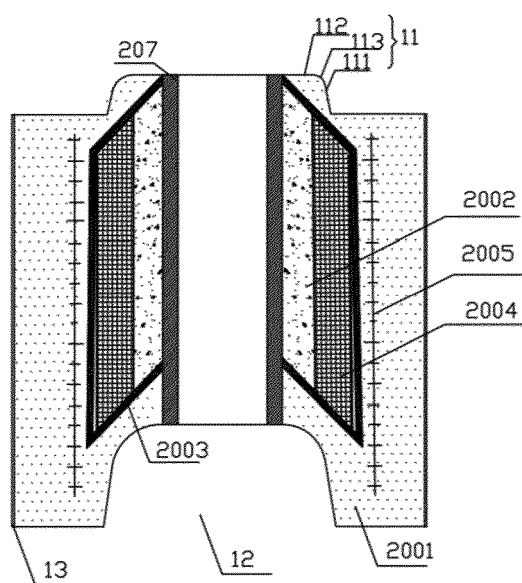


Fig. 7

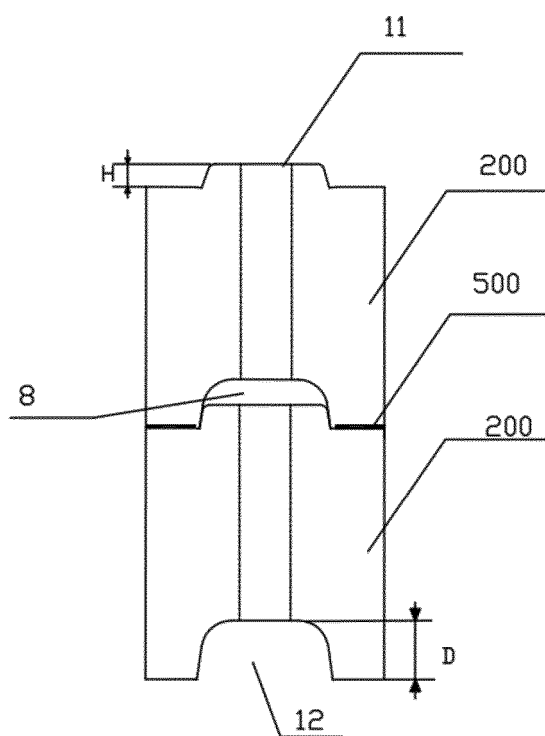


Fig. 8

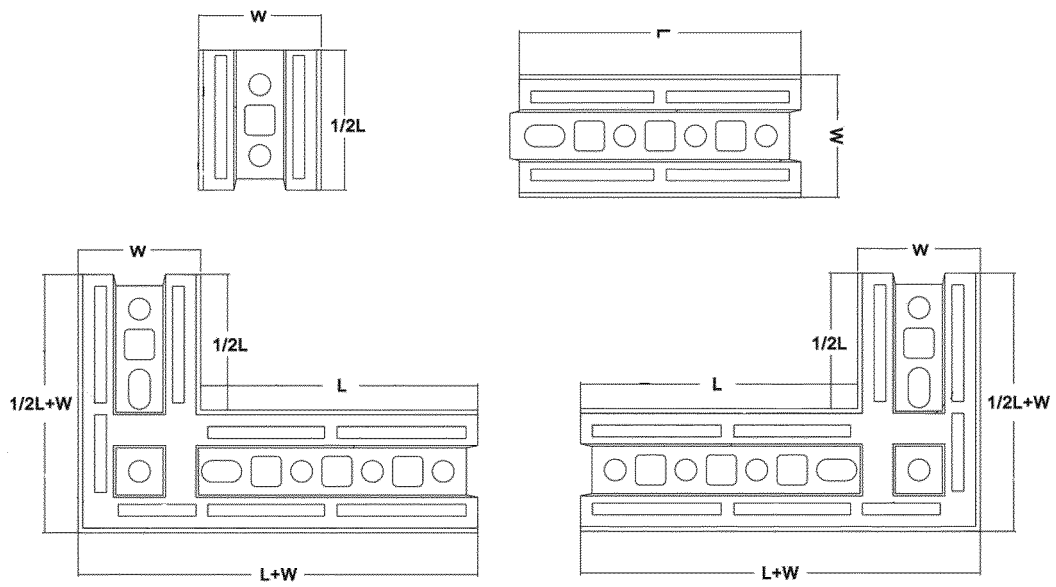


Fig. 9

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2018/085116

A. CLASSIFICATION OF SUBJECT MATTER

E04C 1/00 (2006.01) i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E04C, E04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNABS, CNTXT, VEN, CNKI: 梦圆翔建材科技, 韩文正, 拐角, 斜面, 斜边, 斜坡, 凸, 突, 凹, 榫, 水, 雨, 引导, 导引, 定位, corner?, turning?, bevel+, inclin+, slant+, tali?, groove?, slot?, trough?, recess??. concave?, convex??. protrud+, project+, protrusion?, projection?, fovea?, tenon?, water+, rain+, guid+, induct+, orientation

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	CN 1293293 A (AZAR, T.J.), 02 May 2001 (02.05.2001), description, page 1, line 8 to page 4, line 11, and figures 1-18 and 27	1-20
Y	CN 205577165 U (HUANG, Jiakai), 14 September 2016 (14.09.2016), description, paragraphs 20-23, and figures 1-5	1-20
Y	CN 203947664 U (BEIJING AURORA ENVIRONMENTAL PROTECTION SCI-TECH INSTITUTE CO., LTD.), 19 November 2014 (19.11.2014), description, paragraphs 6-14, and figures 1-4	9-10, 18-19
A	CN 2074329 U (SHI, Shiyong), 03 April 1991 (03.04.1991), entire document	1-20
A	CN 204728562 U (HUANG, Lieyuan), 28 October 2015 (28.10.2015), entire document	1-20
A	CN 204225340 U (TU, Cairong), 25 March 2015 (25.03.2015), entire document	1-20
A	CN 2641186 Y (GUANGZHOU ZIGUANG BUILDING MATERIAL DEVELOPMENT CO., LTD.), 15 September 2004 (15.09.2004), entire document	1-20

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

04 July 2018

Date of mailing of the international search report

11 July 2018

Name and mailing address of the ISA
State Intellectual Property Office of the P. R. China
No. 6, Xitucheng Road, Jimenqiao
Haidian District, Beijing 100088, China
Facsimile No. (86-10) 62019451

Authorized officer

LIU, Aijun

Telephone No. 62089857

Form PCT/ISA/210 (second sheet) (January 2015)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2018/085116

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	CN 204826374 U (FU, Donghua), 02 December 2015 (02.12.2015), entire document	1-20
A	JP 11343686 A (HIYAMA, K.), 14 December 1999 (14.12.1999), entire document	1-20
A	KR 20110090520 A (JUNG, M.Y.), 10 August 2011 (10.08.2011), entire document	1-20

Form PCT/ISA/210 (continuation of second sheet) (January 2015)

INTERNATIONAL SEARCH REPORT
 Information on patent family members

 International application No.
 PCT/CN2018/085116

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
CN 1293293 A	02 May 2001	IT 1314824 B1	16 January 2003
		TN SN00069 A1	30 May 2002
		CA 2285832 A1	13 April 2001
		DE 10015954 A1	19 April 2001
		CA 2285832 C	20 September 2005
		MA 25092 A1	31 December 2000
		FR 2799778 A1	20 April 2001
		IL 135054 D0	20 May 2001
		AU 6543699 A	29 June 2000
		US 2001029719 A1	18 October 2001
		US 6467229 B2	22 October 2002
		GB 2345499 A	12 July 2000
		GB 2345499 B	02 April 2003
		CA 2257032 A1	24 June 2000
CN 205577165 U	14 September 2016	US 6253518 B1	03 July 2001
		NZ 502001 A	28 September 2001
		AU 776368 B2	09 September 2004
		CA 2257032 C	11 December 2001
		ZA 200001151 A	27 December 2000
		TR 200001115 A2	21 May 2001
		TR 200001115 A3	21 May 2001
		ZA 200001151 B	15 October 2000
		None	
		None	
CN 203947664 U	03 April 1991	None	
		None	
		None	
		None	
		None	
		None	
		None	
		None	
CN 204728562 U	28 October 2015	None	
		None	
		None	
		None	
CN 204225340 U	25 March 2015	None	
		None	
		None	
		None	
CN 2641186 Y	15 September 2004	None	
		None	
		None	
		None	
CN 204826374 U	02 December 2015	None	
		None	
		None	
		None	
JP 11343686 A	14 December 1999	None	
		None	
		None	
		None	
KR 20110090520 A	10 August 2011	KR 101154074 B1	11 June 2012

Form PCT/ISA/210 (patent family annex) (January 2015)