

(19)



(11)

EP 3 628 867 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

01.04.2020 Bulletin 2020/14

(51) Int Cl.:

F04B 39/04 ^(2006.01)

F04B 53/14 ^(2006.01)

(21) Application number: **18197613.5**

(22) Date of filing: **28.09.2018**

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

Designated Extension States:

BA ME

Designated Validation States:

KH MA MD TN

(71) Applicant: **AIR PRODUCTS AND CHEMICALS, INC.**
Allentown, Pennsylvania 18195 (US)

(72) Inventor: **Chalk, David Jonathan**
Slatington, PA 18080 (US)

(74) Representative: **Kador & Partner PartG mbB**
Corneliusstraße 15
80469 München (DE)

(54) **SEAL ASSEMBLY FOR RECIPROCATING COMPRESSOR**

(57) A seal assembly for a reciprocating rod of a reciprocating compressor, a reciprocating compressor with the seal assembly, and a method of operating the reciprocating compressor with the seal assembly to prevent leakage of gas once the compressor has been shut down.

The pressure difference between opposite sides of a static seal is kept low during normal operation to reduce wear of the static seal. When the compressor is shut down, a high pressure difference between opposite sides of the static seal assists with sealing.

EP 3 628 867 A1

Description

BACKGROUND

[0001] Compressors and other reciprocating pumps generally have a piston rod that moves into and out of a high (or low) pressure system. The pathway that the piston rod follows provides a natural leak path for the fluid (gas or liquid) into or out of the cylinder. Conventionally, rod packing is designed to seal the high pressure chamber of the compressor but due to the segmented design of these sealing systems, some leakage occurs.

[0002] When the compressor or pump is non-operational, however, the piston rod is static or not moving. The rod packing may not seal properly when the compressor, pump, or valve, in certain embodiments, is shut down but at operating pressures. The fluid, such as for example air or natural gas, may leak past the packing rings of the rod packing to the atmosphere. At best, the leakage results in system loss that must be replaced resulting in inefficiencies. At worst, the leakage results in an environmental contamination hazard that is regulated by government agencies.

[0003] There are numerous problems with allowing a compressor to leak to atmosphere after shutdown. One issue regards the potential for air ingress once gas pressure in the machine has dropped to atmospheric pressure. With no pressure in the machine, minor leakage paths have the potential of allowing air to get inside the compressor and into the process stream, producing a potentially explosive atmosphere in the compressor or downstream of the compressor. Water that may enter the machine during shutdown is another problem that may produce contaminants in the process flow. Loss of product is generally small but is another problem especially if the gas leaking out is flammable, corrosive or otherwise a problem to vent to atmosphere. In general, allowing gas to leak from a compressor after shutdown is acceptable only if that gas is air.

[0004] The problem with having a seal of some sort that can prevent leakage to atmosphere during shutdown is one of the more difficult issues to solve. Packings that normally prevent leakage of process gas to atmosphere will leak to some degree under normal operation because they are made of numerous segments which allow some small amount of leakage between those segments. They are made of segments to allow for a considerable amount of wear over the life of operation. Without segments that can move relative to each other, the amount of wear the seal can withstand before "wearing out" is extremely small. To stop leakage altogether however, the seal must be made of a single piece, just like an O-ring. But this configuration would present the problem of stopping all leakage that would come through the packings under normal operation, and the seal would quickly wear out.

[0005] To overcome these issues, the general concept has been to prevent the shutdown seal from contacting the shaft until the shaft has stopped moving so wear can

be avoided.

[0006] Solutions to preventing leakage from the compressor shaft during shutdown include isolating the compressor and allowing the pressure to leak down to zero, and providing a type of seal used only during shutdown of the system.

[0007] Static sealing assemblies are described for example in U.S. Pat. No. 4,469,017 and EP 3 330 538 A1.

[0008] Industry desires improved static sealing assemblies.

[0009] Industry desires static sealing assemblies that are simple and minimize cost while providing for leak-tight sealing once the compressor is shut down.

BRIEF SUMMARY

[0010] The present disclosure relates to a seal assembly for a reciprocating rod of a reciprocating compressor, a reciprocating compressor with the seal assembly, and a method of operating the reciprocating compressor with the seal assembly.

[0011] There are several aspects of the invention as outlined below. The reference numbers and expressions set in parentheses are referring to an example embodiment explained further below with reference to the figures. The reference numbers and expressions are, however, only illustrative and do not limit the aspect to any specific component or feature of the example embodiment. The aspects can be formulated as claims in which the reference numbers and expressions set in parentheses are omitted or replaced by others as appropriate.

[0012] Aspect 1. A seal assembly (10) for a reciprocating rod (20) of a reciprocating compressor, the seal assembly having a first end (11) and a second end (12), the first end (11) of the seal assembly disposed towards a cylinder end of the reciprocating rod, the second end (12) of the seal assembly disposed towards a crankcase end of the reciprocating rod (20), the reciprocating rod (20) having a longitudinal axis (21), the seal assembly comprising:

one or more packing retainers (30) (a.k.a. "packing cups"), each of the one or more packing retainers (30) containing a respective packing (32) configured to contact the reciprocating rod (20);

an unsegmented seal (40) configured to form a sealing interface with the reciprocating rod (20), wherein the unsegmented seal (40) is arranged at an axial position closer to the second end (12) of the seal assembly relative to the axial position of the one or more packing retainers (30), the axial position defined with respect to the longitudinal axis (21) of the reciprocating rod (20);

a fluid passage (50) having a first end (51) and a second end (52), the first end (51) located at an axial position between the unsegmented seal (40) and at

least one respective packing (32) of the one or more packing retainers (30), the axial position of the first end (51) of the fluid passage (50) defined with respect to the longitudinal axis (21) of the reciprocating rod (20), the fluid passage (50) operatively configured to vent a fluid leaking past the at least one respective packing (32); and

a valve (60) in fluid communication with the second end (52) of the fluid passage (50).

[0013] Aspect 2. The seal assembly according to aspect 1 wherein the inner diameter of the unsegmented seal (40) is the same as the outer diameter of the reciprocating rod (20).

[0014] Aspect 3. The seal assembly according to aspect 1 or aspect 2 further comprising a vent member (70) (a.k.a. "vent cup") wherein the fluid passage (50) passes through the vent member (70).

[0015] Aspect 4. The seal assembly according to aspect 3 wherein the vent member (70) contains a respective packing (72).

[0016] Aspect 5. The seal assembly according to any one of aspects 1 to 4 wherein the packing (32) contained in each of the one or more packing retainers (30) is a segmented packing.

[0017] Aspect 6. The seal assembly according to any one of aspects 1 to 4 wherein the packing (32) contained in each of the one or more packing retainers (30) is a rope packing.

[0018] Aspect 7. The seal assembly according to any one of aspects 1 to 6 further comprising a bushing (80) for the reciprocating rod (20), the bushing (80) in a position effective to reduce the compressive load on the unsegmented seal (40).

[0019] Aspect 8. The seal assembly according to any one of aspects 1 to 7 further comprising a seal carrier (45) in fixed spaced relation to the one or more packing retainers (30), the seal carrier (45) for retaining the unsegmented seal (40).

[0020] Aspect 9. The seal assembly according to aspect 8 wherein the seal carrier (45) is configured to allow the unsegmented seal (40) to move radially (in response to radial movement of the reciprocating rod (20)).

[0021] Aspect 10. The seal assembly according to any one of aspects 1 to 9 further comprising a pressure transducer (100) operatively disposed to sense the pressure in a transfer line between the second end (52) of the fluid passage (50) and the valve (60).

[0022] Aspect 11. A reciprocating compressor comprising:

a reciprocating rod (20); and

a seal assembly (10) according to any one of aspects 1 to 10.

[0023] Aspect 12. A method of operating the reciprocating compressor according to aspect 11 wherein any

fluid leaking past the at least one respective packing (32) is vented through the valve (60) when the reciprocating compressor is operating; and wherein the valve (60) is closed when the reciprocating compressor is stopped.

BRIEF DESCRIPTION OF SEVERAL VIEWS OF THE DRAWINGS

[0024]

FIG. 1 illustrates a sealing assembly with a bushing and fluid passage with a port for venting leaking gas where the port is built into the flange.

FIG. 2 illustrates a sealing assembly with a bushing and fluid passage with a port for venting leaking gas where the port is built into a vent cup.

FIG. 3 illustrates a sealing assembly with a seal carrier with a floating type seal and a fluid passage with a port for venting leaking gas where the port is built into a vent cup.

FIG. 4a illustrates a sealing assembly where the unsegmented seal 40 is a spring-energized U-cup seal.

FIG. 4b illustrates a sealing assembly where the unsegmented seal 40 is a U-cup seal that is not spring-energized.

FIG. 5 illustrates a sealing assembly where the unsegmented seal 40 is a two-part seal comprising an O-ring 40a with a plastic cap 40b.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0025] The ensuing detailed description provides preferred exemplary embodiments only, and is not intended to limit the scope, applicability, or configuration of the invention. Rather, the ensuing detailed description of the preferred exemplary embodiments will provide those skilled in the art with an enabling description for implementing the preferred exemplary embodiments of the invention, it being understood that various changes may be made in the function and arrangement of elements without departing from the scope of the invention as defined by the claims.

[0026] The articles "a" and "an" as used herein mean one or more when applied to any feature in embodiments of the present invention described in the specification and claims. The use of "a" and "an" does not limit the meaning to a single feature unless such a limit is specifically stated. The article "the" preceding singular or plural nouns or noun phrases denotes a particular specified feature or particular specified features and may have a singular or plural connotation depending upon the con-

text in which it is used.

[0027] The adjective "any" means one, some, or all indiscriminately of whatever quantity.

[0028] The term "and/or" placed between a first entity and a second entity includes any of the meanings of (1) only the first entity, (2) only the second entity, and (3) the first entity and the second entity. The term "and/or" placed between the last two entities of a list of 3 or more entities means at least one of the entities in the list including any specific combination of entities in this list. For example, "A, B and/or C" has the same meaning as "A and/or B and/or C" and comprises the following combinations of A, B and C: (1) only A, (2) only B, (3) only C, (4) A and B and not C, (5) A and C and not B, (6) B and C and not A, and (7) A and B and C.

[0029] The phrase "at least one of" preceding a list of features or entities means one or more of the features or entities in the list of entities, but not necessarily including at least one of each and every entity specifically listed within the list of entities and not excluding any combinations of entities in the list of entities. For example, "at least one of A, B, or C" (or equivalently "at least one of A, B, and C" or equivalently "at least one of A, B, and/or C") has the same meaning as "A and/or B and/or C" and comprises the following combinations of A, B and C: (1) only A, (2) only B, (3) only C, (4) A and B and not C, (5) A and C and not B, (6) B and C and not A, and (7) A and B and C.

[0030] The term "plurality" means "two or more than two."

[0031] The present disclosure relates to a seal assembly for a reciprocating rod of a reciprocating compressor, a reciprocating compressor with the seal assembly, and a method of operating the reciprocating compressor with the seal assembly.

[0032] The seal assembly is described with reference to the figures, wherein like reference numbers refer to like elements in the figures.

[0033] As shown in FIGS. 1-3, the seal assembly 10 for a reciprocating rod 20 of a reciprocating compressor has a first end 11 and a second end 12. The first end 11 of the seal assembly is disposed towards a cylinder end of the reciprocating rod, and the second end 12 of the seal assembly is disposed towards a crankcase end of the reciprocating rod 20. The reciprocating rod 20 has a longitudinal axis 21.

[0034] The seal assembly comprises one or more packing retainers 30, so-called "packing cups" by those skilled in the art. Each of the one or more packing retainers 30 contains a respective packing 32 configured to contact the reciprocating rod 20 and provide a seal to prevent leakage of the fluid. The packing 32 contained in each of the one or more packing retainers 30 may be a segmented packing, a rope packing, or any other type of packing known in the art.

[0035] The packing retainers 30 are mounted to a flange 110. A seal may be provided between the packing retainer 30 and the flange by an O-ring seal 90.

[0036] Respective O-ring seals 90 may provide sealing between each of the packing retainers 30.

[0037] The seal assembly comprises an unsegmented seal 40 configured to form a continuous sealing interface with the reciprocating rod 20. The unsegmented seal 40 is arranged at an axial position closer to the second end 12 of the seal assembly relative to the axial position of the one or more packing retainers 30. The axial position is defined with respect to the longitudinal axis 21 of the reciprocating rod 20. The unsegmented seal 40 may be the same as the outer diameter of the reciprocating rod 20. An unsegmented seal is a continuous seal about the circumference of the reciprocating rod 20, not formed by multiple segments about the circumference.

[0038] The unsegmented seal 40 may be a U-cup seal, which may be spring energized as shown in FIG. 4a, or not spring energized as shown in FIG 4b.

[0039] The unsegmented seal may be an O-ring seal.

[0040] The unsegmented seal 40 may be a two-part seal comprising an O-ring 40a with a plastic cap 40b as shown in FIG. 5. The plastic caps improve longevity of the seal. The plastic cap 40b is positioned against the sliding surface (i.e. the reciprocating rod 20), so it's the plastic cap 40b that wears, not the O-ring 40a.

[0041] The unsegmented seal 40 may be made from any desired plastic or elastomer. It is more common for plastic seals to be spring energized and elastomeric seals not to be spring energized.

[0042] The plastic or elastomer may be selected to be compatible with the fluid intended for compression in the compressor.

[0043] The unsegmented seal 40 has no channels that would provide a leak path.

[0044] The unsegmented seal 40 has no channel-through porosity.

[0045] The unsegmented seal 40 is not a rope packing.

[0046] The seal assembly comprises a fluid passage 50 having a first end 51 and a second end 52. The first end 51 is located at an axial position between the unsegmented seal 40 and at least one respective packing 32 of the one or more packing retainers 30. The axial position of the first end 51 of the fluid passage 50 is defined with respect to the longitudinal axis 21 of the reciprocating rod 20. The fluid passage 50 is operatively configured to vent a fluid leaking past the at least one respective packing 32.

[0047] FIG. 1 shows the port at the first end 51 of the fluid passage 50 defined within the flange 110.

[0048] The seal assembly comprises a valve 60 in fluid communication with the second end 52 of the fluid passage 50. The valve 60 is operatively connected to the second end 52 of the fluid passage 50 to allow or prevent flow through the fluid passage 50.

[0049] The seal assembly may comprise a vent member 70, a so-called "vent cup" wherein the fluid passage 50 passes through the vent member 70. At least a portion of the fluid passage is defined within the vent member. The vent member may contain a respective packing 72.

[0050] FIG. 2 and FIG. 3 show the port at the first end 51 of the fluid passage 50 defined within a vent member 70.

[0051] Through the use of the fluid passage 50 and the valve 60, the pressure difference on either side of the unsegmented seal 40 is small. While the reciprocating rod 20 is constantly riding on the unsegmented seal 40, because of the low pressure difference, the contact pressure is relatively low and the motion does not cause rapid wear due to the very low contact pressure.

[0052] The reciprocating rod 20 on a reciprocating compressor typically moves in a radial direction very slightly in addition to the main axial direction. This radial motion will tend to compress the unsegmented seal 40 preferentially on one side, potentially causing wear on the unsegmented seal 40 due to increased contact load.

[0053] As shown in FIG. 1 and FIG. 2, the seal assembly may comprise a bushing 80 for the reciprocating rod 20. The bushing 80, if present, is in a position effective to reduce the compressive load on the unsegmented seal 40. The bushing 80, if present, is positioned next to the unsegmented seal 40 to keep the reciprocating rod 20 centered and prevent undue compressive loads on the unsegmented seal 40.

[0054] The seal assembly may comprise a seal carrier 45 in fixed spaced relation to the one or more packing retainers 30. The seal carrier 45 retains the unsegmented seal 40. The seal carrier 45 may be fixably attached to the mounting flange 110.

[0055] The seal carrier 45 shown in FIG. 3 is configured to allow the unsegmented seal 40 to move radially in response to radial movement of the reciprocating rod 20. The unsegmented seal 40 may be held in the seal carrier 45 such that the unsegmented seal 40 is permitted to move radially with the radial movement of the reciprocating rod 20.

[0056] The seal assembly may comprise a pressure transducer 100 operatively disposed to sense the pressure in a transfer line between the second end 52 of the fluid passage 50 and the valve 60. By monitoring the pressure in the transfer line with the pressure transducer 100, proper operation of the seal can be verified and leakage through the packings can be monitored so that the packings, when worn out, can be replaced.

[0057] The present disclosure also relates to a reciprocating compressor with the seal assembly as described above. The reciprocating compressor comprises a reciprocating rod 20 and a seal assembly 10 as described above. The other components of the reciprocating compressor may be as known in the art.

[0058] The present disclosure also relates to a method of operating the reciprocating compressor with the seal assembly described above. The method comprises venting any fluid leaking past the packings 32 through the valve 60 when the reciprocating compressor is operating, and closing the valve and keeping the valve closed when the reciprocating compressor is stopped.

Example

[0059] Seals wear over the course of their useful lifetime and eventually begin to leak once too much material is lost. The amount of material lost during operation is a function of both contact pressure and the total distance over which the seal has traveled. The higher the contact pressure and the greater the total sliding distance, the higher will be the total loss of material. This loss of material eventually results in the seal 'wearing out'. The sliding distance is equal to the velocity of the sliding multiplied by the total time, so the total amount of material lost during operation per unit time is linearly related to the contact pressure (P) and the velocity (V). The higher the PV, the faster the seal will wear out.

[0060] To increase the amount of time a seal can remain in service, either the velocity can be reduced, which may not be possible for a given application, or the contact pressure can be reduced. The contact pressure is primarily a function of the pressure differential across the seal, so the higher the pressure differential, the faster the seal will wear out.

[0061] In the present invention, the lifetime of the unsegmented seal is increased by providing a minimal contact pressure during normal operating when the seal is exposed to sliding.

[0062] Unsegmented seals like those described in the present disclosure are commonly made of wear resistant materials and can last for roughly 1000 hours while under pressure of 690 kPa (100 psi) differential and while operating at normal velocity. However, a pressure of 690 kPa (100 psi) differential is much lower than the applications considered for this sealing assembly, such as for compressing hydrogen for hydrogen fueling.

[0063] If the differential seal pressure is increased to 6900 kPa (1000 psi), the wear life would be reduced by a factor of 10, resulting in seal life of about 100 hours.

[0064] Seal lives of 100 hours are too short for practical use. However by removing the pressure differential from the seal, the remaining seal pressure which is caused only by the stretching of the seal over the shaft, is very low. The contact pressure of the seal with no pressure differential across it and only pressure caused by the stretching of the seal over the shaft, is lower than the known seal by a factor of 5 to 10 so the seal life will increase by that amount.

[0065] The rate of seal material removed during operation is linearly proportional to contact pressure and sliding velocity. Reducing the contact pressure by essentially eliminating the pressure differential across the seal during operation is expected to increase the useful life of the seal to between 5000 and 10,000 hours.

Claims

1. A seal assembly for a reciprocating rod of a reciprocating compressor, the seal assembly having a first

end and a second end, the first end of the seal assembly disposed towards a cylinder end of the reciprocating rod, the second end of the seal assembly disposed towards a crankcase end of the reciprocating rod, the reciprocating rod having a longitudinal axis, the seal assembly comprising:

one or more packing retainers, each of the one or more packing retainers containing a respective packing configured to contact the reciprocating rod;

an unsegmented seal configured to form a sealing interface with the reciprocating rod, wherein the unsegmented seal is arranged at an axial position closer to the second end of the seal assembly relative to the axial position of the one or more packing retainers, the axial position defined with respect to the longitudinal axis of the reciprocating rod;

a fluid passage having a first end and a second end, the first end located at an axial position between the unsegmented seal and at least one respective packing of the one or more packing retainers, the axial position of the first end of the fluid passage defined with respect to the longitudinal axis of the reciprocating rod, the fluid passage operatively configured to vent a fluid leaking past the at least one respective packing; and
a valve in fluid communication with the second end of the fluid passage.

2. The seal assembly as claimed in claim 1 wherein the inner diameter of the unsegmented seal is the same as the outer diameter of the reciprocating rod.
3. The seal assembly as claimed in claim 1 or 2 further comprising:
a vent member wherein the fluid passage passes through the vent member.
4. The seal assembly as claimed in claim 3 wherein the vent member contains a respective packing.
5. The seal assembly as claimed in any one of the preceding claims wherein the packing contained in each of the one or more packing retainers is a segmented packing.
6. The seal assembly as claimed in any one of claim 1 to 4 wherein the packing contained in each of the one or more packing retainers is a rope packing.
7. The seal assembly as claimed in any one of the preceding claims further comprising:
a bushing for the reciprocating rod, the bushing in a position effective to reduce the compressive load on the unsegmented seal.

8. The seal assembly as claimed in any one of the preceding claims further comprising:
a seal carrier in fixed spaced relation to the one or more packing retainers, the seal carrier for retaining the unsegmented seal.


9. The seal assembly as claimed in claim 8 wherein the seal carrier is configured to allow the unsegmented seal to move radially.

10. The seal assembly as claimed in any one of the preceding claims further comprising:
a pressure transducer operatively disposed to sense the pressure in a transfer line between the second end of the fluid passage and the valve.

11. A reciprocating compressor comprising:

a reciprocating rod; and
a seal assembly as claimed in any one of the preceding claims.

12. A method of operating the reciprocating compressor as claimed in claim 11 wherein any fluid leaking past the at least one respective packing is vented through the valve when the reciprocating compressor is operating; and wherein the valve is closed when the reciprocating compressor is stopped.

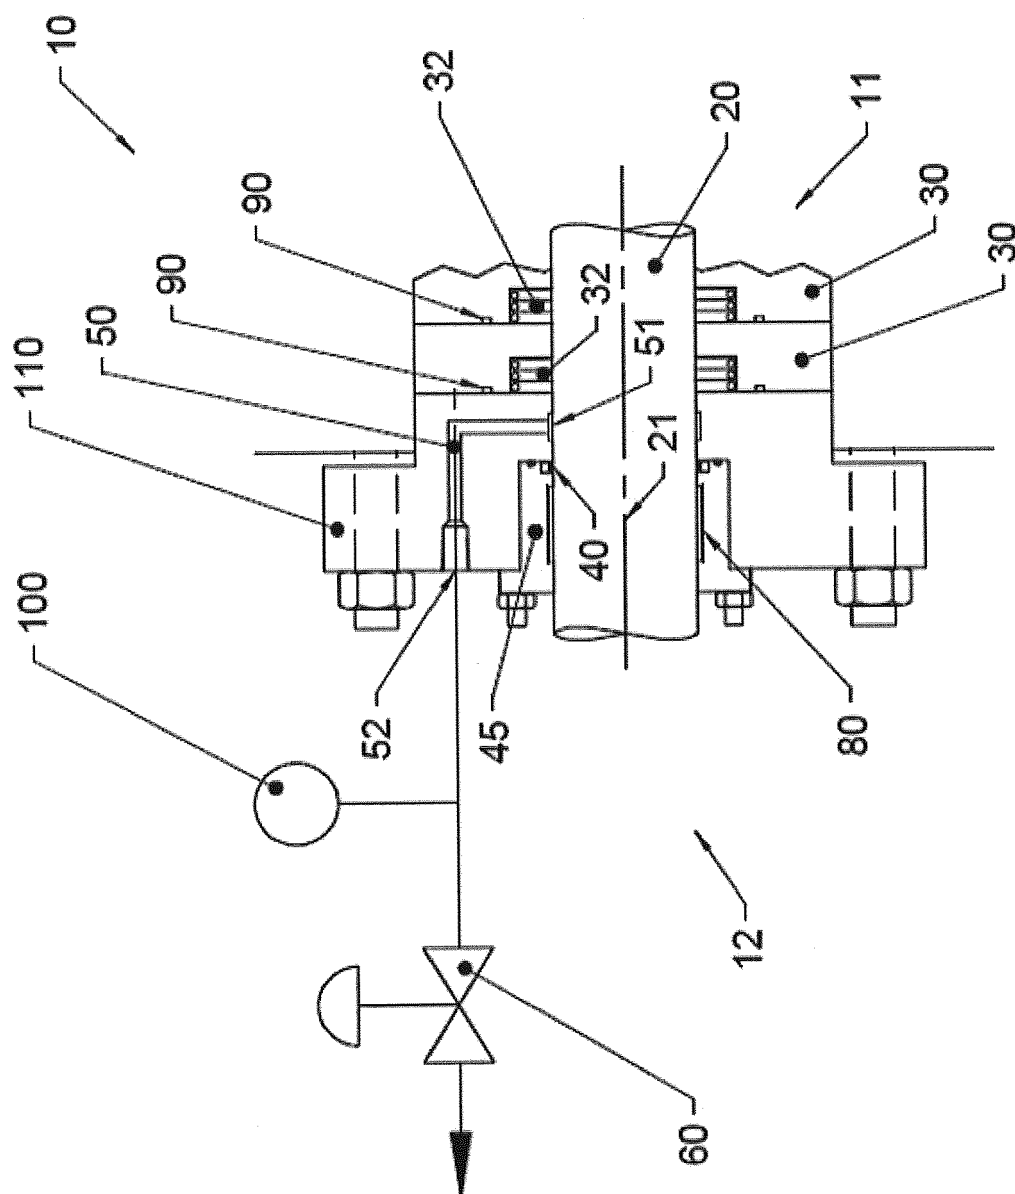

1
G
F

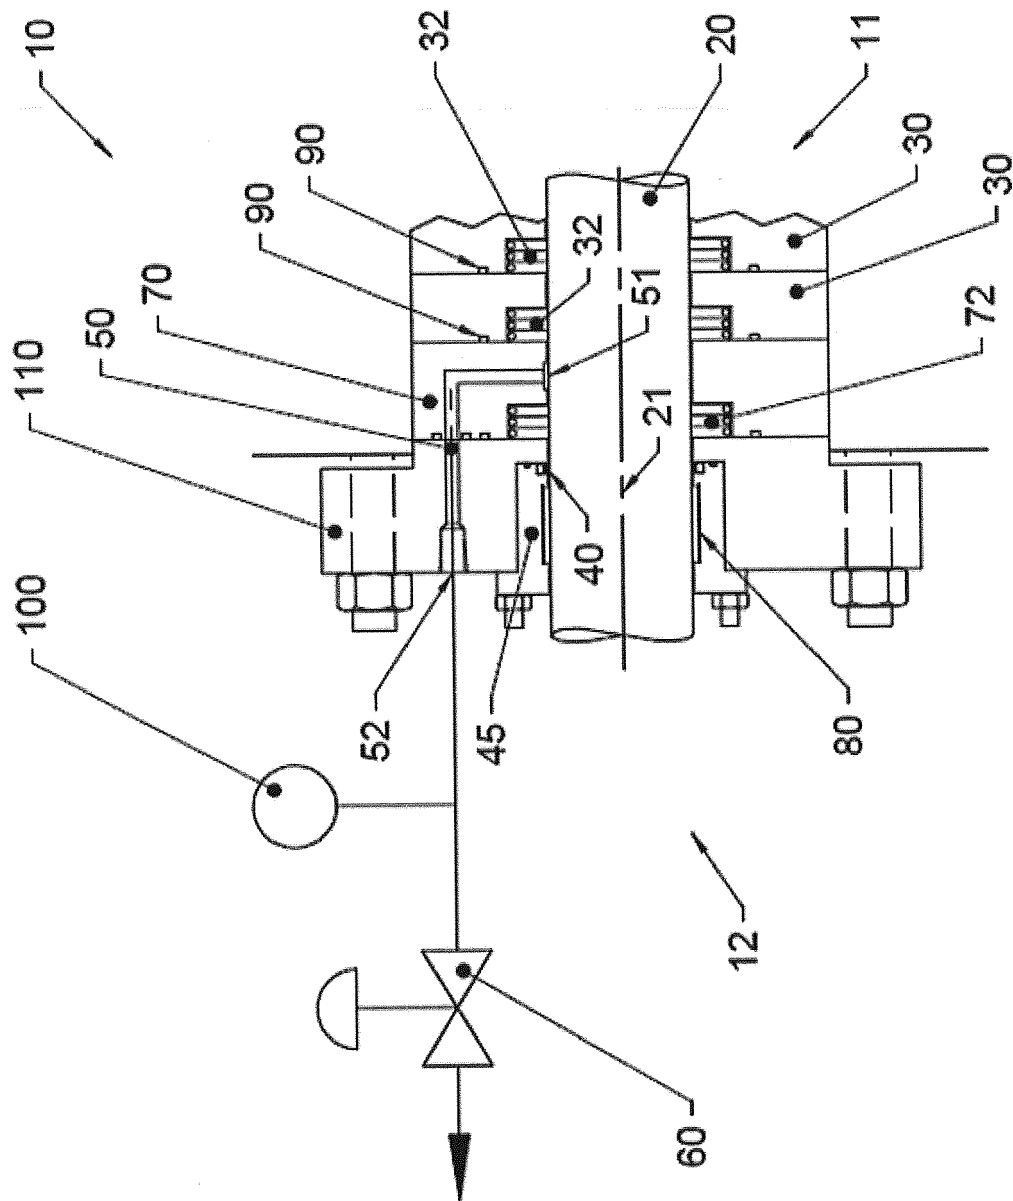


FIG. 2

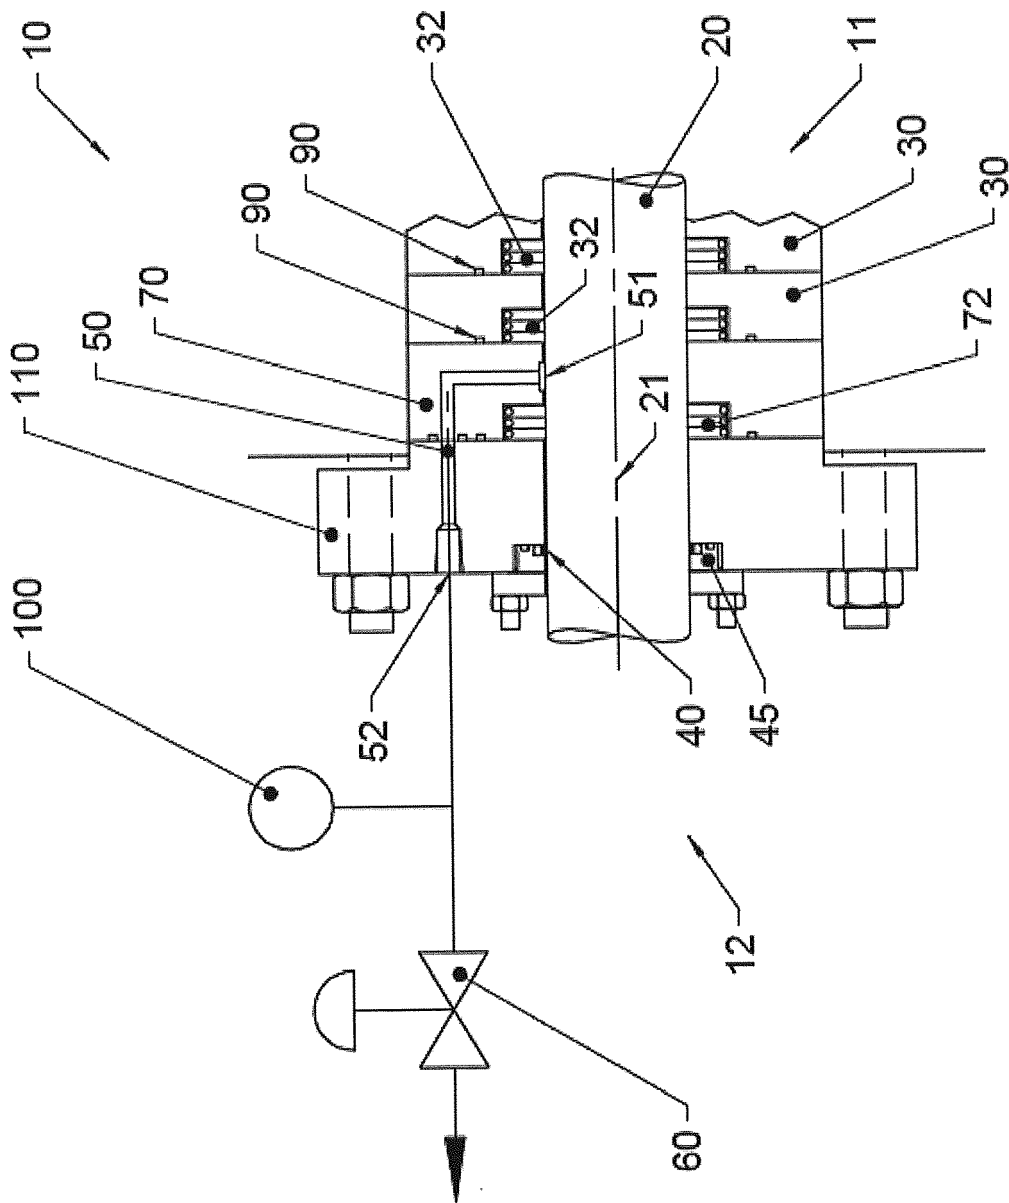


FIG. 3

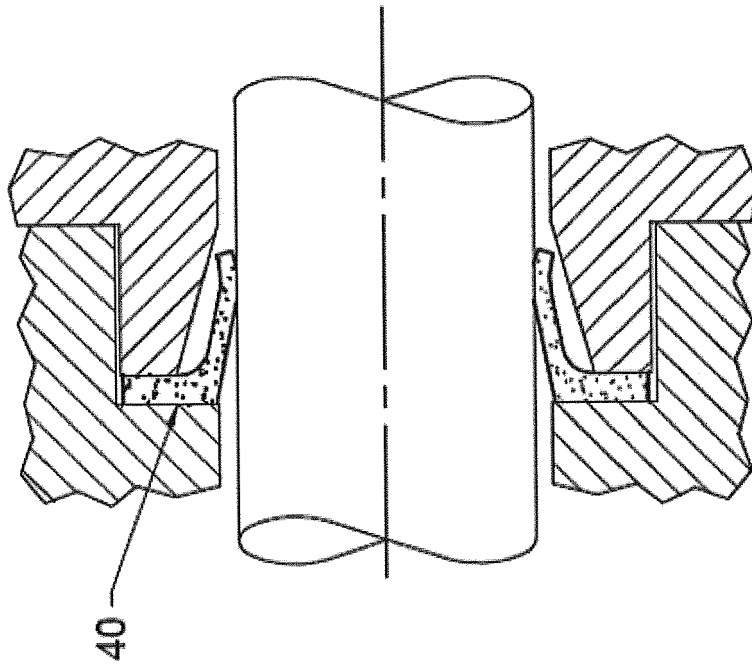


FIG. 4a

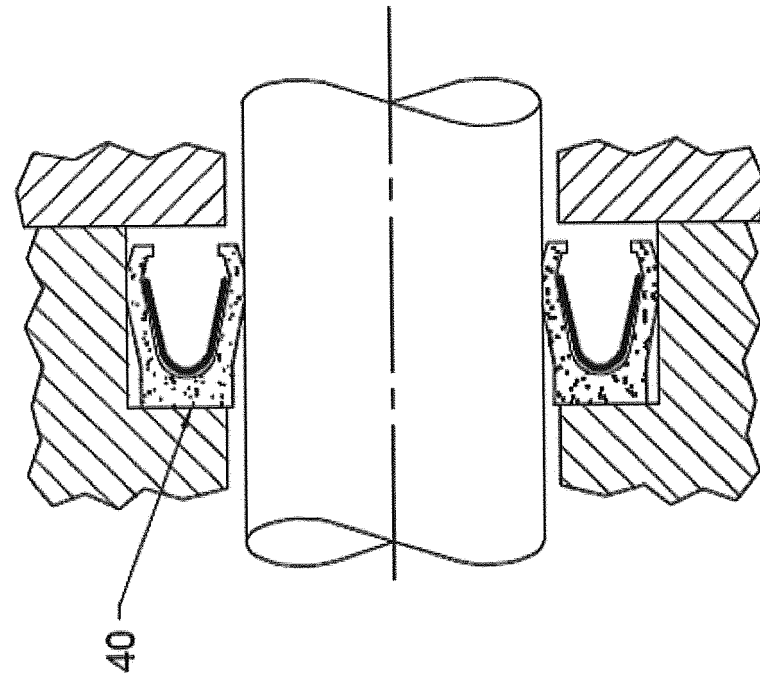


FIG. 4b

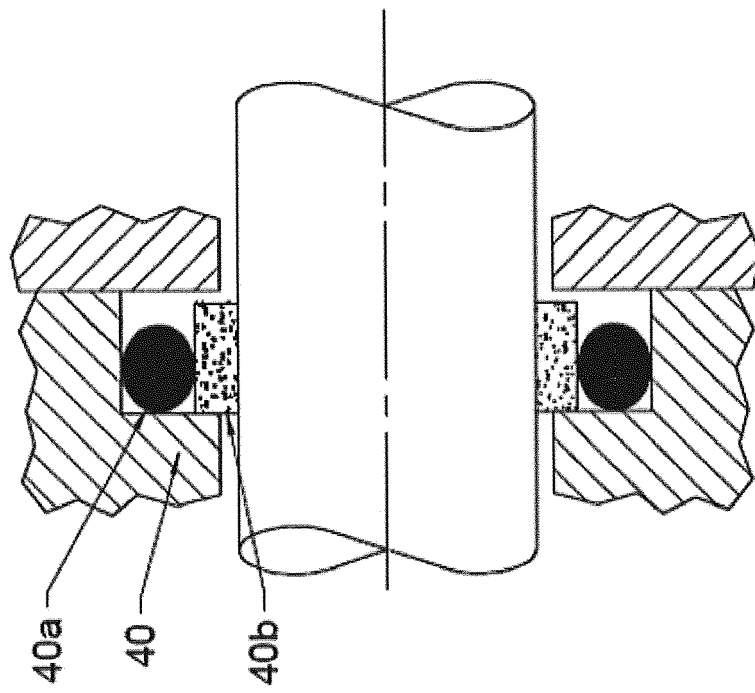


FIG. 5



EUROPEAN SEARCH REPORT

Application Number
EP 18 19 7613

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	DE 10 19 432 B (BURCKHARDT AG MASCHF) 14 November 1957 (1957-11-14) * column 3, lines 1-17; figure 1 *	1-12	INV. F04B39/04 F04B53/14
A	US 2006/275716 A1 (MARTY PASCAL [FR] ET AL) 7 December 2006 (2006-12-07) * paragraphs [0024], [0025]; figure 1 *	1	
A	CN 204 458 258 U (JINCHENG TIANYU NEW ENERGY CO LTD) 8 July 2015 (2015-07-08) * the whole document *	1	
A,D	US 4 469 017 A (HANLON PAUL C [US]) 4 September 1984 (1984-09-04) * column 3, line 8 - column 4, line 55; figure 3 *	1-12	
A,D	EP 3 330 538 A1 (COMPRESSOR PRODUCTS INT LLC [US]) 6 June 2018 (2018-06-06) * the whole document *	1-12	
			TECHNICAL FIELDS SEARCHED (IPC)
			F04B
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 18 March 2019	Examiner Ziegler, Hans-Jürgen
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 18 19 7613

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-03-2019

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 1019432 B	14-11-1957	NONE	
US 2006275716 A1	07-12-2006	AT 404821 T CN 1892110 A EP 1726878 A1 ES 2312098 T3 FR 2885992 A1 JP 2006322702 A US 2006275716 A1	15-08-2008 10-01-2007 29-11-2006 16-02-2009 24-11-2006 30-11-2006 07-12-2006
CN 204458258 U	08-07-2015	NONE	
US 4469017 A	04-09-1984	NONE	
EP 3330538 A1	06-06-2018	CA 2987650 A1 EP 3330538 A1 US 2018156208 A1	05-06-2018 06-06-2018 07-06-2018

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 4469017 A [0007]
- EP 3330538 A1 [0007]