

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
15.04.2020 Bulletin 2020/16

(51) Int Cl.:
H04W 52/36 (2009.01)

(21) Application number: **18794828.6**

(86) International application number:
PCT/CN2018/085593

(22) Date of filing: **04.05.2018**

(87) International publication number:
WO 2018/202123 (08.11.2018 Gazette 2018/45)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(72) Inventors:
• **LIU, Fengwei**
Shenzhen
Guangdong 518129 (CN)
• **CHEN, Lei**
Shenzhen
Guangdong 518129 (CN)
• **QIU, Jing**
Shenzhen
Guangdong 518129 (CN)

(30) Priority: **05.05.2017 CN 201710314120**

(71) Applicant: **Huawei Technologies Co., Ltd.**
Longgang District
Shenzhen, Guangdong 518129 (CN)

(74) Representative: **Epping - Hermann - Fischer**
Patentanwaltsgesellschaft mbH
Schloßschmidstraße 5
80639 München (DE)

(54) **TRANSMISSION METHOD FOR POWER HEADROOM AND DEVICE**

(57) Embodiments of this application disclose a power headroom transmission method and a device, and relate to the field of communications technologies, so that in a scenario in which two different types of waveforms are both used in an uplink for data transmission, for each waveform, a network device can obtain PH of a terminal device when data is transmitted by using the waveform. The transmission method is applied to a terminal device that supports use of a first waveform and a second waveform for data transmission, where a type of the first waveform is different from that of the second waveform. A specific solution is: determining, by the terminal device, first power headroom information and Δ_M , where the first power headroom information is used to indicate power headroom of the terminal device when data is transmitted by using the first waveform, Δ_M is a difference between a first maximum power and a second maximum power, the first maximum power is a maximum power of the terminal device when data is transmitted by using the first waveform, and the second maximum power is a maximum power of the terminal device when data is transmitted by using the second waveform; and sending, by the terminal device, the first power headroom information and Δ_M to a network device.

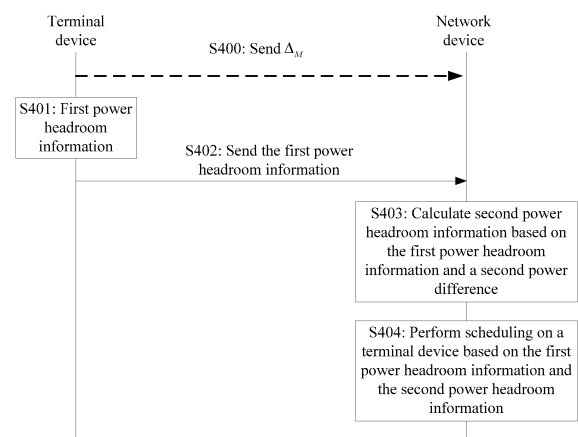


FIG. 4

Description

[0001] This application claims priority to Chinese Patent Application No. 201710314120.2, filed with the Chinese Patent Office on May 5, 2017 and entitled "POWER HEADROOM TRANSMISSION METHOD AND DEVICE", which is incorporated herein by reference in its entirety.

TECHNICAL FIELD

[0002] Embodiments of this application relate to the field of communications technologies, and in particular, to a power headroom transmission method and a device.

BACKGROUND

[0003] Both an orthogonal frequency division multiplexing (Orthogonal Frequency Division Multiplexing, OFDM) waveform and a discrete Fourier transform spread orthogonal frequency division multiplexing (Discrete Fourier Transform spread OFDM, DFT-S-OFDM) waveform are typical waveforms in wireless communications. The OFDM waveform can be used to provide a higher capacity in a scenario in which a signal-to-noise ratio is high, and is applicable to a cell center user. In contrast, the DFT-S-OFDM waveform characterized by a relatively low peak-to-average power ratio (Peak to Average Power Ratio, PAPR) can be used to provide a wider coverage area, and is applicable to a cell edge user with limited coverage.

[0004] Currently, the new generation wireless communication (New Radio, NR) standard of the 3rd Generation Partnership Project (3rd Generation Partnership Project, 3GPP) stipulates that both the OFDM waveform and the DFT-S-OFDM waveform are used in an uplink for data transmission. Correspondingly, a terminal device needs to support both the OFDM waveform and the DFT-S-OFDM waveform, and a network device needs to obtain power headroom (Power Headroom, PH) information of the terminal device when data is transmitted by using the OFDM waveform and obtain PH information of the terminal device when data is transmitted by using the DFT-S-OFDM waveform, so that the network device implements resource scheduling and power control for the terminal device based on the two types of PH information. PH is defined as a difference between a maximum transmit power of the terminal device and a calculated configuration transmit power of the terminal device.

[0005] However, in a scenario in which both the OFDM waveform and the DFT-S-OFDM waveform are used in the uplink for data transmission, currently there is no method for obtaining the two types of PH information by the network device.

SUMMARY

[0006] Embodiments of this application provide a power headroom transmission method and a device, so that in a scenario in which both an OFDM waveform and a DFT-S-OFDM waveform are used in an uplink for data transmission, for each waveform, a network device can obtain PH information of a terminal device when data is transmitted by using the waveform.

[0007] To achieve the foregoing objective, the following technical solutions are used in the embodiments of this application.

[0008] According to a first aspect, a power headroom transmission method is provided, and is applied to a terminal device that supports use of a first waveform and a second waveform for data transmission, where a type of the first waveform is different from that of the second waveform. The transmission method is: determining, by the terminal device, first power headroom information and Δ_M , where the first power headroom information is used to indicate power headroom of the terminal device when data is transmitted by using the first waveform, Δ_M is a difference between a first maximum power and a second maximum power, the first maximum power is a maximum power of the terminal device when data is transmitted by using the first waveform, and the second maximum power is a maximum power of the terminal device when data is transmitted by using the second waveform; and sending, by the terminal device, the first power headroom information and Δ_M to a network device.

[0009] There is a difference between the first maximum power and the second maximum power. After the terminal device sends the first power headroom information and Δ_M to the network device, the network device may calculate second power headroom information based on Δ_M , the first power headroom information, and another related parameter, to implement scheduling performed by the network device on the terminal device. The terminal device determines and reports only the first power headroom information and Δ_M , so that overheads of communications signaling between the terminal device and the network device are reduced.

[0010] Optionally, in a possible implementation of this application, Δ_M is pre-configured, or is calculated by the terminal device based on the first maximum power and the second maximum power. If Δ_M is calculated by the terminal device

based on the first maximum power and the second maximum power, the terminal device further sends Δ_M to the network device.

[0011] Optionally, in another possible implementation of this application, when an uplink channel of the terminal device is transmitted without using the first waveform, if the uplink channel of the terminal device is transmitted by using the second waveform, the terminal device calculates the first power headroom information based on a scheduling parameter in case of the uplink channel of the terminal device is transmitted by using the second waveform.

[0012] The uplink channel in the embodiments of this application may be a physical uplink shared channel (Physical Uplink Shared Channel, PUSCH), a physical uplink control channel (Physical Uplink Control Channel, PUCCH), an NR-PUSCH, or an NR-PUCCH. The NR-PUSCH represents a PUSCH in an NR system, and the NR-PUCCH represents a PUCCH in the NR system.

[0013] Optionally, in another possible implementation of this application, if the first waveform supports spectrum shaping (Spectrum Shaping, SS), the terminal device further sends first power difference information corresponding to the first waveform to the network device, where a first power difference corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a second modulation scheme; or the terminal device further sends an additional power corresponding to the first waveform to the network device, where the additional power corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is not added; or if the second waveform supports spectrum shaping SS, the terminal device further sends first power difference information corresponding to the second waveform to the network device, where a first power difference corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using a second modulation scheme; or the terminal device further sends an additional power corresponding to the second waveform to the network device, where the additional power corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is not added.

[0014] According to a second aspect, a terminal device is provided. The terminal device supports use of a first waveform and a second waveform for data transmission, a type of the first waveform is different from that of the second waveform, and the terminal device includes a processing unit and a sending unit.

[0015] Functions implemented by the unit modules provided in this application are specifically as follows.

[0016] The processing unit is configured to determine first power headroom information and Δ_M , where the first power headroom information is used to indicate power headroom of the terminal device when data is transmitted by using the first waveform, Δ_M is a difference between a first maximum power and a second maximum power, the first maximum power is a maximum power of the terminal device when data is transmitted by using the first waveform, and the second maximum power is a maximum power of the terminal device when data is transmitted by using the second waveform; and the sending unit is configured to send, to a network device, the first power headroom information and Δ_M that are determined by the processing unit.

[0017] Optionally, in a possible implementation of this application, Δ_M is pre-configured, or is calculated by the terminal device based on the first maximum power and the second maximum power. If Δ_M is calculated by the terminal device based on the first maximum power and the second maximum power, the sending unit is further configured to send Δ_M to the network device.

[0018] Optionally, in another possible implementation of this application, when an uplink channel of the terminal device is transmitted without using the first waveform, the processing unit is specifically configured to: if the uplink channel of the terminal device is transmitted by using the second waveform, calculate the first power headroom information based on a scheduling parameter in case of the uplink channel of the terminal device is transmitted by using the second waveform.

[0019] Optionally, in another possible implementation of this application, if the first waveform supports spectrum shaping SS, the sending unit is further configured to: send first power difference information corresponding to the first waveform to the network device, where a first power difference corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a second modulation scheme; or send an additional power corresponding to the first waveform to the network device, where the additional power corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is not added; or if the second waveform supports spectrum shaping SS, the sending

unit is further configured to: send first power difference information corresponding to the second waveform to the network device, where a first power difference corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using a second modulation scheme; or send an additional power corresponding to the second waveform to the network device, where the additional power corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is not added.

[0020] Under action of SS, a maximum power of the terminal device additionally increases. When a waveform supports SS, the terminal device further sends first power difference information corresponding to the waveform or an additional power corresponding to the waveform to the network device, so that the network device can schedule a resource for the terminal device more accurately and sufficiently.

[0021] For specific descriptions of the second aspect and various implementations of the second aspect in this application, refer to detailed descriptions of the first aspect and various implementations of the first aspect. In addition, for beneficial effects of the second aspect and various implementations of the second aspect, refer to analysis of the beneficial effects of the first aspect and various implementations of the first aspect. Details are not described herein again.

[0022] According to a third aspect, a power headroom transmission method is provided, and is applied to a terminal device that supports use of a first waveform and a second waveform for data transmission, where a type of the first waveform is different from that of the second waveform. The transmission method includes: after determining first power headroom information and second power headroom information, sending, by the terminal device, the first power headroom information and the second power headroom information to a network device, where the first power headroom information is used to indicate power headroom of the terminal device when data is transmitted by using the first waveform, and the second power headroom information is used to indicate power headroom of the terminal device when data is transmitted by using the second signal.

[0023] The terminal device in this embodiment may directly send the first power headroom information and the second power headroom information to the network device. In this way, the network device can directly utilize the first power headroom information and the second power headroom information that are received by the network device, to implement resource scheduling for the terminal device.

[0024] Optionally, in a possible implementation of this application, a method for sending, by the terminal device, the first power headroom information and the second power headroom information to the network device is: sending, by the terminal device, both the first power headroom information and the second power headroom information to the network device, where the first power headroom information is a value of first power headroom, the second power headroom information is a value of second power headroom or is a power headroom difference, and the power headroom difference is a difference between the second power headroom and the first power headroom.

[0025] In a scenario in which the terminal device sends both the first power headroom information and the second power headroom information to the network device, the second power headroom information may be the value of the second power headroom or may be the power headroom difference. A quantity of bits occupied by the power headroom difference is less than a quantity of bits occupied by the value of the second power headroom, and therefore overheads of signaling between the terminal device and the network device can be reduced.

[0026] Optionally, in another possible implementation of this application, a method for sending, by the terminal device, the first power headroom information and the second power headroom information to the network device is: when a first preset report condition is satisfied, sending, by the terminal device, target power headroom information to the network device, where the first preset report condition is that reporting of the target power headroom information is triggered when a first timer exceeds first preset duration, and the target power headroom information is the first power headroom information or the second power headroom information; and when a second preset report condition is satisfied, sending, by the terminal device, the first power headroom information and the second power headroom information to the network device, where the second preset report condition is that reporting of the first power headroom information and the second power headroom information is triggered when a second timer exceeds second preset duration, and the second timer coexists with the first timer; or when a third preset report condition is satisfied, sending, by the terminal device, target power headroom information to the network device, where the third preset report condition is that reporting of the target power headroom information is triggered when a change amount of a path loss relative to a path loss corresponding to previous reporting of power headroom information is greater than or equal to a first preset threshold, and the target power headroom information is the first power headroom information or the second power headroom information; and when a fourth preset report condition is satisfied, sending, by the terminal device, the first power headroom information and the second power headroom information to the network device, where the fourth preset report condition is that reporting of the first power headroom information and the second power headroom information is triggered when the change amount of the path loss relative to the path loss corresponding to the previous reporting of power headroom

information is greater than or equal to a second preset threshold; or when a fifth preset report condition is satisfied, sending, by the terminal device, target power headroom information to the network device, where the fifth preset report condition is that reporting of the target power headroom information is triggered when a quantity of to-be-stuffed bits of a transmission resource is greater than or equal to a third preset threshold, and the target power headroom information is the first power headroom information or the second power headroom information; and when a sixth preset report condition is satisfied, sending, by the terminal device, the first power headroom information and the second power headroom information to the network device, where the sixth preset report condition is that reporting of the first power headroom information and the second power headroom information is triggered when the quantity of the to-be-stuffed bits of the transmission resource is greater than or equal to a fourth preset threshold.

[0027] Optionally, in another possible implementation of this application, a method for sending, by the terminal device, the first power headroom information and the second power headroom information to the network device is: receiving configuration information sent by the network device, where the configuration information is used to instruct to report the first power headroom information and the second power headroom information within a preset time period; and sending, by the terminal device, the first power headroom information and the second power headroom information to the radio access network device within the preset time period based on the configuration information.

[0028] The terminal device may send at least one of the first power headroom information and the second power headroom information to the network device under different conditions.

[0029] Optionally, in another possible implementation of this application, when an uplink channel of the terminal device is transmitted without using the first waveform, if the uplink channel of the terminal device is transmitted by using the second waveform, the terminal device calculates the first power headroom information based on a scheduling parameter in case of the uplink channel of the terminal device is transmitted by using the second waveform.

[0030] Herein, the uplink channel of the terminal device is the same as the uplink channel of the terminal device in the first aspect.

[0031] Optionally, in another possible implementation of this application, if the first waveform supports spectrum shaping SS, the terminal device further sends first power difference information corresponding to the first waveform to the network device, where a first power difference corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a second modulation scheme; or the terminal device further sends an additional power corresponding to the first waveform to the network device, where the additional power corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is not added; or if the second waveform supports spectrum shaping SS, the terminal device further sends first power difference information corresponding to the second waveform to the network device, where a first power difference corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using a second modulation scheme; or the terminal device further sends an additional power corresponding to the second waveform to the network device, where the additional power corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is not added.

[0032] Under action of SS, a maximum power of the terminal device additionally increases. When a waveform supports SS, the terminal device further sends first power difference information corresponding to the waveform or an additional power corresponding to the waveform to the network device, so that the network device can schedule a resource for the terminal device more accurately and sufficiently.

[0033] According to a fourth aspect, a terminal device is provided. The terminal device supports use of a first waveform and a second waveform for data transmission, a type of the first waveform is different from that of the second waveform, and the terminal device includes a processing unit and a sending unit.

[0034] Functions implemented by the unit modules provided in this application are specifically as follows.

[0035] The processing unit is configured to determine first power headroom information and second power headroom information, where the first power headroom information is used to indicate power headroom of the terminal device when data is transmitted by using the first waveform, and the second power headroom information is used to indicate power headroom of the terminal device when data is transmitted by using the second signal; and the sending unit is configured to send, to a network device, the first power headroom information and the second power headroom information that are determined by the processing unit.

[0036] Optionally, in a possible implementation of this application, the sending unit is specifically configured to: send both the first power headroom information and the second power headroom information to the network device, where

the first power headroom information is a value of first power headroom, the second power headroom information is a value of second power headroom or is a power headroom difference, and the power headroom difference is a difference between the second power headroom and the first power headroom; or when a first preset report condition is satisfied, send target power headroom information to the network device, where the first preset report condition is that reporting of the target power headroom information is triggered when a first timer exceeds first preset duration, and the target power headroom information is the first power headroom information or the second power headroom information; and when a second preset report condition is satisfied, send the first power headroom information and the second power headroom information to the network device, where the second preset report condition is that reporting of the first power headroom information and the second power headroom information is triggered when a second timer exceeds second preset duration, and the second timer coexists with the first timer; or when a third preset report condition is satisfied, send target power headroom information to the network device, where the third preset report condition is that reporting of the target power headroom information is triggered when a change amount of a path loss relative to a path loss corresponding to previous reporting of power headroom information is greater than or equal to a first preset threshold, and the target power headroom information is the first power headroom information or the second power headroom information; and when a fourth preset report condition is satisfied, send the first power headroom information and the second power headroom information to the network device, where the fourth preset report condition is that reporting of the first power headroom information and the second power headroom information is triggered when the change amount of the path loss relative to the path loss corresponding to the previous reporting of power headroom information is greater than or equal to a second preset threshold; or when a fifth preset report condition is satisfied, send target power headroom information to the network device, where the fifth preset report condition is that reporting of the target power headroom information is triggered when a quantity of to-be-stuffed bits of a transmission resource is greater than or equal to a third preset threshold, and the target power headroom information is the first power headroom information or the second power headroom information; and when a sixth preset report condition is satisfied, send the first power headroom information and the second power headroom information to the network device, where the sixth preset report condition is that reporting of the first power headroom information and the second power headroom information is triggered when the quantity of the to-be-stuffed bits of the transmission resource is greater than or equal to a fourth preset threshold.

[0037] Optionally, in another possible implementation of this application, the terminal device provided in this embodiment of this application further includes a receiving unit. The receiving unit is configured to receive configuration information sent by the network device, where the configuration information is used to instruct to report the first power headroom information and the second power headroom information within a preset time period. Correspondingly, the sending unit is specifically configured to send the first power headroom information and the second power headroom information to the radio access network device within the preset time period based on the configuration information received by the receiving unit.

[0038] Optionally, in another possible implementation of this application, when an uplink channel of the terminal device is transmitted without using the first waveform, the processing unit is specifically configured to: if the uplink channel of the terminal device is transmitted by using the second waveform, calculate the first power headroom information based on a scheduling parameter in case of the uplink channel of the terminal device is transmitted by using the second waveform.

[0039] Optionally, in another possible implementation of this application, if the first waveform supports spectrum shaping SS, the sending unit is further configured to: send first power difference information corresponding to the first waveform to the network device, where a first power difference corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a second modulation scheme; or send an additional power corresponding to the first waveform to the network device, where the additional power corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is not added; or if the second waveform supports spectrum shaping SS, the sending unit is further configured to: send first power difference information corresponding to the second waveform to the network device, where a first power difference corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using a second modulation scheme; or send an additional power corresponding to the second waveform to the network device, where the additional power corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is not added.

[0040] For specific descriptions of the fourth aspect and various implementations of the fourth aspect in this application, refer to detailed descriptions of the third aspect and various implementations of the third aspect. In addition, for beneficial

effects of the fourth aspect and various implementations of the fourth aspect, refer to analysis of the beneficial effects of the third aspect and various implementations of the third aspect. Details are not described herein again.

[0041] According to a fifth aspect, a terminal device is provided. The terminal device includes a processor, a memory, and a communications interface. The memory is configured to store computer program code, where the computer program code includes an instruction, and the processor, the communications interface, and the memory are connected through a bus. When the terminal device runs, the processor executes the instruction stored in the memory, so that the terminal device performs the power headroom transmission method according to the first aspect and various possible implementations of the first aspect, or performs the power headroom transmission method according to the third aspect and various possible implementations of the third aspect.

[0042] According to a sixth aspect, a computer readable storage medium is further provided, where the computer readable storage medium stores an instruction. When the instruction is run on a terminal device, the terminal device is enabled to perform the power headroom transmission method according to the first aspect and various possible implementations of the first aspect, or perform the power headroom transmission method according to the third aspect and various possible implementations of the third aspect.

[0043] According to a seventh aspect, a computer program product including an instruction is further provided. When the computer program product is run on a terminal device, the terminal device is enabled to perform the power headroom transmission method according to the first aspect and various possible implementations of the first aspect, or perform the power headroom transmission method according to the third aspect and various possible implementations of the third aspect.

[0044] In this application, a name of the foregoing terminal device does not constitute any limitation on a device or a functional module. In actual implementation, these devices or functional modules may have other names. Each device or functional module falls within the scope defined by the claims and their equivalent technologies in this application, provided that a function of the device or functional module is similar to that described in this application.

[0045] For specific descriptions of the fifth aspect, the sixth aspect, the seventh aspect, and various implementations of the fifth aspect, the sixth aspect, and the seventh aspect in this application, refer to detailed descriptions of the first aspect and various implementations of the first aspect, or refer to detailed descriptions of the third aspect and various implementations of the third aspect. In addition, for beneficial effects of the fifth aspect, the sixth aspect, the seventh aspect, and various implementations of the fifth aspect, the sixth aspect, and the seventh aspect, refer to analysis of the beneficial effects of the first aspect and various implementations of the first aspect, or refer to analysis of the beneficial effects of the third aspect and various implementations of the third aspect. Details are not described herein again.

[0046] According to an eighth aspect, a power headroom transmission method is provided. The transmission method includes: obtaining, by a network device, first power headroom information, Δ_M , and a second power difference, where the first power headroom information is used to indicate power headroom of a terminal device when data is transmitted by using a first waveform, Δ_M is equal to a difference between a first maximum power and a second maximum power, the first maximum power is a maximum power of the terminal device when data is transmitted by using the first waveform, the second maximum power is a maximum power of the terminal device when data is transmitted by using a second waveform, a type of the first waveform is different from that of the second waveform, the second power difference is a difference between a first configuration transmit power and a second configuration transmit power, the first configuration transmit power is a power configured by the network device for the terminal device when a physical uplink shared channel PUSCH is transmitted by using the first waveform, and the second configuration transmit power is a power configured by the network device for the terminal device when the PUSCH is transmitted by using the second waveform; calculating, by the network device, second power headroom information based on the first power headroom information, Δ_M , and the second power difference, where the second power headroom information is used to indicate power headroom of the terminal device when data is transmitted by using the second waveform; and performing, by the network device, scheduling on the terminal device based on the first power headroom information and the second power headroom information.

[0047] In the case of the first power headroom information, Δ_M , and the second power difference are obtained, the network device can calculate the second power headroom information. In this way, the network device can implement resource scheduling for the terminal device based on the first power headroom information and the second power headroom information.

[0048] Optionally, in a possible implementation of this application, a method for obtaining, by the network device, the first power headroom information is: receiving, by the network device, the first power headroom information sent by the terminal device. A method for obtaining, by the network device, Δ_M is: receiving, by the network device, Δ_M sent by the terminal device, or obtaining preset Δ_M .

[0049] Optionally, in another possible implementation of this application, if the first waveform supports spectrum shaping SS, the network device further receives first power difference information that is corresponding to the first waveform and that is sent by the terminal device, where a first power difference corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated

by using a second modulation scheme; or the network device further receives an additional power that is corresponding to the first waveform and that is sent by the terminal device, where the additional power corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is not added. If the second waveform supports spectrum shaping SS, the network device further receives first power difference information that is corresponding to the second waveform and that is sent by the terminal device, where a first power difference corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is not added. Correspondingly, if the first waveform supports SS, a method for performing, by the network device, scheduling on the terminal device based on the first power headroom information and the second power headroom information is: performing, by the network device, scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the first power difference information corresponding to the first waveform; or performing, by the network device, scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the additional power corresponding to the first waveform. If the second waveform supports SS, a method for performing, by the network device, scheduling on the terminal device based on the first power headroom information and the second power headroom information is: performing, by the network device, scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the first power difference information corresponding to the second waveform; or performing, by the network device, scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the additional power corresponding to the second waveform.

[0050] Under action of SS, a maximum power of the terminal device additionally increases. When a waveform supports SS, the network device may further receive a first power difference that is corresponding to the waveform and that is reported by the terminal device or an additional power that is corresponding to the waveform and that is reported by the terminal device. In this way, the network device can schedule a resource for the terminal device more accurately and sufficiently.

[0051] According to a ninth aspect, a network device is provided. The network device includes an obtaining unit and a processing unit.

[0052] Functions implemented by the unit modules provided in this application are specifically as follows.

[0053] The obtaining unit is configured to obtain first power headroom information, Δ_M , and a second power difference, where the first power headroom information is used to indicate power headroom of a terminal device when data is transmitted by using a first waveform, Δ_M is equal to a difference between a first maximum power and a second maximum power, the first maximum power is a maximum power of the terminal device when data is transmitted by using the first waveform, the second maximum power is a maximum power of the terminal device when data is transmitted by using a second waveform, a type of the first waveform is different from that of the second waveform, the second power difference is a difference between a first configuration transmit power and a second configuration transmit power, the first configuration transmit power is a power configured by the network device for the terminal device when a physical uplink shared channel PUSCH is transmitted by using the first waveform, and the second configuration transmit power is a power configured by the network device for the terminal device when the PUSCH is transmitted by using the second waveform; and the processing unit is configured to calculate second power headroom information based on the first power headroom information, Δ_M , and the second power difference that are obtained by the obtaining unit, where the second power headroom information is used to indicate power headroom of the terminal device when data is transmitted by using the second waveform; and is configured to perform scheduling on the terminal device based on the first power headroom information and the second power headroom information.

[0054] Optionally, in a possible implementation of this application, the obtaining unit is specifically configured to receive the first power headroom information sent by the terminal device; and the obtaining unit is specifically configured to: receive Δ_M sent by the terminal device, or obtain preset Δ_M .

[0055] Optionally, in a possible implementation of this application, if the first waveform supports spectrum shaping SS, the obtaining unit is further configured to: receive first power difference information that is corresponding to the first waveform and that is sent by the terminal device, where a first power difference corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a second modulation scheme; or receive an additional power that is corresponding to

the first waveform and that is sent by the terminal device, where the additional power corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is not added; and correspondingly, if the first waveform supports SS, the processing unit is specifically configured to: perform scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the first power difference information corresponding to the first waveform; or perform scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the additional power corresponding to the first waveform; or if the second waveform supports spectrum shaping SS, the obtaining unit is further configured to: receive first power difference information that is corresponding to the second waveform and that is sent by the terminal device, where a first power difference corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using a second modulation scheme; or receive an additional power that is corresponding to the second waveform and that is sent by the terminal device, where the additional power corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is not added; and correspondingly, the processing unit is specifically configured to: perform scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the first power difference information corresponding to the second waveform; or perform scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the additional power corresponding to the second waveform.

[0056] For specific descriptions of the ninth aspect and various implementations of the ninth aspect in this application, refer to detailed descriptions of the eighth aspect and various implementations of the eighth aspect. In addition, for beneficial effects of the ninth aspect and various implementations of the ninth aspect, refer to analysis of the beneficial effects of the eighth aspect and various implementations of the eighth aspect. Details are not described herein again.

[0057] According to a tenth aspect, a power headroom transmission method is provided. The transmission method is: receiving, by a network device, first power headroom information and second power headroom information that are sent by a terminal device, where the first power headroom information is used to indicate power headroom of the terminal device when data is transmitted by using a first waveform, and the second power headroom information is used to indicate power headroom of the terminal device when data is transmitted by using a second waveform; and performing, by the network device, scheduling on the terminal device based on the first power headroom information and the second power headroom information.

[0058] It can be learned that the network device in this embodiment may directly obtain the first power headroom information and the second power headroom information. In this way, the network device can implement resource scheduling for the terminal device directly based on the first power headroom information and the second power headroom information.

[0059] Optionally, in a possible implementation of this application, before the network device receives the first power headroom information and the second power headroom information that are sent by the terminal device, the network device further determines configuration information that is used to instruct the terminal device to report the first power headroom information and the second power headroom information within a preset time period, and sends the configuration information to the terminal device. In this way, a method for receiving, by the network device, the first power headroom information and the second power headroom information that are sent by the terminal device is specifically: receiving, within the preset time period, the first power headroom information and the second power headroom information that are sent by the terminal device.

[0060] Optionally, in another possible implementation of this application, if the first waveform supports spectrum shaping SS, the network device further receives first power difference information that is corresponding to the first waveform and that is sent by the terminal device, where a first power difference corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a second modulation scheme; or the network device further receives an additional power that is corresponding to the first waveform and that is sent by the terminal device, where the additional power corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is not added; and correspondingly, if the first waveform supports SS, a method for performing, by the network device, scheduling on the terminal device based on the first power headroom information and the second power headroom information is: performing, by the network device, scheduling on the terminal device based on the first power headroom information, the second power headroom

information, and the first power difference information corresponding to the first waveform; or performing, by the network device, scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the additional power corresponding to the first waveform; or if the second waveform supports spectrum shaping SS, the network device further receives first power difference information that is corresponding to the second waveform and that is sent by the terminal device, where a first power difference corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using a second modulation scheme; or the network device further receives an additional power that is corresponding to the second waveform and that is sent by the terminal device, where the additional power corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is not added; and correspondingly, if the second waveform supports SS, a method for performing, by the network device, scheduling on the terminal device based on the first power headroom information and the second power headroom information is: performing, by the network device, scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the first power difference information corresponding to the second waveform; or performing, by the network device, scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the additional power corresponding to the second waveform.

[0061] Under action of SS, a maximum power of the terminal device additionally increases. When a waveform supports SS, the network device may further receive a first power difference that is corresponding to the waveform and that is reported by the terminal device or an additional power that is corresponding to the waveform and that is reported by the terminal device. In this way, the network device can schedule a resource for the terminal device more accurately and sufficiently.

[0062] According to an eleventh aspect, a network device is provided. The network device includes a receiving unit and a processing unit.

[0063] Functions implemented by the unit modules provided in this application are specifically as follows.

[0064] The receiving unit is configured to receive first power headroom information and second power headroom information that are sent by a terminal device, where the first power headroom information is used to indicate power headroom of the terminal device when data is transmitted by using a first waveform, and the second power headroom information is used to indicate power headroom of the terminal device when data is transmitted by using a second waveform; and the processing unit is configured to perform scheduling on the terminal device based on the first power headroom information and the second power headroom information that are received by the receiving unit.

[0065] Optionally, in a possible implementation of this application, the processing unit is further configured to: before the receiving unit receives the first power headroom information and the second power headroom information that are sent by the terminal device, determine configuration information, where the configuration information is used to instruct the terminal device to report the first power headroom information and the second power headroom information within a preset time period; and the receiving unit is specifically configured to receive, within the preset time period, the first power headroom information and the second power headroom information that are sent by the terminal device.

[0066] Optionally, in another possible implementation of this application, if the first waveform supports spectrum shaping SS, the receiving unit is further configured to: receive first power difference information that is corresponding to the first waveform and that is sent by the terminal device, where a first power difference corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a second modulation scheme; or receive an additional power that is corresponding to the first waveform and that is sent by the terminal device, where the additional power corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is not added; and correspondingly, if the first waveform supports SS, the processing unit is specifically configured to: perform scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the first power difference information corresponding to the first waveform; or perform scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the additional power corresponding to the first waveform; or if the second waveform supports spectrum shaping SS, the receiving unit is further configured to: receive first power difference information that is corresponding to the second waveform and that is sent by the terminal device, where a first power difference corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using a second

modulation scheme; or receive an additional power that is corresponding to the second waveform and that is sent by the terminal device, where the additional power corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is not added; and correspondingly, if the second waveform supports SS, the processing unit is specifically configured to: perform scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the first power difference information corresponding to the second waveform; or perform scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the additional power corresponding to the second waveform.

[0067] According to a twelfth aspect, a network device is provided. The network device includes a processor, a memory, and a communications interface. The memory is configured to store computer program code, where the computer program code includes an instruction, and the processor, the communications interface, and the memory are connected through a bus. When the network device runs, the processor executes the instruction stored in the memory, so that the network device performs the power headroom transmission method according to the eighth aspect and various possible implementations of the eighth aspect, or performs the power headroom transmission method according to the tenth aspect and various possible implementations of the tenth aspect.

[0068] According to a thirteenth aspect, a computer readable storage medium is further provided, where the computer readable storage medium stores an instruction. When the instruction is run on a network device, the network device is enabled to perform the power headroom transmission method according to the eighth aspect and various possible implementations of the eighth aspect, or perform the power headroom transmission method according to the tenth aspect and various possible implementations of the tenth aspect.

[0069] According to a fourteenth aspect, a computer program product including an instruction is further provided. When the computer program product is run on a network device, the network device is enabled to perform the power headroom transmission method according to the eighth aspect and various possible implementations of the eighth aspect, or perform the power headroom transmission method according to the tenth aspect and various possible implementations of the tenth aspect.

[0070] In this application, a name of the foregoing network device does not constitute any limitation on a device or a functional module. In actual implementation, these devices or functional modules may have other names. Each device or functional module falls within the scope defined by the claims and their equivalent technologies in this application, provided that a function of the device or functional module is similar to that described in this application.

[0071] For specific descriptions of the twelfth aspect, the thirteenth aspect, the fourteenth aspect, and various implementations of the twelfth aspect, the thirteenth aspect, and the fourteenth aspect in this application, refer to detailed descriptions of the eighth aspect and various implementations of the eighth aspect, or refer to detailed descriptions of the tenth aspect and various implementations of the tenth aspect. In addition, for beneficial effects of the twelfth aspect, the thirteenth aspect, the fourteenth aspect, and various implementations of the twelfth aspect, the thirteenth aspect, and the fourteenth aspect, refer to analysis of the beneficial effects of the eighth aspect and various implementations of the eighth aspect, or refer to analysis of the beneficial effects of the tenth aspect and various implementations of the tenth aspect. Details are not described herein again.

[0072] These aspects or another aspect in this application are more concise and comprehensible in the following description.

BRIEF DESCRIPTION OF DRAWINGS

[0073]

FIG. 1 is a structural diagram of a communications system according to an embodiment of this application;
 FIG. 2 is a schematic diagram of a hardware structure of a mobile phone according to an embodiment of this application;
 FIG. 3 is a schematic diagram of a hardware structure of a base station according to an embodiment of this application;
 FIG. 4 is a first schematic flowchart of a power headroom transmission method according to an embodiment of this application;
 FIG. 5 is a second schematic flowchart of a power headroom transmission method according to an embodiment of this application;
 FIG. 6 is a schematic structural diagram of a terminal device according to an embodiment of this application;
 FIG. 7 is a first schematic structural diagram of a network device according to an embodiment of this application;
 FIG. 8 is a second schematic structural diagram of a network device according to an embodiment of this application;
 and
 FIG. 9 is a third schematic structural diagram of a network device according to an embodiment of this application.

DESCRIPTION OF EMBODIMENTS

[0074] In the specification, claims, and accompanying drawings of this application, the terms such as "first", "second", "third", and "fourth" are intended to distinguish between different objects but do not indicate a particular order.

[0075] In the embodiments of this application, the word "for example" or the like is used to represent giving an example, an illustration, or a description. Any embodiment or design scheme described as "for example" in the embodiments of this application should not be interpreted as being preferable or having more advantages than another embodiment or design scheme. Exactly, use of the word "for example" or the like is intended to present a related concept in a specific manner.

[0076] For ease of understanding of the embodiments of this application, a related element in the embodiments of this application is first described herein.

[0077] PH is a difference between a maximum transmit power (represented by P_{MAX}) of a terminal device and a calculated configuration transmit power (represented by P_{C-Data}) of the terminal device. The configuration transmit power of the terminal device is a power configured by a network device for the terminal device when an uplink channel of the terminal device is being transmitted. The uplink channel of the terminal device may be a PUSCH, a PUCCH, an NR-PUSCH, or an NR-PUCCH.

[0078] It can be understood that, when the uplink channel of the terminal device is any one of a PUSCH, a PUCCH, an NR-PUSCH, and an NR-PUCCH, a power headroom transmission method provided in the embodiments of this application can be performed.

[0079] For ease of description, an example in which the uplink channel of the terminal device is a PUSCH is used for description in the embodiments of this application.

[0080] For example, when the uplink channel of the terminal device is a PUSCH, a calculation formula of PH may be represented by a formula (1):

$$PH = P_{MAX} - P_{C-Data} \quad (1)$$

where a calculation formula of P_{C-Data} may be represented by a formula (2):

$$P_{C-Data} = 10 \log_{10} M + P_0 + \alpha \cdot PL + \Delta_{TF} + f \quad (2)$$

[0081] In the formula (2), M is a quantity of resource blocks (Resource Block, RB) occupied by a current PUSCH, that is, a quantity of resource blocks scheduled for the PUSCH, P_0 is an open-loop power control adjustment value, α is a partial path loss compensation value, PL is a path loss value calculated by the terminal device, Δ_{TF} is a transport format compensation value, and f is a closed-loop power control adjustment value.

[0082] It can be learned from the formula (2) that the calculated configuration transmit power of the terminal device is related to all of bandwidth of a resource occupied by a current PUSCH, a path loss between the terminal device and a base station, an open-loop power control configuration, and a closed-loop power control configuration.

[0083] After PH information reporting is triggered, when the terminal device has an uplink scheduling resource that can accommodate PH information, the terminal device sends PH information of the terminal device to the network device, so that the network device performs resource scheduling and power control for the terminal device. Generally, the terminal device reports the PH information of the terminal device to the network device by using a media access control (Media Access Control, MAC) layer control element (Control Element, CE). Specifically, the terminal device generates a PH MAC CE and reports the PH MAC CE to the network device. If the PH information reported by the terminal device reflects that the terminal device has a relatively large amount of power headroom, the network device can allocate a relatively large quantity of radio resource blocks to the terminal device. If the PH information reported by the terminal device reflects that the terminal device already has no power headroom or does not have much power headroom, the network device can allocate only a relatively small quantity of radio resource blocks or a lower-order modulation command to the terminal device.

[0084] The 3GPP NR standard stipulates that both an OFDM waveform and a DFT-S-OFDM waveform are used in an uplink for data transmission. In this case, the network device needs to obtain PH information of the terminal device when data is transmitted by using the OFDM waveform and obtain PH information of the terminal device when data is transmitted by using the DFT-S-OFDM waveform. However, currently there is no method for obtaining the two types of PH information by the network device.

[0085] As regards this problem, an embodiment of this application provides a power headroom transmission method. For a terminal device that supports use of a first waveform and a second waveform for data transmission, the terminal

device may directly send, to a network device, first power headroom information and second power headroom information that are determined by the terminal device; or the terminal device determines first power headroom information and Δ_M , and sends the first power headroom information and Δ_M to a network device, so that the network device determines second power headroom information based on the first power headroom information, Δ_M , and other related information. In this way, the network device can perform scheduling on the terminal device based on the first power headroom information and the second power headroom information.

[0086] The power headroom transmission method provided in this embodiment of this application is applicable to a communications system. FIG. 1 is a structural diagram of a communications system according to an embodiment of this application. As shown in FIG. 1, the communications system includes a terminal device 10 and a network device 11. In actual application, the communications system usually includes a plurality of terminal devices 10 and a plurality of network devices 11. To simplify the system in discussion, FIG. 1 shows only a single terminal device 10 and a single network device 11.

[0087] The terminal device 10 supports use of two different types of waveforms for data transmission. The terminal device 10 may send PH information to the network device 11. The PH information may include information used to indicate a difference between a maximum transmit power of the terminal device and a calculated configuration transmit power of the terminal device. The terminal device 10 may send the PH information periodically, or may send the PH information when a change amount of a downlink path loss exceeds a threshold.

[0088] The terminal device 10 may be a device that provides voice and/or data connectivity for a user, a handheld device having a wireless connection function, or another processing device connected to a wireless modem. The terminal device 10 may communicate with one or more core networks through a radio access network (Radio Access Network, RAN). The terminal device 10 may be a mobile terminal, such as a mobile phone (also referred to as a "cellular" phone), or a computer having a mobile terminal, or may be a portable, pocket-sized, handheld, computer built-in, or in-vehicle mobile apparatus, and such mobile apparatuses exchange language and/or data with the radio access network. For example, the terminal device 10 may be a mobile phone, a tablet computer, a notebook computer, a netbook, or a personal digital assistant (Personal Digital Assistant, PDA).

[0089] For example, in this embodiment of this application, the terminal device 10 shown in FIG. 1 may be a mobile phone. The following describes constituent parts of the mobile phone in this embodiment of this application in detail with reference to FIG. 2. As shown in FIG. 2, the mobile phone includes components such as a processor 21, a radio frequency (Radio Frequency, RF) circuit 22, a power supply 23, a memory 24, an input unit 25, a display unit 26, and an audio circuit 27. A person skilled in the art can understand that the mobile phone structure shown in FIG. 2 does not constitute any limitation on the mobile phone, and the mobile phone may include components more or fewer than those shown in FIG. 2, or may include a combination of some components shown in FIG. 2, or may include components disposed differently from those shown in FIG. 2.

[0090] The processor 21 is a control center of the mobile phone, is connected to all the parts of the entire mobile phone by using various interfaces and lines, and by running or executing a software program and/or a module that are/is stored in the memory 24 and by invoking data stored in the memory 24, performs various functions and data processing of the mobile phone, so as to perform overall monitoring on the mobile phone. Optionally, the processor 21 may include one or more processing units. An application processor and a modem processor may be integrated into the processor 21. The application processor mainly processes an operating system, a user interface, an application program, and the like, and the modem processor mainly processes wireless communication. The foregoing modem processor and the processor 21 may be alternatively independent of each other.

[0091] The RF circuit 22 may be configured to receive and send signals in an information receiving/sending process or a call process. In particular, after receiving downlink information from a base station, the RF circuit 22 sends the downlink information to the processor 21 for processing, and sends uplink data to the base station. The RF circuit usually includes but is not limited to an antenna, at least one amplifier, a transceiver, a coupler, a low noise amplifier (Low Noise Amplifier, LNA), and a duplexer. In addition, the RF circuit 22 may also perform wireless communication with a network and another device. Any communications standard or protocol may be used for the wireless communication, including but not limited to: global system for mobile communications (Global System of Mobile Communication, GSM), general packet radio service (General Packet Radio Service, GPRS), code division multiple access (Code Division Multiple Access, CDMA), wideband code division multiple access (Wideband Code Division Multiple Access, WCDMA), LTE, email, and short message service (Short Messaging Service, SMS).

[0092] The mobile phone includes the power supply 23 (for example, a battery) that supplies power to all the components. Optionally, the power supply may be logically connected to the processor 21 by using a power management system, so that functions such as charging and discharging management and power consumption management are implemented by using the power management system.

[0093] The memory 24 may be configured to store the software program and the module. The processor 21 performs various function applications and data processing of the mobile phone by running the software program and the module that are stored in the memory 24. The memory 24 may mainly include a program storage area and a data storage area.

The program storage area may store an operating system, an application program required by at least one function (such as a voice playing function and an image playing function), and the like. The data storage area may store data (such as audio data, image data, and a phone book) created based on use of the mobile phone, and the like. In addition, the memory 24 may include a high-speed random access memory, and may further include a nonvolatile memory, for

example, at least one magnetic disk storage device, a flash memory device, or another volatile solid-state storage device. **[0094]** The input unit 25 may be configured to receive input digit or character information, and generate key signal input related to user setting and function control of the mobile phone. Specifically, the input unit 25 may include a touchscreen 251 and another input device 252. The touchscreen 251, also referred to as a touch panel, may collect a touch operation performed by a user on or near the touchscreen 251 (for example, an operation performed by the user on or near the touchscreen 251 by using any proper object or accessory, such as a finger or a stylus), and drive a corresponding connecting apparatus according to a preset program. Optionally, the touchscreen 251 may include two parts: a touch detection apparatus and a touch controller. The touch detection apparatus detects a touch position of the user, detects a signal generated by a touch operation, and transmits the signal to the touch controller. The touch controller receives touch information from the touch detection apparatus, converts the touch information into contact coordinates, and sends the contact coordinates to the processor 21, and is also capable of receiving and executing a command sent by the processor 21. In addition, the touchscreen 251 may be implemented by using a plurality of types, such as a resistive type, a capacitive type, an infrared type, and a surface acoustic wave type. The another input device 252 may include but is not limited to one or more of a physical keyboard and a function key (such as a volume control key or a power on/off key).

[0095] The display unit 26 may be configured to display information entered by the user or information provided for the user, and various menus of the mobile phone. The display unit 26 may include a display panel 261. Optionally, the display panel 261 may be configured in a form of a liquid crystal display (Liquid Crystal Display, LCD), an organic light-emitting diode (Organic Light-emitting Diode, OLED), or the like. Further, the touchscreen 251 may cover the display panel 261. After detecting a touch operation on or near the touchscreen 251, the touchscreen 251 transmits information about the touch operation to the processor 21 to determine a touch event type, and then the processor 21 provides corresponding visual output on the display panel 261 based on the touch event type. In FIG. 2, the touchscreen 251 and the display panel 261 are used as two independent components to implement input and output functions of the mobile phone. However, in some embodiments, the touchscreen 251 and the display panel 261 may be integrated to implement the input and output functions of the mobile phone.

[0096] The audio circuit 27, a loudspeaker 271, and a microphone 272 are configured to provide an audio interface between the user and the mobile phone. The audio circuit 27 may transmit, to the loudspeaker 271, an electrical signal that is obtained after conversion of received audio data, and the loudspeaker 271 converts the electrical signal into a sound signal and outputs the sound signal. In addition, the microphone 272 converts a collected sound signal into an electrical signal; the audio circuit 27 receives the electrical signal, converts the electrical signal into audio data, and outputs the audio data to the RF circuit 22; and then, the audio data is sent to, for example, another mobile phone, or the audio data is output to the memory 24 for further processing.

[0097] Optionally, the mobile phone may further include various sensors (for example, a gyro sensor, a hygrometer sensor, an infrared sensor, or a magnetometer sensor), a wireless fidelity (English: Wireless Fidelity, Wi-Fi for short) module, a Bluetooth module, and the like. These components are not shown in FIG. 2.

[0098] In FIG. 1, the network device 11 in this embodiment of this application may receive PH information from the terminal device 10, and implement resource scheduling for the terminal device 10 based on the PH information received by the network device 11. The network device 11 may be a radio access point (Access Point, AP), an evolved NodeB (English: evolved Node Base Station, eNB for short), or an NR gNB. The NR gNB represents a base station in a 5th generation communications technology (the 5 Generation Mobile Communication Technology, 5G) network. This is not specifically limited in this embodiment of this application. In FIG. 1, a base station is used to represent the network device 11.

[0099] For example, in this embodiment of this application, the network device 11 shown in FIG. 1 is any one of the foregoing base stations. The following describes constituent parts of the base station in detail with reference to FIG. 3. As shown in FIG. 3, the base station includes a baseband unit (Base Band Unit, BBU), a remote radio unit (Radio Remote Unit, RRU), and an antenna. The BBU and the RRU may be connected through an optical fiber. The RRU is then connected to the antenna through a coaxial cable and a power splitter (a coupler). One BBU may be usually connected to a plurality of RRUs.

[0100] The RRU may include four modules: a digital intermediate frequency module, a transceiver module, a power amplification module, and a filtering module. The digital intermediate frequency module is configured to perform modulation and demodulation, digital up/down frequency conversion, digital-to-analog conversion, and the like for optical transmission. The transceiver module completes conversion from an intermediate frequency signal to a radio frequency signal. The radio frequency signal is amplified by the power amplification module and filtered by the filtering module, and then a processed radio frequency signal is transmitted by using the antenna.

[0101] The BBU is configured to implement a baseband processing function (encoding, multiplexing, modulation, spectrum spreading, and the like) of a Uu interface (that is, an interface between a terminal device and a base station), an interface function of a logical interface between a radio network controller (Radio Network Controller, RNC) and a base station, signaling processing, local and remote operation and maintenance functions, working status monitoring and alarm information reporting functions of a base station system, and the like.

[0102] The following specifically explains the power headroom transmission method provided in this embodiment of this application.

[0103] The power headroom transmission method provided in this embodiment of this application may be applied to the communications system shown in FIG. 1. It can be learned from the foregoing description that the terminal device 10 in this embodiment of this application supports use of two different types of waveforms for data transmission. An example in which the terminal device supports use of the first waveform and the second waveform for data transmission is used for description. A maximum power of the terminal device when data is transmitted by using the first waveform is a first maximum power P_{MAX1} , and a maximum power of the terminal device when data is transmitted by using the second waveform is a second maximum power P_{MAX2} . The first power headroom information is used to indicate power headroom PH_1 of the terminal device when data is transmitted by using the first waveform, and the second power headroom information is used to indicate power headroom PH_2 of the terminal device when data is transmitted by using the second waveform. A first configuration transmit power $P_{C-Data1}$ is a power configured by the network device for the terminal device when a PUSCH of the terminal device is transmitted by using the first waveform, and a second configuration transmit power $P_{C-Data2}$ is a power configured by the network device for the terminal device when the PUSCH of the terminal device is transmitted by using the second waveform. A difference between the first configuration transmit power and the second configuration transmit power is a second power difference ΔP_{C-Data} .

[0104] Specifically, the power headroom transmission method provided in this embodiment of this application may be as follows.

(1) A difference between the first maximum power and the second maximum power is Δ_M . The terminal device determines the first power headroom information and Δ_M , and sends the first power headroom information and Δ_M to the network device. Correspondingly, the network device receives the first power headroom information and Δ_M that are sent by the terminal device. In addition, the network device further obtains the second power difference. In this way, the network device can determine the second power headroom information based on the first power headroom information, Δ_M , and the second power difference, and further implement resource scheduling for the terminal device based on the first power headroom information and the second power headroom information.

(2) The terminal device determines the first power headroom information and the second power headroom information, and sends, to the network device, the first power headroom information and the second power headroom information that are determined by the terminal device, so that the network device implements resource scheduling for the terminal device based on the first power headroom information and the second power headroom information.

[0105] The foregoing method (1) is first described herein. As shown in FIG. 4, a power headroom transmission method provided in an embodiment of this application includes the following steps.

[0106] S400 (optional): A terminal device sends Δ_M to a network device.

[0107] Δ_M in this embodiment of this application may be pre-configured by a system, or may be calculated by the terminal device based on a first maximum power P_{MAX1} and a second maximum power P_{MAX2} , for example, $\Delta_M = P_{MAX1} - P_{MAX2}$.

[0108] In a scenario in which the terminal device calculates Δ_M based on the first maximum power and the second maximum power, the terminal device further needs to send Δ_M calculated by the terminal device to the network device.

[0109] Optionally, a method for sending, by the terminal device, Δ_M to the network device may be: sending, by the terminal device to the network device, an initial access Msg3 message that carries Δ_M , or during PUSCH transmission, sending, by the terminal device to the network device, higher layer signaling that carries Δ_M . This is not specifically limited in this embodiment of this application.

[0110] Optionally, the terminal device may send Δ_M to the network device after receiving a message that is used to instruct to report Δ_M and that is sent by the network device, or may send Δ_M to the network device based on a system configuration. This is not specifically limited in this embodiment of this application.

[0111] Because S400 is an optional step, S400 is represented by a dashed line in FIG. 4.

[0112] S401: The terminal device determines first power headroom information.

[0113] It can be learned from the foregoing description that the terminal device supports use of a first waveform and a second waveform for data transmission. In this case, the terminal device can determine the first power headroom information or second power headroom information. Optionally, the terminal device may determine, based on the system preconfiguration, which power headroom information is to be calculated, or may determine, in case of receiving higher layer signaling sent by the network device, which power headroom information is to be calculated. This is not specifically

limited in this embodiment of this application.

[0114] An example in which the terminal device determines the first power headroom information is used for description in this embodiment of this application.

[0115] Specifically, when a PUSCH of the terminal device is transmitted by using the first waveform, the terminal device determines the first power headroom information based on the first maximum power P_{MAX1} and a first configuration transmit power $P_{C-Data1}$.

[0116] For example, the terminal device calculates the first power headroom information according to a formula (3) and a formula (4):

$$PH_1 = P_{MAX1} - P_{C-Data1} \quad (3)$$

$$P_{C-Data1} = 10 \log_{10} M_1 + P_0 + \alpha \cdot PL + \Delta_{TF} + f \quad (4)$$

where M_1 is a quantity of resource blocks occupied by the PUSCH of the terminal device when the PUSCH of the terminal device is transmitted by using the first waveform, that is, a quantity of RBs scheduled for the PUSCH of the terminal device when the PUSCH of the terminal device is transmitted by using the first waveform. For content of other parameters, refer to the description of the formula (1). Details are not described herein again.

[0117] When the PUSCH of the terminal device is transmitted without using the first waveform but by using the second waveform, the terminal device may determine the first power headroom information based on the first maximum power P_{MAX1} and a second configuration transmit power $P_{C-Data2}$.

[0118] For example, when the PUSCH of the terminal device is transmitted without using the first waveform but by using the second waveform, the terminal device calculates the first power headroom information according to a formula (5) and a formula (6):

$$PH_1 = P_{MAX1} - P_{C-Data2} \quad (5)$$

$$P_{C-Data2} = 10 \log_{10} M_2 + P_0 + \alpha \cdot PL + \Delta_{TF} + f \quad (6)$$

where M_2 is a quantity of resource blocks occupied by the PUSCH of the terminal device when the PUSCH of the terminal device is transmitted by using the second waveform, that is, a quantity of RBs scheduled for the PUSCH of the terminal device when the PUSCH of the terminal device is transmitted by using the second waveform. For content of other parameters, refer to the description of the formula (1). Details are not described herein again.

[0119] When the PUSCH of the terminal device is transmitted without using the first waveform but by using the second waveform, the terminal device determines the first power headroom information based on the first maximum power P_{MAX1} and a second configuration transmit power $P_{C-Data2}$. Alternatively, a method for determining, by the terminal device, the first power headroom information may be: determining, by the terminal device, the first power headroom information according to a preset formula without considering PUSCH scheduling.

[0120] For example, when the PUSCH of the terminal device is transmitted without using the first waveform but by using the second waveform, the terminal device calculates the first power headroom information according to the formula (3) and a formula (7):

$$P_{C-Data1} = P_0 + \alpha \cdot PL + f \quad (7)$$

[0121] When the PUSCH of the terminal device is transmitted neither by using the first waveform nor by using the second waveform, the terminal device determines the first power headroom information according to a preset formula without considering PUSCH scheduling. For the preset formula herein, refer to the formula (3) and the formula (7).

[0122] S402: The terminal device sends the first power headroom information to the network device.

[0123] Specifically, when a preset condition is satisfied, the terminal device sends the first power headroom information to the network device in case of adding the first power headroom information to a MAC CE.

[0124] The preset condition is at least one of the following: a first timer exceeds first preset duration, a change amount of a path loss relative to a path loss corresponding to previous reporting of power headroom information is greater than or equal to a first preset threshold, and a quantity of to-be-stuffed bits of a transmission resource is greater than a third

preset threshold.

[0125] S403: The network device calculates the second power headroom information based on the first power headroom information, Δ_M , and a second power difference.

[0126] Optionally, if the terminal device sends Δ_M to the network device in S400, the network device receives Δ_M from the terminal device. If Δ_M is pre-configured by the system, the network device may directly obtain Δ_M .

[0127] The second power difference ΔP_{C-Data} is a difference between the first configuration transmit power and the second configuration transmit power. The network device may directly obtain the second power difference.

[0128] With reference to the formula (1) and the formula (2), when the network device obtains the first power headroom information, Δ_M , and the second power difference, the network device may calculate the second power headroom information.

[0129] For example, the network device may calculate the second power headroom information PH_2 according to the following formula:

$$PH_2 = PH_1 - \Delta_M + \Delta P_{C-Data} \text{ or } PH_2 = PH_1 + \Delta_M - \Delta P_{C-Data}$$

[0130] S404: The network device performs scheduling on the terminal device based on the first power headroom information and the second power headroom information.

[0131] Further, when only the first waveform or the second waveform supports SS, the terminal device further sends first power difference information corresponding to the waveform or additional power information corresponding to the waveform to the network device, so that the network device determines power headroom information of the terminal device that is under action of SS, thereby scheduling a resource for the terminal device more sufficiently.

[0132] A value of a first power difference corresponding to the waveform is equal to a difference between a maximum transmit power of the terminal device when the waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the waveform is modulated by using a second modulation scheme. A value of an additional power is equal to a difference between a maximum transmit power of the terminal device when the waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the waveform is modulated by using a first modulation scheme to which SS is not added.

[0133] The first modulation scheme may be a modulation scheme in which bandwidth used by the terminal device is not expanded or is expanded slightly after SS is added, for example, a pi/2 binary phase shift keying (Binary Phase Shift Keying, BPSK) modulation scheme.

[0134] The second modulation scheme may be a modulation scheme in which the bandwidth used by the terminal device is expanded relatively significantly after SS is added, for example, a quadrature phase shift keying (Quadrature Phase Shift Keying, QPSK) scheme.

[0135] An example in which the first modulation scheme is a pi/2-BPSK modulation scheme and the second modulation scheme is a QPSK modulation scheme is used for description in this embodiment of this application. A maximum power of the terminal device is represented by P_{MAX11} when the first waveform is modulated by using the pi/2-BPSK modulation scheme to which SS is added, and a maximum transmit power of the terminal device is represented by P_{MAX12} when the first waveform is modulated by using the QPSK modulation scheme. First power headroom information calculated by the terminal device by using P_{MAX11} is represented by PH_{11} , and first power headroom information calculated by the terminal device by using P_{MAX12} is represented by PH_{12} . A first power difference corresponding to the first waveform is represented by ΔP_{10} , and an additional power corresponding to the first waveform is represented by ΔP_{11} . A maximum power of the terminal device is represented by P_{MAX21} when the second waveform is modulated by using the pi/2-BPSK modulation scheme to which SS is added, and a maximum transmit power of the terminal device is represented by P_{MAX22} when the second waveform is modulated by using the QPSK modulation scheme. Second power headroom information calculated by the terminal device by using P_{MAX21} is represented by PH_{21} , and second power headroom information calculated by the terminal device by using P_{MAX22} is represented by PH_{22} . A first power difference corresponding to the second waveform is represented by ΔP_{20} , and an additional power corresponding to the second waveform is represented by ΔP_{21} .

[0136] Specifically, in a scenario in which modulation of the first waveform by using the pi/2-BPSK modulation scheme to which SS is added is supported, but modulation of the second waveform by using the pi/2-BPSK modulation scheme to which SS is added is not supported, in a case of protocol-transparent SS (the terminal device transparently transmits data to the network device, and the network device cannot learn whether the first waveform is modulated by using the pi/2-BPSK modulation scheme to which SS is added), for the network device, modulation of the first waveform by using the pi/2-BPSK modulation scheme to which SS is not added does not differ from modulation of the first waveform by using the pi/2-BPSK modulation scheme to which SS is added. In this case, the terminal device sends PH_{11} and ΔP_{10}

to the network device, or the terminal device sends PH_{12} and ΔP_{10} to the network device.

[0137] If the terminal device sends PH_{11} and ΔP_{10} to the network device, the network device may obtain the second power headroom information PH_2 according to the following formula (8) or the following formula (9):

$$PH_2 = PH_{11} - \Delta_M + \Delta P_{C-Data} - \Delta P_{10} \quad (8)$$

$$PH_2 = PH_{11} + \Delta_M - \Delta P_{C-Data} - \Delta P_{10} \quad (9)$$

[0138] If the terminal device sends PH_{12} and ΔP_{10} to the network device, the network device may obtain the second power headroom information PH_2 according to the following formula (10) or the following formula (11):

$$PH_2 = PH_{12} - \Delta_M + \Delta P_{C-Data} + \Delta P_{10} \quad (10)$$

$$PH_2 = PH_{12} + \Delta_M - \Delta P_{C-Data} + \Delta P_{10} \quad (11)$$

[0139] In a scenario in which modulation of the first waveform by using the pi/2-BPSK modulation scheme to which SS is added is supported, but modulation of the second waveform by using the pi/2-BPSK modulation scheme to which SS is added is not supported, in a case of non-protocol-transparent SS (the network device can learn whether the first waveform is modulated by using the pi/2-BPSK modulation scheme to which SS is added), the terminal device sends PH_{11} and ΔP_{11} to the network device, or the terminal device sends PH_{12} and ΔP_{11} to the network device.

[0140] If the terminal device sends PH_{11} and ΔP_{11} to the network device, the network device may obtain the second power headroom information PH_2 according to the following formula (12) or the following formula (13):

$$PH_2 = PH_{11} - \Delta_M + \Delta P_{C-Data} - \Delta P_{11} \quad (12)$$

$$PH_2 = PH_{11} + \Delta_M - \Delta P_{C-Data} - \Delta P_{11} \quad (13)$$

[0141] If the terminal device sends PH_{12} and ΔP_{11} to the network device, the network device may obtain the second power headroom information PH_2 according to the following formula (14) or the following formula (15):

$$PH_2 = PH_{12} - \Delta_M + \Delta P_{C-Data} + \Delta P_{11} \quad (14)$$

$$PH_2 = PH_{12} + \Delta_M - \Delta P_{C-Data} + \Delta P_{11} \quad (15)$$

[0142] Under action of SS, a maximum transmit power of the terminal device increases after the first waveform is modulated by using the pi/2-BPSK modulation scheme to which SS is added. Therefore, the network device can schedule a resource for the terminal device more sufficiently based on PH_{11} and PH_2 .

[0143] Specifically, in a scenario in which modulation of the first waveform by using the pi/2-BPSK modulation scheme to which SS is added is not supported, but modulation of the second waveform by using the pi/2-BPSK modulation scheme to which SS is added is supported, in a case of protocol-transparent SS, the terminal device sends PH_{10} and ΔP_{20} to the network device, or the terminal device sends PH_{12} and ΔP_{20} to the network device.

[0144] If the terminal device sends PH_{10} and ΔP_{20} to the network device, the network device may obtain PH_{22} according to the following formula (16) or the following formula (17):

$$PH_{22} = PH_{10} - \Delta_M + \Delta P_{C-Data} + \Delta P_{20} \quad (16)$$

$$PH_{22} = PH_{10} + \Delta_M - \Delta P_{C-Data} + \Delta P_{20} \quad (17)$$

[0145] If the terminal device sends PH_{12} and ΔP_{20} to the network device, the network device may obtain the second power headroom information PH_{22} according to the following formula (18) or the following formula (19):

$$PH_{22} = PH_{12} - \Delta_M + \Delta P_{C-Data} + \Delta P_{20} \quad (18)$$

$$PH_{22} = PH_{12} + \Delta_M - \Delta P_{C-Data} + \Delta P_{20} \quad (19)$$

[0146] In a scenario in which modulation of the first waveform by using the pi/2-BPSK modulation scheme to which SS is added is not supported, but modulation of the second waveform by using the pi/2-BPSK modulation scheme to which SS is added is supported, in a case of non-protocol-transparent SS, the terminal device sends PH_{10} and ΔP_{21} to the network device, or the terminal device sends PH_{12} and ΔP_{21} to the network device.

[0147] If the terminal device sends PH_{10} and ΔP_{21} to the network device, the network device may obtain PH_{22} according to the following formula (20) or the following formula (21):

$$PH_{22} = PH_{10} - \Delta_M + \Delta P_{C-Data} + \Delta P_{21} \quad (20)$$

$$PH_{22} = PH_{10} + \Delta_M - \Delta P_{C-Data} + \Delta P_{21} \quad (21)$$

[0148] If the terminal device sends PH_{12} and ΔP_{21} to the network device, the network device may obtain PH_{22} according to the following formula (22) or the following formula (23):

$$PH_{22} = PH_{12} - \Delta_M + \Delta P_{C-Data} + \Delta P_{21} \quad (22)$$

$$PH_{22} = PH_{12} + \Delta_M - \Delta P_{C-Data} + \Delta P_{21} \quad (23)$$

[0149] Under action of SS, a maximum transmit power of the terminal device increases after the second waveform is modulated by using the pi/2-BPSK modulation scheme to which SS is added. Therefore, the network device can schedule a resource for the terminal device more sufficiently based on PH_1 and PH_{22} .

[0150] When both the first waveform and the second waveform support SS, the terminal device may also send first power difference information corresponding to each waveform or additional power difference information corresponding to each waveform to the network device, or may no longer send first power difference information corresponding to each waveform or additional power difference information corresponding to each waveform to the network device. This is not specifically limited in this embodiment of this application.

[0151] According to the power headroom information transmission method provided in this embodiment, in a scenario in which the terminal device determines and reports the first power headroom information and Δ_M , the network device determines the second power headroom information based on the obtained Δ_M , the obtained second power difference, and the obtained first power headroom information. In this way, the network device can obtain the first power headroom information and the second power headroom information, so that the network device implements resource scheduling for the terminal device based on the first power headroom information and the second power headroom information. In terms of the terminal device, the terminal device sends only the first power headroom information to the network device, so that overheads of communications signaling between the terminal device and the network device are reduced.

[0152] The foregoing method (2) is described herein. As shown in FIG. 5, a power headroom transmission method provided in an embodiment of this application includes the following steps.

[0153] S500: A terminal device determines first power headroom information and second power headroom information.

[0154] The first power headroom information is information about a value of first power headroom. For a method for determining, by the terminal device, the first power headroom information, refer to the description of S401. Details are not described herein again.

[0155] The second power headroom information is information about a value of second power headroom or information about a power headroom difference, and the power headroom difference is a difference between the second power headroom and the first power headroom.

[0156] A quantity of bits occupied by the power headroom difference is usually less than a quantity of bits occupied

by the value of the second power headroom. Therefore, using the power headroom difference rather than the value of the second power headroom to represent the second power headroom information can reduce overheads of communications signaling between the terminal device and a network device.

[0157] If the second power headroom information is the information about the value of the second power headroom, a method for determining the second power headroom information by the terminal device is similar to the method for determining the first power headroom information by the terminal device. Details are not described herein again.

[0158] If the second power headroom information is the information about the power headroom difference, a method for determining the second power headroom information by the terminal device may be: determining, by the terminal device, the information about the value of the first power headroom and the information about the value of the second power headroom, and determining the information about the power headroom difference based on the information about the value of the first power headroom and the information about the value of the second power headroom; or determining, by the terminal device, the information about the value of the first power headroom and Δ_M , and determining the information about the power headroom difference based on the information about the value of the first power headroom and Δ_M .

[0159] S501: The terminal device sends the first power headroom information and the second power headroom information to the network device.

[0160] Optionally, the terminal device may send both the first power headroom information and the second power headroom information to the network device based on a system preconfiguration. In this way, the network device can directly obtain the first power headroom information and the second power headroom information.

[0161] Optionally, when one preset report condition is satisfied, the terminal device sends target power headroom information to the network device, where the target power headroom information is the first power headroom information or the second power headroom information. When another preset report condition is satisfied, the terminal device sends the first power headroom information and the second power headroom information to the network device.

[0162] The foregoing one preset report condition is that reporting of the target power headroom information is triggered when any one of the following conditions is satisfied:

(1A) a first preset report condition: A first timer exceeds first preset duration;

(2A) a third preset report condition: A change amount of a path loss relative to a path loss corresponding to previous reporting of power headroom information is greater than or equal to a first preset threshold; and

(3A) a fifth preset report condition: A quantity of to-be-stuffed bits of a transmission resource is greater than or equal to a third preset threshold.

[0163] The foregoing another preset report condition is that reporting of the first power headroom information and the second power headroom information is triggered when any one of the following conditions is satisfied:

(1B) a second preset report condition: A second timer exceeds second preset duration, where the second timer may coexist with the first timer, and

the second preset duration is usually greater than the first preset duration;

(2B) a fourth preset report condition: The change amount of the path loss relative to the path loss corresponding to the previous reporting of power headroom information is greater than or equal to a second preset threshold; and

(3B) a sixth preset report condition: The quantity of the to-be-stuffed bits of the transmission resource is greater than or equal to a fourth preset threshold.

[0164] It should be noted that when both the foregoing one preset report condition and the foregoing another preset report condition are satisfied, the terminal device sends the first power headroom information and the second power headroom information to the network device.

[0165] Optionally, the terminal device may alternatively send the first power headroom information and the second power headroom information to the radio access network device within a preset time period based on configuration information sent by the network device.

[0166] For example, if the configuration information is used to instruct the terminal device to send, within the preset time period (for example, 20 seconds after the configuration information is received), power headroom information to the network device twice (once every 10 seconds), and to send both the first power headroom information and the second power headroom information each time. In this case, the terminal device sends the first power headroom information and the second power headroom information to the network device once every 10 seconds for a total of two times after receiving the configuration information.

[0167] Under any one of the foregoing preset report conditions, the terminal device sends the first power headroom information and the second power headroom information to the network device in a form of a MAC CE. For details, refer to the description of S402. Details are not described herein again.

[0168] S502: The network device performs scheduling on the terminal device based on the first power headroom

information and the second power headroom information.

[0169] In addition, a first waveform or a second waveform in this embodiment may alternatively support SS. In this embodiment, for a case in which the first waveform or the second waveform supports SS, refer to the description of supporting SS by the first waveform in the embodiment shown in FIG. 4. Details are not described herein again.

[0170] The network device in this embodiment may directly obtain the first power headroom information and the second power headroom information, so that the network device implements resource scheduling for the terminal device based on the first power headroom information and the second power headroom information.

[0171] An embodiment of this application provides a terminal device. The terminal device is configured to perform steps performed by the terminal device in the foregoing power headroom transmission method. The terminal device provided in this embodiment of this application may include modules corresponding to corresponding steps.

[0172] In this embodiment of this application, functional module division may be performed on the terminal device based on the foregoing method examples. For example, functional module division may be performed in correspondence to functions, or at least two functions may be integrated into one processing module. The integrated module may be implemented in a form of hardware, or may be implemented in a form of a software functional module. The module division in this embodiment of this application is an example, is merely logical function division, and may be other division in actual implementation.

[0173] When functional module division is performed in correspondence to functions, FIG. 6 is a possible schematic structural diagram of the terminal device in the foregoing embodiments. As shown in FIG. 6, the terminal device 600 includes a processing unit 60 and a sending unit 61. The processing unit 60 is configured to support the terminal device 600 in performing S401, and/or S500, and the like in the foregoing embodiments, and/or another process of a technology described in this specification. The sending unit 61 is configured to support the terminal device 600 in performing S400, S402, and/or S501, and the like in the foregoing embodiments, and/or another process of the technology described in this specification. All related content of the steps in the foregoing method embodiments may be cited in function descriptions of corresponding functional modules. Details are not described herein again. Certainly, the terminal device 600 provided in this embodiment of this application includes but is not limited to the foregoing modules. For example, the terminal device 600 may further include a receiving unit 62 and a storage unit 63. The receiving unit 62 is configured to communicate with another device. The storage unit 63 may be configured to store at least one of first power headroom information and second power headroom information, and may be further configured to store program code and data that are of the terminal device.

[0174] When an integrated unit is used, the processing unit 60 in this embodiment of this application may be the processor 21 in FIG. 2, the sending unit 61 and the receiving unit 62 may be the RF circuit 22 and an antenna connected to the RF circuit 22 in FIG. 2, and the storage unit 63 may be the memory 23 in FIG. 2.

[0175] When the terminal device 600 runs, the terminal device 600 performs the power headroom transmission method in the embodiment shown in FIG. 4 or FIG. 5. For details about the power headroom transmission method, refer to a related description in the embodiment shown in FIG. 4 or FIG. 5. Details are not described herein again.

[0176] Another embodiment of this application further provides a computer readable storage medium. The computer readable storage medium includes one or more pieces of program code. The one or more programs include an instruction. When a processor in the terminal device 600 executes the program code, the terminal device 600 performs the power headroom transmission method shown in FIG. 4 or FIG. 5.

[0177] In another embodiment of this application, a computer program product is further provided. The computer program product includes a computer executable instruction, and the computer executable instruction is stored in a computer readable storage medium. At least one processor of a terminal device may read the computer executable instruction from the computer readable storage medium. When the at least one processor executes the computer executable instruction, the terminal device is enabled to perform steps performed by the source terminal device in the power headroom transmission method shown in FIG. 4 or FIG. 5.

[0178] An embodiment of this application provides a network device. The network device is configured to perform steps performed by the network device in the foregoing power headroom transmission method. The network device provided in this embodiment of this application may include modules corresponding to corresponding steps.

[0179] In this embodiment of this application, functional module division may be performed on the network device based on the foregoing method examples. For example, functional module division may be performed in correspondence to functions, or at least two functions may be integrated into one processing module. The integrated module may be implemented in a form of hardware, or may be implemented in a form of a software functional module. The module division in this embodiment of this application is an example, is merely logical function division, and may be other division in actual implementation.

[0180] When functional module division is performed in correspondence to functions, FIG. 7 is a possible schematic structural diagram of the network device in the foregoing embodiments. As shown in FIG. 7, the network device 700 includes a processing unit 70 and a receiving unit 71. The processing unit 70 is configured to support the network device 700 in performing S403, S404, and/or S502, and the like in the foregoing embodiments. In addition, the processing unit

70 is further configured to obtain a second power difference; and when Δ_M is preset by a system, the processing unit 70 may be further configured to obtain Δ_M , and/or is configured to perform another process of a technology described in this specification. The receiving unit 71 is configured to support the network device 700 in performing S400, S402, S501, and the like in the foregoing embodiments, and/or another process of the technology described in this specification.

All related content of the steps in the foregoing method embodiments may be cited in function descriptions of corresponding functional modules. Details are not described herein again. Certainly, the network device 700 provided in this embodiment of this application includes but is not limited to the foregoing modules. For example, the network device 700 may further include a sending unit 72 and a storage unit 73. The sending unit 72 is configured to communicate with another device. The storage unit 73 may be configured to store first power headroom information and second power headroom information, and may be further configured to store program code and data that are of the network device.

[0181] It should be noted that all related content of the steps in the foregoing method embodiments may be cited in function descriptions of corresponding functional modules. Details are not described herein again.

[0182] For example, when an integrated unit is used, FIG. 8 is a schematic structural diagram of a network device according to an embodiment of this application. In FIG. 8, the network device includes a processing module 80 and a communications module 81. The processing module 80 is configured to control and manage an action of the network device. For example, the processing module 80 is configured to perform steps performed by the processing unit 70, and/or is configured to perform another process of a technology described in this specification. The communications module 81 is configured to support interaction between the network device and another device, for example, perform steps performed by the receiving unit 71 and the sending unit 72. As shown in FIG. 8, the network device may further include a storage module 82. The storage module 82 is configured to store program code and data that are of the network device, for example, store content stored by the storage unit 73.

[0183] The processing module 80 may be a processor or a controller in the network device, for example, a central processing unit (Central Processing Unit, CPU), a general-purpose processor, or a digital signal processor (Digital Signal Processor, DSP). The processing module 80 may implement or execute various example logical blocks, modules, and circuits described with reference to content disclosed in the embodiments of this application. The communications module 81 may be a transceiver, a transceiver circuit, a transceiver, or the like. The storage module 82 may be a memory.

[0184] When the processing module 80 is a processor, the communications module 81 is a transceiver, and the storage module 82 is a memory, the network device in this embodiment of this application may be a network device shown in FIG. 9.

[0185] As shown in FIG. 9, the network device includes a transceiver 90, a processor 91, and a memory 92. The transceiver 90, the processor 91, and the memory 92 are connected through a system bus 93, and complete communication between each other.

[0186] When the network device runs, the network device performs the power headroom transmission method in the embodiment shown in FIG. 4 or FIG. 5. For details about the power headroom transmission method, refer to a related description in the embodiment shown in FIG. 4 or FIG. 5. Details are not described herein again.

[0187] The transceiver 90 is configured to communicate with another device or a communications network, for example, an Ethernet or a WLAN.

[0188] The memory 92 is configured to store first power headroom information and second power headroom information, and may be further configured to store a software program and an application module. The processor 91 performs various function applications and data processing of the network device by running the software program and the application module that are stored in the memory 92.

[0189] The memory 92 may mainly include a program storage area 920 and a data storage area 921. The program storage area 920 may store an operating system, an application program required by at least one function, for example, configuration information sending. The data storage area 921 may store the first power headroom information and the second power headroom information that are obtained by the network device.

[0190] The memory 92 may include a volatile memory (English: Volatile Memory), for example, a random access memory (English: Random-Access Memory, RAM for short). The memory may alternatively include a nonvolatile memory (non-volatile memory), for example, a read-only memory (English: Read-Only Memory, ROM for short), a flash memory (Flash Memory), a hard disk drive (English: Hard Disk Drive, HDD for short), a solid-state drive (English: Solid-State Drive, SSD for short), a magnetic disk storage medium or another magnetic storage device, or any other medium that can be configured to carry or store expected program code in a form of an instruction or a data structure and that is accessible by the network device, but is not limited thereto.

[0191] The memory 92 may independently exist, and may be connected to the processor 91 through the system bus 93. The memory 92 may be alternatively integrated with the processor 91.

[0192] The processor 91 is a control center of the network device. The processor 91 is connected to all the parts of the entire network device by using various interfaces and lines, and by running or executing the software program and/or the application module that are/is stored in the memory 92 and by invoking data stored in the memory 92, performs various functions and data processing of the network device, so as to perform overall monitoring on the network device.

[0193] In specific implementation, in an embodiment, the processor 91 may include one or more CPUs. For example,

the processor 91 in FIG. 9 includes a CPU 0 and a CPU 1.

[0194] The system bus 93 may be a peripheral component interconnect (English: Peripheral Component Interconnect, PCI for short) bus, an extended industry standard architecture (English: Extended Industry Standard Architecture, EISA for short) bus, or the like.

[0195] The system bus 93 may be classified into an address bus, a data bus, a control bus, and the like. For a clear description, various buses are all denoted as the system bus 93 in FIG. 9 in this embodiment of this application.

[0196] Correspondingly, an embodiment of this application further provides a computer readable storage medium, where the computer readable storage medium stores an instruction. When the instruction is run on a network device, the network device is enabled to perform steps performed by the network device in method procedures shown in the foregoing method embodiments.

[0197] All or some of the foregoing embodiments may be implemented by using software, hardware, firmware, or any combination thereof. When a software program is used to implement the embodiments, the embodiments may be implemented completely or partially in a form of a computer program product. The computer program product includes one or more computer instructions. When the computer program instruction is loaded and executed on a computer, the procedure or functions according to the embodiments of this application are all or partially generated. The computer may be a general-purpose computer, a dedicated computer, a computer network, or another programmable apparatus. The computer instruction may be stored in a computer readable storage medium or may be transmitted from a computer readable storage medium to another computer readable storage medium. For example, the computer instruction may be transmitted from a website, computer, server, or data center to another website, computer, server, or data center in a wired (for example, a coaxial cable, an optical fiber, or a digital subscriber line (DSL)) or wireless (for example, infrared, radio, or microwave) manner. The computer readable storage medium may be any usable medium accessible by a computer, or a data storage device, such as a server or a data center, integrating one or more usable media. The usable medium may be a magnetic medium (for example, a floppy disk, a hard disk, or a magnetic tape), an optical medium (for example, a DVD), a semiconductor medium (for example, a solid-state drive Solid State Disk (SSD)), or the like.

[0198] According to the foregoing descriptions about implementations, a person skilled in the art can clearly understand that, for the purpose of ease and brevity of description, only division of the foregoing functional modules is used as an example for description. In actual application, the foregoing functions can be allocated to different functional modules for implementation depending on requirements, that is, an inner structure of an apparatus is divided into different functional modules to perform all or some of the functions described above.

[0199] In the several embodiments provided in this application, it should be understood that the disclosed apparatus and method may be implemented in other manners. For example, the described apparatus embodiments are merely examples. For example, the module or unit division is merely logical function division and may be other division in actual implementation. For example, a plurality of units or components may be combined or may be integrated into another apparatus, or some features may be ignored or not be performed. In addition, the displayed or discussed mutual couplings or direct couplings or communication connections may be implemented through some interfaces. The indirect couplings or communication connections between the apparatuses or units may be implemented in electrical, mechanical, or other forms.

[0200] The units described as separate parts may or may not be physically separate, and parts displayed as units may be one or more physical units, may be located in one position, or may be distributed in a plurality of different positions. Some or all of the units may be selected depending on actual requirements, to achieve the objectives of the solutions of the embodiments.

[0201] In addition, functional units in the embodiments of this application may be integrated into one processing unit, or each of the units may exist alone physically, or at least two units may be integrated into one unit. The integrated unit may be implemented in a form of hardware, or may be implemented in a form of a software functional unit.

[0202] When the integrated unit is implemented in a form of a software functional unit and sold or used as an independent product, the integrated unit may be stored in a readable storage medium. Based on such an understanding, the technical solutions in the embodiments of this application essentially, or the part contributing to the prior art, or all or some of the technical solutions may be implemented in a form of a software product. The software product is stored in a storage medium, and includes amount of instructions for instructing a device (which may be a single-chip microcomputer, a chip, or the like) or a processor (processor) to perform all or some of the steps of the methods described in the embodiments of this application. The foregoing storage medium includes any medium that can store program code, such as a USB flash drive, a removable hard disk, a read-only memory (Read-Only Memory, ROM), a random access memory (Random Access Memory, RAM), a magnetic disk, or an optical disc.

[0203] The foregoing descriptions are merely specific implementations of this application, but are not intended to limit the protection scope of this application. Any variation or replacement within the technical scope disclosed in this application shall fall within the protection scope of this application. Therefore, the protection scope of this application shall be subject to the protection scope of the claims.

Claims

1. A power headroom transmission method, applied to a terminal device that supports use of a first waveform and a second waveform for data transmission, wherein a type of the first waveform is different from that of the second waveform, and the transmission method comprises:

determining, by the terminal device, first power headroom information and Δ_M , wherein the first power headroom information is used to indicate power headroom of the terminal device when data is transmitted by using the first waveform, Δ_M is a difference between a first maximum power and a second maximum power, the first maximum power is a maximum power of the terminal device when data is transmitted by using the first waveform, the second maximum power is a maximum power of the terminal device when data is transmitted by using the second waveform, and $\Delta_M > 0$; and sending, by the terminal device, the first power headroom information and Δ_M to a network device.

2. The transmission method according to claim 1, wherein in case of an uplink channel of the terminal device is transmitted without using the first waveform, the determining, by the terminal device, first power headroom information specifically comprises:

if the uplink channel of the terminal device is transmitted by using the second waveform, calculating, by the terminal device, the first power headroom information based on a scheduling parameter in case of the uplink channel of the terminal device is transmitted by using the second waveform.

3. The transmission method according to claim 1 or 2, wherein if the first waveform supports spectrum shaping SS, the transmission method further comprises:

sending, by the terminal device, first power difference information corresponding to the first waveform to the network device, wherein a first power difference corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which the SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a second modulation scheme; or sending, by the terminal device, an additional power corresponding to the first waveform to the network device, wherein the additional power corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is not added; or

if the second waveform supports spectrum shaping SS, the transmission method further comprises:

sending, by the terminal device, first power difference information corresponding to the second waveform to the network device, wherein a first power difference corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using the first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using the second modulation scheme; or sending, by the terminal device, an additional power corresponding to the second waveform to the network device, wherein the additional power corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is not added.

4. A power headroom transmission method, applied to a terminal device that supports use of a first waveform and a second waveform for data transmission, wherein a type of the first waveform is different from that of the second waveform, and the transmission method comprises:

determining, by the terminal device, first power headroom information and second power headroom information, wherein the first power headroom information is used to indicate power headroom of the terminal device when data is transmitted by using the first waveform, and the second power headroom information is used to indicate power headroom of the terminal device when data is transmitted by using the second signal; and sending, by the terminal device, the first power headroom information and the second power headroom information to a network device.

5. The transmission method according to claim 4, wherein the sending, by the terminal device, the first power headroom

information and the second power headroom information to a network device specifically comprises:

when a first preset report condition is satisfied, sending, by the terminal device, target power headroom information to the network device, wherein the first preset report condition is that reporting of the target power headroom information is triggered when a first timer exceeds first preset duration, and the target power headroom information is the first power headroom information or the second power headroom information; and when a second preset report condition is satisfied, sending, by the terminal device, the first power headroom information and the second power headroom information to the network device, wherein the second preset report condition is that reporting of the first power headroom information and the second power headroom information is triggered when a second timer exceeds second preset duration, and the second timer coexists with the first timer; or when a third preset report condition is satisfied, sending, by the terminal device, target power headroom information to the network device, wherein the third preset report condition is that reporting of the target power headroom information is triggered when a change amount of a path loss relative to a path loss corresponding to previous reporting of power headroom information is greater than or equal to a first preset threshold, and the target power headroom information is the first power headroom information or the second power headroom information; and when a fourth preset report condition is satisfied, sending, by the terminal device, the first power headroom information and the second power headroom information to the network device, wherein the fourth preset report condition is that reporting of the first power headroom information and the second power headroom information is triggered when the change amount of the path loss relative to the path loss corresponding to the previous reporting of power headroom information is greater than or equal to a second preset threshold; or

when a fifth preset report condition is satisfied, sending, by the terminal device, target power headroom information to the network device, wherein the fifth preset report condition is that reporting of the target power headroom information is triggered when a quantity of to-be-stuffed bits of a transmission resource is greater than or equal to a third preset threshold, and the target power headroom information is the first power headroom information or the second power headroom information; and when a sixth preset report condition is satisfied, sending, by the terminal device, the first power headroom information and the second power headroom information to the network device, wherein the sixth preset report condition is that reporting of the first power headroom information and the second power headroom information is triggered when the quantity of the to-be-stuffed bits of the transmission resource is greater than or equal to a fourth preset threshold.

6. The transmission method according to claim 4, wherein the sending, by the terminal device, the first power headroom information and the second power headroom information to a network device specifically comprises:

receiving configuration information sent by the network device, wherein the configuration information is used to instruct to report the first power headroom information and the second power headroom information within a preset time period; and

sending, by the terminal device, the first power headroom information and the second power headroom information to the radio access network device within the preset time period based on the configuration information.

7. The transmission method according to any one of claims 4 to 6, wherein when an uplink channel of the terminal device is transmitted without using the first waveform, the determining, by the terminal device, first power headroom information specifically comprises:

if the uplink channel of the terminal device is transmitted by using the second waveform, calculating, by the terminal device, the first power headroom information based on a scheduling parameter in case of the uplink channel of the terminal device is transmitted by using the second waveform.

8. The transmission method according to any one of claims 4 to 7, wherein if the first waveform supports spectrum shaping SS, the transmission method further comprises:

sending, by the terminal device, first power difference information corresponding to the first waveform to the network device, wherein a first power difference corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a second modulation scheme; or sending, by the terminal device, an additional power corresponding to the first waveform to the network device, wherein the additional power corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the

terminal device when the first waveform is modulated by using a first modulation scheme to which SS is not added; or

if the second waveform supports spectrum shaping SS, the transmission method further comprises:

sending, by the terminal device, first power difference information corresponding to the second waveform to the network device, wherein a first power difference corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using the first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using the second modulation scheme; or sending, by the terminal device, an additional power corresponding to the second waveform to the network device, wherein the additional power corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is not added.

9. A power headroom transmission method, comprising:

obtaining, by a network device, first power headroom information, Δ_M , and a second power difference, wherein the first power headroom information is used to indicate power headroom of a terminal device when data is transmitted by using a first waveform, Δ_M is equal to a difference between a first maximum power and a second maximum power, the first maximum power is a maximum power of the terminal device when data is transmitted by using the first waveform, the second maximum power is a maximum power of the terminal device when data is transmitted by using a second waveform, a type of the first waveform is different from that of the second waveform, the second power difference is a difference between a first configuration transmit power and a second configuration transmit power, the first configuration transmit power is a power configured by the network device for the terminal device when a physical uplink shared channel PUSCH is transmitted by using the first waveform, and the second configuration transmit power is a power configured by the network device for the terminal device when the PUSCH is transmitted by using the second waveform;

calculating, by the network device, second power headroom information based on the first power headroom information, Δ_M , and the second power difference, wherein the second power headroom information is used to indicate power headroom of the terminal device when data is transmitted by using the second waveform; and performing, by the network device, scheduling on the terminal device based on the first power headroom information and the second power headroom information.

10. The transmission method according to claim 9, wherein

the obtaining, by a network device, first power headroom information specifically comprises:

receiving, by the network device, the first power headroom information sent by the terminal device; and

the obtaining, by a network device, Δ_M specifically comprises:

receiving, by the network device, Δ_M sent by the terminal device, or obtaining, by the network device, preset Δ_M .

11. The transmission method according to claim 9 or 10, wherein

if the first waveform supports spectrum shaping SS, the transmission method further comprises:

receiving, by the network device, first power difference information that is corresponding to the first waveform and that is sent by the terminal device, wherein a first power difference corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a second modulation scheme; or receiving, by the network device, an additional power that is corresponding to the first waveform and that is sent by the terminal device, wherein the additional power corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is not added; and

the performing, by the network device, scheduling on the terminal device based on the first power headroom information and the second power headroom information specifically comprises: performing, by the network device, scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the first power difference information corresponding to the first waveform; or performing, by the network device, scheduling on the terminal device based on the first power headroom information,

the second power headroom information, and the additional power corresponding to the first waveform; or if the second waveform supports spectrum shaping SS, the transmission method further comprises:

receiving, by the network device, first power difference information that is corresponding to the second waveform and that is sent by the terminal device, wherein a first power difference corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using the first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using the second modulation scheme; or receiving, by the network device, an additional power that is corresponding to the second waveform and that is sent by the terminal device, wherein the additional power corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is not added; and

the performing, by the network device, scheduling on the terminal device based on the first power headroom information and the second power headroom information specifically comprises: performing, by the network device, scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the first power difference information corresponding to the second waveform; or performing, by the network device, scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the additional power corresponding to the second waveform.

12. A power headroom transmission method, comprising:

receiving, by a network device, first power headroom information and second power headroom information that are sent by a terminal device, wherein the first power headroom information is used to indicate power headroom of the terminal device when data is transmitted by using a first waveform, and the second power headroom information is used to indicate power headroom of the terminal device when data is transmitted by using a second waveform; and

performing, by the network device, scheduling on the terminal device based on the first power headroom information and the second power headroom information.

13. The transmission method according to claim 12, wherein before the receiving, by a network device, first power headroom information and second power headroom information that are sent by a terminal device, the transmission method further comprises:

determining, by the network device, configuration information, wherein the configuration information is used to instruct the terminal device to report the first power headroom information and the second power headroom information within a preset time period; and

sending, by the network device, the configuration information to the terminal device; and

the receiving, by a network device, first power headroom information and second power headroom information that are sent by a terminal device specifically comprises:

receiving, within the preset time period, the first power headroom information and the second power headroom information that are sent by the terminal device.

14. The transmission method according to claim 12 or 13, wherein if the first waveform supports spectrum shaping SS, the transmission method further comprises:

receiving, by the network device, first power difference information that is corresponding to the first waveform and that is sent by the terminal device, wherein a first power difference corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a second modulation scheme; or receiving, by the network device, an additional power that is corresponding to the first waveform and that is sent by the terminal device, wherein the additional power corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is not added; and

the performing, by the network device, scheduling on the terminal device based on the first power headroom information and the second power headroom information specifically comprises: performing, by the network device, scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the first power difference information corresponding to the first waveform; or performing, by the network device, scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the additional power corresponding to the first waveform; or if the second waveform supports spectrum shaping SS, the transmission method further comprises:

receiving, by the network device, first power difference information that is corresponding to the second waveform and that is sent by the terminal device, wherein a first power difference corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using the first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using the second modulation scheme; or receiving, by the network device, an additional power that is corresponding to the second waveform and that is sent by the terminal device, wherein the additional power corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is not added; and

the performing, by the network device, scheduling on the terminal device based on the first power headroom information and the second power headroom information specifically comprises: performing, by the network device, scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the first power difference information corresponding to the second waveform; or performing, by the network device, scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the additional power corresponding to the second waveform.

15. A terminal device, wherein the terminal device supports use of a first waveform and a second waveform for data transmission, a type of the first waveform is different from that of the second waveform, and the terminal device comprises a processing unit and a sending unit;

the processing unit is configured to determine first power headroom information and Δ_M , wherein the first power headroom information is used to indicate power headroom of the terminal device when data is transmitted by using the first waveform, Δ_M is a difference between a first maximum power and a second maximum power, the first maximum power is a maximum power of the terminal device when data is transmitted by using the first waveform, and the second maximum power is a maximum power of the terminal device when data is transmitted by using the second waveform; and

the sending unit is configured to send, to a network device, the first power headroom information and Δ_M that are determined by the processing unit.

16. The terminal device according to claim 15, wherein when an uplink channel of the terminal device is transmitted without using the first waveform, the processing unit is specifically configured to: if the uplink channel of the terminal device is transmitted by using the second waveform, calculate the first power headroom information based on a scheduling parameter in case of the uplink channel of the terminal device is transmitted by using the second waveform.

17. The terminal device according to claim 15 or 16, wherein

if the first waveform supports spectrum shaping SS, the sending unit is further configured to: send first power difference information corresponding to the first waveform to the network device, wherein a first power difference corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a second modulation scheme; or send an additional power corresponding to the first waveform to the network device, wherein the additional power corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is not added; or

if the second waveform supports spectrum shaping SS, the sending unit is further configured to: send first power difference information corresponding to the second waveform to the network device, wherein a first power difference corresponding to the second waveform is a difference between a maximum transmit power of the terminal device

when the second waveform is modulated by using the first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using the second modulation scheme; or send an additional power corresponding to the second waveform to the network device, wherein the additional power corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is not added.

18. A terminal device, wherein the terminal device supports use of a first waveform and a second waveform for data transmission, a type of the first waveform is different from that of the second waveform, and the terminal device comprises a processing unit and a sending unit;
the processing unit is configured to determine first power headroom information and second power headroom information, wherein the first power headroom information is used to indicate power headroom of the terminal device when data is transmitted by using the first waveform, and the second power headroom information is used to indicate power headroom of the terminal device when data is transmitted by using the second signal; and
the sending unit is configured to send, to a network device, the first power headroom information and the second power headroom information that are determined by the processing unit.

19. The terminal device according to claim 18, wherein the sending unit is specifically configured to:

when a first preset report condition is satisfied, send target power headroom information to the network device, wherein the first preset report condition is that reporting of the target power headroom information is triggered when a first timer exceeds first preset duration, and the target power headroom information is the first power headroom information or the second power headroom information; and when a second preset report condition is satisfied, send the first power headroom information and the second power headroom information to the network device, wherein the second preset report condition is that reporting of the first power headroom information and the second power headroom information is triggered when a second timer exceeds second preset duration, and the second timer coexists with the first timer; or
when a third preset report condition is satisfied, send target power headroom information to the network device, wherein the third preset report condition is that reporting of the target power headroom information is triggered when a change amount of a path loss relative to a path loss corresponding to previous reporting of power headroom information is greater than or equal to a first preset threshold, and the target power headroom information is the first power headroom information or the second power headroom information; and when a fourth preset report condition is satisfied, send the first power headroom information and the second power headroom information to the network device, wherein the fourth preset report condition is that reporting of the first power headroom information and the second power headroom information is triggered when the change amount of the path loss relative to the path loss corresponding to the previous reporting of power headroom information is greater than or equal to a second preset threshold; or
when a fifth preset report condition is satisfied, send target power headroom information to the network device, wherein the fifth preset report condition is that reporting of the target power headroom information is triggered when a quantity of to-be-stuffed bits of a transmission resource is greater than or equal to a third preset threshold, and the target power headroom information is the first power headroom information or the second power headroom information; and when a sixth preset report condition is satisfied, send the first power headroom information and the second power headroom information to the network device, wherein the sixth preset report condition is that reporting of the first power headroom information and the second power headroom information is triggered when the quantity of the to-be-stuffed bits of the transmission resource is greater than or equal to a fourth preset threshold.

20. The terminal device according to claim 18, wherein the terminal device further comprises a receiving unit, wherein the receiving unit is configured to receive configuration information sent by the network device, wherein the configuration information is used to instruct to report the first power headroom information and the second power headroom information within a preset time period; and
the sending unit is specifically configured to send the first power headroom information and the second power headroom information to the radio access network device within the preset time period based on the configuration information received by the receiving unit.

21. The terminal device according to any one of claims 18 to 20, wherein when an uplink channel of the terminal device is transmitted without using the first waveform, the processing unit is specifically configured to: if the uplink channel

of the terminal device is transmitted by using the second waveform, calculate the first power headroom information based on a scheduling parameter in case of the uplink channel of the terminal device is transmitted by using the second waveform.

- 5 **22.** The terminal device according to any one of claims 18 to 21, wherein
 if the first waveform supports spectrum shaping SS, the sending unit is further configured to: send first power
 difference information corresponding to the first waveform to the network device, wherein a first power difference
 corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when
 10 the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit
 power of the terminal device when the first waveform is modulated by using a second modulation scheme; or send
 an additional power corresponding to the first waveform to the network device, wherein the additional power corre-
 sponding to the first waveform is a difference between a maximum transmit power of the terminal device when the
 first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit
 15 power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS
 is not added; or
 if the second waveform supports spectrum shaping SS, the sending unit is further configured to: send first power
 difference information corresponding to the second waveform to the network device, wherein a first power difference
 corresponding to the second waveform is a difference between a maximum transmit power of the terminal device
 when the second waveform is modulated by using the first modulation scheme to which SS is added and a maximum
 20 transmit power of the terminal device when the second waveform is modulated by using the second modulation
 scheme; or send an additional power corresponding to the second waveform to the network device, wherein the
 additional power corresponding to the second waveform is a difference between a maximum transmit power of the
 terminal device when the second waveform is modulated by using a first modulation scheme to which SS is added
 and a maximum transmit power of the terminal device when the second waveform is modulated by using a first
 25 modulation scheme to which SS is not added.
- 23.** A network device, wherein the network device comprises an obtaining unit and a processing unit, wherein
 the obtaining unit is configured to obtain first power headroom information, Δ_M , and a second power difference,
 wherein the first power headroom information is used to indicate power headroom of a terminal device when data
 30 is transmitted by using a first waveform, Δ_M is equal to a difference between a first maximum power and a second
 maximum power, the first maximum power is a maximum power of the terminal device when data is transmitted by
 using the first waveform, the second maximum power is a maximum power of the terminal device when data is
 transmitted by using a second waveform, a type of the first waveform is different from that of the second waveform,
 the second power difference is a difference between a first configuration transmit power and a second configuration
 35 transmit power, the first configuration transmit power is a power configured by the network device for the terminal
 device when a physical uplink shared channel PUSCH is transmitted by using the first waveform, and the second
 configuration transmit power is a power configured by the network device for the terminal device when the PUSCH
 is transmitted by using the second waveform; and
 the processing unit is configured to calculate second power headroom information based on the first power headroom
 40 information, Δ_M , and the second power difference that are obtained by the obtaining unit, wherein the second power
 headroom information is used to indicate power headroom of the terminal device when data is transmitted by using
 the second waveform; and is configured to perform scheduling on the terminal device based on the first power
 headroom information and the second power headroom information.
- 45 **24.** The network device according to claim 23, wherein
 the obtaining unit is specifically configured to receive the first power headroom information sent by the terminal
 device; and
 the obtaining unit is specifically configured to: receive Δ_M sent by the terminal device, or obtain preset Δ_M .
- 50 **25.** The network device according to claim 23 or 24, wherein
 if the first waveform supports spectrum shaping SS, the obtaining unit is further configured to: receive first power
 difference information that is corresponding to the first waveform and that is sent by the terminal device, wherein a
 first power difference corresponding to the first waveform is a difference between a maximum transmit power of the
 terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and
 55 a maximum transmit power of the terminal device when the first waveform is modulated by using a second modulation
 scheme; or receive an additional power that is corresponding to the first waveform and that is sent by the terminal
 device, wherein the additional power corresponding to the first waveform is a difference between a maximum transmit
 power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS

is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is not added; and

if the first waveform supports SS, the processing unit is specifically configured to: perform scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the first power difference information corresponding to the first waveform; or perform scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the additional power corresponding to the first waveform; or

if the second waveform supports spectrum shaping SS, the obtaining unit is further configured to: receive first power difference information that is corresponding to the second waveform and that is sent by the terminal device, wherein a first power difference corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using the first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using the second modulation scheme; or receive an additional power that is corresponding to the second waveform and that is sent by the terminal device, wherein the additional power corresponding to the second waveform is a difference between a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second waveform is modulated by using a first modulation scheme to which SS is not added; and

if the second waveform supports SS, the processing unit is specifically configured to: perform scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the first power difference information corresponding to the second waveform; or perform scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the additional power corresponding to the second waveform.

26. A network device, wherein the network device comprises a receiving unit and a processing unit, wherein the receiving unit is configured to receive first power headroom information and second power headroom information that are sent by a terminal device, wherein the first power headroom information is used to indicate power headroom of the terminal device when data is transmitted by using a first waveform, and the second power headroom information is used to indicate power headroom of the terminal device when data is transmitted by using a second waveform; and the processing unit is configured to perform scheduling on the terminal device based on the first power headroom information and the second power headroom information that are received by the receiving unit.

27. The network device according to claim 26, wherein the processing unit is further configured to: before the receiving unit receives the first power headroom information and the second power headroom information that are sent by the terminal device, determine configuration information, wherein the configuration information is used to instruct the terminal device to report the first power headroom information and the second power headroom information within a preset time period; the network device further comprises a sending unit, wherein the sending unit is configured to send, to the terminal device, the configuration information determined by the processing unit; and the receiving unit is specifically configured to receive, within the preset time period, the first power headroom information and the second power headroom information that are sent by the terminal device.

28. The network device according to claim 26 or 27, wherein if the first waveform supports spectrum shaping SS, the receiving unit is further configured to: receive first power difference information that is corresponding to the first waveform and that is sent by the terminal device, wherein a first power difference corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a second modulation scheme; or receive an additional power that is corresponding to the first waveform and that is sent by the terminal device, wherein the additional power corresponding to the first waveform is a difference between a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is added and a maximum transmit power of the terminal device when the first waveform is modulated by using a first modulation scheme to which SS is not added; and if the first waveform supports SS, the processing unit is specifically configured to: perform scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the first power difference information corresponding to the first waveform; or perform scheduling on the terminal device based on the first power headroom information, the second power headroom information, and the additional power corresponding to the first waveform; or if the second waveform supports spectrum shaping SS, the receiving unit is further configured to: receive first power

5 difference information that is corresponding to the second waveform and that is sent by the terminal device, wherein
a first power difference corresponding to the second waveform is a difference between a maximum transmit power
of the terminal device when the second waveform is modulated by using the first modulation scheme to which SS
is added and a maximum transmit power of the terminal device when the second waveform is modulated by using
the second modulation scheme; or receive an additional power that is corresponding to the second waveform and
that is sent by the terminal device, wherein the additional power corresponding to the second waveform is a difference
between a maximum transmit power of the terminal device when the second waveform is modulated by using a first
modulation scheme to which SS is added and a maximum transmit power of the terminal device when the second
waveform is modulated by using a first modulation scheme to which SS is not added; and
10 if the second waveform supports SS, the processing unit is specifically configured to: perform scheduling on the
terminal device based on the first power headroom information, the second power headroom information, and the
first power difference information corresponding to the second waveform; or perform scheduling on the terminal
device based on the first power headroom information, the second power headroom information, and the additional
power corresponding to the second waveform.
15

29. A device, wherein the device comprises a memory and a processor, the memory stores code and data, the memory
is connected to the processor through a bus, or may be integrated with the processor, and the processor runs the
code in the memory, so that the device performs the data transmission method according to any one of claims 1 to
8, or performs the data transmission method according to any one of claims 9 to 14.
20

30. A readable storage medium, wherein the readable storage medium stores an instruction, and when the readable
storage medium is run on a device, the device is enabled to perform the data transmission method according to any
one of claims 1 to 8, or perform the data transmission method according to any one of claims 9 to 14.
25

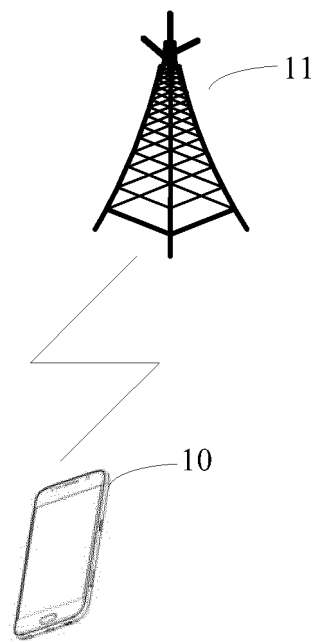


FIG. 1

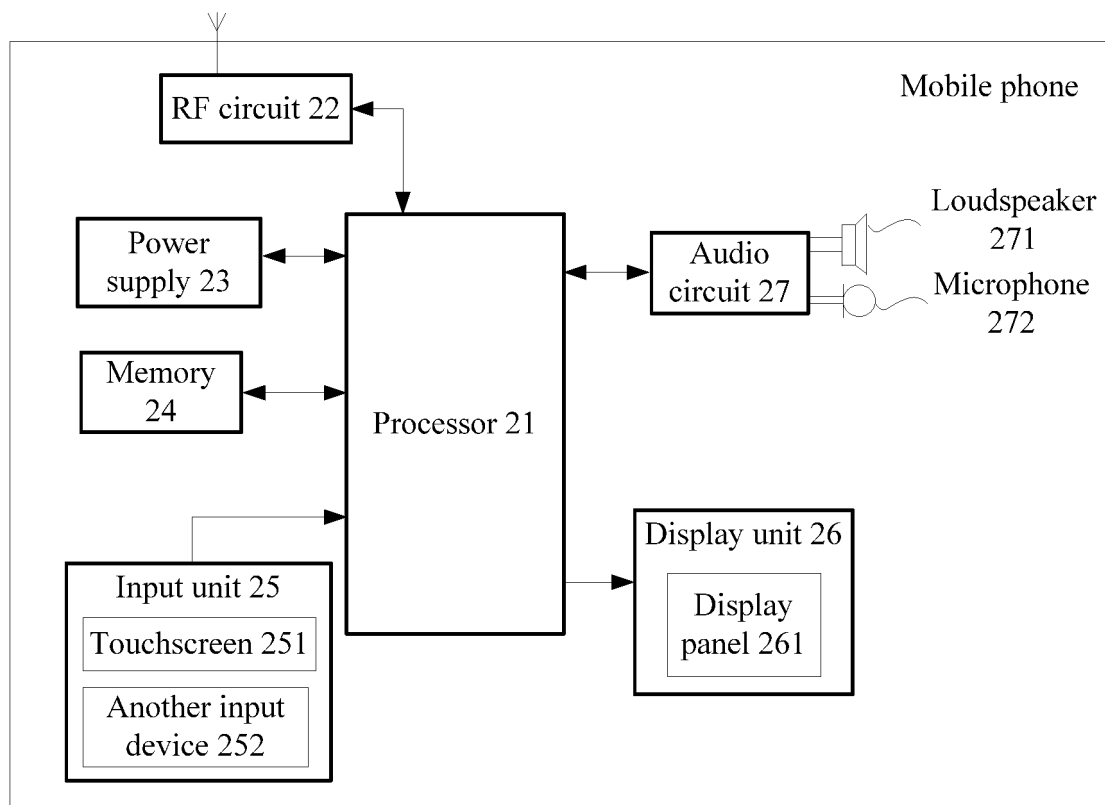


FIG. 2

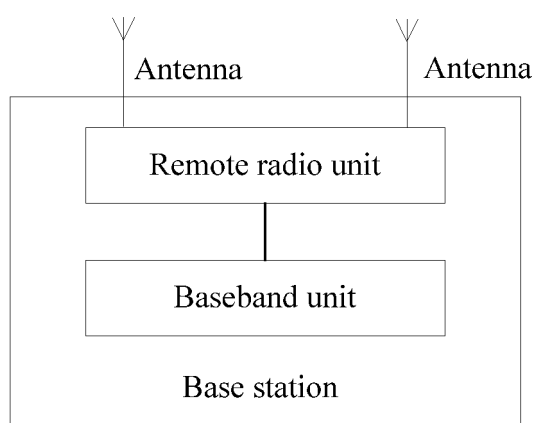


FIG. 3

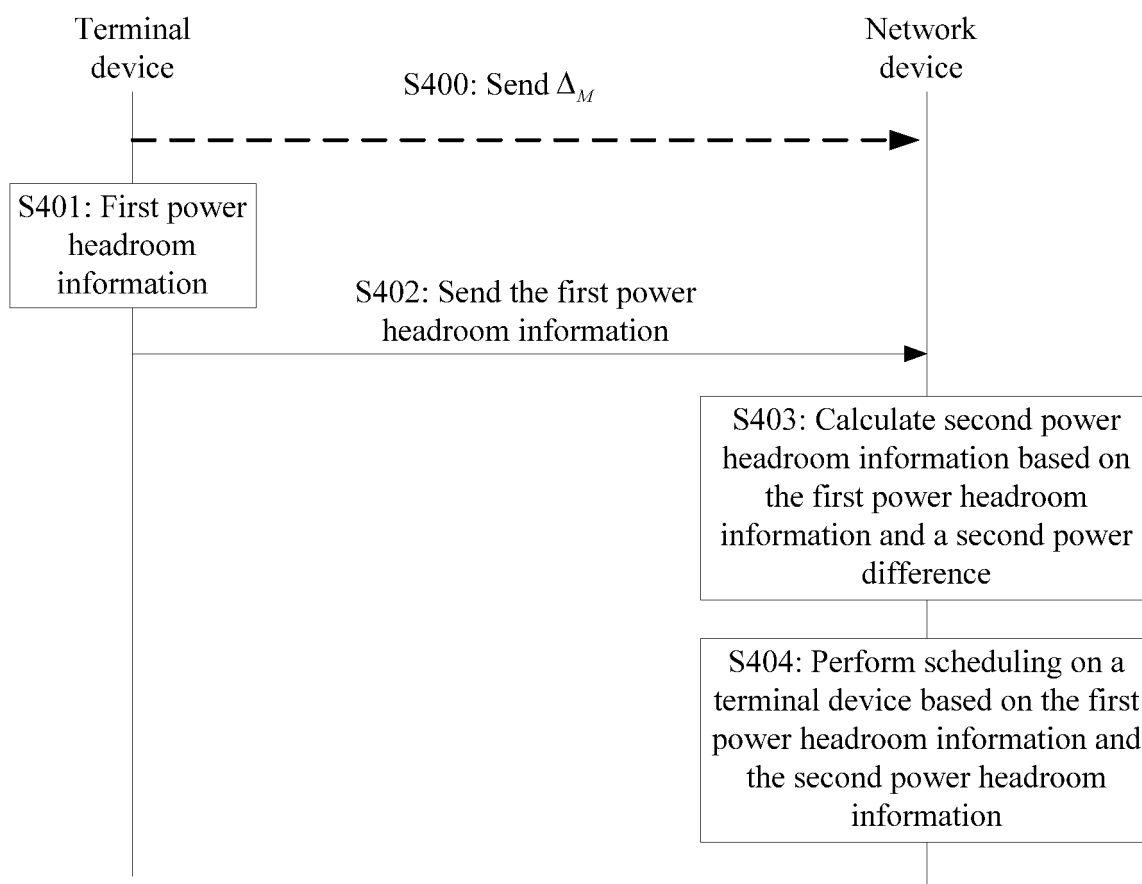


FIG. 4

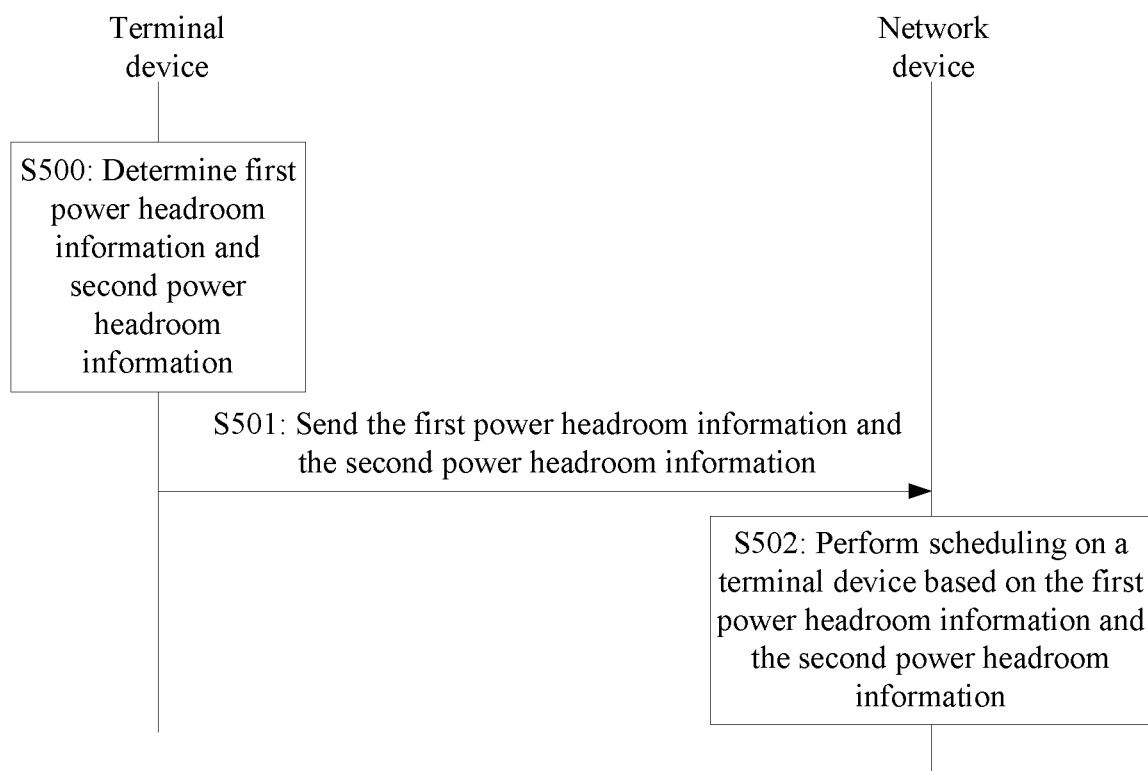


FIG. 5

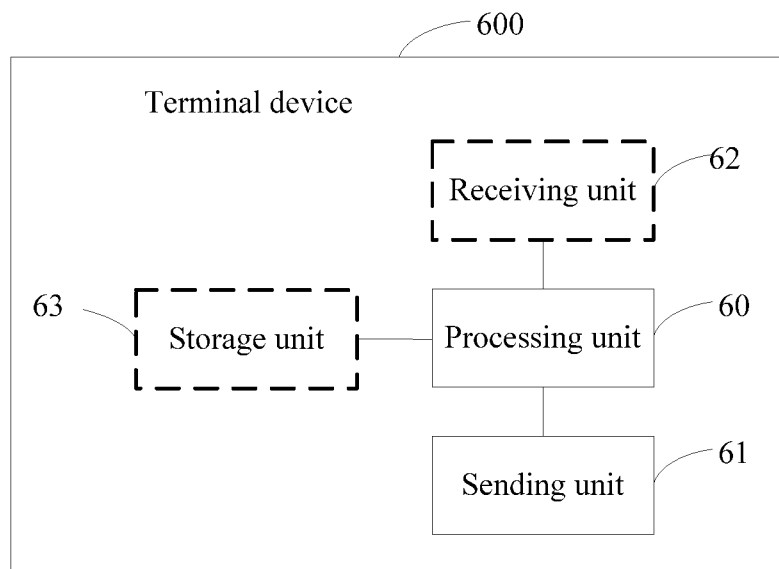


FIG. 6

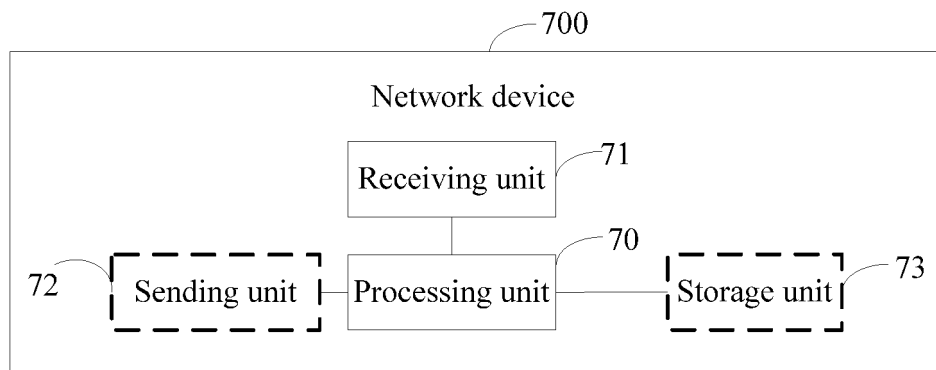


FIG. 7

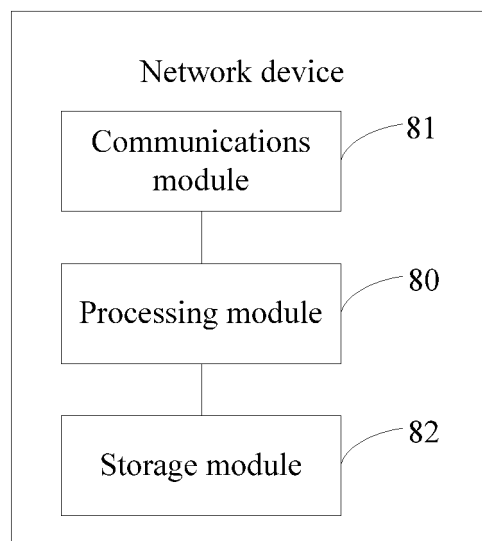


FIG. 8

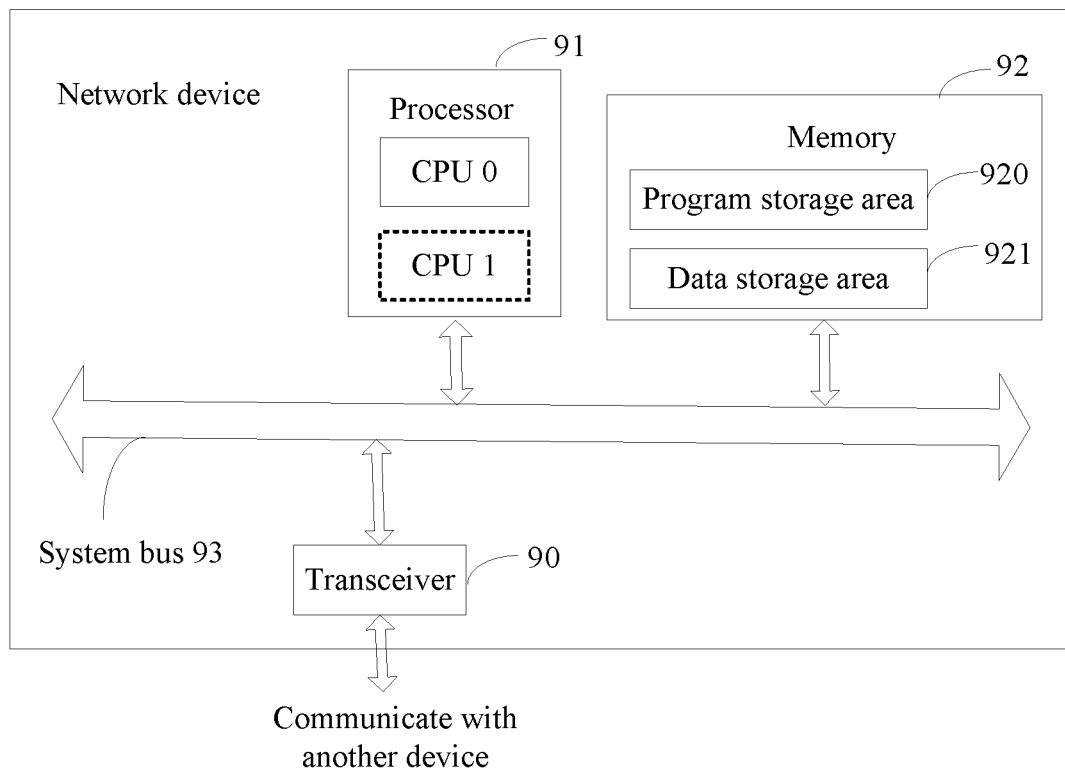


FIG. 9

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CN2018/085593

A. CLASSIFICATION OF SUBJECT MATTER

H04W 52/36 (2009.01) i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNPAT; WPI; EPODOC; CNKI; IEEE: 功率余量, 波形, 第一, 第二, 类型, 不同, 最大功率, 配置传输功率, 差值, 计算, Power Headroom, PH, waveform, first, second, type, different, maximum power, peak power, configure, transmitted power, difference, calculate

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CN 103270798 A (QUALCOMM INCORPORATED) 28 August 2013 (28.08.2013), description, paragraphs [0006]-[0025], [0043] and [0064]	4-8, 12-14, 18-22, 26-30
A	CN 103718624 A (HUAWEI TECHNOLOGIES CO., LTD.) 09 April 2014 (09.04.2014), entire document	1-30
A	CN 104144447 A (CHINA MOBILE COMMUNICATIONS CORPORATION) 12 November 2014 (12.11.2014), entire document	1-30
A	EP 1912345 A1 (ALCATEL LUCENT) 16 April 2008 (16.04.2008), entire document	1-30

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	"&" document member of the same patent family

Date of the actual completion of the international search
16 July 2018

Date of mailing of the international search report
27 July 2018

Name and mailing address of the ISA
State Intellectual Property Office of the P. R. China
No. 6, Xitucheng Road, Jimenqiao
Haidian District, Beijing 100088, China
Facsimile No. (86-10) 62019451

Authorized officer
LIN, Guirong
Telephone No. (86-10) 53961573

Form PCT/ISA/210 (second sheet) (July 2009)

INTERNATIONAL SEARCH REPORT
 Information on patent family members

 International application No.
 PCT/CN2018/085593

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
CN 103270798 A	28 August 2013	WO 2012064872 A1	18 May 2012
		EP 2642805 A1	25 September 2013
		HU E028180 T2	28 December 2016
		ES 2567295 T3	21 April 2016
		KR 20130087036 A	05 August 2013
		CN 107071883 A	18 August 2017
		ES 2533190 T3	08 April 2015
		EP 2638750 A1	18 September 2013
		JP 2014500665 A	09 January 2014
		ES 2599649 T3	02 February 2017
		EP 2642804 A1	25 September 2013
		US 2012115537 A1	10 May 2012
CN 103718624 A	09 April 2014	WO 2014205747 A1	31 December 2014
CN 104144447 A	12 November 2014	JP 2016522628 A	28 July 2016
		WO 2014180315 A1	13 November 2014
		US 2016142976 A1	19 May 2016
		EP 2996380 A1	16 March 2016
EP 1912345 A1	16 April 2008	US 2008084848 A1	10 April 2008
		AT 532373 T	15 November 2011

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CN 201710314120 [0001]